



TERMA

SINCE 1990

Heating Products **2019/2020**



Heating Products 2019/2020

Gdańsk 2019

Editorial Team:

Magdalena Jagielska
Piotr Klemenski

Typography:

Kacper Wołoski

Graphic design:

Tomasz Gigiel
Kacper Wołoski

Development of drawings and illustrations:

Dariusz Berus
Albert Maciański
Adam Nowaczyk
Robert Piotrowski
Karol Waszkinel
Kacper Wołoski
Magdalena Zakrzewska

Proofreading:

Tomasz Danek
Magdalena Jagielska
Piotr Klemenski
Wojciech Przychodzeń
Alex Ramsay
Magdalena Różańska

All information provided in this catalogue was valid until printing. In accordance with the motto of Terma Sp. z o.o. that expresses the necessity of constant development, some technical features of products as well as their detailed descriptions may vary in the future from their state at the time of this publication.



Introduction

We have 25 years of experience working with consumers and within this industry, not only in Poland, but also in more than 40 countries on 4 continents. We strive to offer the highest quality products and this is an expression of our respect for the consumer, whose satisfaction is our highest priority.

Fulfilling the consumers' expectations is not enough for us; we want to stay ahead of them. We know that development is achieved only with cooperation, which is why cooperation with competent and creative people allows us to be innovative and create functional solutions. Are we perfect? No. We are attracted to perfection and it is the most powerful engine of our activities.

Embedded in the company's operations are the values that are the common denominator for all the processes undertaken by us. Innovation, hard work, responsibility, efficiency and humility. These are the components of our everyday life and signposts for being the best possible supplier.

The good of the other man inspires us to find new and different ways of expression and action. Beyond the clichés, we want to make full use of the free market conditions, offering to our partners and consumers possibly the most perfect product at the best and affordable prices.

The catalogue that we provide, is the result of the work of more than 400 people. It is their knowledge, experience, commitment and passion that drives us forward. Each year we sell thousands of radiators worldwide. This publication presents products available in our offer.

Working closely with leading designers and engineers we are creating trends in the contemporary design of heating products. We continue to be recognised for the designs and quality of our work and have received a number of annual awards, but for us the most important recognition is the fact that you choose our products.

As a leading light within this industry we believe that the products in this catalogue not only meet expectations, but exceed them.

We hope that you will keep challenging and pushing us to deliver new and improved products.

TABLE OF CONTENTS



Illustrations / Technical Information

TECHNICAL INFORMATION

- 18** Colours
- 594** Boiler type parameters
- 594** Room Temperatures
- 595** Calculating your required heat output
- 596** Converting between different power outputs
- 627** How heat circulates in an electric radiator

CAST IRON RADIATORS



BART
CENTRAL HEATING
26 | 270



PLAIN
CENTRAL HEATING
32 | 286



KASZUB
CENTRAL HEATING
28 | 274



PLAIN 3 COLUMN
CENTRAL HEATING
34 | 296




OXFORD
CENTRAL HEATING
30 | 280



PLAIN TOWEL RAIL
CENTRAL HEATING
38 | 304

DESIGNER RADIATORS AND TOWEL RAILS



AERO V
CENTRAL HEATING
Aero V 44 | 308



ANGUS V
CENTRAL HEATING/DUAL FUEL
Angus V 58 | 322
Angus DW 62 | 326

ELECTRIC
Angus V E 324
Angus DW E 328

AERO H
CENTRAL HEATING
Aero H 48 | 310
Aero HG 52 | 312



ANGUS H
CENTRAL HEATING/DUAL FUEL
Angus H 66 | 330

ELECTRIC
Angus H 602



ALEX
CENTRAL HEATING/DUAL FUEL
Alex 54 | 314
Alex One 54 | 318

ELECTRIC
Alex 601
Alex One 601



BONE
CENTRAL HEATING/DUAL FUEL
Bone 68 | 334
Bone One 68 | 336
Bone DW 70 | 338

ELECTRIC
Bone 602
Bone One 602
Bone DW 602

KEY FOR LETTERS IN RADIATOR NAMES

- V - Vertical
- H - Horizontal
- D - Double Panel
- S - Single Panel
- One - Model with discreet, internal heating element
- C - Corner Model
- G - Gap for Towels
- M - Mirror
- DW - Dividing Wall

CAMBER

CENTRAL HEATING
Camber 72 | 340

ELECTRIC
Camber 602



DELFIN

CENTRAL HEATING/DUAL FUEL
Delfin 90 | 360

ELECTRIC
Delfin 604



FIONA

CENTRAL HEATING/DUAL FUEL
Fiona 114 | 386
Fiona One 114 | 392

ELECTRIC
Fiona 606
Fiona One 608



CANE

CENTRAL HEATING/DUAL FUEL
Cane 76 | 342

ELECTRIC
Cane E 344



DEXTER

CENTRAL HEATING/DUAL FUEL
Dexter 94 | 366
Dexter One 94 | 368

ELECTRIC
Dexter 604
Dexter One 605



HEX

CENTRAL HEATING
Hex 118 | 398

CASE SLIM

CENTRAL HEATING/DUAL FUEL
Case Slim 78 | 346

ELECTRIC
Case Slim 603



DEXTER PRO

CENTRAL HEATING/DUAL FUEL
Dexter Pro 98 | 370
Dexter Pro One 98 | 372



INCORNER

CENTRAL HEATING/DUAL FUEL
Incorner 122 | 404

ELECTRIC
Incorner 610

CITY

CENTRAL HEATING/DUAL FUEL
City 84 | 350
City One 84 | 352

ELECTRIC
City 604
City One 604



DIAMOND

CENTRAL HEATING/DUAL FUEL
Diamond 100 | 374

ELECTRIC
Diamond 605



INTRA

CENTRAL HEATING
Intra 126 | 406

CYKLON V

CENTRAL HEATING
Cyklon V 86 | 356



DOMI

CENTRAL HEATING/DUAL FUEL
Domi 104 | 378

ELECTRIC
Domi 605



INTRAM

CENTRAL HEATING
Intra M 128 | 408

CYKLON H

CENTRAL HEATING
Cyklon H 88 | 358



EASY

CENTRAL HEATING/DUAL FUEL
Easy 106 | 380
Easy One 106 | 382
Easy DW 110 | 384

ELECTRIC
Easy 606
Easy One 606
Easy DW 606



IRON D

CENTRAL HEATING/DUAL FUEL
Iron D 130 | 410

ELECTRIC
Iron D 610



IRON S

CENTRAL HEATING/DUAL FUEL
Iron S 134 | 412

ELECTRIC
Iron S 610



MARLIN

CENTRAL HEATING/DUAL FUEL
Marlin 150 | 440
Marlin One 150 | 444

ELECTRIC
Marlin 615
Marlin One 615



PERŁA

CENTRAL HEATING
Perła 170 | 468

ELECTRIC
Perła E Class I 470



KIOTO

CENTRAL HEATING/DUAL FUEL
Kioto 138 | 414
Kioto One 138 | 416

ELECTRIC
Kioto 611
Kioto One 611



MICHELLE

CENTRAL HEATING/DUAL FUEL
Michelle 152 | 448

ELECTRIC
Michelle 616



PIER

CENTRAL HEATING
Pier 172 | 472



LENA

CENTRAL HEATING/DUAL FUEL
Lena 140 | 418


ELECTRIC
Lena 611



MIKE

CENTRAL HEATING/DUAL FUEL
Mike 156 | 450
Mike One 156 | 454

ELECTRIC
Mike 617
Mike One 617



PLC V

CENTRAL HEATING
PLC V 174 | 474



LIMA

CENTRAL HEATING/DUAL FUEL
Lima 142 | 424
Lima One 142 | 430

ELECTRIC
Lima 613
Lima One 614




NEMO

CENTRAL HEATING/DUAL FUEL
Nemo 160 | 458

ELECTRIC
Nemo 618

PLC H

CENTRAL HEATING
PLC H 178 | 476



LUKKA

CENTRAL HEATING/DUAL FUEL
Lukka 144 | 434

ELECTRIC
Lukka 615



OUTCORNER

CENTRAL HEATING/DUAL FUEL
Outcorner 164 | 462

ELECTRIC
Outcorner 618



POC 2

CENTRAL HEATING/DUAL FUEL
POC 2 180 | 478

ELECTRIC
POC 2 619



MANTIS

CENTRAL HEATING/DUAL FUEL
Mantis 148 | 436
Mantis One 148 | 438

ELECTRIC
Mantis 615
Mantis One 615



PAJAŁ

CENTRAL HEATING/DUAL FUEL
Pająk 168 | 464

ELECTRIC
Pająk E 466



POLA

CENTRAL HEATING/DUAL FUEL
Pola 184 | 482
Pola One 184 | 484

ELECTRIC
Pola 619
Pola One 619



QUADRUS BOLD

CENTRAL HEATING/DUAL FUEL

Quadrus Bold **188 | 486**
Quadrus Bold One **188 | 488**


ELECTRIC

Quadrus Bold 620
Quadrus Bold One 620

SHERWOOD H

CENTRAL HEATING

Sherwood H **214 | 510**



TRIGA AW

CENTRAL HEATING

Triga AW **238 | 544**

ELECTRIC

Triga AW E **546**



QUADRUS SLIM

CENTRAL HEATING/DUAL FUEL

Quadrus Slim **190 | 490**
Quadrus Slim One **190 | 492**

ELECTRIC

Quadrus Slim 620
Quadrus Slim One 620



SIMPLE

CENTRAL HEATING/DUAL FUEL

Simple **218 | 512**
Simple One **218 | 516**
Simple DW **222 | 520**

ELECTRIC

Simple 620
Simple One 621
Simple DW 621



TUNE V

CENTRAL HEATING/DUAL FUEL

Tune VWD **240 | 548**
Tune VWS **242 | 556**

ELECTRIC

Tune VWD E **552**
Tune VWS E **560**



RETRO

CENTRAL HEATING/DUAL FUEL

Retro **194 | 494**
Retro S **196 | 496**

ELECTRIC

Retro 620



STAND

CENTRAL HEATING

Stand **226 | 522**



TUNE H

CENTRAL HEATING

Tune HSD **244 | 564**



RIBBON V

CENTRAL HEATING

Ribbon V **198 | 498**

ELECTRIC

Ribbon V E **202 | 500**



TRIGA

CENTRAL HEATING /DUAL FUEL

Triga **228 | 524**

ELECTRIC

Triga E **528**



TYTUS

CENTRAL HEATING/DUAL FUEL

Tytus **248 | 566**
Tytus One **248 | 568**

ELECTRIC

Tytus 622
Tytus One 623

RIBBON H

CENTRAL HEATING

Ribbon HSD **206 | 502**
Ribbon HWS **210 | 504**



TRIGA M

CENTRAL HEATING/DUAL FUEL

Triga M **232 | 532**

ELECTRIC

Triga M E **534**



VIPERA

CENTRAL HEATING/DUAL FUEL

Vipera **250 | 570**
Vipera One **250 | 572**

ELECTRIC

Vipera 623
Vipera One 623



SHERWOOD

CENTRAL HEATING/DUAL FUEL

Sherwood V **212 | 506**

ELECTRIC

Sherwood V E **508**



TRIGA AN

CENTRAL HEATING

Triga AN **234 | 536**
Triga ANC **236 | 540**

ELECTRIC

Triga AN E **538**
Triga ANC E **542**



VIVO

CENTRAL HEATING/DUAL FUEL

Vivo **252 | 574**
Vivo One **252 | 578**

ELECTRIC

Vivo 624
Vivo One 624



WARP S

CENTRAL HEATING/DUAL FUEL

Warp S 254 | 582

ELECTRIC

Warp S 625



WARP T

CENTRAL HEATING/DUAL FUEL

Warp T 258 | 584

Warp T One 258 | 586

Warp T Bold 260 | 588

Warp T Bold One 260 | 590

ELECTRIC

Warp T 625

Warp T One 626

Warp T Bold 626

Warp T Bold One 626



ZIGZAG

CENTRAL HEATING/DUAL FUEL

ZigZag 264 | 592

ELECTRIC

ZigZag 626

VALVES AND ACCESSORIES

SHELVES, HANGERS AND MASKING FASCIAS

| | | | |
|-----------------------------------|-----|--|-----|
| EASY Shelf | 631 | ZIP H hanger | 636 |
| SIMPLE shelf | 632 | ZIP V hanger | 637 |
| STAND shelf | 631 | Curved towel rail hanger - BASIC | 637 |
| TRIGA shelf | 632 | Straight towel rail hanger - BASIC | 638 |
| TRIGA shelf with towel rail | 633 | HAPPY HIPPO hanger | 638 |
| TRIGA towel rail | 633 | HAPPY RABBIT hanger | 639 |
| HANDY GRIP hanger | 634 | HAPPY SHARK hanger | 639 |
| HANDY VIP hanger | 634 | SIMPLE hanger | 640 |
| KUKA hanger | 635 | Case Slim towel rail | 640 |
| SPARK hanger | 635 | Michelle fascia | 641 |
| Yo! hanger | 636 | Iron D and Iron S fascia | 641 |

VALVE SETS

| | | | |
|--|-----|---|-----|
| Dexter manual valve set | 643 | 3-axis thermostatic valve set | 650 |
| Dexter thermostatic valve set | 644 | 3-axis thermostatic valve and lockshield integrated with T-piece set | 651 |
| Brass Wood angled regulatnig valve set | 645 | Set Integrated thermostatic valve | 652 |
| Angled manual valves set | 646 | Integrated thermostatic T-piece valve set | 653 |
| Star angled manual valves set | 647 | Integrated thermostatic valve with immersion tube set | 654 |
| Angled thermostatic valve set | 648 | Integrated lockshield valves set | 655 |
| 3-axis manual valve set | 649 | | |

VALVES AND ACCESSORIES

| | | | |
|--|-----|--|-----|
| Integrated thermostatic valve with immersion tube | 657 | Lockshield valve integrated with T-piece | 659 |
| Integrated thermostatic valve | 658 | Integrated lockshield valve | 660 |
| Integrated thermostatic T-piece valve | 659 | 3-axis thermostatic valve | 661 |
| | | 3-axis manual valve | 661 |

| | | | |
|------------------------------------|-----|--|-----|
| 3-axis lockshield valve | 662 | Adapter for steel – 24x19 | 669 |
| Angled thermostatic valve | 662 | Adapter for steel – M22x1,5 | 669 |
| Angled manual | 663 | ETNA thermostatic head | 670 |
| Angled lockshield valve | 663 | NOBLE thermostatic head | 670 |
| Straight thermostatic valve | 664 | SLIM thermostatic head | 671 |
| Straight manual valve | 664 | Blank plug with concealing cover | 671 |
| Straight lockshield valve | 665 | Blank plug | 672 |
| T-piece | 665 | Nut spacer | 672 |
| Adapter for alupex – 24x19 | 666 | Bleed valve | 673 |
| Adapter for alupex – 3/4" | 666 | Pipe masking set – 70 mm | 673 |
| Adapter for alupex – M22x1,5 | 667 | TERMA special spanner set | 674 |
| Adapter for copper – 24x19 | 667 | Integrated pipe masking set | 675 |
| Adapter for copper – 3/4" | 668 | Brush | 675 |
| Adapter for copper – M22x1,5 | 668 | | |

CAST IRON RADIATOR VALVE SETS AND ACCESSORIES

| | | | |
|--|-----|---------------------------------------|-----|
| CLASSIC ART manual angled valve | 677 | Copper adapter reducer – 24x19 | 683 |
| MINIMALIST manual angled valve set | 678 | Bleed valve | 683 |
| ARTISTIC thermostatic angled valve set | 679 | Reducing bush 5/4" × 1/2" | 684 |
| WOOD thermostatic angled valve set | 680 | Blanking plug 5/4" | 684 |
| ARTISTIC pipe masking set | 681 | Joining nipple 5/4" | 685 |
| Pipe masking set – 160 mm | 681 | Gasket for cast iron | 685 |
| AluPEX adapter reducer – 24 × 19 | 682 | Cast iron radiator wall bracket | 686 |
| Steel adapter reducer – 24 × 19 | 682 | Cast iron radiator joining key | 686 |

ELECTRIC HEATING ELEMENTS



Illustrations / Technical information



ONE
690 / 724



KTX 1
700 / 736



MEG
712 / 748



TS1
726



MOA
702 / 738



REG 3
714 / 750



KTX 4
692 / 728



MOA IR
704 / 740



REG 2
716 / 752



KTX 4 BLUE
694 / 730



MOA BLUE
706 / 742



SIM
718 / 754



KTX 3
696 / 732



DRY
708 / 744



TTIR1
758



KTX 2
698 / 734



TDY
710 / 746



DTIR1
760

Heating element comparison tool.....722
Terma BlueLine mobile application.....756

Choosing the correct heating element.....762
How to install a heating element in a radiator762

BATHROOM ACCESSORIES

| | | | |
|--|-----|---|-----|
| Straight handrail | 766 | Wall-mounted horizontal handrail | 773 |
| Handrail with 90° bend | 767 | Wall-mounted handrail with hanger | 774 |
| Handrail with 125° bend | 768 | Wall-mounted folding handrail | 775 |
| Horizontal handrail | 769 | Wall-mounted folding handrail with hanger | 776 |
| Vertical, floor support handrail | 770 | Suggested installation dimensions | 778 |
| Wall-mounted support handrail..... | 771 | Fitting Kit | 779 |
| Free standing floor handrail..... | 772 | | |

INFORMATION

| | | | |
|---|-----|---|-----|
| Terms and Conditions | 782 | Structure of configuration code for electric radiators with a heating wire..... | 790 |
| Key to symbols used in catalogue | 786 | Structure of configuration code for customizable accessories | 791 |
| Structure of configuration code for water and dual fuel radiators | 787 | Connections Table | 792 |
| Structure of configuration code for central heating radiators with the built-in ONE heating element and electric radiators with the built-in ONE heating element..... | 788 | Contact information | 794 |
| Structure of configuration code for electric radiators with a heating medium..... | 789 | Breakdown of sales regions | 794 |

Colours

The printed reproduction of some colours may vary slightly from those seen on the actual products. For a more exact colour selection it is always best to ask for a matching colour chip sample. These are available from our Sales Managers and trading partners.

RAL colours

| | | | | | | | | | | | | |
|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| RAL: CODE: | 1000 100 | 1001 101 | 1002 102 | 1003 103 | 1004 104 | 1005 105 | 1006 106 | 1007 107 | 1011 111 | 1012 112 | 1013 113 | 1014 114 |
| 1015 115 | 1016 116 | 1017 117 | 1018 118 | 1019 119 | 1020 120 | 1021 121 | 1023 123 | 1024 124 | 1027 127 | 1028 128 | 1032 132 | 1033 133 |
| 1034 134 | 1037 137 | 2000 200 | 2001 201 | 2002 202 | 2003 203 | 2004 204 | 2008 208 | 2009 209 | 2010 210 | 2011 211 | 2012 212 | 3000 300 |
| 3001 301 | 3002 302 | 3003 303 | 3004 304 | 3005 305 | 3007 307 | 3009 309 | 3011 311 | 3012 312 | 3013 313 | 3014 314 | 3015 315 | 3016 316 |
| 3017 317 | 3018 318 | 3020 320 | 3022 322 | 3027 327 | 3028 328 | 3031 331 | 4001 401 | 4002 402 | 4003 403 | 4004 404 | 4005 405 | 4006 406 |
| 4007 407 | 4008 408 | 4009 409 | 4010 410 | 5000 500 | 5001 501 | 5002 502 | 5003 503 | 5004 504 | 5005 505 | 5007 507 | 5008 508 | 5009 509 |
| 5010 510 | 5011 511 | 5012 512 | 5013 513 | 5014 514 | 5015 515 | 5017 517 | 5018 518 | 5019 519 | 5020 520 | 5021 521 | 5022 522 | 5023 523 |
| 5024 524 | 6000 600 | 6001 601 | 6002 602 | 6003 603 | 6004 604 | 6005 605 | 6006 606 | 6007 607 | 6008 608 | 6009 609 | 6010 610 | 6011 611 |
| 6012 612 | 6013 613 | 6014 614 | 6015 615 | 6016 616 | 6017 617 | 6018 618 | 6019 619 | 6020 620 | 6021 621 | 6022 622 | 6024 624 | 6025 625 |
| 6026 626 | 6027 627 | 6028 628 | 6029 629 | 6032 632 | 6033 633 | 6034 634 | 7000 700 | 7001 701 | 7002 702 | 7003 703 | 7004 704 | 7005 705 |
| 7006 706 | 7008 708 | 7009 709 | 7010 710 | 7011 711 | 7012 712 | 7013 713 | 7015 715 | 7016 716 | 7021 721 | 7022 722 | 7023 723 | 7024 724 |
| 7026 726 | 7030 730 | 7031 731 | 7032 732 | 7033 733 | 7034 734 | 7035 735 | 7036 736 | 7037 737 | 7038 738 | 7039 739 | 7040 740 | 7042 742 |
| 7043 743 | 7044 744 | 7045 745 | 7046 746 | 7047 747 | 8000 800 | 8001 801 | 8002 802 | 8003 803 | 8004 804 | 8007 807 | 8008 808 | 8011 811 |
| 8012 812 | 8014 814 | 8015 815 | 8016 816 | 8017 817 | 8019 819 | 8022 822 | 8023 823 | 8024 824 | 8025 825 | 8028 828 | 9001 901 | 9002 902 |
| 9003 903 | 9004 904 | 9006 906 | 9007 907 | 9010 910 | 9011 911 | 9016 916 | 9017 917 | 9018 918 | | | | |

Special colours palette*


| | | | |
|--|---|--|---|
| | <p>Name: Heban (matt, rough texture)</p> <p>code: IHE</p> | <p>Black Pepper (matt, rough 3D texture)</p> <p>CPE</p> | <p>Metallic Black (matt, rough texture)</p> <p>MBC</p> |
| <p>Black Crocodile New (matt, rough 3D texture)</p> <p>BLN</p> | <p>Soft 9005 (matt, smooth texture)</p> <p>S95</p> | <p>Matt 9005 (matt, smooth texture)</p> <p>9M5</p> | <p>Gloss 9005 (gloss, smooth texture)</p> <p>9P5</p> |
| <p>(silk, smooth texture)</p> <p>ABC</p> | <p>Magic Pearl (gloss, smooth texture)</p> <p>MPR</p> | <p>Sparkling Grey (gloss, smooth texture)</p> <p>RGY</p> | <p>Metallic Grey (matt, rough texture)</p> <p>MGR</p> |
| <p>Granite (gloss, smooth texture)</p> <p>GRA</p> | <p>Modern Grey (silk, rough texture)</p> <p>DGR</p> | <p>Storm Sky (silk, smooth texture)</p> <p>SSK</p> | <p>Winter Sky (matt, smooth texture)</p> <p>WSK</p> |
| <p>Graphite (matt, rough texture)</p> <p>GRP</p> | <p>Salt & Pepper (matt, rough texture)</p> <p>SPP</p> | <p>Inox (silk, smooth texture)</p> <p>INO</p> | <p>Diamond Silver (gloss, smooth texture)</p> <p>DIS</p> |
| <p>Silver Gloss (gloss, smooth texture)</p> <p>SPO</p> | <p>Silver Matt (silk, smooth texture)</p> <p>SMA</p> | <p>Metallic Silver (matt, rough texture)</p> <p>MSI</p> | <p>Vibrant Brown (matt, rough texture)</p> <p>OVB</p> |
| <p>Metallic Stone (matt, rough texture)</p> <p>MST</p> | <p>Sparkling Gravel (silk, smooth texture)</p> <p>RGR</p> | <p>Quartz (matt, rough texture)</p> <p>QUA</p> | <p>Metallic Beige (matt, rough texture)</p> <p>MBE</p> |
| <p>Anodic Brown (silk, smooth texture)</p> <p>ABN</p> | <p>African Bronze (silk, smooth texture)</p> <p>IAZ</p> | <p>Noble Brown (matt, rough texture)</p> <p>INB</p> | <p>Antique Copper (gloss, smooth pitted texture)</p> <p>AMI</p> |
| <p>Copper (gloss, smooth texture)</p> <p>COP</p> | <p>Bright Copper (silk, smooth texture)</p> <p>BCO</p> | <p>Van Gogh (matt, rough texture)</p> <p>IVG</p> | <p>Gold Gloss (gloss, smooth texture)</p> <p>GPO</p> |

| | | | |
|---|--|---|--|
|  <p>California Beige (matt, rough texture) ICB</p> |  <p>Bahama Beige (gloss, smooth texture) OBB</p> |  <p>Morning Beige (gloss, smooth texture) BTS</p> |  <p>Sparkling Cream (matt, rough texture) RCR</p> |
|  <p>Blush (matt, rough texture) BUH</p> |  <p>Modern Ivory (matt, rough texture) DIV</p> |  <p>White Gold (gloss, smooth pitted texture) WGD</p> |  <p>Pergamon (gloss, smooth texture) OPE</p> |
|  <p>Sea Salt (matt, rough texture) FMS</p> |  <p>Sweet Sugar (gloss, smooth texture) FSS</p> |  <p>White Cream (silk, smooth texture) WCR</p> |  <p>Soft 9016 (matt, smooth texture) S96</p> |
|  <p>White Wall (matt, rough texture) WWL</p> |  <p>Blueberry (silk, smooth texture) BLR</p> |  <p>Anodic Sapphire (silk, smooth texture) ASP</p> |  <p>Anodic Malachite (silk, smooth texture) AMT</p> |
|  <p>Pastel Blue (silk, smooth texture) PBL</p> |  <p>Soft 7047 (matt, smooth texture) S77</p> |  <p>Lavender (silk, smooth texture) LAV</p> |  <p>Soft 4010 (matt, smooth texture) S40</p> |
|  <p>Soft 4006 (matt, smooth texture) S46</p> |  <p>Soft 3028 (matt, smooth texture) S38</p> |  <p>Metallic Red (matt, rough texture) MRE</p> |  <p>Soft Green Apple (matt, smooth texture) SGA</p> |
|  <p>Soft 1023 (matt, smooth texture) S13</p> |  <p>Chrome Effect (gloss, smooth texture) CRE</p> | | |

Plated finishes



Raw Copper



This option is only available for Pajak and Pajak E radiators. Due to its properties, copper may darken over time. Raw Copper will change, and its colour will eventually turn to reddish or reddish-brown.

* Not available for cast iron radiators and their accessories

Camber Colours palette:

| | | | |
|---|---|--|---|
| <p>Heban Black (matt, rough texture) IHE</p> | <p>Black Pepper (matt, rough 3D texture) CPE</p> | <p>Metallic Black (matt, rough texture) MBC</p> | <p>Metallic Grey (matt, rough texture) MGR</p> |
| <p>Anthracite (matt, rough texture) ANT</p> | <p>Modern Grey (silk, rough texture) DGR</p> | <p>Graphite (matt, rough texture) GRP</p> | <p>Salt & Pepper (matt, rough texture) SPP</p> |
| <p>Metallic Silver (matt, rough texture) MSI</p> | <p>Vibrant Brown (matt, rough texture) OVV</p> | <p>Quartz Mocha (matt, rough texture) QUA</p> | <p>Metallic Beige (matt, rough texture) MBE</p> |
| <p>Noble Brown (matt, rough texture) INB</p> | <p>Van Gogh (matt, rough texture) IVG</p> | <p>Metallic Stone (matt, rough texture) MST</p> | <p>California Beige (matt, rough texture) ICB</p> |
| <p>Metallic Red (matt, rough texture) MRE</p> | <p>White Gold (gloss, smooth pitted texture) WGD</p> | <p>Sea Salt White (matt, rough texture) FMS</p> | <p>Modern Ivory (matt, rough texture) DIV</p> |
| <p>White Wall (matt, rough texture) WWL</p> | <p>White Mat (matt, smooth texture) WMA</p> | <p>RAL 9016 (matt, smooth texture) 916</p> | |

Special coatings



A white, anti-bacterial coating (RAL 9016) containing silver compounds. The release of silver ions destroy bacteria and inhibits the growth of mould and fungi. The use of this coating is recommended in particular on the products installed in bathrooms. The cost of application is the same as the anti-bacterial coating and equal to our standard paint surcharge.



Each product can be additionally protected with epoxy primer, which increases the corrosion resistance of the product. Priming the product with epoxy primer allows for more freedom of installation in areas subject to contact with water (in the vicinity of a bathtub, a toilet or a shower, etc.) However, the primer does not protect the product, where there is danger of direct exposure of the radiator's surface to a stream of water. Price for the epoxy primer service is fixed at 150 zł (40 €) net, regardless of the radiator type. Handles, handrails and support rails are primed with epoxy primer as standard.

Radiators carrying a 25% surcharge for the colour

List of colours offered at no extra cost. For other colours a surcharge of 25% is applicable, with the exception of zinc primer coating offered at a fixed cost and chrome plating finish which is always quoted separately.

| Name | Colours at no extra cost |
|----------------|--|
| Alex | RAL 9016, Metallic Grey, Metallic Black |
| Alex One | RAL 9016, Metallic Grey, Metallic Black |
| Bone DW | RAL 9016, Metallic Grey, Metallic Black |
| Bone One | RAL 9016, Metallic Grey, Metallic Black |
| Bone | RAL 9016, Metallic Grey, Metallic Black |
| Dexter | RAL 9016, Silver Matt, Metallic Grey, Metallic Black |
| Dexter One | RAL 9016, Silver Matt, Metallic Grey, Metallic Black |
| Dexter Pro | RAL 9016, Silver Matt, Metallic Grey, Metallic Black |
| Dexter Pro One | RAL 9016, Silver Matt, Metallic Grey, Metallic Black |
| Domi | RAL 9016, Silver Matt, Metallic Grey, Metallic Black |
| Fiona | RAL 9016, Metallic Grey, Metallic Black |
| Fiona One | RAL 9016, Metallic Grey, Metallic Black |
| Lena | RAL 9016, Metallic Grey, Metallic Black |
| Marlin | RAL 9016, Metallic Grey, Metallic Black |
| Marlin One | RAL 9016, Metallic Grey, Metallic Black |
| POC 2 | RAL 9016, Metallic Grey, Metallic Black |
| Tytus | RAL 9016, Metallic Grey, Metallic Black |
| Tytus | RAL 9016, Metallic Grey, Metallic Black |
| Tytus One | RAL 9016, Metallic Grey, Metallic Black |

Radiators with the colour included in the price


There are 190 RAL and special Terma colours that are available at no extra cost with the exception of chrome and zinc coatings.

| | | | | | |
|------------|-----------|------------|------------------|--------------|-----------------|
| Aero H | Delfin | Lima One | Pola | Sherwood V E | Tune VWD E |
| Aero HG | Diamond | Lukka | Pola One | Simple | Tune VWS |
| Aero V | Easy | Mantis | Quadrus Bold | Simple DW | Tune VWS E |
| Angus DW | Easy DW | Mantis One | Quadrus Bold One | Simple One | Vipera |
| Angus H | Easy One | Michelle | Quadrus Slim | Triga | Vipera One |
| Angus V | Hex | Mike | Quadrus Slim One | Triga E, | Vivo |
| Angus V E, | Incorner | Mike One | Retro | Triga AN | Vivo One |
| Cane | Intra | Nemo | Retro S | Triga AN E | Warp S |
| Cane E, | Intra M | Outcorner | Ribbon HSD | Triga ANC | Warp T |
| Case Slim | Iron D | Perla | Ribbon HWS | Triga ANC E | Warp T One |
| City | Iron S | Perla E | Ribbon V | Triga AW | Warp T Bold |
| City One | Kioto | Pier | Ribbon V E | Triga M | Warp T Bold One |
| Cyklon H | Kioto One | PLC H | Sherwood H | Tune HSD | ZigZag |
| Cyklon V | Lima | PLC V | Sherwood V | Tune VWD | |

Cast iron colour & finish selection.

In addition to 192 standard RAL colours, Terma offers special colours and special decorative finishes. Upon client's request, Terma is able to provide radiators and accessories in individually chosen finishes.

Cast iron special colour selection

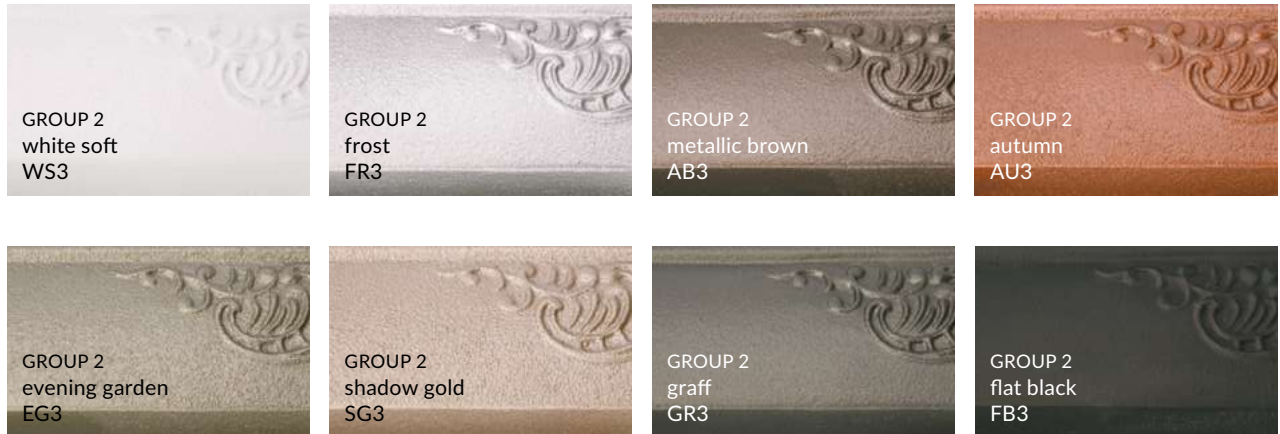

Cast iron decorativ finishes



* exposed ornament can be finished in any one special colour from the special colour selection

** special finish offered in both painted (Antique Copper, group 4) or galvanic finishes (Galvanic Copper, group 5)

*** special finish offered in both painted (Antique Brass, group 4) or galvanic finishes (Galvanic Brass, group 5)

Cast Iron Radiators

Bart ^① s. 270



Radiator

Free standing Bart 640 ↑ x 852 ↔ LP, colour: autumn, product and configuration code: WGBRF064085 LAU3LP

Valves and accessories

Angled manual valve set Minimalist, chrome, TGZRCR017

Pipe masking set – 160 mm, chrome, TGPCR004



Kaszub ⓘ s. 274



Radiator

Free standing Kaszub 720↑ x 1098↔ LP, colour: antique brass, product and configuration code: WGKAF072109 LAN5LP

Valves and accessories

Angled manual valve set Classic Art, brushed bronze, TGERANT03

Pipe masking set Artistic, brushed bronze, TGPBR001



Radiator


Free standing Kaszub 920↑ x 688↔ LP, colour: raw metal, product and configuration code: WGKAF092068 LZE3LP

Valves and accessories

Angled thermostatic manual valve set Artistic, anthracite, TGETAN002

Artistic pipe masking set, anthracite, TGPAN001



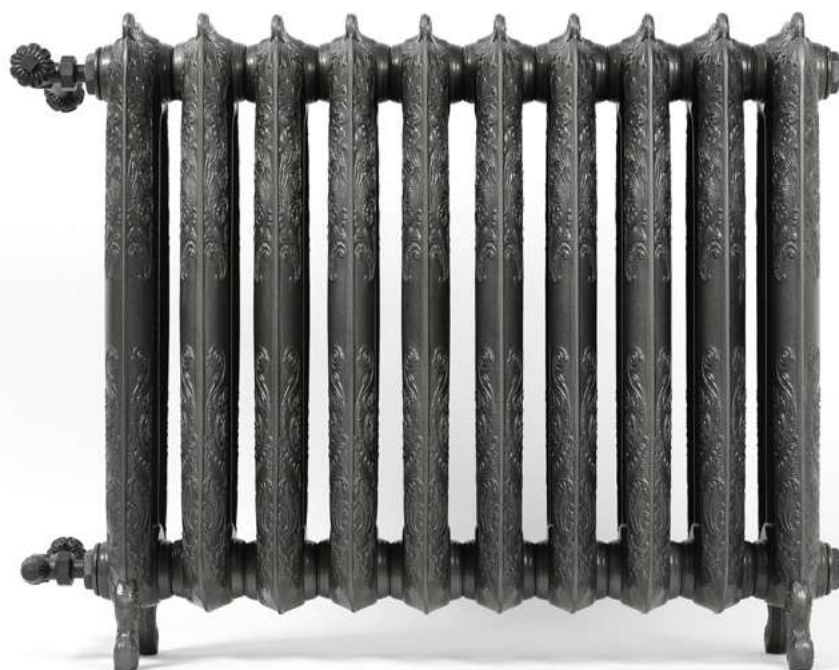

Radiator

Free standing Oxford 710↑ x 852↔ LP, colour: raw metal, product and configuration code: WGOXF071085 LZE3LP

Valves and accessories

Angled thermostatic manual valve set Artistic, anthracite, TGETAN002

Artistic pipe masking set, anthracite, TGPAN001



Plain [ⓘ] s. 286




Radiator

Free standing Plain 920 ↓ x 852 ↔ LP, colour: polished metal, product and configuration code: WGPLF092085 LZE2LP

Valves and accessories

Angled manual valve set Minimalist, anthracite, TGERAN002

Pipe masking set – 160 mm, anthracite, TGPAN002

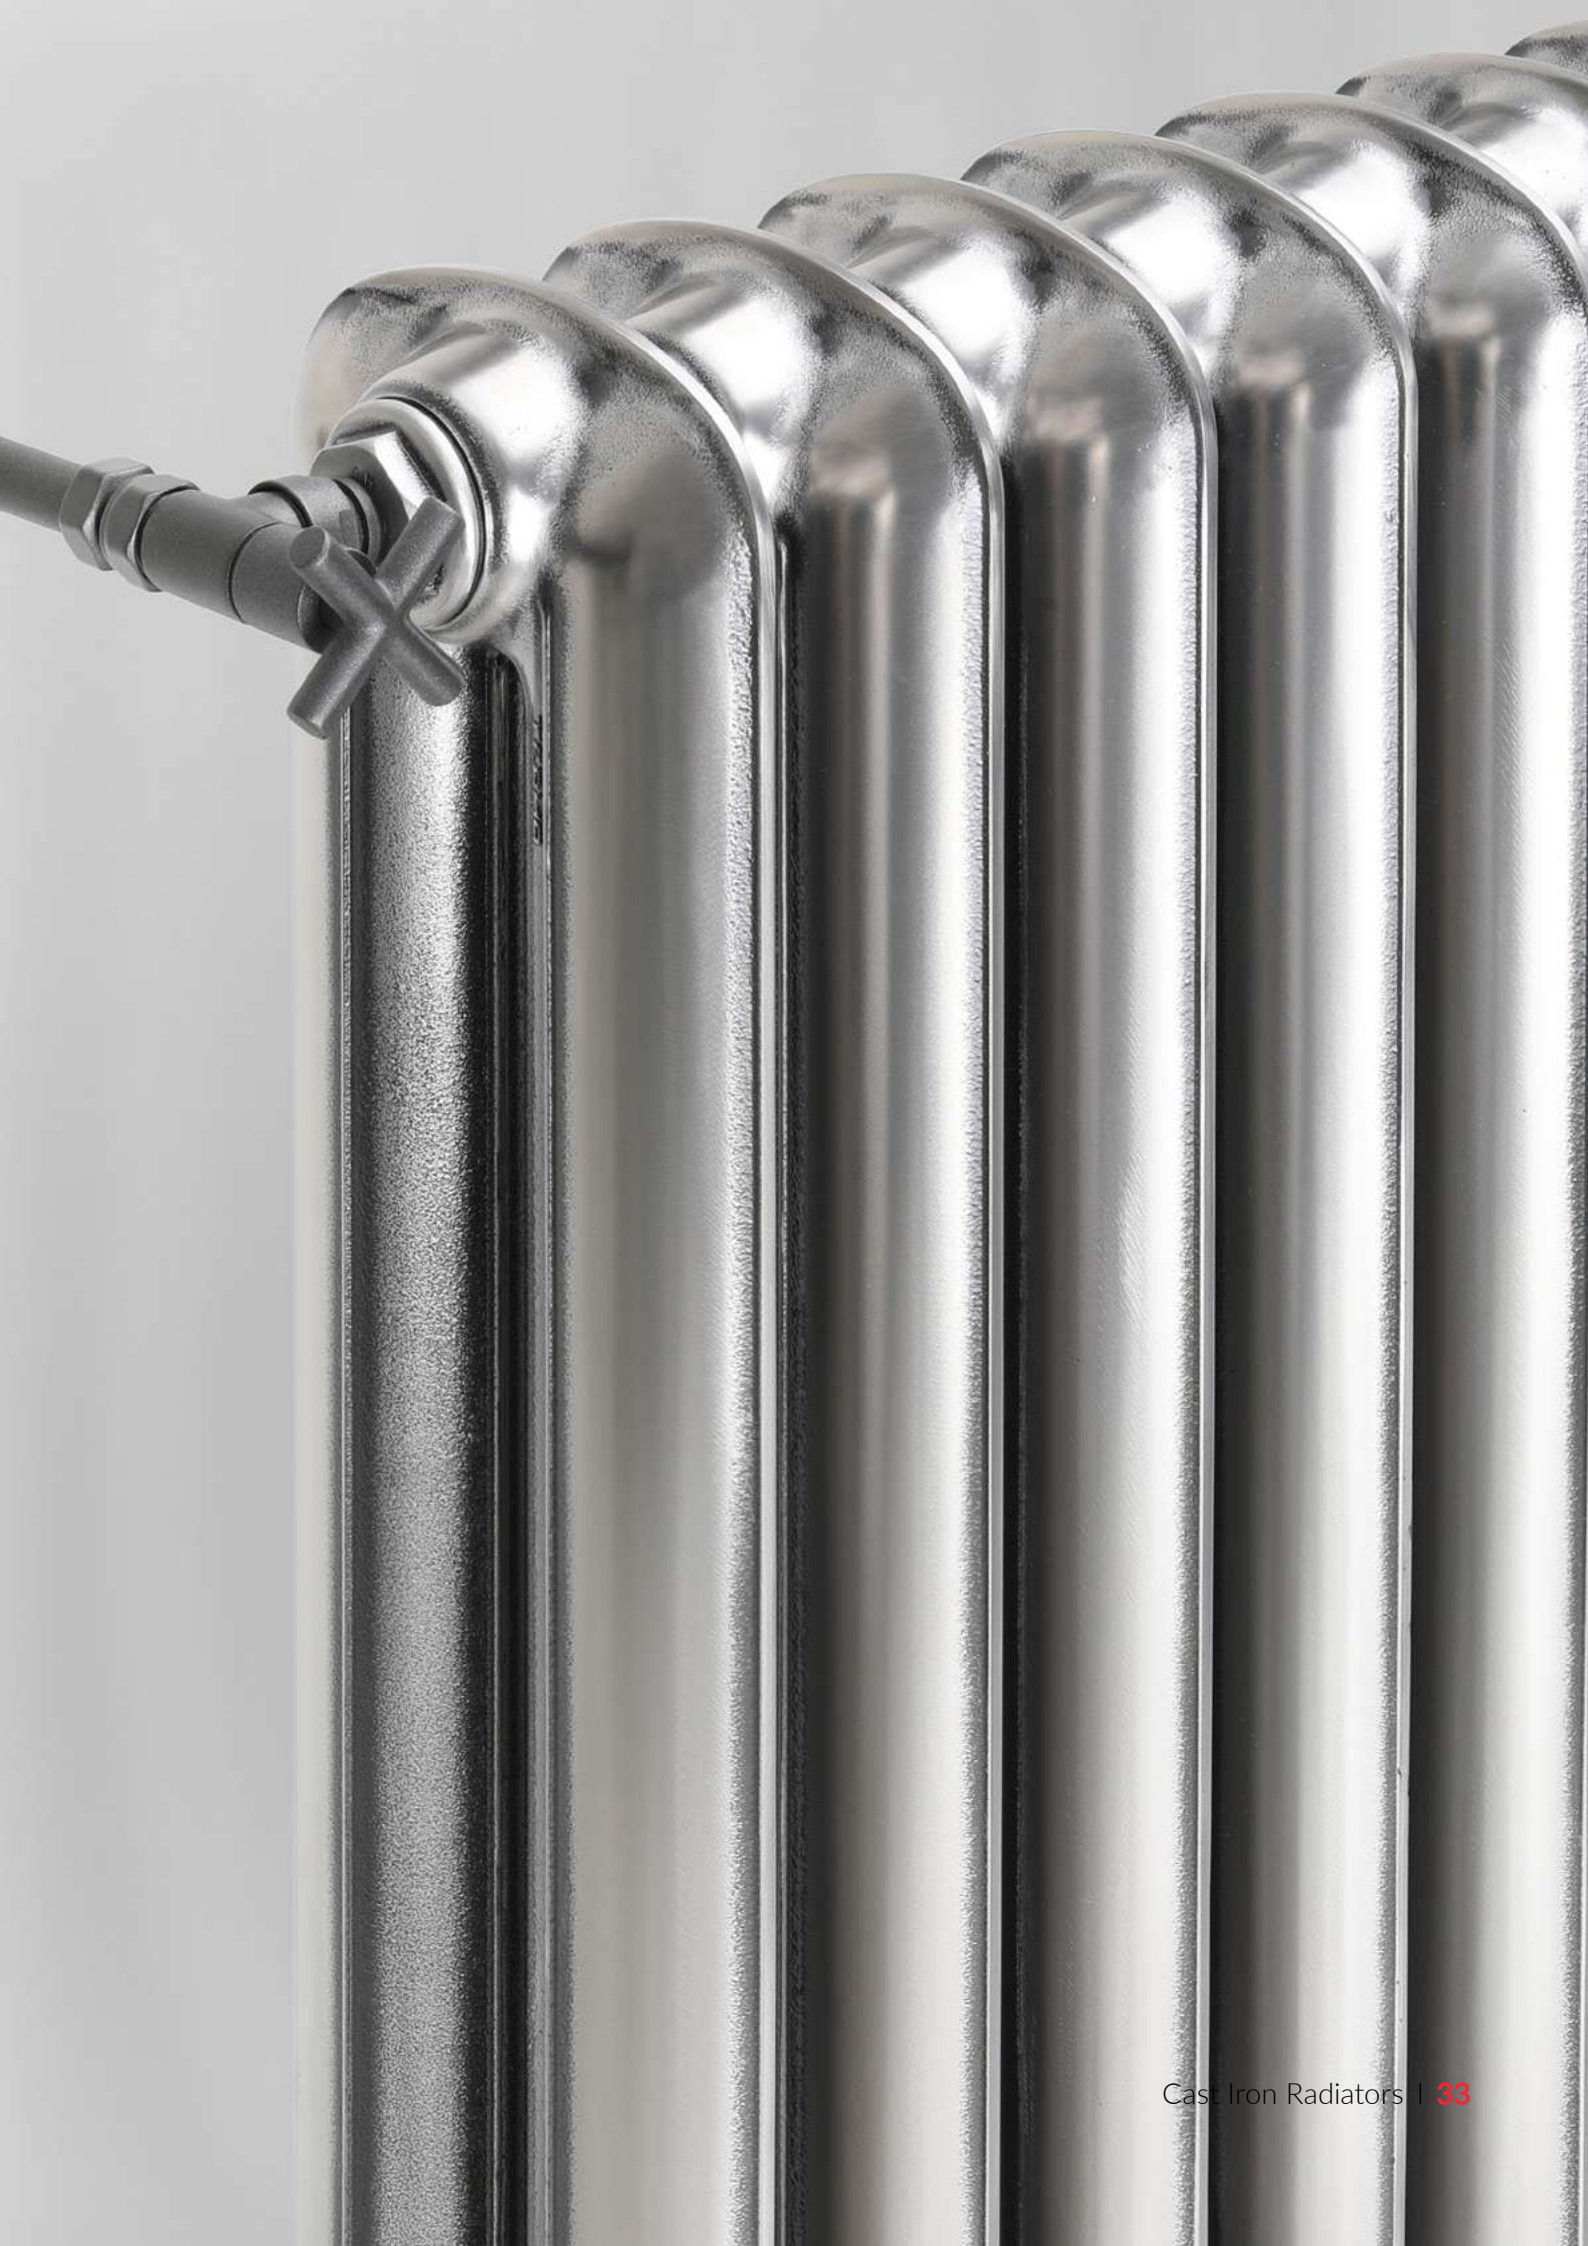

Plain 3 column ① s. 296



Radiator

Free standing Plain 3 column 720 \updownarrow x 688 \leftrightarrow LP, colour: antique brass, product and configuration code: WGP3F072068
LAN5LP

Valves and accessories

WOOD thermostatic angled valve set, brushed bronze, TGERAN002
Pipe masking set – 160 mm, brushed bronze, TGPBR002



Radiator

Free standing Plain 3 column 920 ↓ x 1098 ↔ LP, colour: raw metal,
product and configuration code: WGP3F092109 LZE3LP

Valves and accessories

Angled manual valve set Minimalist, anthracite, TGERAN002
Pipe masking set – 160 mm, anthracite, TGPAN002





Plain Towel Rail ⓘ s. 304



Radiator

Plain Towel Rail 900↑ x 650↔ AX, colour: galvanic copper, chrome, product and configuration code: WGNTR090065 LGC5LP

Valves and accessories

Star Angled manual valves set, chrome, TGERSTCR01

Pipe masking set – 160 mm, chrome, TGPCR004







Radiator

Plain Towel Rail 900↑ x 490↔ AX, colour:
raw metal, chrome, product and configuration code:

WGNTRO90049 LZE3AX


Valves and accessories

Angled manual valve set Minimalist, chrome, TGZRCR017

Pipe masking set – 160 mm, chrome, TGPCR004

Radiators and Towel Rails

Aero V ^① s. 308

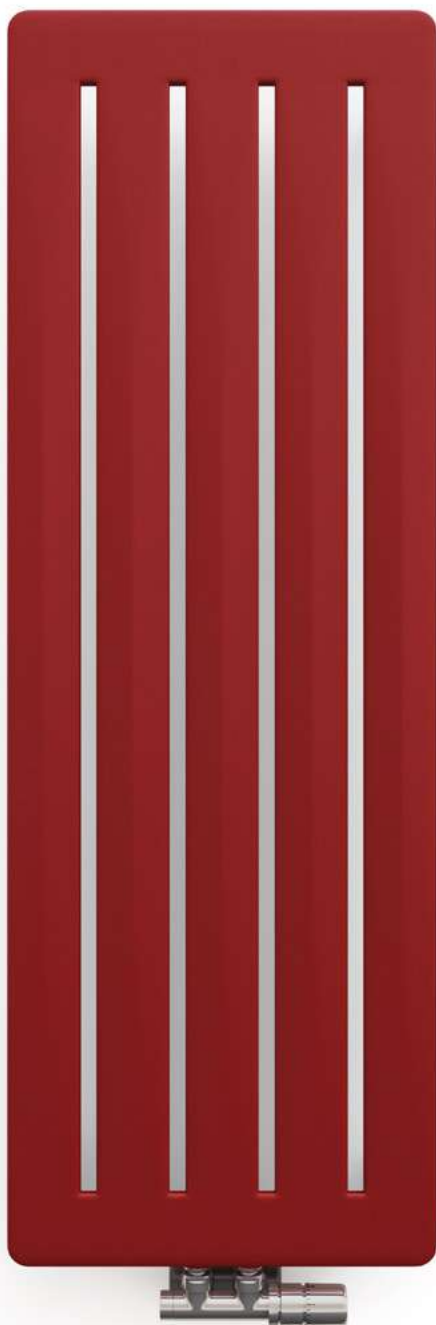

Radiator

Aero V 1500↕ x 410↔ ZX, colour: metallic red, product and configuration code: WGARV150041 KMREZX

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002








Radiator

Aero V 1800 ↑ x 410 ↔ ZX, colour:
quartz, product and configuration code:
WGARV180041 KQUAZX

Valves and accessories

Integrated thermostatic valve set, angled,
left, chrome, WRZT5G1-CR
Integrated pipe masking set, chrome,
TGPCR002

Aero H [ⓘ] s. 310

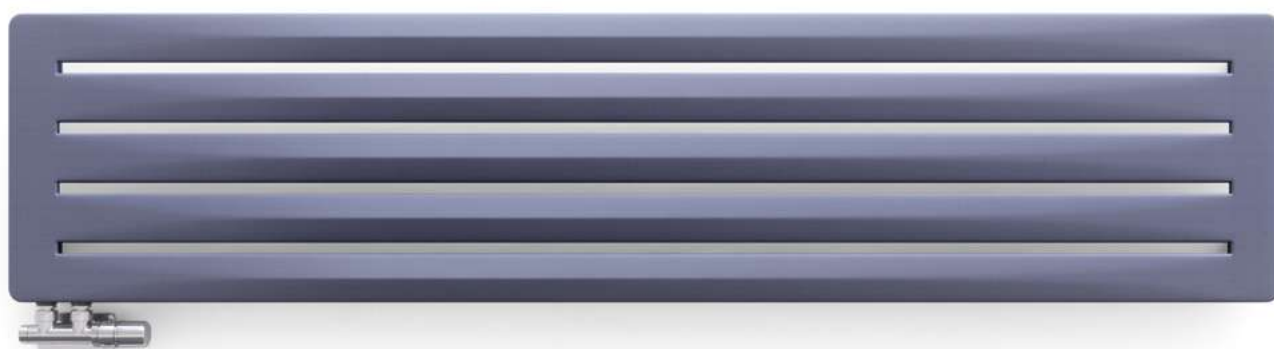

Radiator

Aero H 410↑ x 1800↔ YL, colour: blueberry, product and configuration code: WGARH032120 KBLRYL

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002





Radiator

Aero H 325 ↑ x 1200 ↔ YP, colour: graphite, product and configuration code: WGARH032120 KGRPYP

Valves and accessories


Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002





Aero HG [ⓘ] s. 312

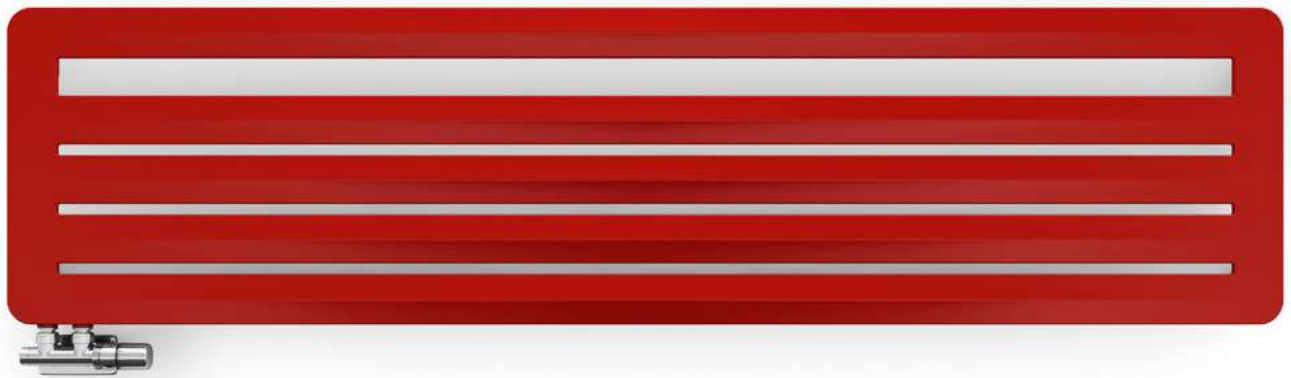


Radiator

Aero HG 455 ↑ x 1500 ↔ YL, colour: RAL 3028, product and configuration code: WGARG045150 K328YL

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002

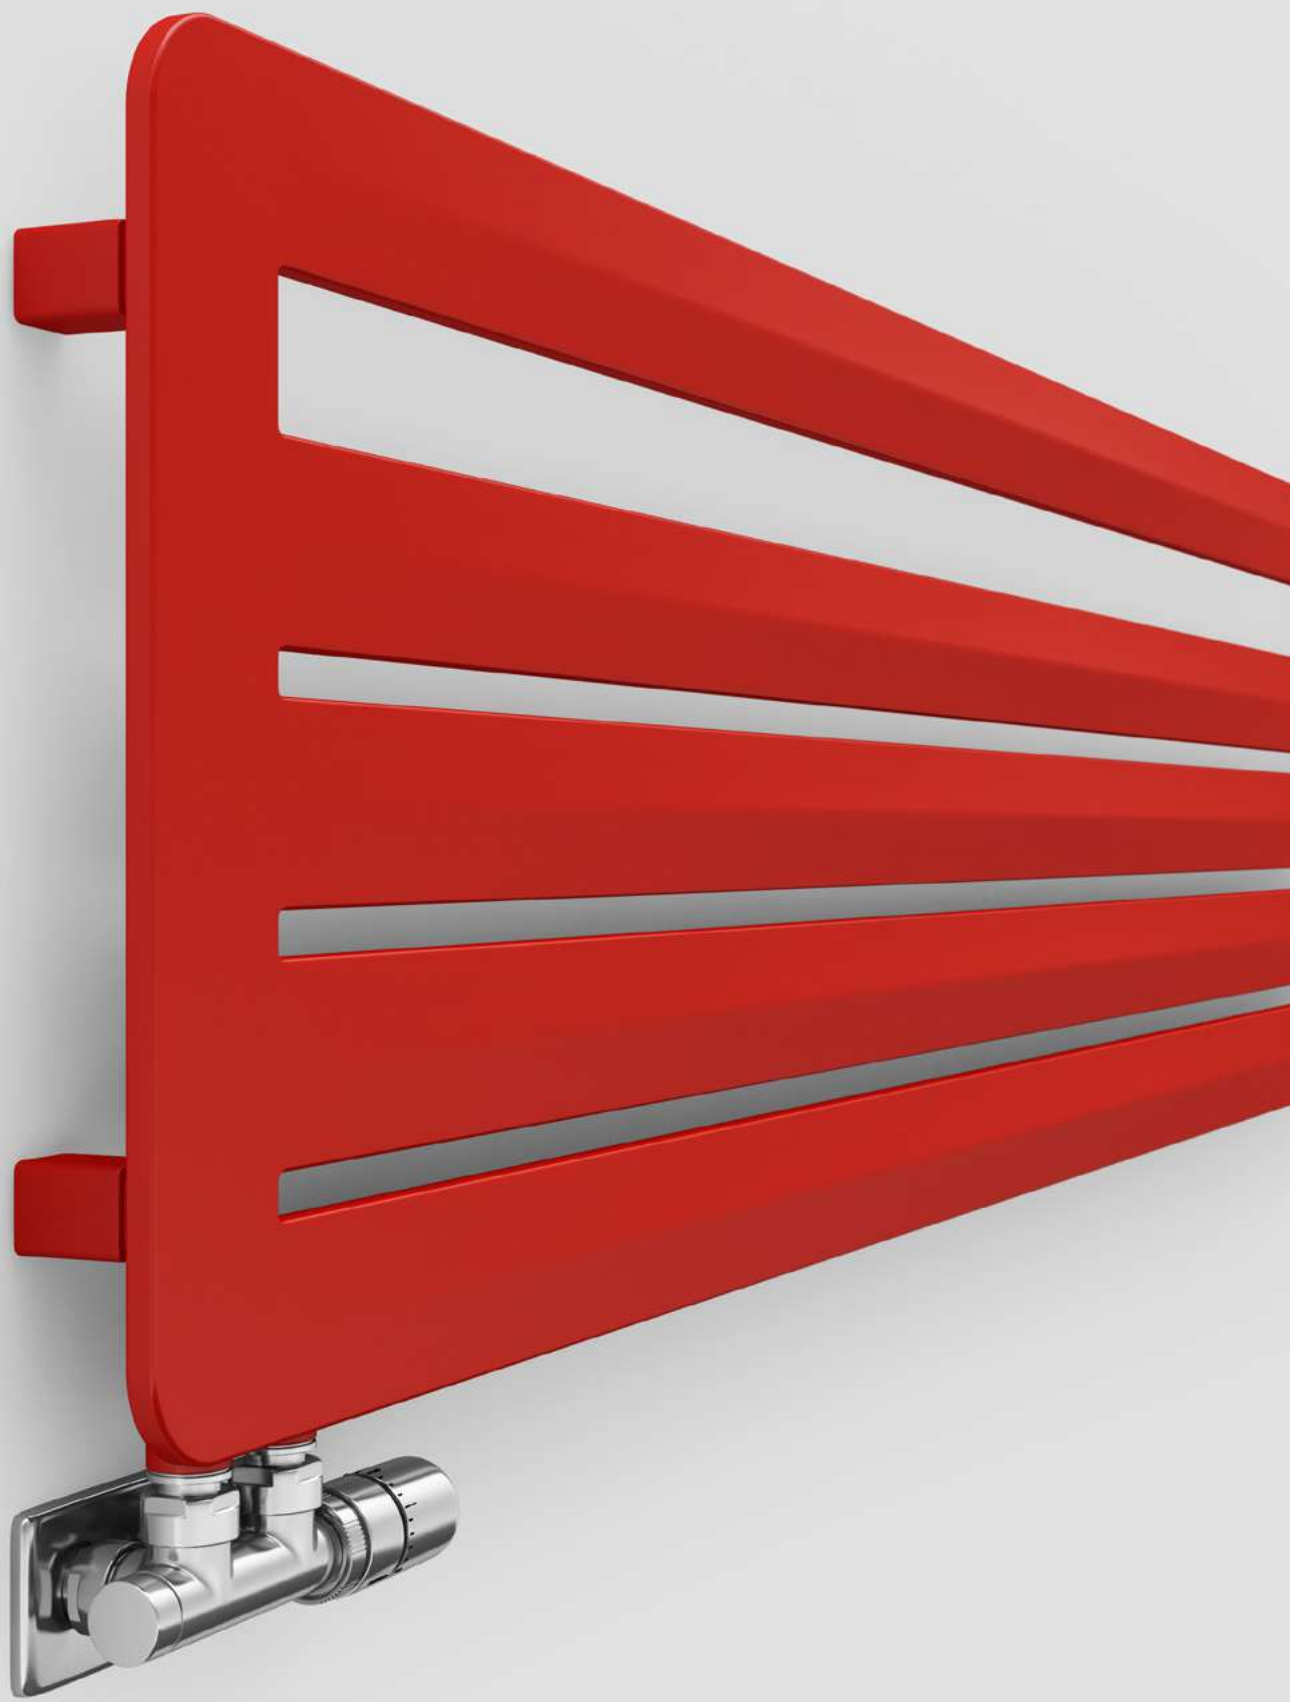

Alex s. 314

Alex One  s. 318



Radiator (shown fitted as Dual Fuel)

Alex One 1140↑ x 600↔ S1, colour: modern grey, product and configuration code: WZALN114060 KDGRS1P

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR


Integrated pipe masking set, chrome, TGPCR002

Heating element

Built-in, integrated One heating element







A close-up photograph of a modern radiator. The radiator consists of several parallel, curved metal tubes. At the bottom, a chrome valve set is visible, including a 3-axis thermostatic valve and a pipe masking set. The background is a dark, textured wall.

Radiator


Alex 1580 ↑ x 500 ↔ SX, colour: metallic grey, product and configuration code: WGALE158050 KMGRSX

Valves and accessories

Connection set: 3-axis thermostatic valve set, left, chrome, WRZTCG1-CR
Pipe masking set – 70 mm, chrome, TGPCR001

Angus V ① s. 322

Angus V E ① s. 324

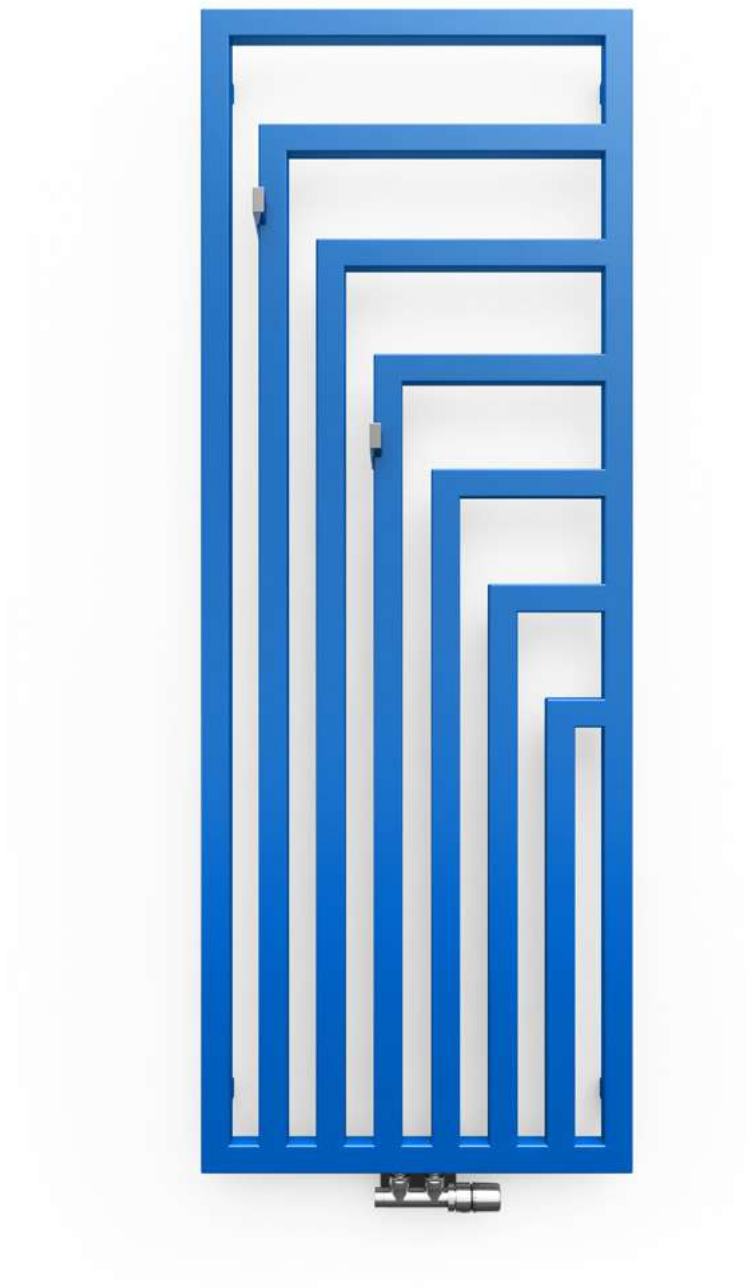

Radiator


Angus V 1620↕ x 600↔ ZX, colour: RAL 5015, product and configuration code: WGANG162060 K515ZX

Valves and accessories

Connection set: Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002

ZIP V 30 hanger, WRWZIP012 KCRO

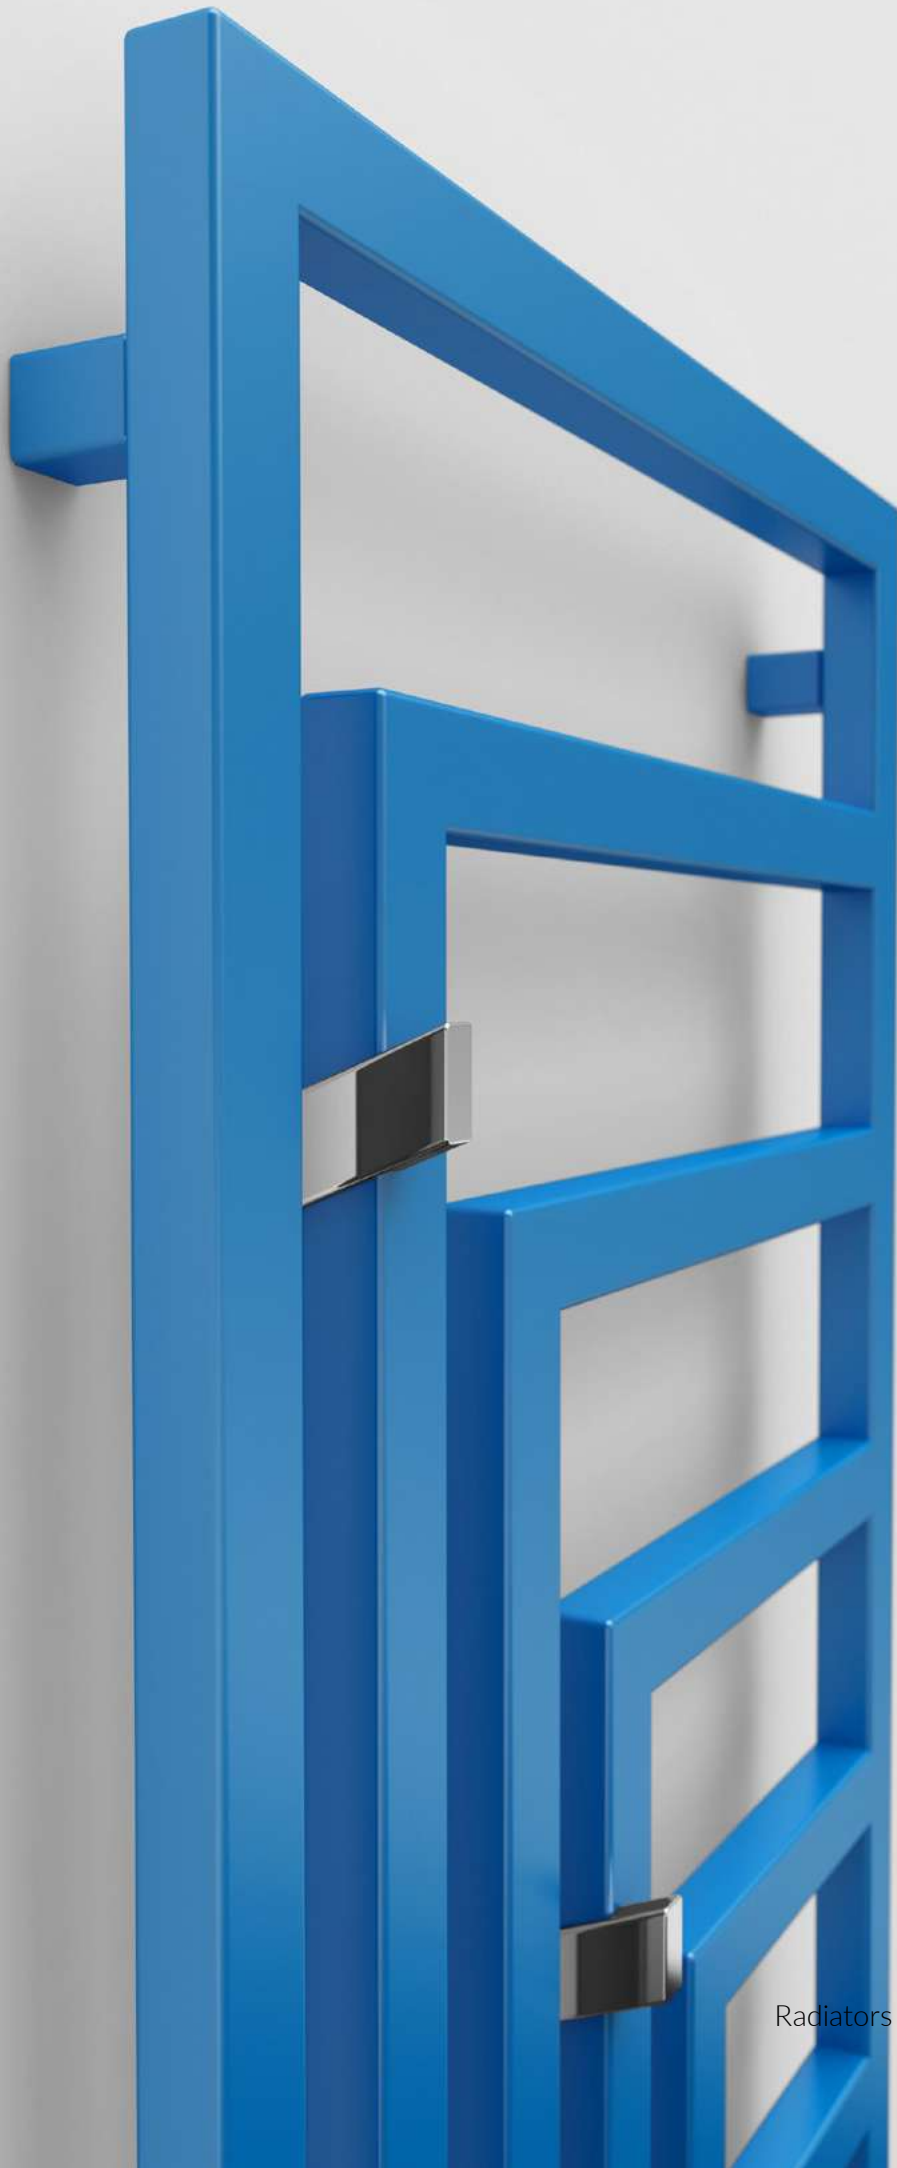



Radiator (shown fitted as Dual Fuel)

Angus V 1780↑ x 680⇔ SX, colour: vibrant brown,
product and configuration code: WGANG178068 KOVBSX

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right,
chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002

ZIP V 30 hanger, WRWZIP012 KCRO


Heating element

KTX 4 Blue heating element, chrome, WEK4B TCROWP



Angus DW ① s. 326

Angus DW E ① s. 328

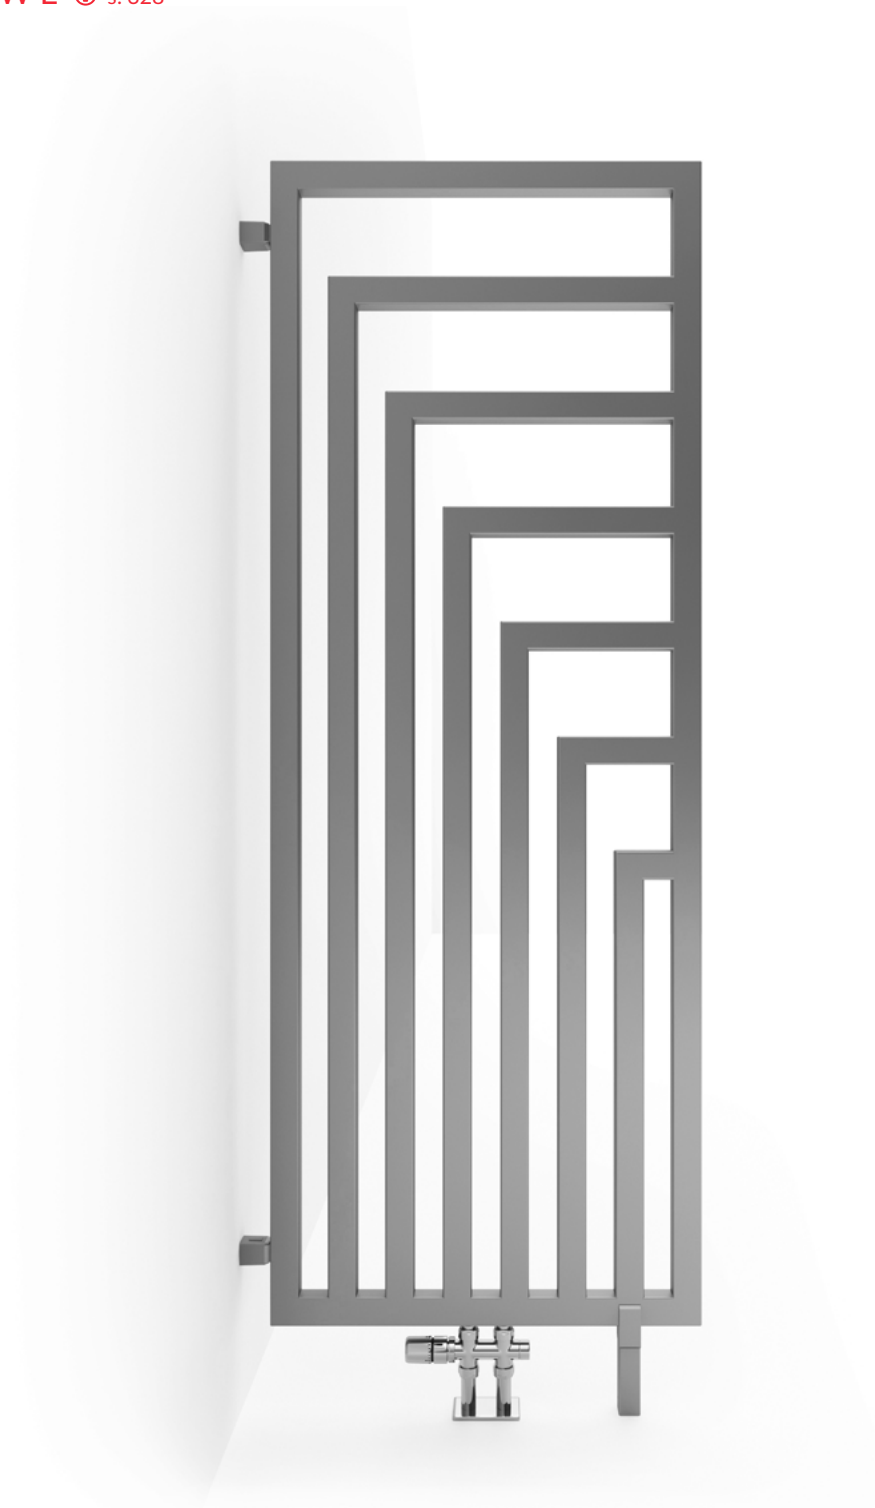

Radiator

Angus DW 1620↑ x 600↔ ZX, colour: chrome effect, product and configuration code: WGANS162060 KCREZX

Valves and accessories

Integrated thermostatic valve set, straight, right, chrome, WRZT5G4-CR

Integrated pipe masking set, chrome, TGPCR002





Radiator

Angus DW 1780⇕ x 680⇔ ZX, colour: RAL 3003,
product and configuration code: WGANS178068 K303ZXE


Valves and accessories

Integrated thermostatic valve set, straight, right,
chrome, WRZT5G4-CR

Integrated pipe masking set, chrome, TGPCR002



Angus H ① s. 330

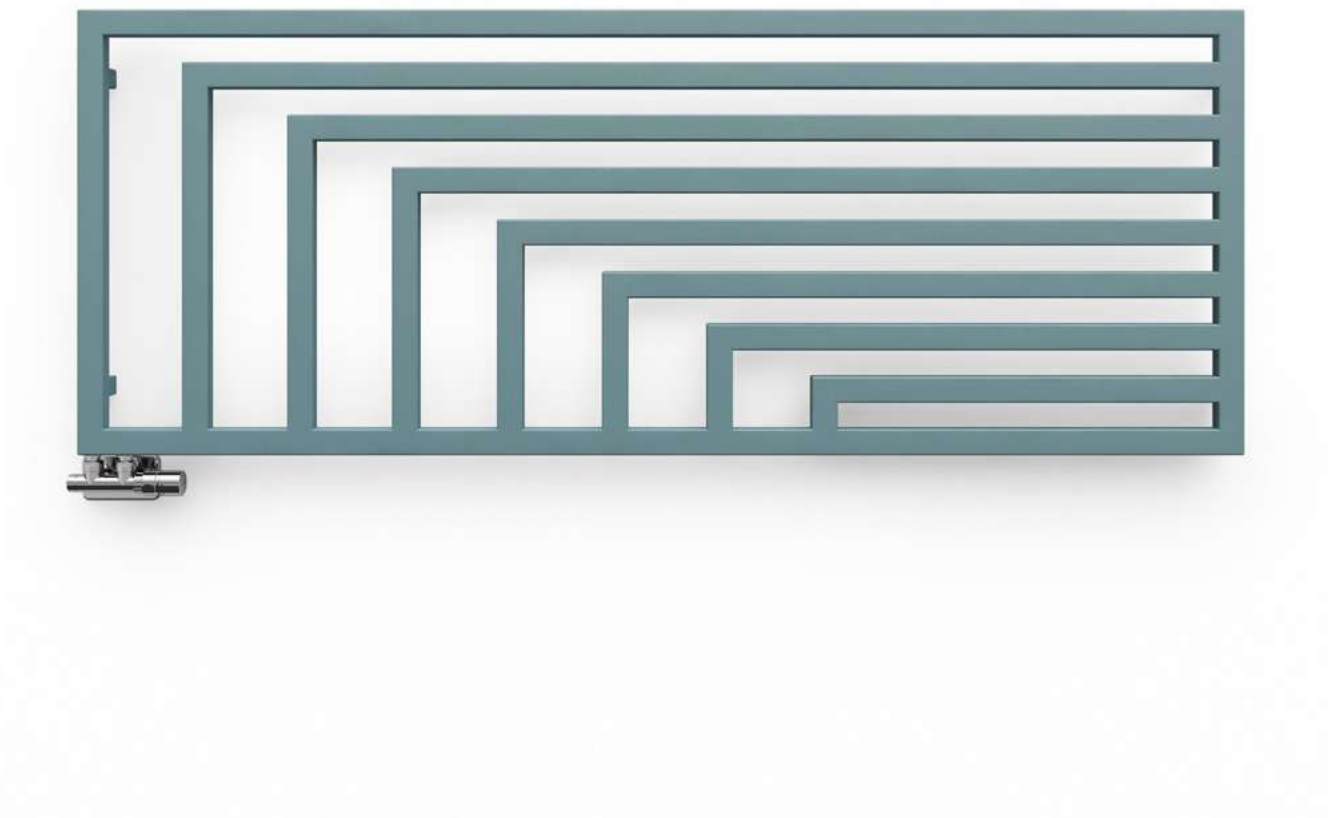


Radiator

Angus H 680↓ x 1780↔ YL, colour: anodic saphire, product and configuration code: WGANH068178 KASPYL

Valves and accessories

Connection set: Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR
Integrated pipe masking set, chrome, TGPCR002

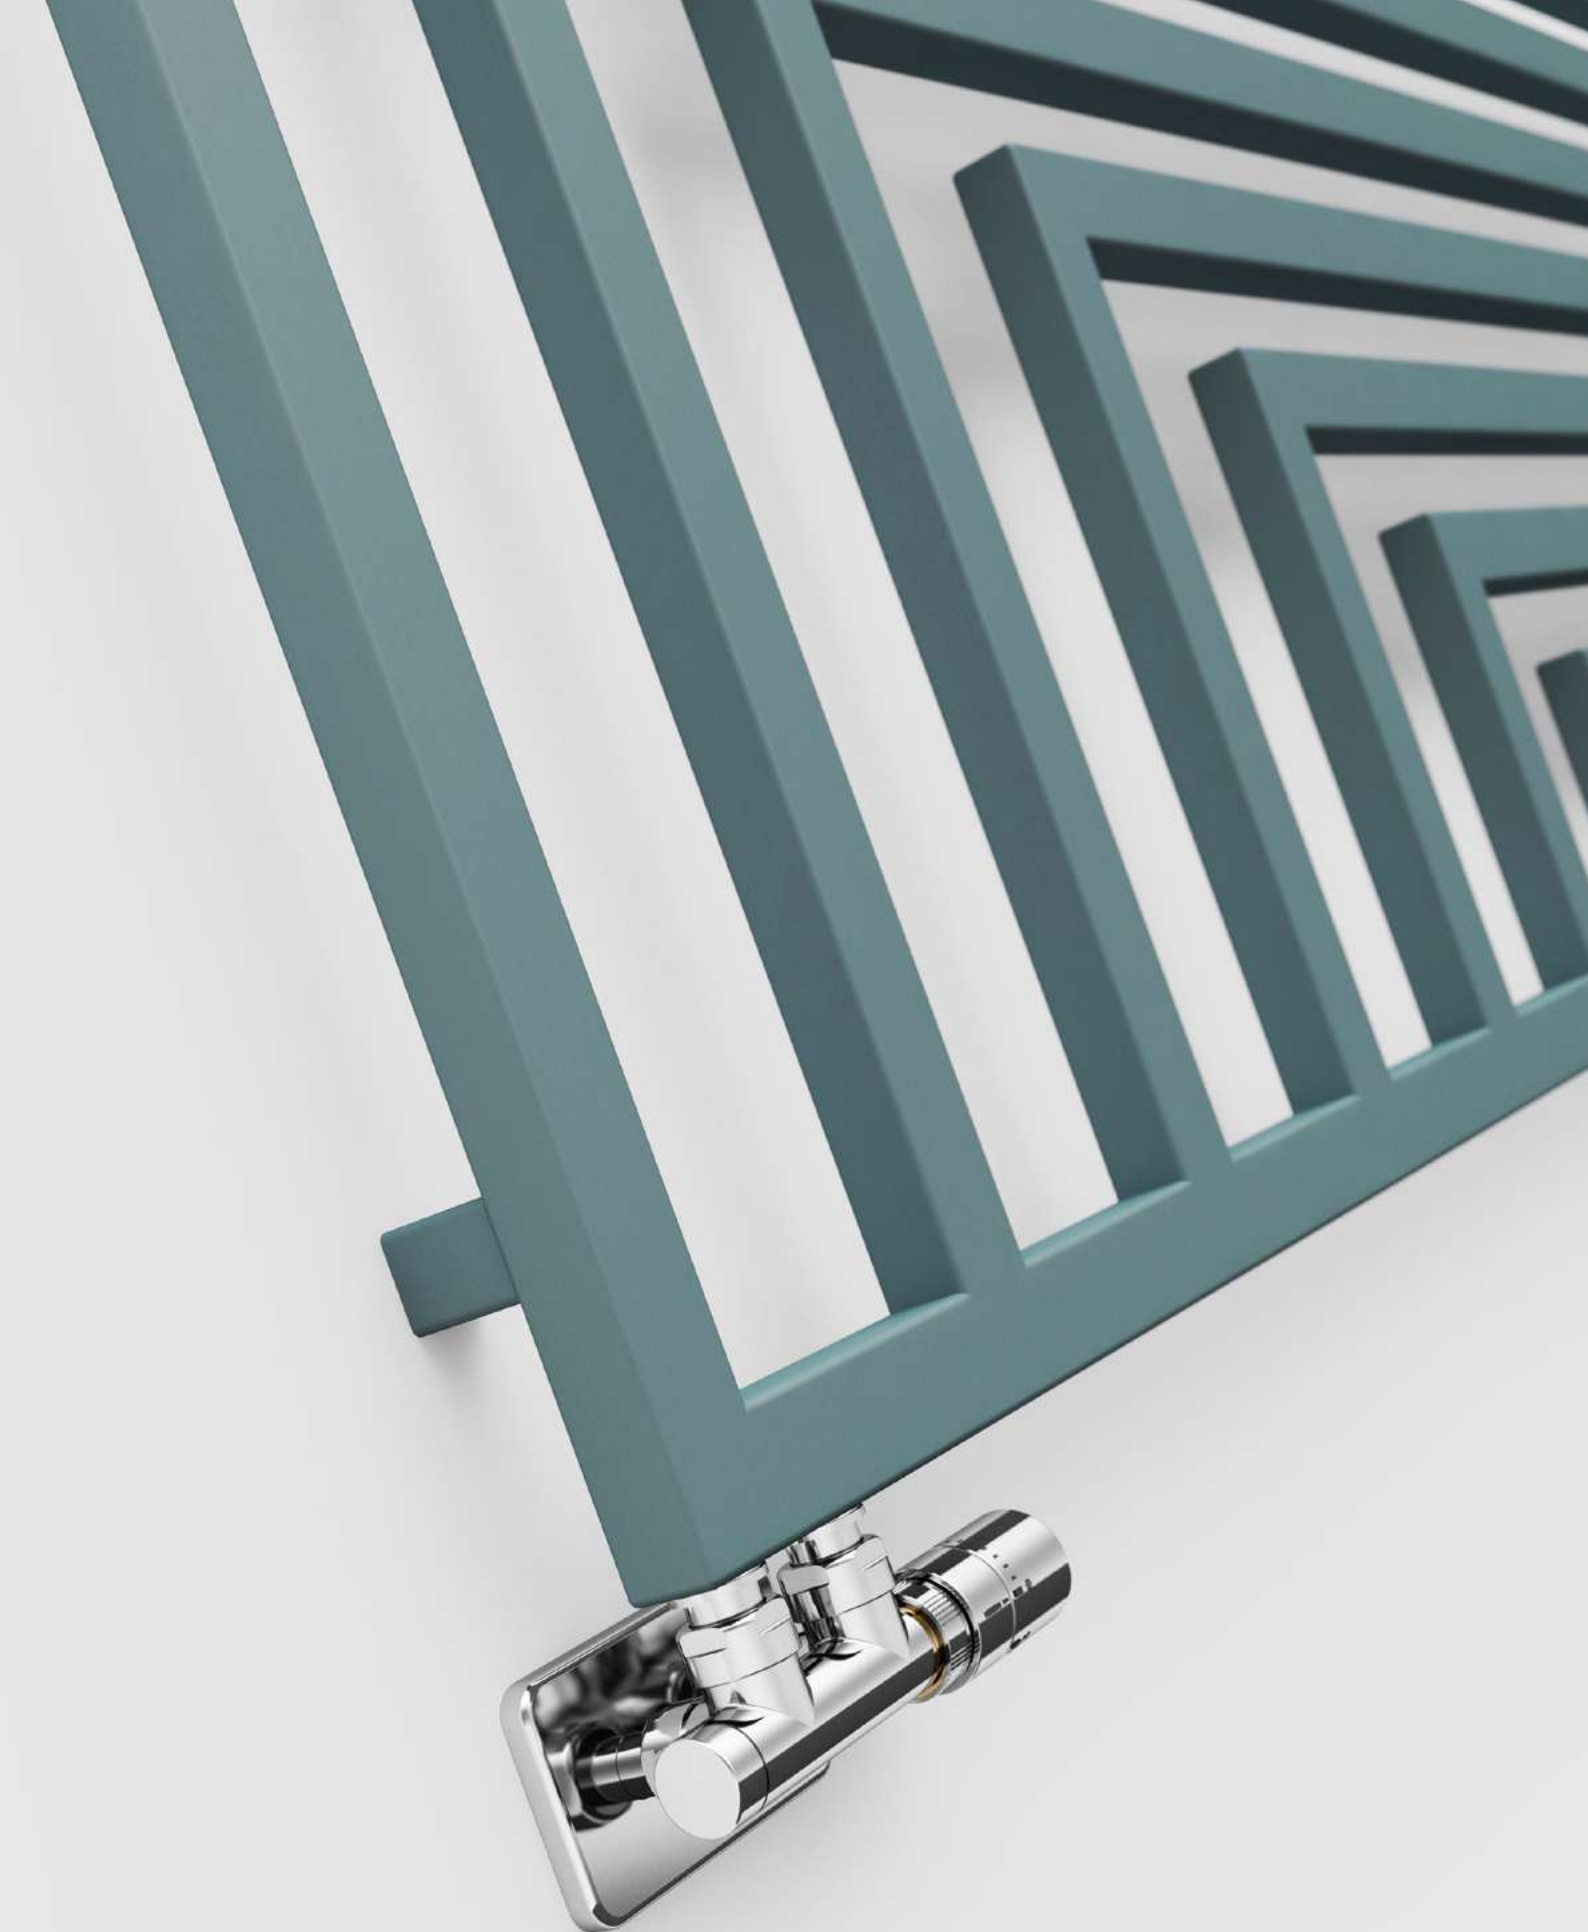

Bone s. 334

Bone One  s. 336



Radiator (shown fitted as Dual Fuel)

Bone 1260 ↑ x 500 ↔ SX, colour: noble brown, product and configuration code: WGBON126050 KINBSX

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR


Integrated pipe masking set, chrome, TGPCR002

Heating element

REG 3 heating element, white with grey ring, WER3G06 T916W



Bone DW [ⓘ] s. 338

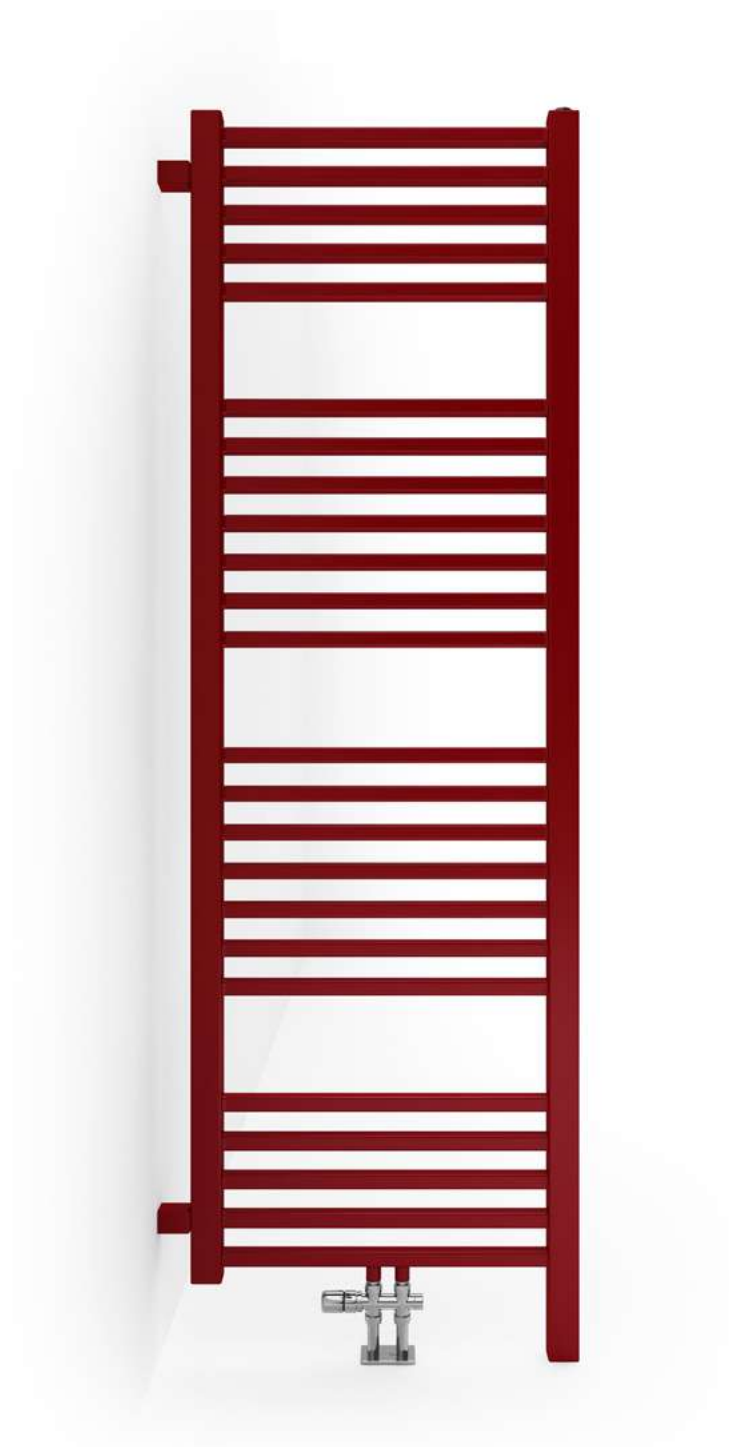

Radiator

Bone DW 1610↓ x 500↔ ZX, colour: RAL 3003, product and configuration code: WGBON126050 K303SX

Valves and accessories

Integrated thermostatic valve set, straight, right, chrome, WRZT5G4-CR

Integrated pipe masking set, chrome, TGPCR002



Camber ⓘ s. 340




Radiator

Camber 575 ↑ x 800 ↔ LP, colour: Salt & Pepper, product and configuration code: WGCAM057080 KSPPLP

Valves and accessories

Angled thermostatic valve set, left, chrome, WRZTCG3-CR

Pipe masking set – 70 mm, chrome, TGPCR001

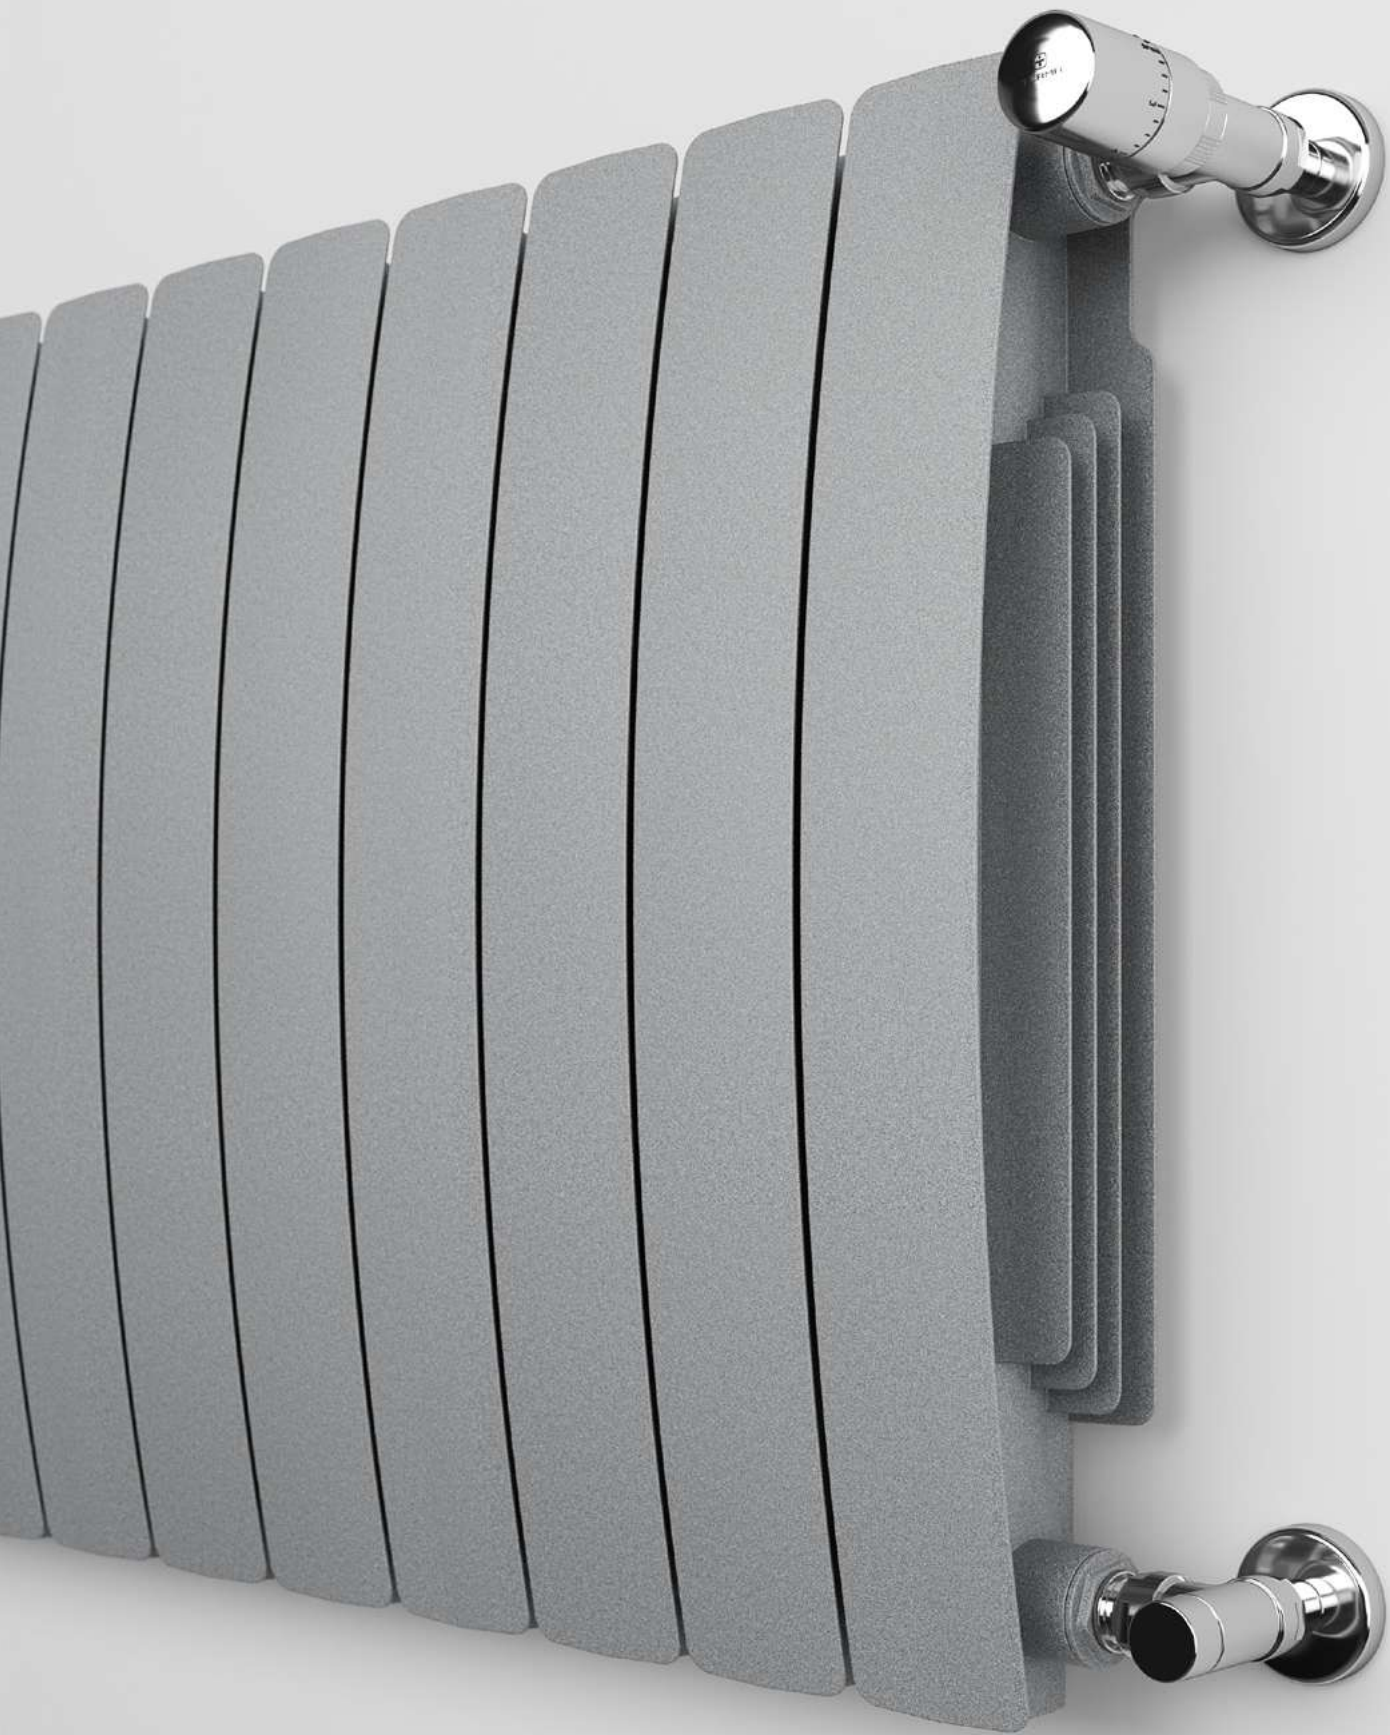



Radiator

Camber 575 ↑ x 800 ↔ LP, colour: metallic grey, product and configuration code: W3CAM057080 KMGR1P

Valves and accessories

Angled regulating valves set, chrome, WRZRC1-CR

Pipe masking set – 70 mm, chrome, TGPCR001



BREATHE

THE FLORIDA HOUSES
CHRISTOPHER DOMIN AND JOSEPH KING

Cane

① s. 342

Cane E ① s. 344



Radiator

Cane 1600↑ x 390↔ ZX, colour: white gold, product and configuration code: WGCAN160039 KWGDZX

Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002



Case Slim ① s. 346




Radiator

Case Slim 585 ↑ x 1100 ↔ ZX, colour: gold gloss, product and configuration code: WGCSS058110 KGPOYL

Valves and accessories

Connection set: Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR
Integrated pipe masking set, chrome, TGPCR002

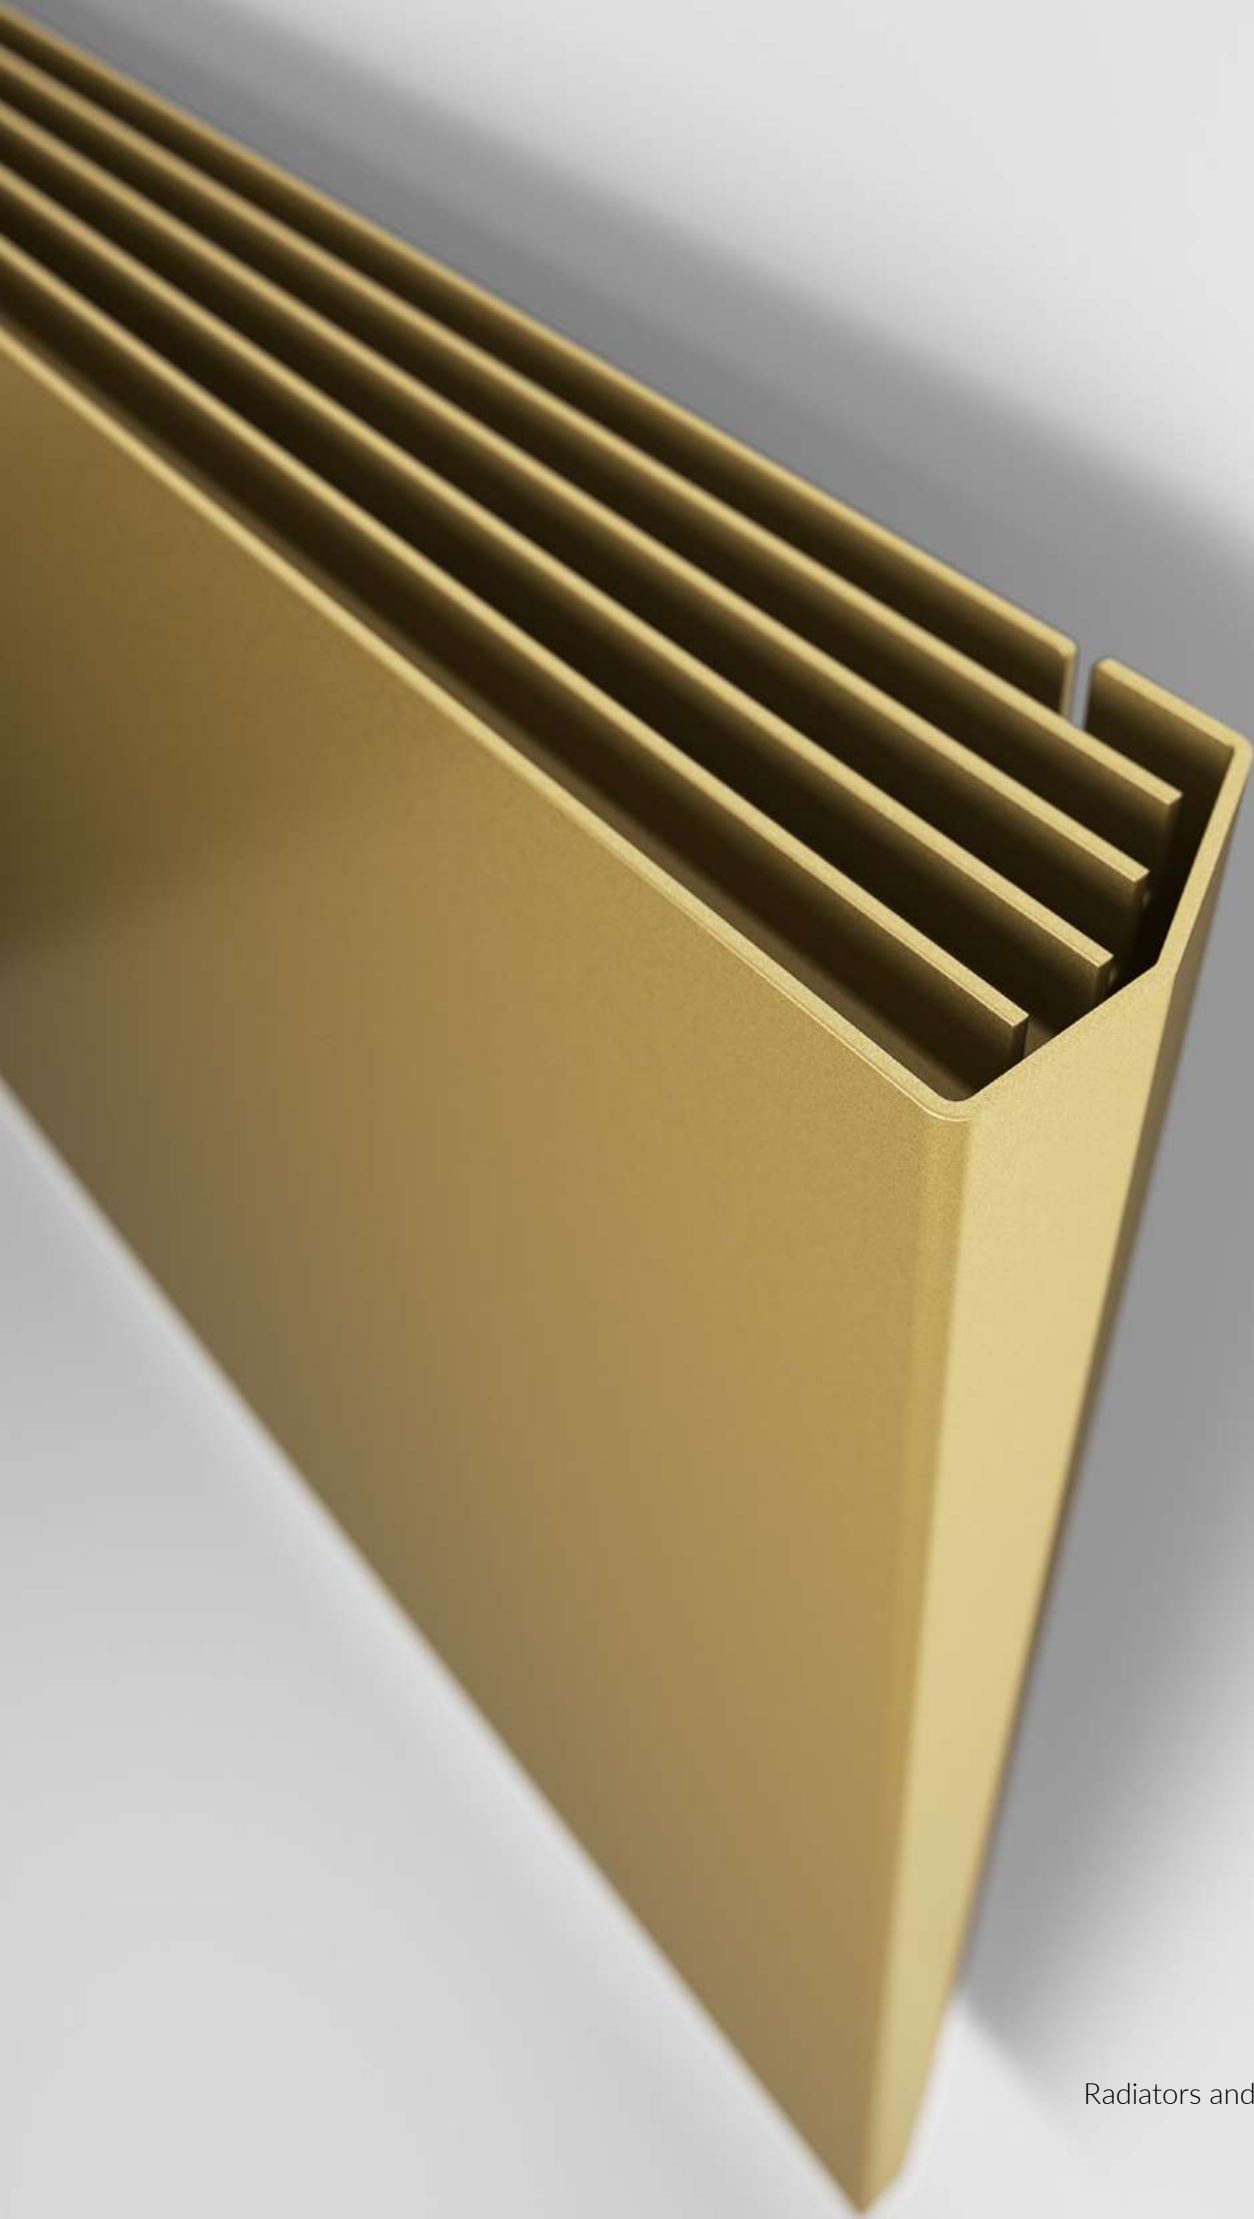



Radiator

Case Slim 1585 ↑ x 520 ↔ ZX , colour: graphics 05, product and configuration code: WGCSS158052 K9P5ZX 00

Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002

Case Slim hanger, chrome, WRRCSS052 KCRO





Case Slim ① s. 346



GLASS



MIRROR



CONCRETE



Selection of graphics for the Case Slim vertical radiator



Selection of graphics for the Case Slim horizontal radiator

The outer shell of the Case Slim is available in 249 different colours (including RAL, special finishes and Concrete). The concrete finish, due to its hand application, has a unique structure. The glass finish is available in RAL colours (excluding Metallic and fluorescent colours – more details on Terma website) as well as manufacturers image selection or your own graphics.

All glass and mirror radiators can be used as a blackboard when using a special marker that comes with the radiator. If using your own marker, please make sure that it is washable and suitable to use on glass.


Suggested image selection *



34



38

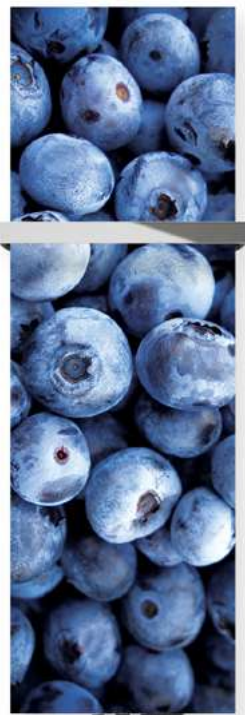

52



72



78



93



86




109

* Selection available for glass finish. Current selection available on manufacturer's website. If you want to design your own Case Slim, please contact your supplier or visit our website www.termaheat.com.

City ⓘ s. 350

City One ⓘ s. 352

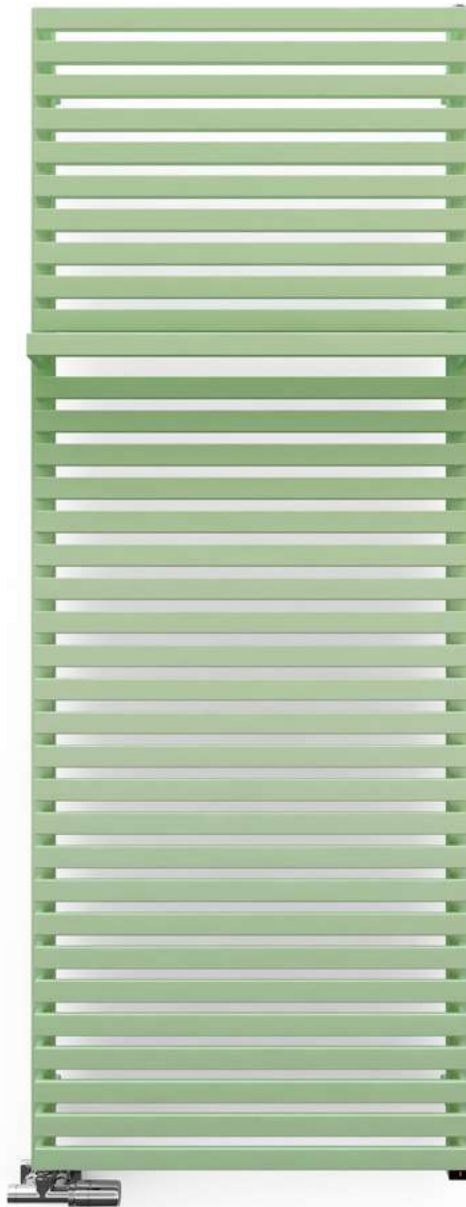

Radiator (shown fitted as Dual Fuel)

City One 1590↑ x 600↔ S8, colour: RAL 6019, product and configuration code: WZCIN159060 K619S8P

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, left, chrome, WRZT5G5-CR

Integrated pipe masking set, chrome, TGPCR002

Heating element

Built-in, integrated One heating element



Cyklon V [ⓘ] s. 356



Radiator

Cyklon V 1900↑ x 495 YL, colour: RAL 5024, product and configuration code: WGCYV190049 K524YL

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002



Cyklon H ① s. 358



Radiator


Cyklon H 410↑ x 1600↔ O1, colour: RAL 1014, product and configuration code: WGCYH041160 K114O1

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, left, chrome, WRZT5G5-CR

Integrated pipe masking set, chrome, TGPCR002



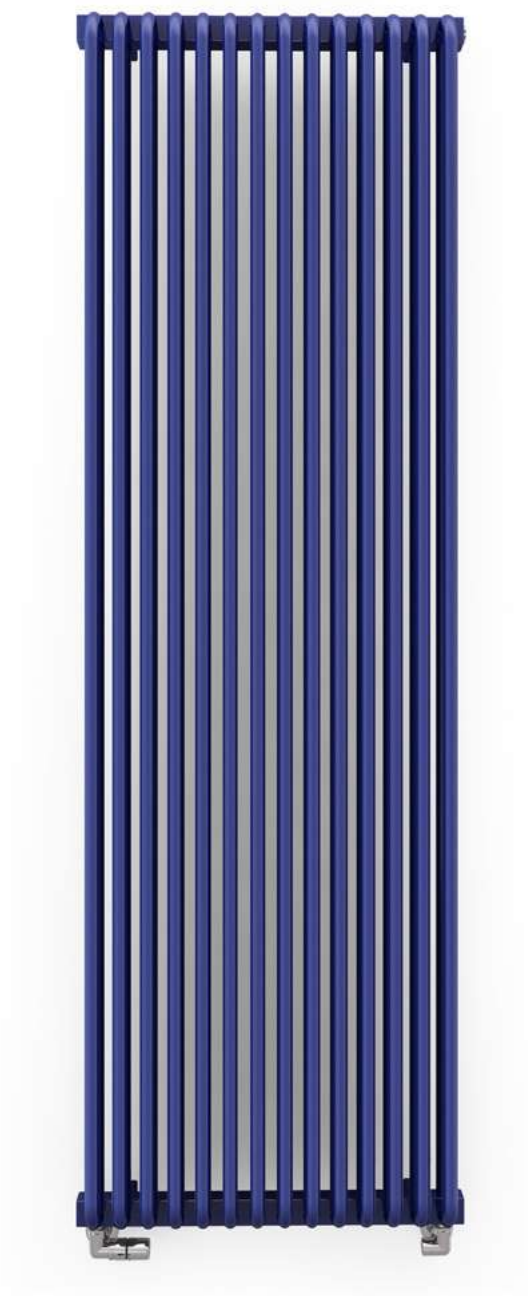

Radiator

Delfin 1800⇕ x 580⇔ SX, colour: RAL 5022, product and configuration code: WGDLF180058 K522SX

Valves and accessories

Connection set: 3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001





Radiator

Delfin 540 ↑ x 1220 ↔ VP colour: metallic black, product and configuration code: WGDLF054122 KMBCVP

Valves and accessories

Integrated lockshield valves set, chrome, WRZOSSC1-CR

Integrated pipe masking set, chrome, TGPCR002



Dexter ^① s. 366

Dexter One ^① s. 368



Radiator

Dexter 1220↑ x 600↔ SX colour: modern grey, product and configuration code: WGDEX122060 KDGRSX


Valves and accessories

Dexter thermostatic valve set, left, chrome, TGETCG6-CR

Pipe masking set – 70 mm, chrome, TGPCR001





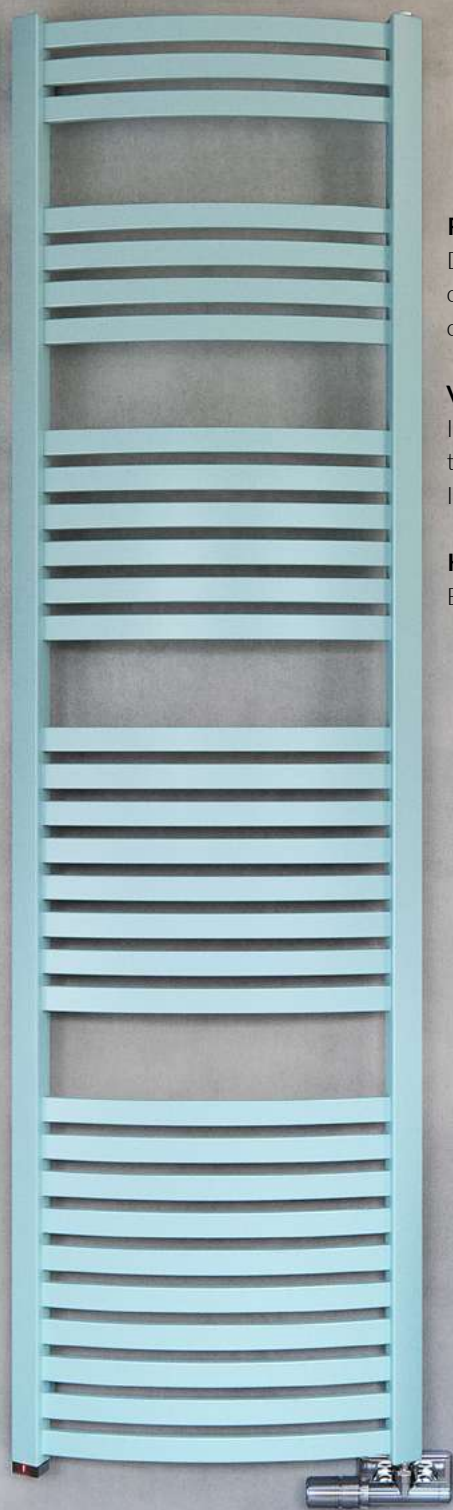

Radiator (shown fitted as Dual Fuel)

Dexter One 1760 ↓ x 500 ↔ S1,
colour: pastel blue, product and configuration
code: WZDEN176050 KPBL51PE

Valves and accessories

Integrated thermostatic valve with immersion
tube set, angled, right, chrome, WRZT5G6-CR
Integrated pipe masking set, chrome, TGPCR002

Heating element

Built-in, integrated One heating element

Dexter Pro [ⓘ] s. 370

Dexter Pro One [ⓘ] s. 372



Radiator (shown fitted as Dual Fuel)

Dexter Pro One 1220↕ x 600↔ Z1, colour: granite, product and configuration code: WZDPN122060 KGRAZ1P

Valves and accessories

Radiator sold with: 2 x Angled lockshield valve


Radiator sold with: Noble thermostatic head, chrome

Heating element

Built-in, integrated One heating element



Diamond ① s. 374

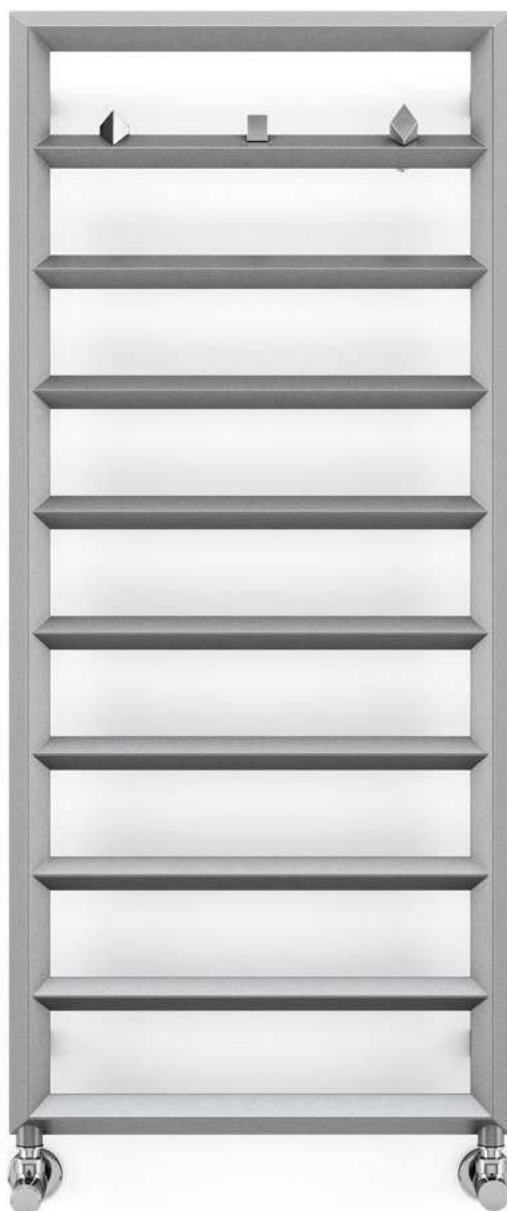

Radiator

Diamond 1120⇕ x 500⇔ SX, colour: diamond silver, product and configuration code: WGDIM112050 KDISSX

Valves and accessories

Angled manual valves set, chrome, WRZRCK1-CR

Pipe masking set – 70 mm, chrome, TGPCR001

3 x Spark hanger, chrome, WRWSP1025 KCRO, WRWSP2025 KCRO, WRWSP3025 KCRO







Radiator (shown fitted as Dual Fuel)

Diamond 1120 ↓ x 500 ↔ SX, colour: RAL 5021,
product and configuration code: WGDIM112050 K521SX

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002

3 x Spark hanger, chrome, WRWSP1025 KCRO, WRWSP2025 KCRO, WRWSP3025 KCRO

Heating element

DRY heating element, chrome, WEDRY04 TCROM



Radiator (shown fitted as Dual Fuel)

Domi 1116 ↑ x 500 ↔ SX, colour: chrome, product and configuration code: WGD0M111050 KCRO SX

Valves and accessories

Connection set: Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002


Heating element

REG 3 heating element, silver with chrome ring, WER3G04 TCROW



Easy ^① s. 380

Easy One ^① s. 382

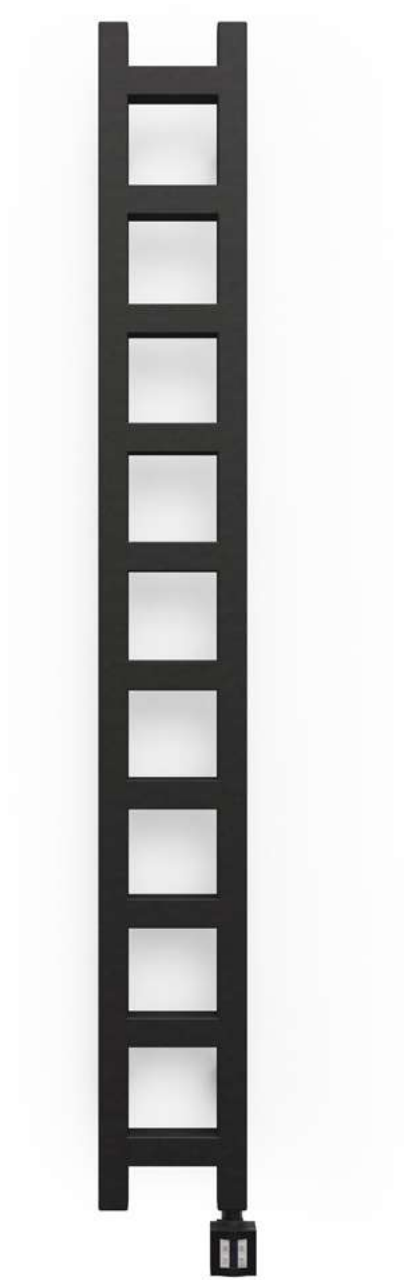

Radiator (shown fitted as an Electric Radiator)

Easy 1600↑ x 200↔ E8, colour: heban, product and configuration code: WLEAS160020 KIHEE8KT4S

Heating element

KTX 4 heating element, black





Radiator

Easy 1600 ↑ x 200 ↔ SX, colour: modern grey,
product and configuration code: WGEAS160020 K706SX

Valves and accessories


3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001

Easy shelf, Oak, WRPEAS020 KDAB



Easy DW ⓘ s. 384

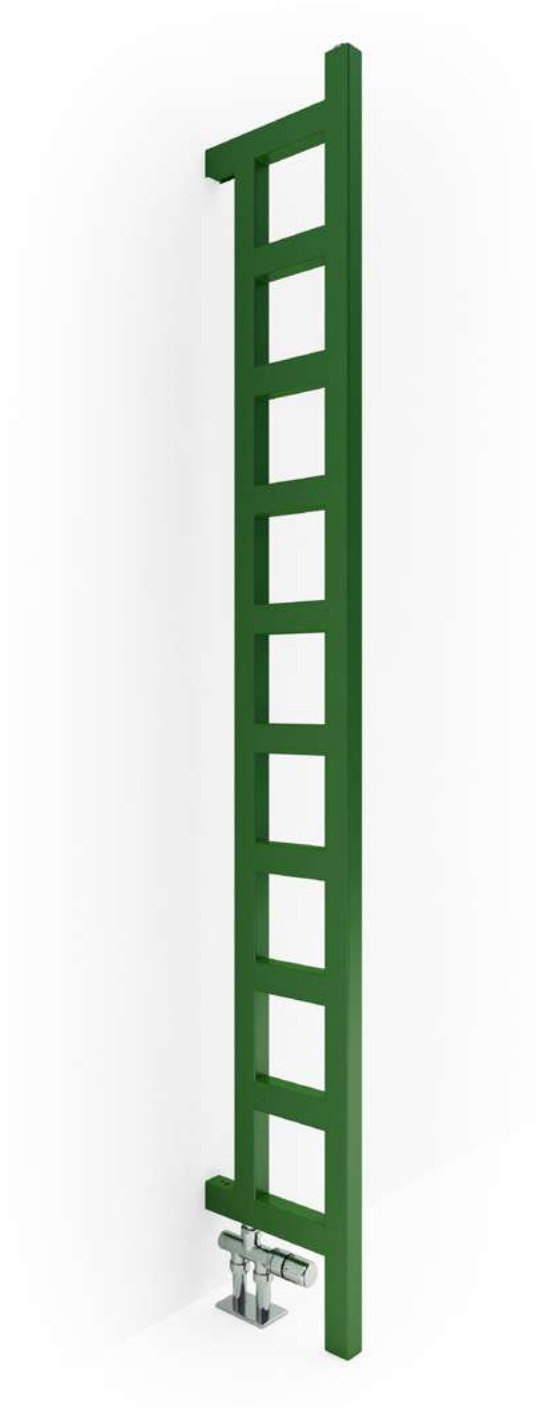

Radiator

Easy DW 1660↑ x 200↔ O1, colour: RAL 6010, product and configuration code: WGEAW166020 K61001

Valves and accessories

Integrated thermostatic valve with immersion tube, straight, left, chrome, WRZT5G7-CR

Integrated pipe masking set, chrome, TGPCR002





Radiator

Easy DW 1980↕ x 200↔ O1, colour: RAL 5002, product and configuration code: WGEAW198020 K502O1E

Valves and accessories


Integrated thermostatic valve with immersion tube, straight, left, chrome, WRZT5G7-CR

Integrated pipe masking set, chrome, TGPCR002



Fiona ^① s. 386

Fiona One ^① s. 392

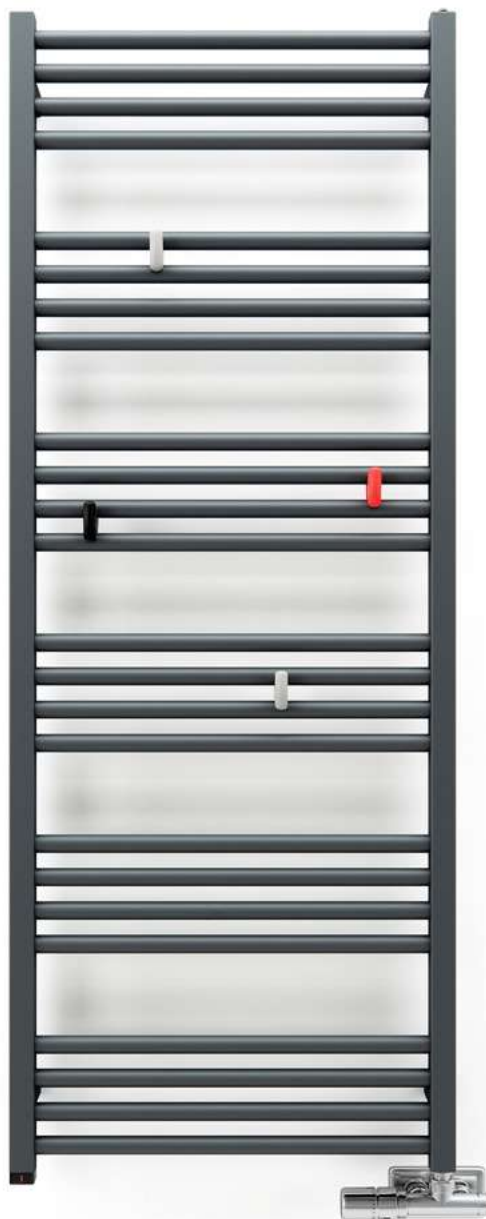

Radiator (shown fitted as Dual Fuel)

Fiona One 1380↓ x 530↔ S1, colour: modern grey, product and configuration code: WZFIE138053 KDGRS1P

Valves and accessories

Connection set: Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002

Yo! hanger 2 x white, WRWYOY001 SBIA, 1 x black, WRWYOY001 SCZA, 1 x red, WRWYOY001 SCZE

Heating element

Built-in, integrated One heating element





Radiator (shown fitted as an Electric Radiator)

Fiona One 1620↑ x 480↔ E1, colour: Sparkling Gravel,
product and configuration code: WWFIE162048 KRGRE1P


Valves and accessories

Yo! hanger 2 x white, WRWYOY001 SBIA, 2 x gray WRWYOY001 SSZA

Heating element

Built-in, integrated One heating element



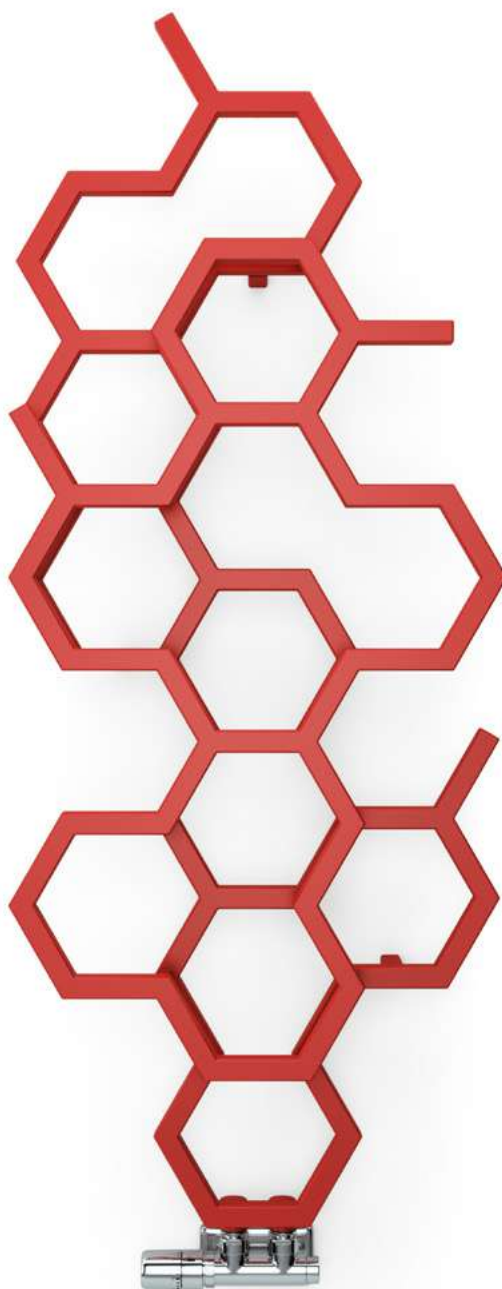


Radiator

Hex 1220 ↓ x 480 ↔ ZX, colour: soft 3028, product and configuration code: WGH2X122048 KS38ZX

Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002

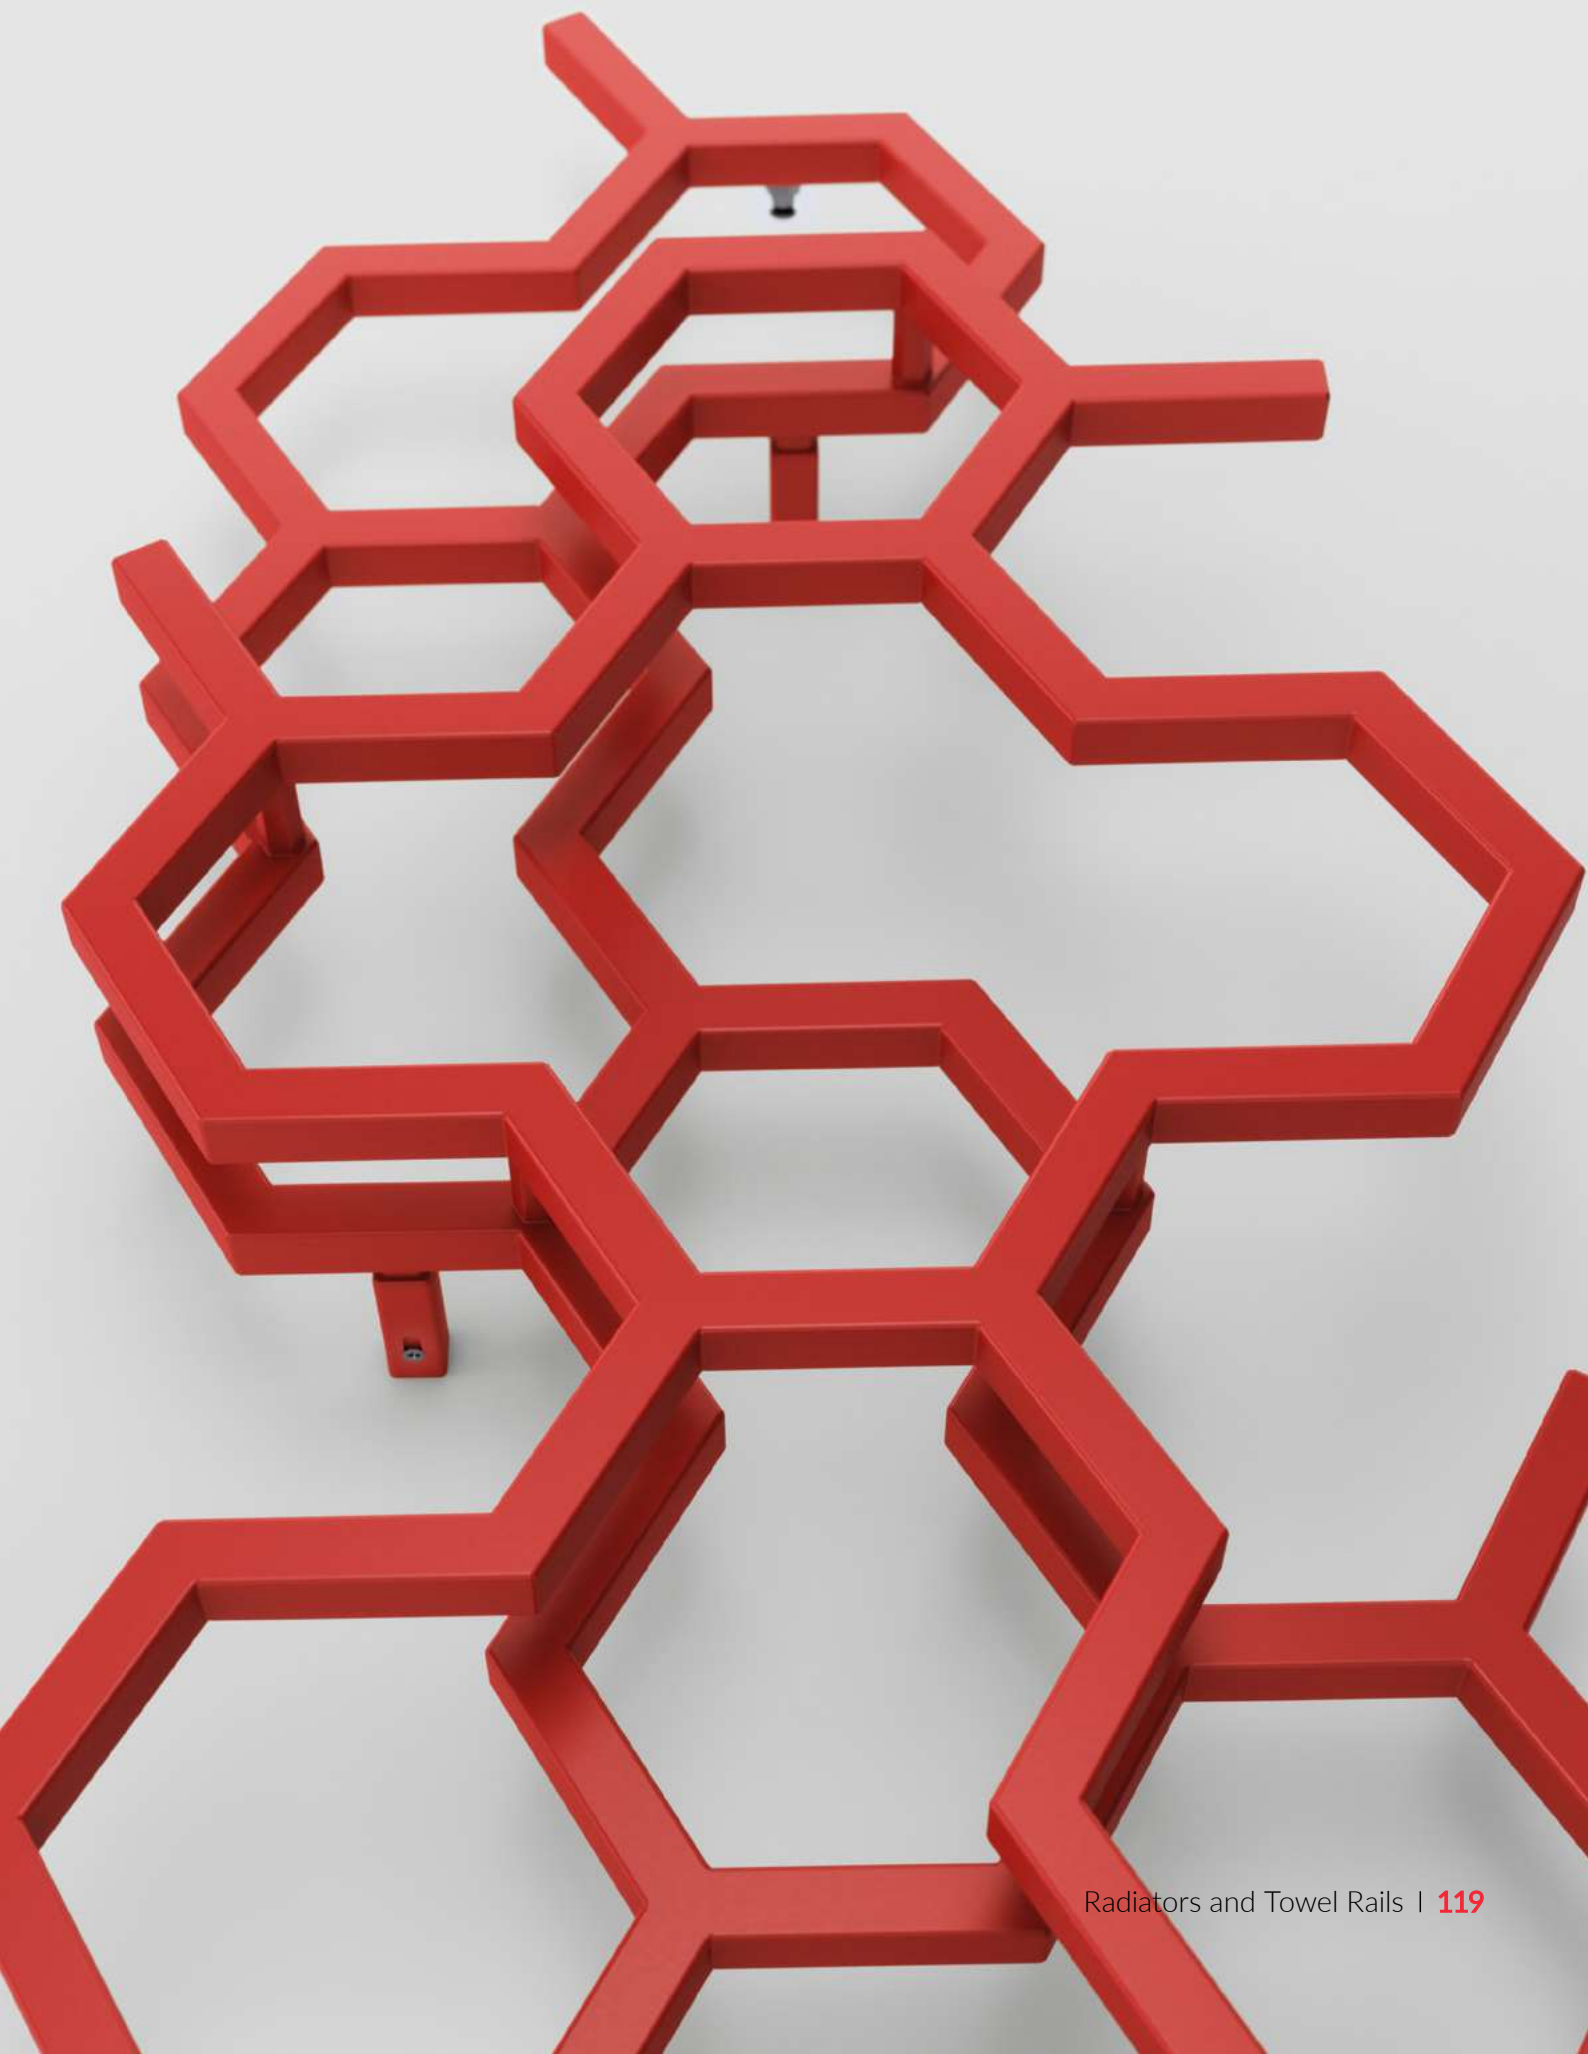





Radiator

Hex 1700 \updownarrow x 570 \leftrightarrow ZX, colour: copper, product and configuration code: WGH2X170057 KCOPZX

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR
Integrated pipe masking set, chrome, TGPCR002



Incorner [ⓘ] s. 404



Radiator (shown fitted as an Electric Radiator)

Incorner 1275 ↑ x 350 ↔ E1, colour: RAL 3005, product and configuration code: WLQIN127035 K305E1KT2S

Heating element

KTX 2 heating element, black








Radiator

Incorner 1005 ↓ x 350 ↔ SX, colour: sparkling grey,
product and configuration code: WGQIN100035 KRGYSXE

Valves and accessories

3-axis thermostatic valve set, left, chrome, WRZTCG1-CR
Pipe masking set – 70 mm, TGPCR001

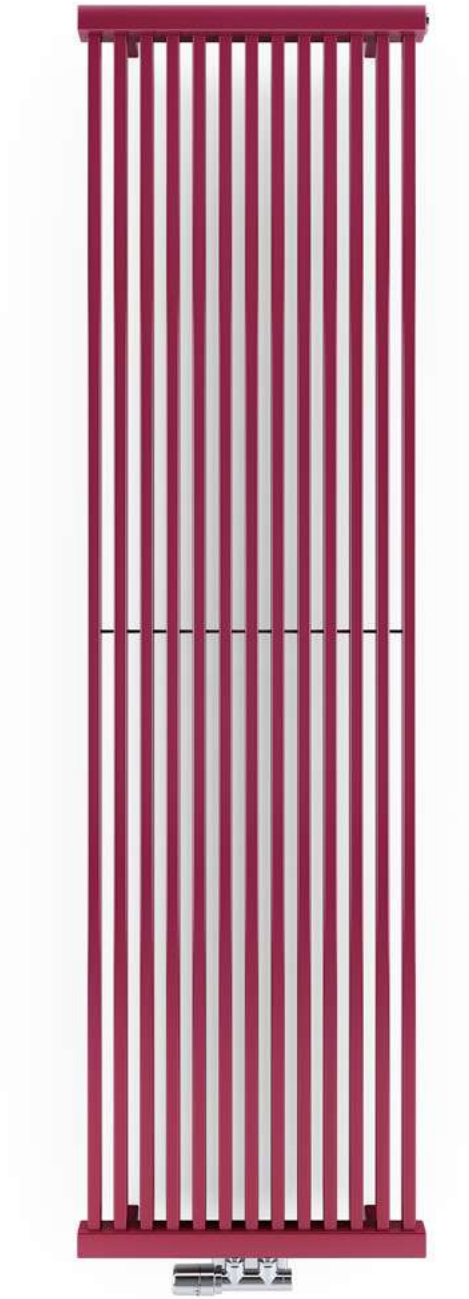


Radiator

Intra 1900↑ x 530↔ ZX, colour: RAL 4004, product and configuration code: WGINB190053 K404ZX

Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002

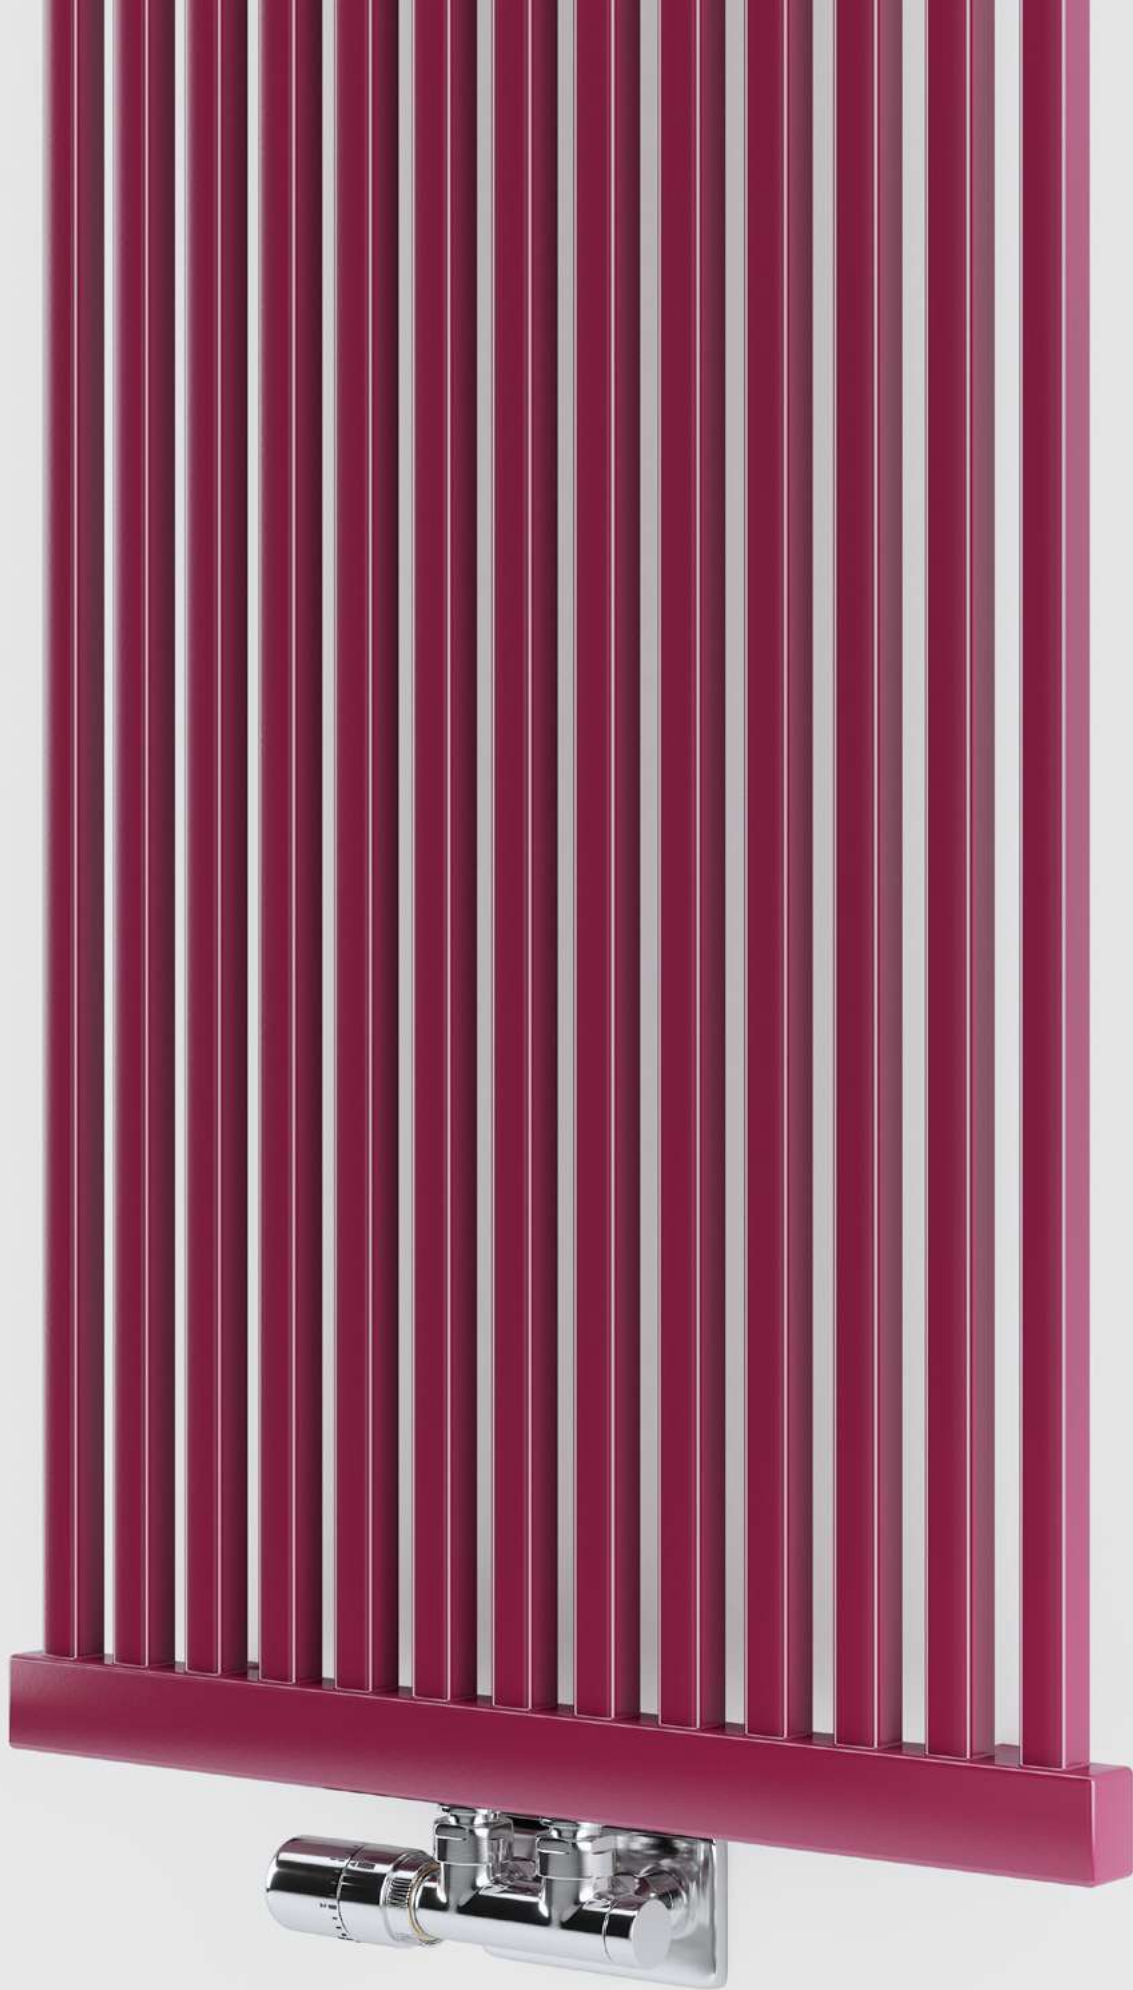

Intra M [ⓘ] s. 408



Radiator

Intra M 1700↑ x 640↔ ZX, colour: metallic stone, product and configuration code: WGINT170064 KMSTZX

Valves and accessories

Connection set: Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002

ZIP V hanger 20, WRWZIP011 KCRO



Iron D ① s. 410



Radiator

Iron D 1315 \updownarrow x 500 \leftrightarrow ZX, colour: copper, product and configuration code: WGIRD131050 KCOPZX

Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002





Radiator (shown fitted as Dual Fuel)

Iron D 1510 \updownarrow x 500 \leftrightarrow ZX, colour: metallic red,
product and configuration code: WGIRD151050 KMREZX

Valves and accessories

Integrated thermostatic t-piece valve set, left, chrome, WRZT5G14-CR
Integrated pipe masking set, chrome, TGPCR002

Heating element

DRY heating element, chrome, WEDRY08 TCROM





Iron S

① s. 412



Radiator

Iron S 1315 ↑ x 500 ↔ GD, colour: graphite, product and configuration code: WGIRS131050 KGRPGD

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002







Radiator (shown fitted as Dual Fuel)

Iron S 1510 \updownarrow x 500 \leftrightarrow GD, colour: metallic red, product and configuration code: WGIRS151050 KMREGD

Valves and accessories

Integrated thermostatic t-piece valve set, right, chrome, WRZT5G15-CR

Integrated pipe masking set, chrome, TGPCR002

Heating element

DRY heating element, chrome, WEDRY08 TCROM

Kioto s. 414

Kioto One  s. 416



Radiator (shown fitted as Dual Fuel)

Kioto One 1185 \updownarrow x 480 \leftrightarrow S8, colour: RAL 7022, product and configuration code: WZKIN118048 K722S8P

Valves and accessories

Connection set: Integrated thermostatic valve with immersion tube set, angled, left, chrome, WRZT5G5-CR
Integrated pipe masking set, chrome, TGPCR002

Heating element

Built-in, integrated One heating element



Lena s. 418



Radiator

Lena 1620 \updownarrow x 586 \leftrightarrow O8, colour: metallic red, product and configuration code: WGLEN162058 KMREO8


Valves and accessories

Connection set: Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR
Integrated pipe masking set, chrome, TGPCR002



Lima ① s. 424

Lima One ① s. 430

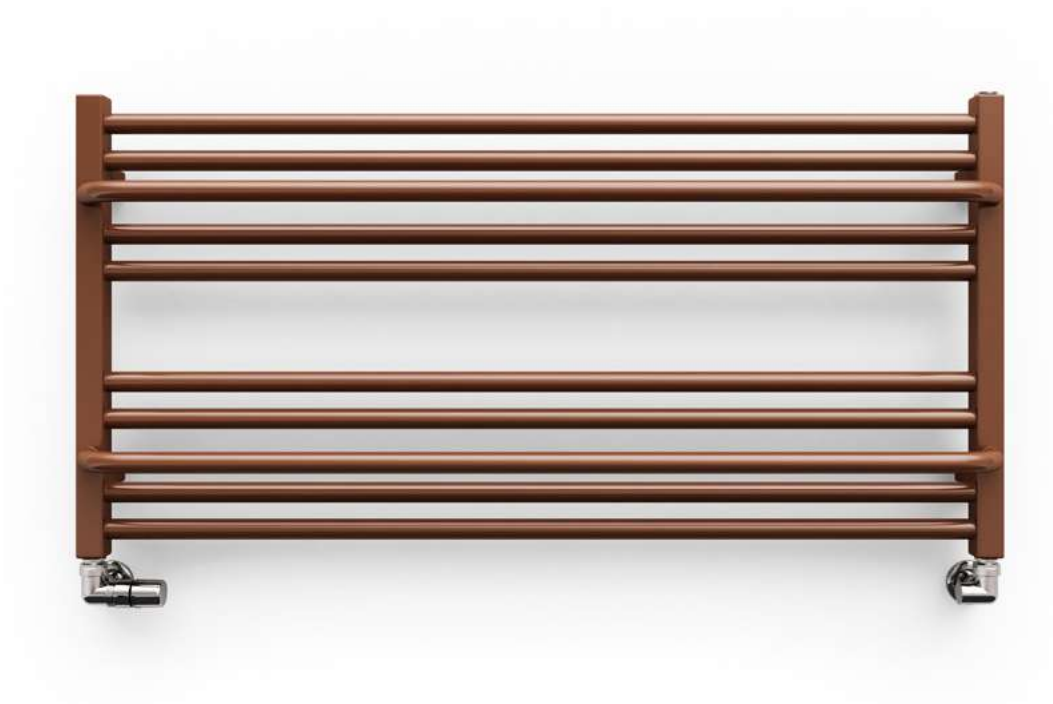

Radiator

Lima 500↑ x 1000↔ SX, colour: RAL 8004, product and configuration code: WGLIM050100 K804SX

Valves and accessories

Connection set: 3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001





Radiator

Lukka 940↑ x 400↔ SX, colour: gold gloss, product and configuration code: WGW51094040 KGPOSX

Valves and accessories

Connection set: 3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001





Radiator (shown fitted as Dual Fuel)

Lukka 1420 ↑ x 600 ↔ SX, colour: metallic black, product and configuration code: WGW51142060 KMBCSXE

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, left, chrome, WRZT5G5-CR
Integrated pipe masking set, chrome, TGPCR002

Heating element

MOA heating element, chrome, WEMOA08 TCROM



Mantis [ⓘ] s. 436

Mantis One [ⓘ] s. 438



Radiator (shown fitted as an Electric Radiator)

Mantis One 860↑ x 440↔ E8, colour: salt&pepper, product and configuration code: WWMAE086044 KSPPE8P


Heating element

Built-in, integrated One heating element



Marlin [ⓘ] s. 440

Marlin One [ⓘ] s. 444

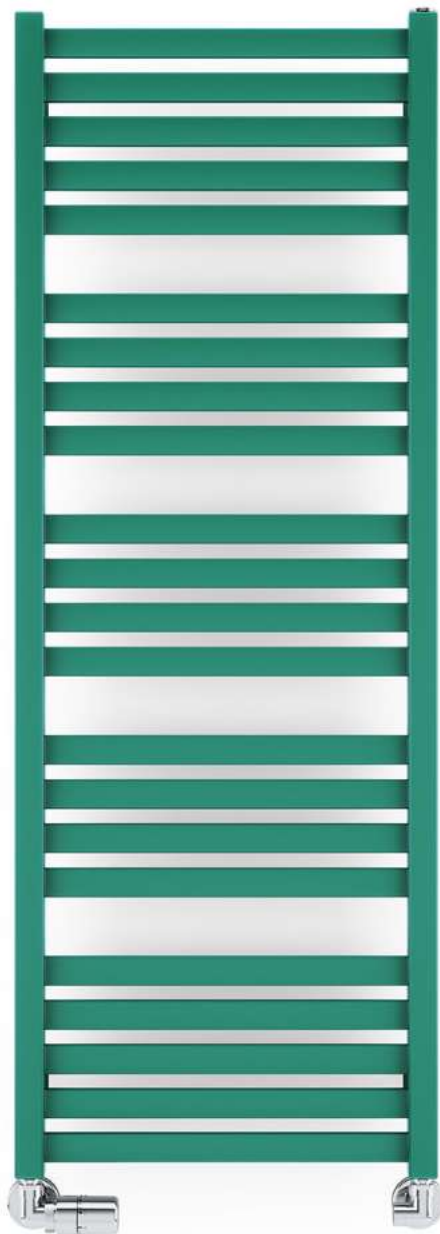

Radiator

Marlin 1185 \updownarrow x 430 \leftrightarrow SX, colour: RAL 6000, product and configuration code: WGMAR118043 K600SX

Valves and accessories

Connection set: 3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe-masking set – 70 mm, chrome, TGPCR001



Michelle ① s. 448



Radiator

Michelle 1620 \updownarrow x 500 \leftrightarrow YL, colour: chrome, Fascia cover colour: Metallic Red, product and configuration code: WGMIC162050 KMREYL (Additions code for Fascia cover is needed)

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR
Integrated pipe masking set, chrome, TGPCR002





Radiator

Michelle 1200↕ x 500↔ YL, colour: chrome, Facia cover colour: copper, product and configuration code: WGMIC120050 KCROYL
(Additions code for Fascia cover is needed)


Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR
Integrated pipe masking set, chrome, TGPCR002



Mike s. 450

Mike One  s. 454

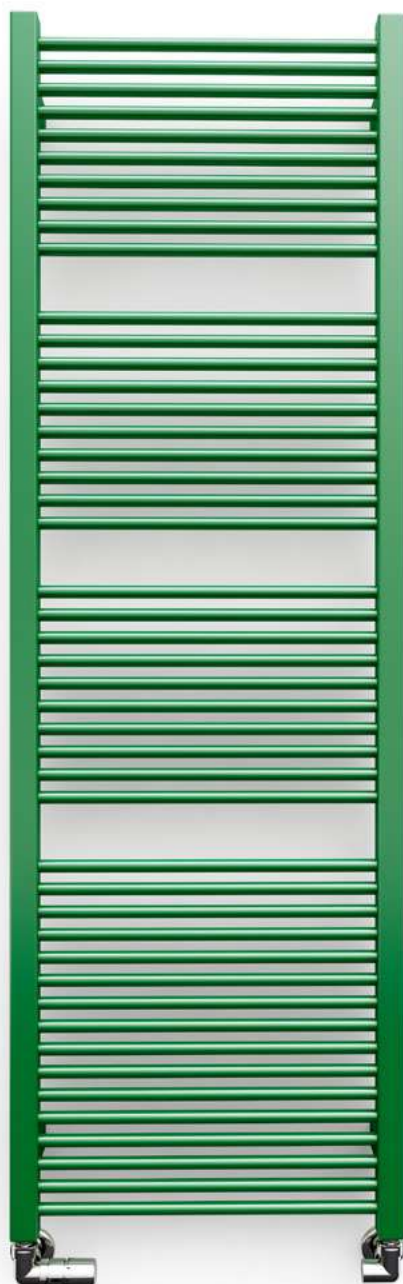

Radiator

Mike 1335 \updownarrow x 530 \leftrightarrow SX, colour: RAL 6029, product and configuration code: WGMIK133053 K629SX

Valves and accessories

3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001




**Radiator (shown fitted as
an Electric Radiator)**


Mike 1335↑ x 530↔ E8,
colour: soft 9016, product
and configuration code:
WLMIK133053 KS96E8OKXP

Heating element

ONE heating element,
external

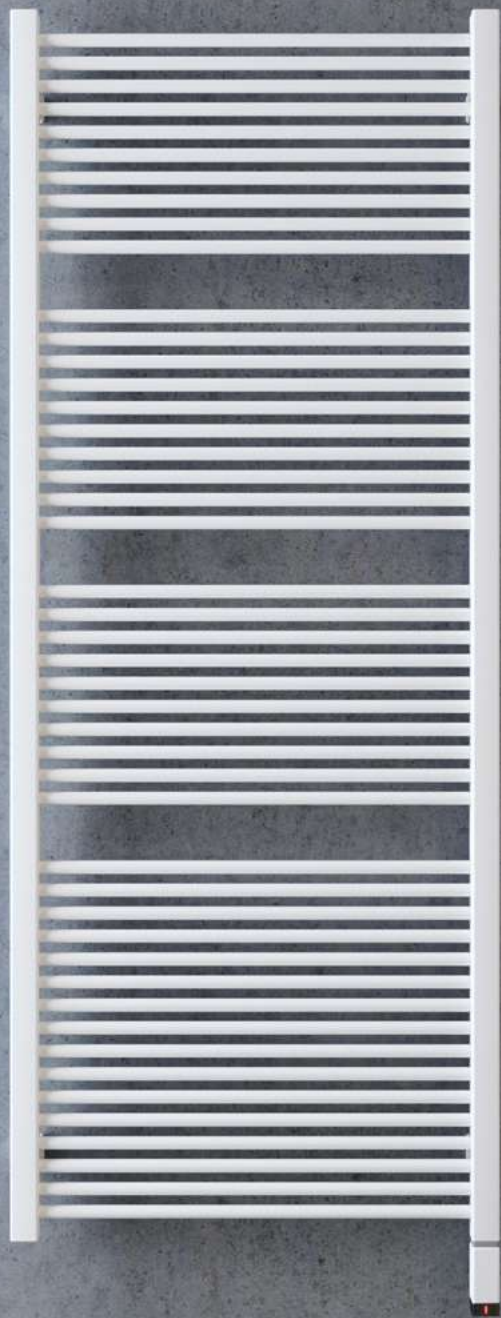



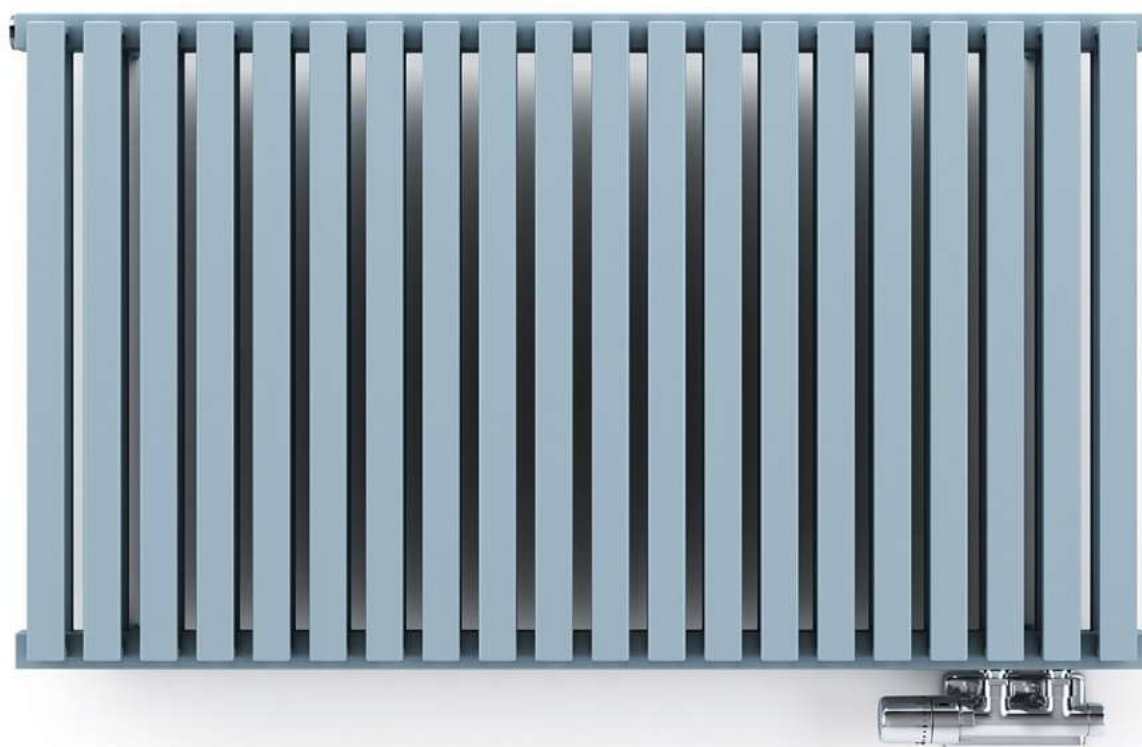

Radiator


Nemo 530↑ x 915↔ YP, colour: pastel blue, product and configuration code: WGNEM053091 KPBLYP

Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002



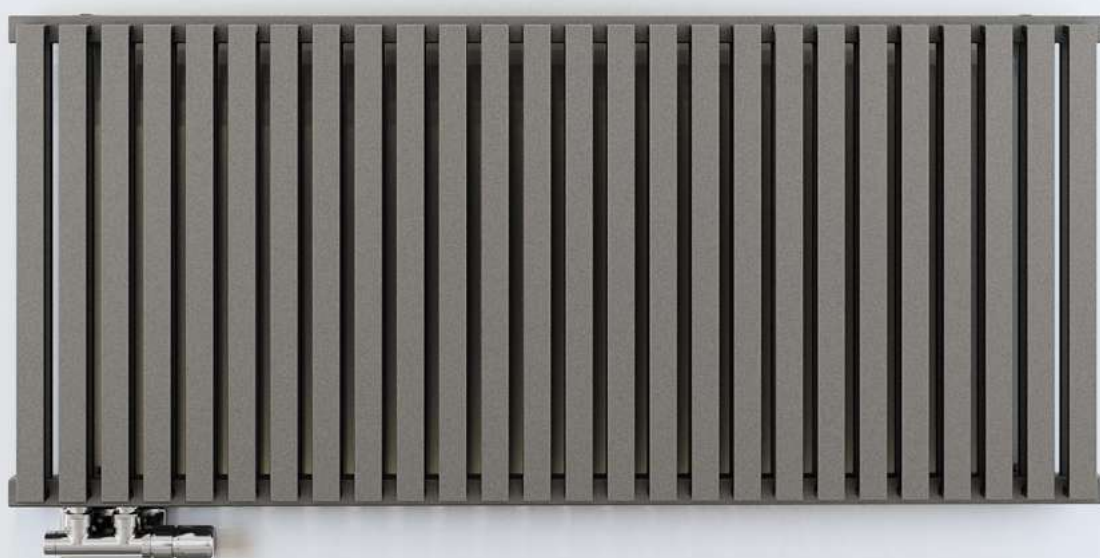

Radiator

Nemo 530 \updownarrow x 1185 \leftrightarrow YL, colour: metallic stone, product and configuration code: WGNEM053118 KMSTYL


Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002



Outcorner ① s. 462

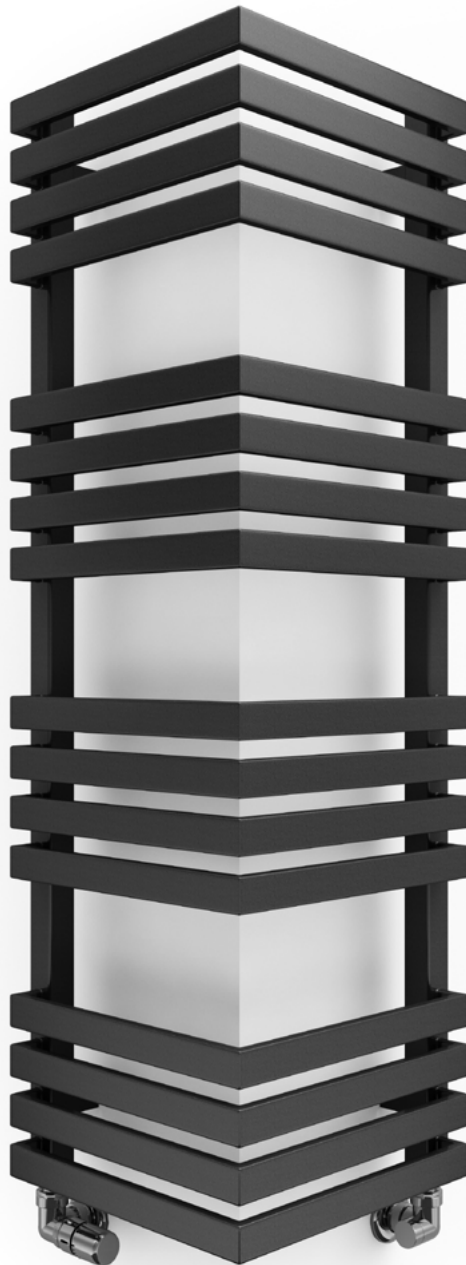

Radiator

Outcorner 1005↑ x 300↔ SX, colour: granite, product and configuration code: WGQON100030 KGRASX

Valves and accessories

3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001







Radiator


Outcorner 1545 \updownarrow x 1185 \leftrightarrow SX, colour: modern grey,
product and configuration code: WGQN154030 KDGRSXE

Valves and accessories

3-axis thermostatic valve set, left, chrome, WRZTCG1-CR
Pipe masking set – 70 mm, chrome, TGPCR001

Pająk ^① s. 464

Pająk E ^① s. 466

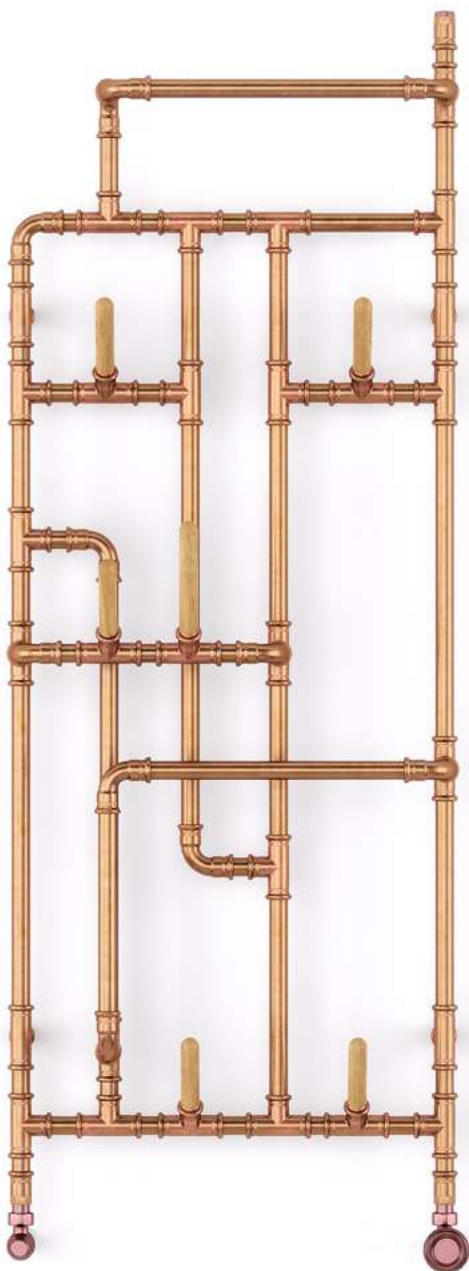

Radiator

Pająk 1400↑ x 531↔ SX, colour: raw copper, product and configuration code: WGPAJ140053 KMIESX

Radiator sold with

Angled regulating manual valve set Wood
Wooden hangers.



Perta ① s. 468

Perta E ① s. 470



Radiator

Perta 1760 \updownarrow x 600 \leftrightarrow ZX, colour: chrome, product and configuration code: WGPER176060 KCROZX

Radiator sold with

2 x Angled lockshield valve
NOBLE thermostatic head

Valves and accessories

Integrated pipe masking set, chrome, TGPCR002



Pier [ⓘ] s. 472



Radiator

Pier 1800↑ x 580↔ SX, colour: california beige, product and configuration code: WGB19180058 KICBSX


Valves and accessories

3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001



PLC V ① s. 474

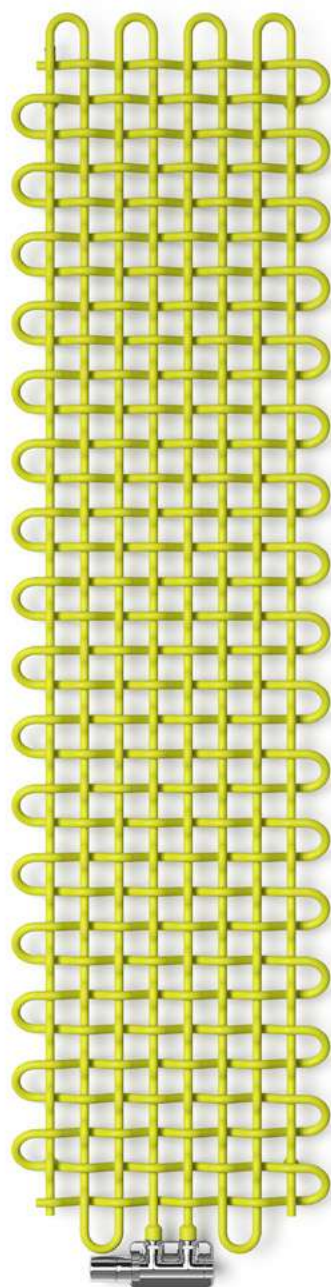

Radiator

PLC V 1800⇕ x 463⇔ ZX, colour: soft green apple, product and configuration code: WGPLV180046 KSGAZX


Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002





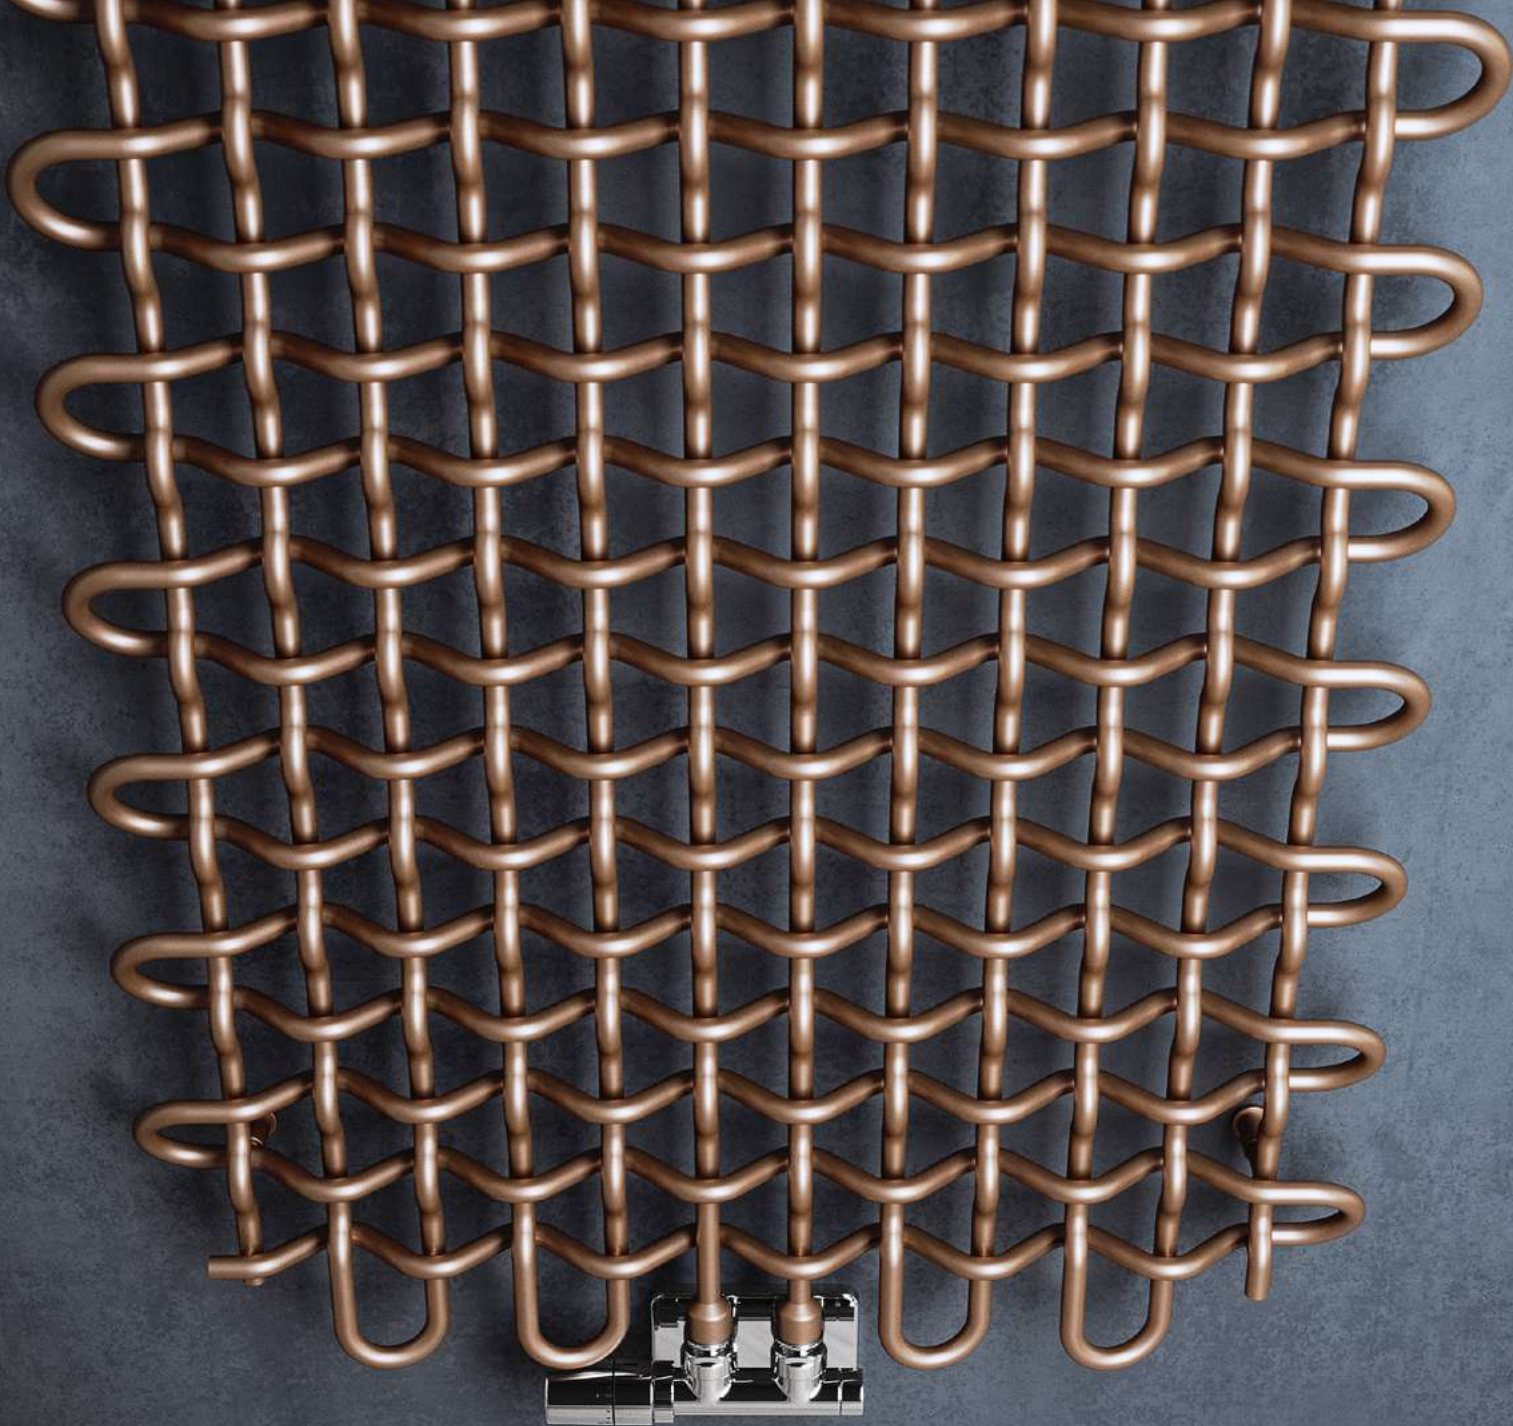

Radiator


PLC V 1600↕ x 663↔ ZX, colour: bright copper, product and configuration code: WGPLY160066 KBCOZX

Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002

PLC H [ⓘ] s. 476

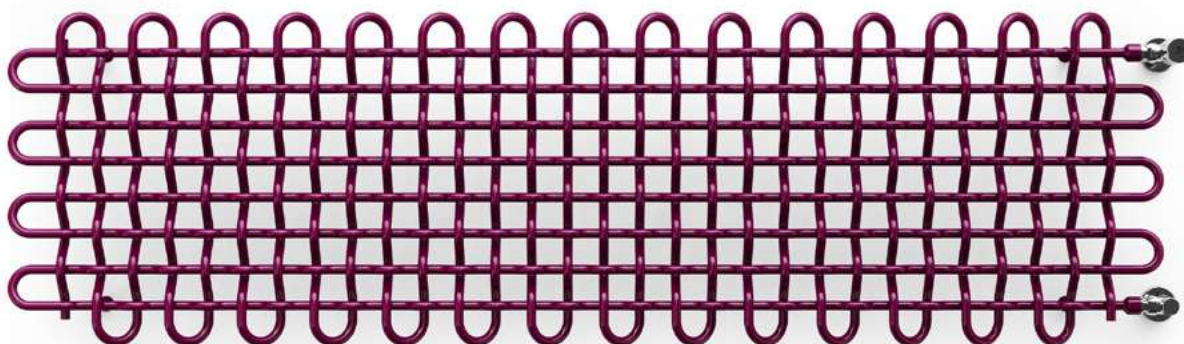

Radiator


PLC H 463 ↑ x 1600 ↔ PX, colour: RAL 4004, product and configuration code: WGPLH046160 K404PX

Radiator sold with

Angled thermostatic valve set, chrome, WRZTCG3-CR

Valves and accessories

Pipe masking set – 70 mm, chrome, TGPCR001

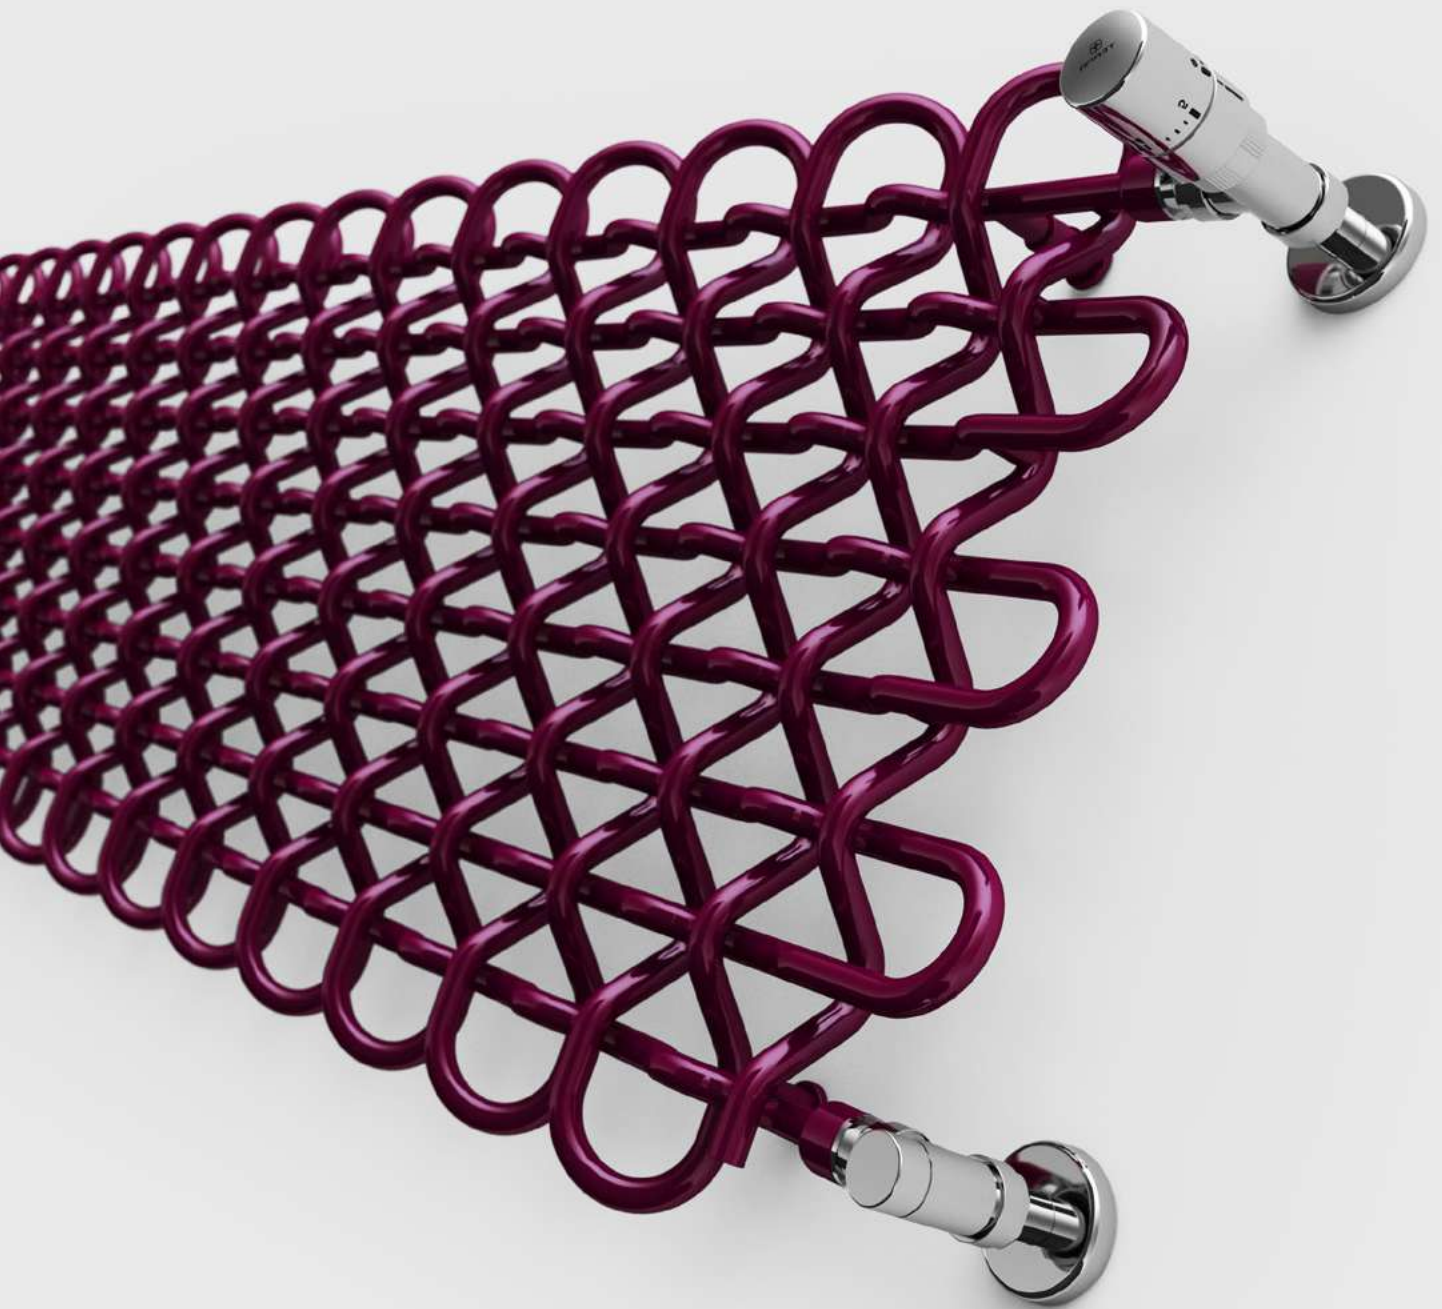

POC 2 [ⓘ] s. 478



Radiator (shown fitted as an Electric Radiator)

POC 2 1400↑ x 600↔ E1, colour: california beige, product and configuration code: WLZUL140060 KICBE1MOAM

Heating element

MOA heating element, chrome





Radiator (shown fitted as Dual Fuel)

POC 2 1400 ↑ x 600 ↔ SX, colour: metallic grey, product and configuration code: WGZUL140060 KMGRSX

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, left, chrome, WRZT5G5-CR

Integrated pipe masking set, chrome, TGPCR002


Heating element

KTX 3 heating element, chrome, WEKT3 KCROP



Pola ^① s. 482

Pola One ^① s. 484

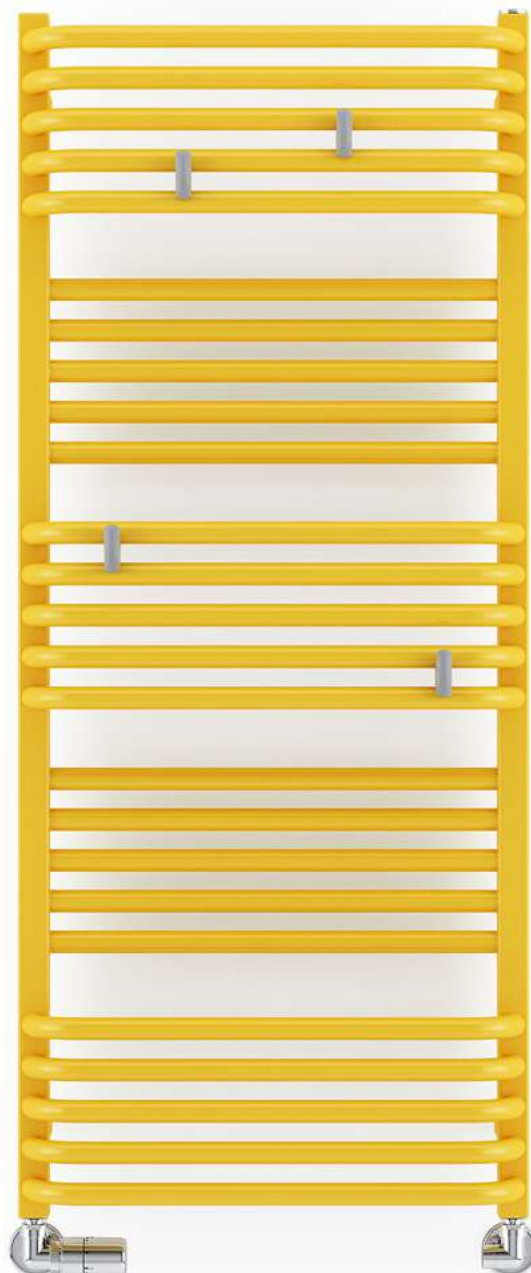

Radiator

Pola 1180⇕ x 500↔ SX, colour: Soft 1023, product and configuration code: WGPAL118050 KS13SX

Valves and accessories

Connection set: Angled manual valves set, chrome, WRZRCK1-CR

Pipe masking set – 70 mm, chrome, TGPCR001

Yo! hanger, Grey, WRWYOY001 SSZA







Radiator (shown fitted as an Electric Radiator)

POLA 1580 ⇕ x 600 ⇔ E8, colour: magic pearl, product and configuration code: WLPAL158060 KLAVE8KT2P


Heating element

KTX 2 heating element, chrome



Quadrus Bold ^① s. 486

Quadrus Bold One ^① s. 488

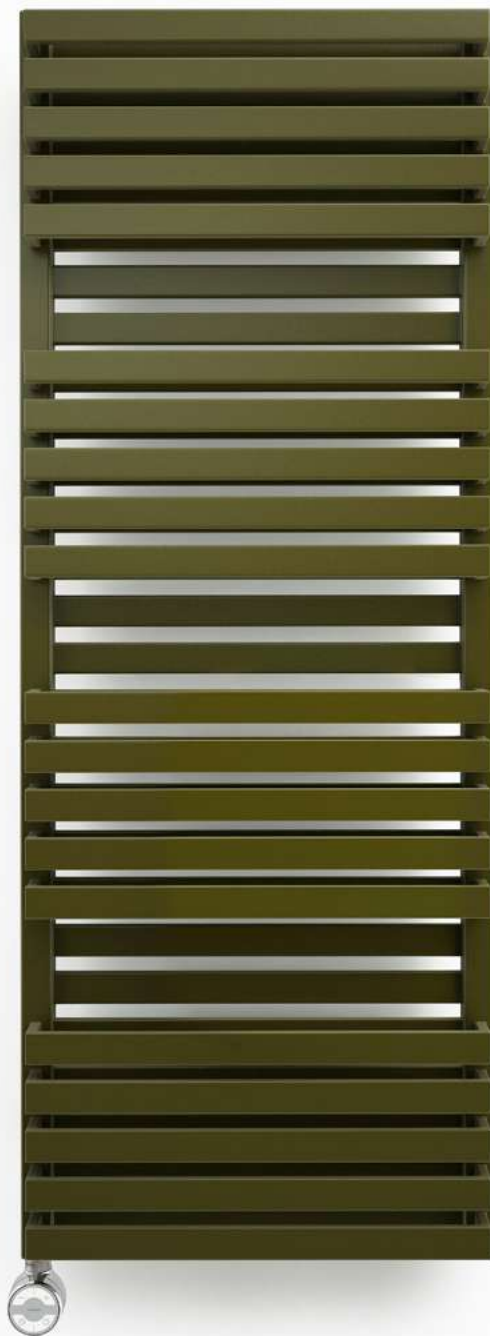

Radiator (shown fitted as an Electric Radiator)

Quadrus Bold 1185 ↓ x 450 ↔ E1, colour: RAL 6003, product and configuration code: WLQBA118045 K603E1MOAW


Heating element

MOA heating element, chrome



Quadrus Slim ① s. 490

Quadrus Slim One ① s. 492

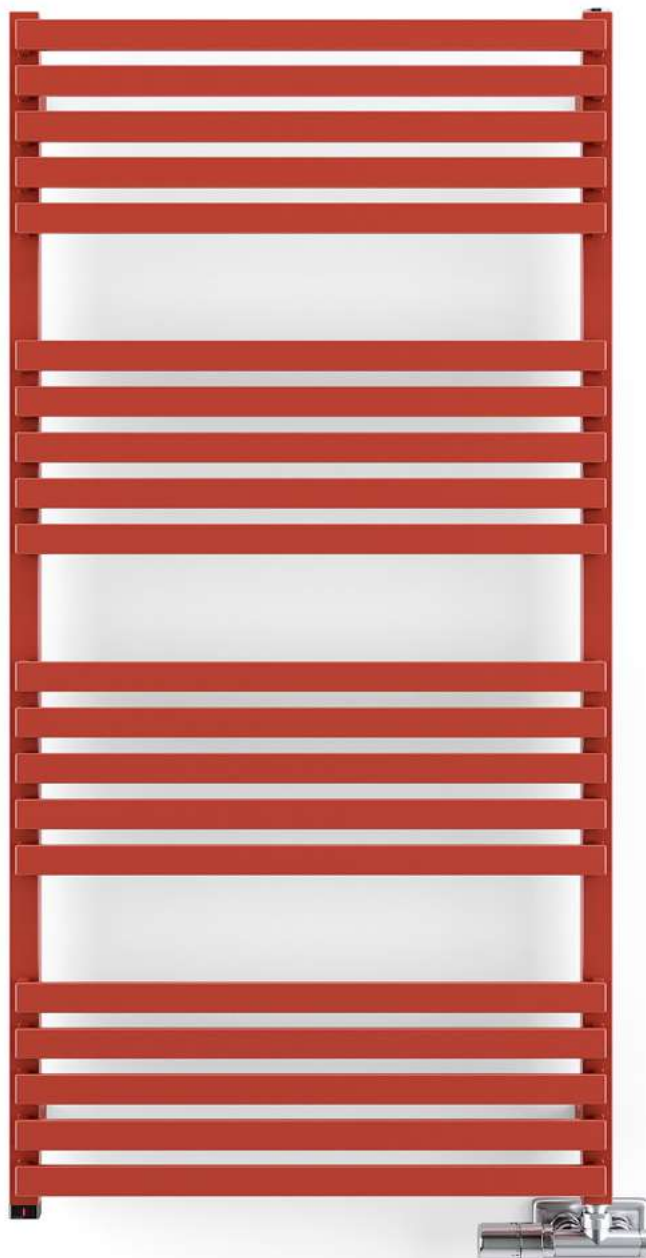

Radiator (shown fitted as Dual Fuel)

Quadrus Slim One 1185 ↑ x 600 ↔ S1, colour: RAL 3013, product and configuration code: WZQSN118060 K313S1

Valves and accessories

Connection set: Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002

Heating element

Built-in, integrated One heating element





Radiator (shown fitted as Dual Fuel)

Quadrus Slim One 1185 ↑ x 450 ⇔ S1, colour: soft 9016,
product and configuration code: WZQSN118045 KS96S1

Valves and accessories


Integrated thermostatic valve with immersion tube set,
angled, right, chrome, WRZT5G6-CR
Integrated pipe masking set, chrome, TGPCR002

Heating element

Built-in, integrated One heating element



Retro ① s. 494

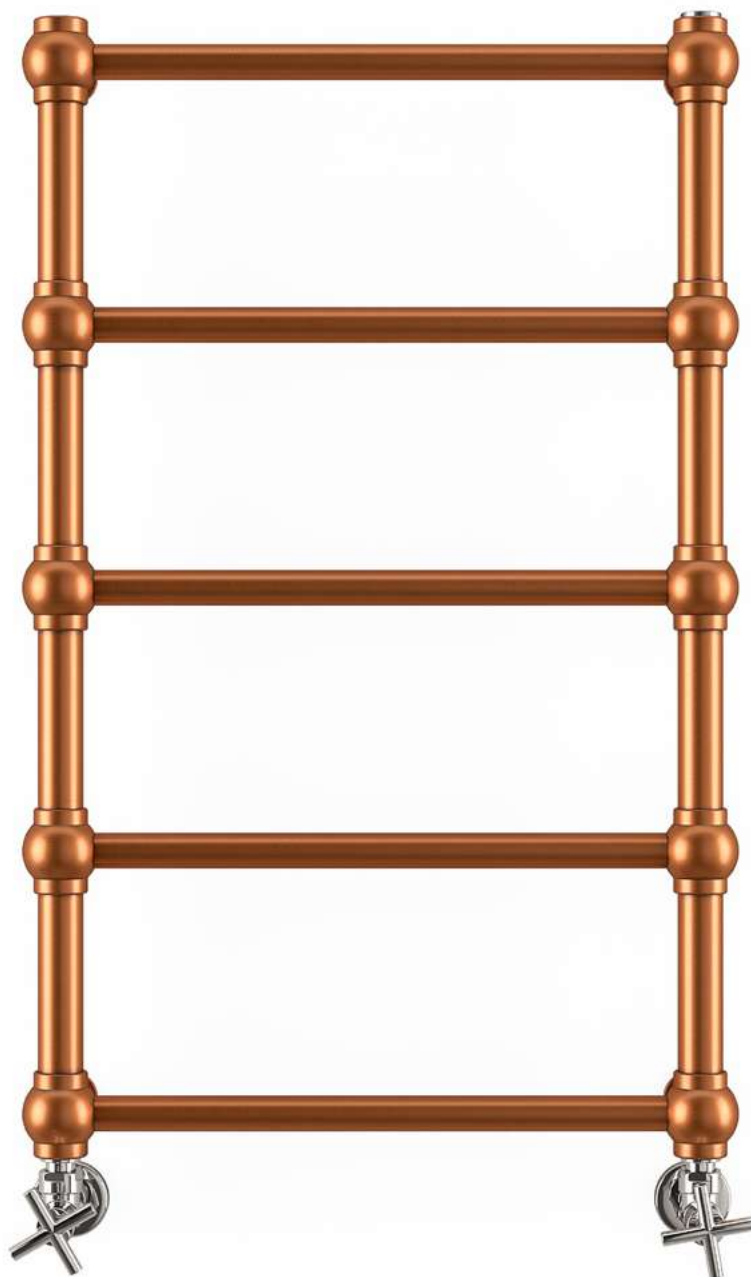

Radiator

Retro 800↑ x 504↔ SX, colour: old copper, product and configuration code: WGRE1080050 KOCOSX

Radiator sold with

Angled manual valve set Minimalist, chrome, TGZRCR017

Valves and accessories

Pipe masking set – 70 mm, chrome, TGPCR001



Retro S [ⓘ] s. 496



Radiator

Retro S 1245 ↑ x 504 ↔ AX, colour: sparkling grey, product and configuration code: WGR1S124050 KRGYAX

Valves and accessories

Pipe masking set – 70 mm, chrome, TGPCR001

Radiator sold with

Star Angled manual valves set, chrome, WRZRCK1-CR



Ribbon V ① s. 498



Radiator

Ribbon V 1920⇕ x 390⇔ ZX, colour: copper, product and configuration code: WGRIB172039 KCOPZX

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002





Radiator

Ribbon V 1720 \updownarrow x 290 \leftrightarrow ZX, colour: metallic black, product and configuration code: WGRIB172029 KMBCZX


Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002



Ribbon V E [ⓘ] s. 500

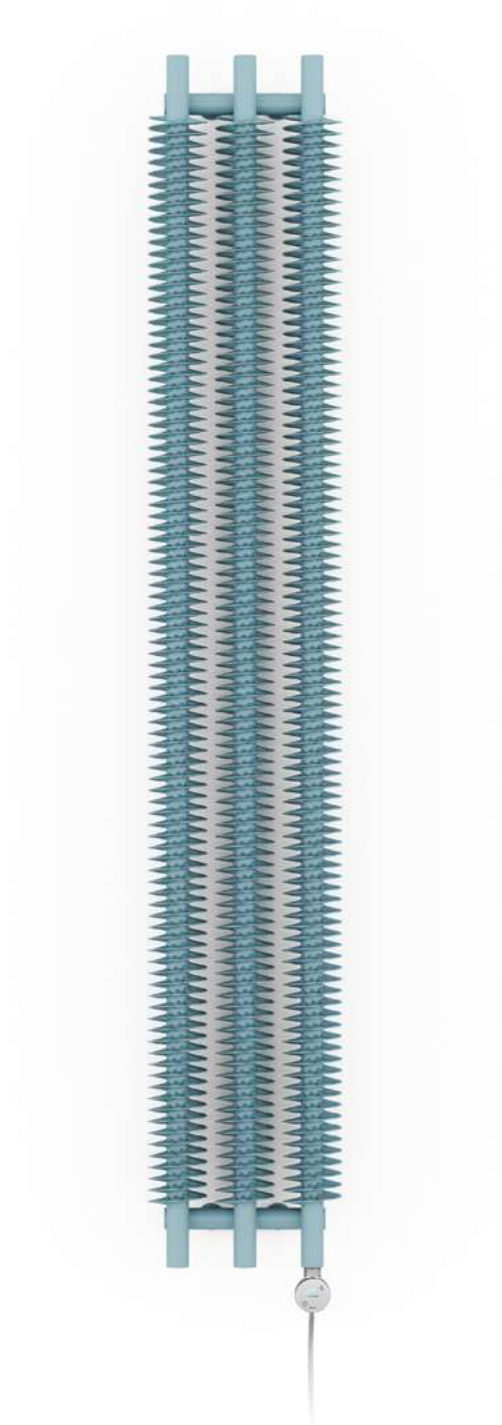

Radiator (shown fitted as an Electric Radiator)

Ribbon V E 1800↑ x 290↔ E8, colour: pastel blue, product and configuration code: WLRVE180029 KPBLE8MOBW

Heating element

MOA BLUE heating element, chrome







Radiator

Ribbon V E 1800↕ x 290↔ E8,
colour: bright copper, product and configuration
code: WLRVE180029 KBCOE8TDYM

Heating element

TDY heating element, black

Ribbon HSD [ⓘ] s. 502



Radiator

Ribbon HSD 290↑ x 1740↔ VL, colour: magic pearl, product and configuration code: WGHSD029174 KMPRVL


Radiator sold with

Integrated lockshield valve, chrome

SLIM thermostatic head, chrome

Valves and accessories

Integrated pipe masking set, chrome, TGPCR002

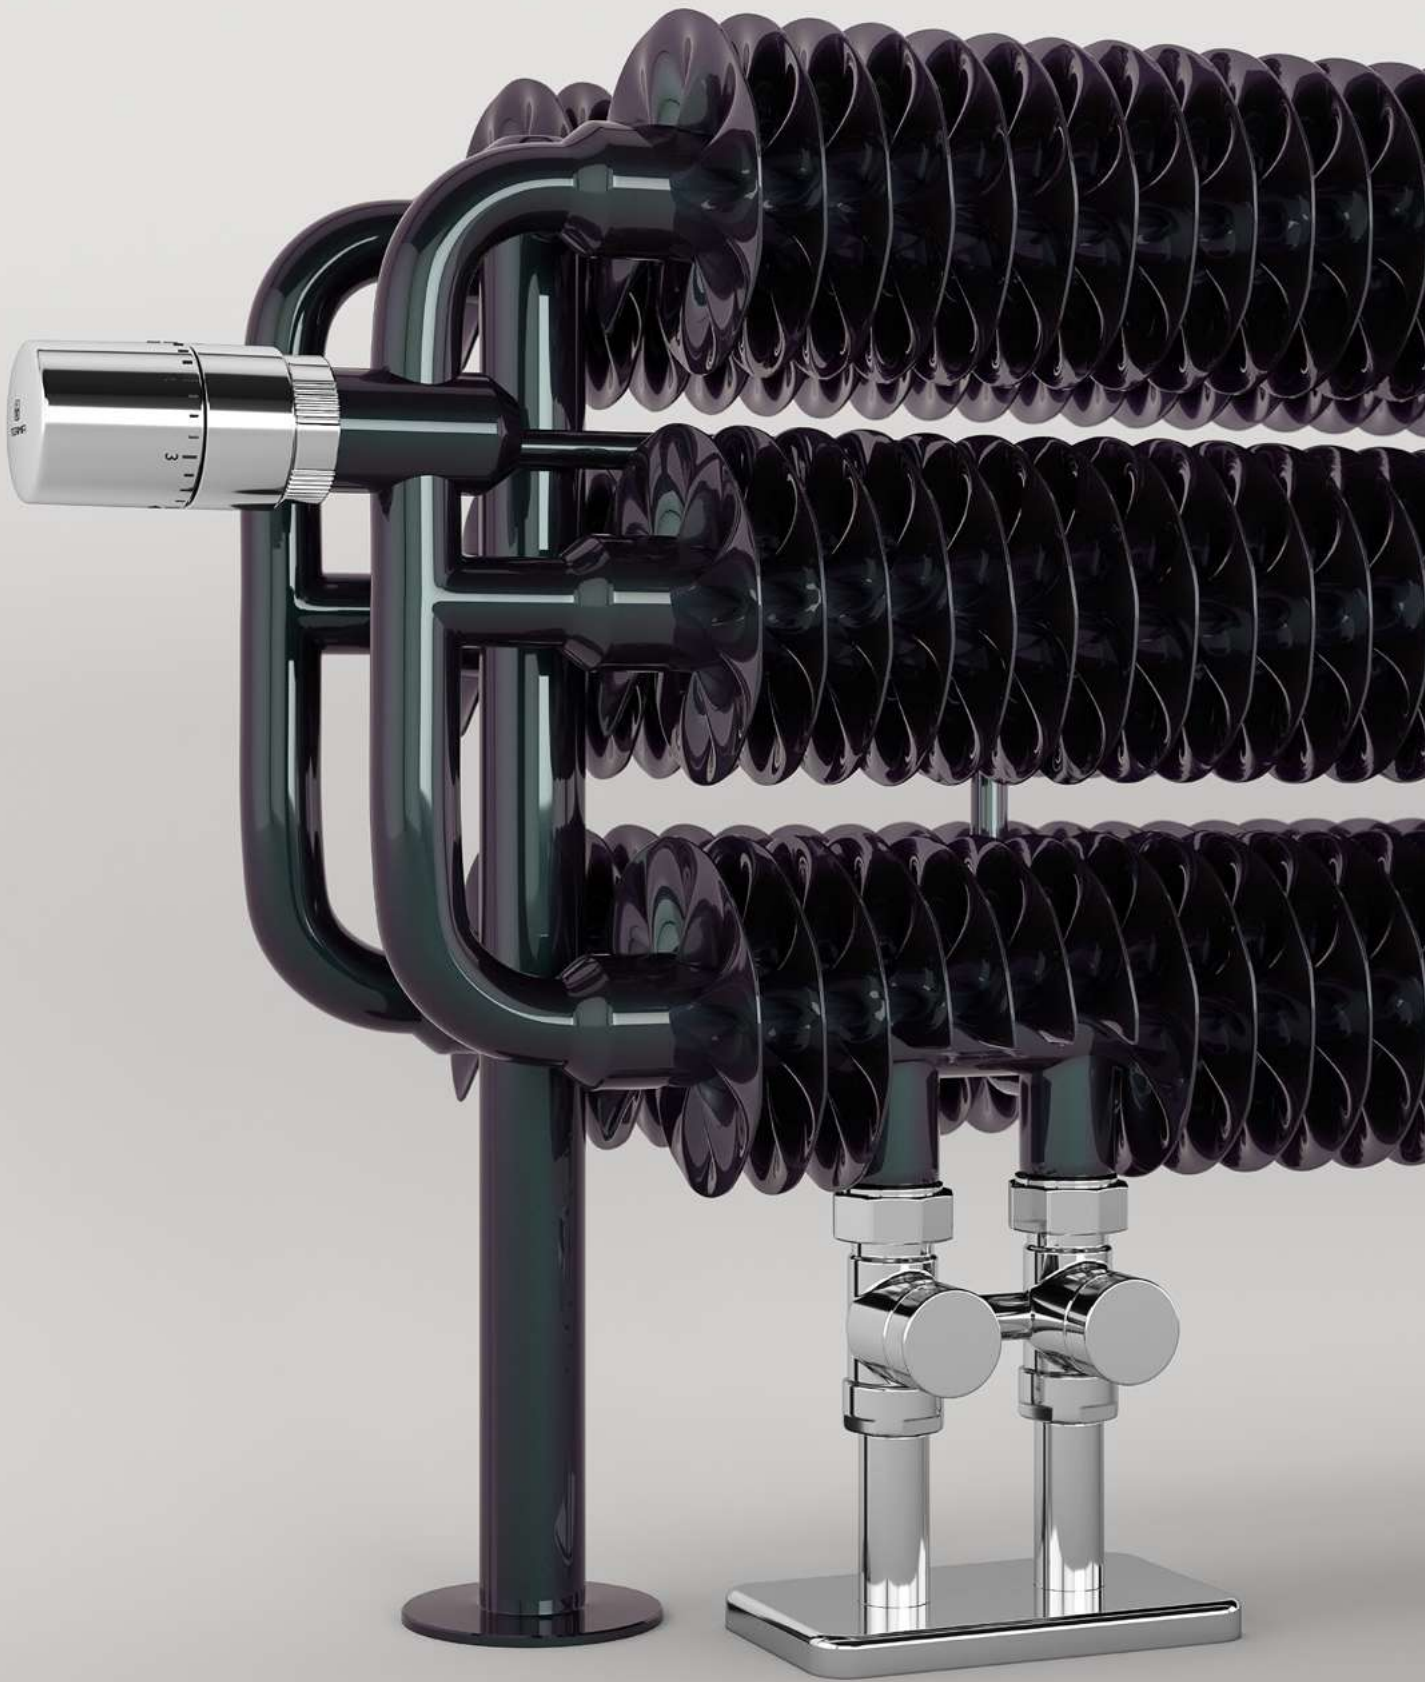





Radiator

Ribbon HSD 290↑ x 1540↔ VP, colour: heban,
product and configuration code: WGHSD029154 KIHEVP


Radiator sold with

Integrated lockshield valves set, Inline valve, chrome

Valves and accessories

Integrated pipe masking set, chrome, TGPCR002

Ribbon HWS [ⓘ] s. 504

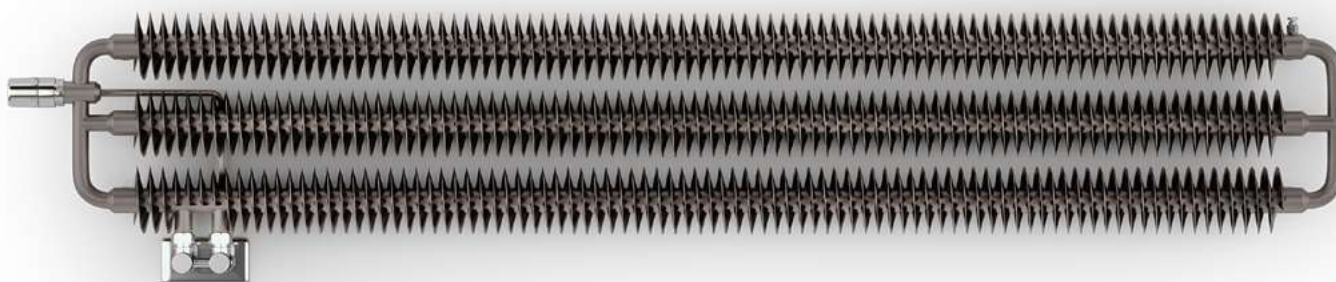

Radiator


Ribbon HWS 290↑ x 1740↔ VL, colour: graphite, product and configuration code: WGHWS029174 KGRAVL

Radiator sold with

Integrated lockshield valve, angled, chrome
SLIM thermostatic head, chrome


Valves and accessories

Integrated pipe masking set, chrome, TGPCR002

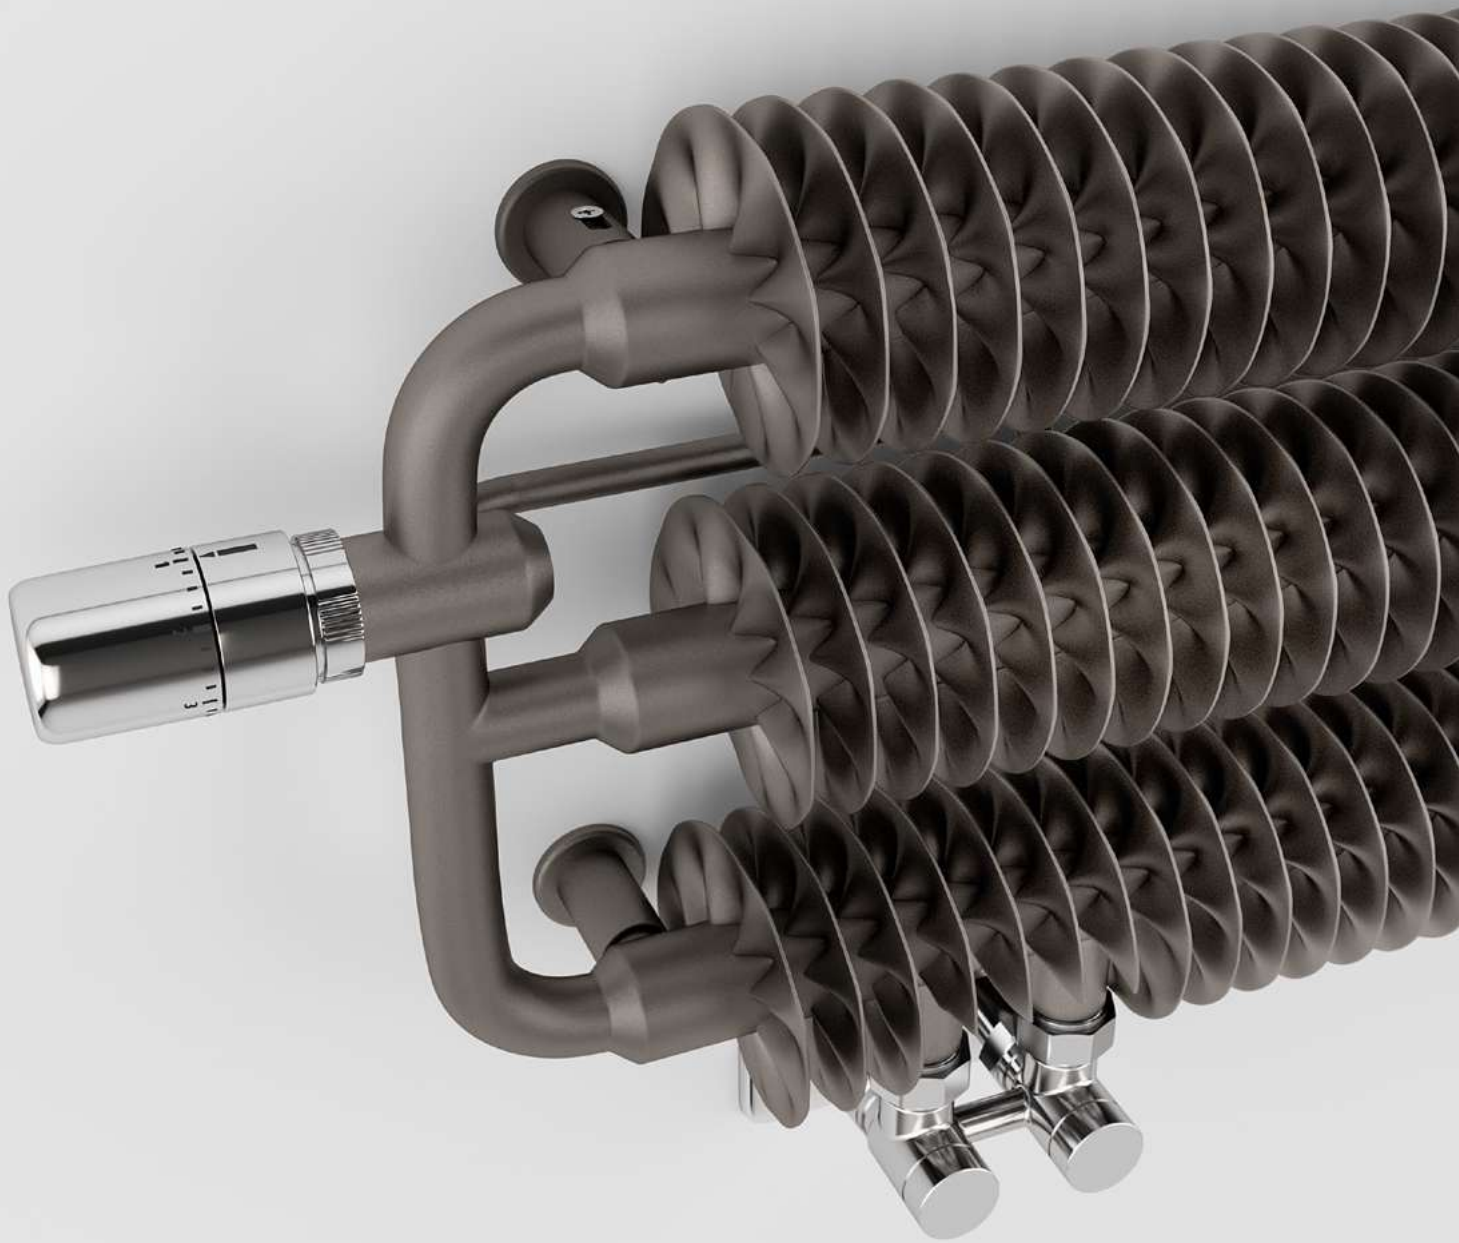

Sherwood V [ⓘ] s. 506

Sherwood V E [ⓘ] s. 508

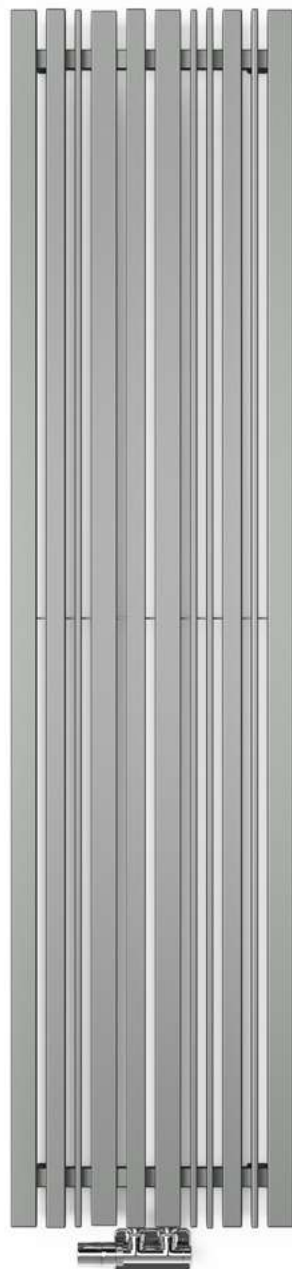

Radiator

Sherwood V 1900⇕ x 440⇔ ZX, colour: inox, product and configuration code: WGSTV190044 KINOZX


Valves and accessories

Integrated thermostatic valve set, angled, right, chrome, WRZT5G2-CR

Integrated pipe masking set, chrome, TGPCR002



Sherwood H ⓘ s. 510

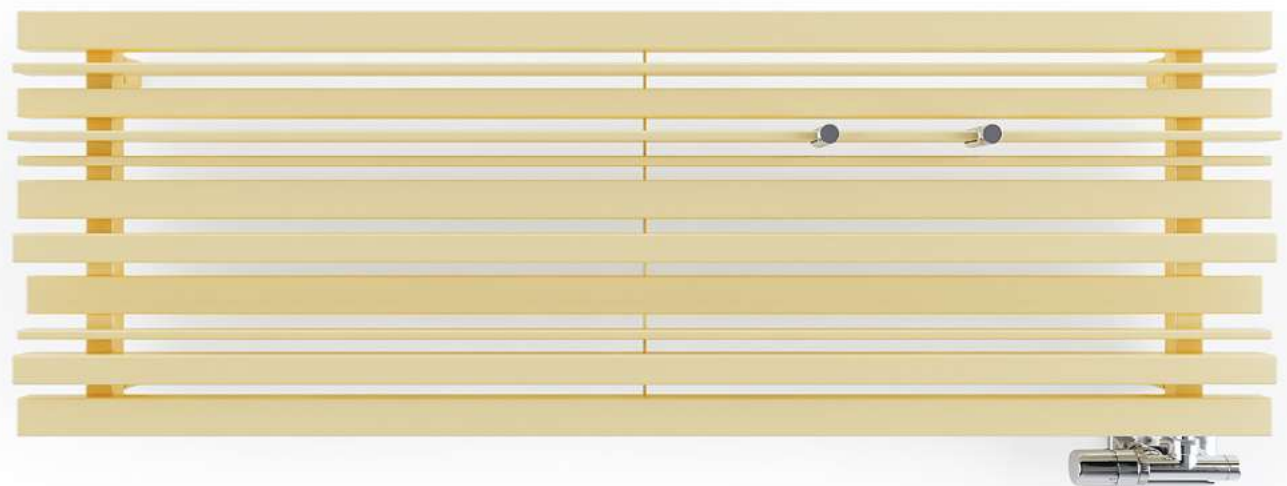

Radiator

Sherwood H 440↑ x 1300↔ O8, colour: RAL 1014, product and configuration code: WGSTH044130 K1014O8

Radiator sold with

Integrated thermostatic valve with immersion tube set, angled, right, chrome

Valves and accessories

Integrated pipe masking set, chrome, TGPCR002

KUKA hanger, 50 x 10 mm, WRWKUK001 KCRO



Radiator

Sherwood H 540↑ x 1600↔ O1, colour: metallic grey, product and configuration code: WGSTH054160 KMGRO1


Radiator sold with

Integrated thermostatic valve with immersion tube set, angled, left, chrome

Valves and accessories

Integrated pipe masking set, chrome, TGPCR002



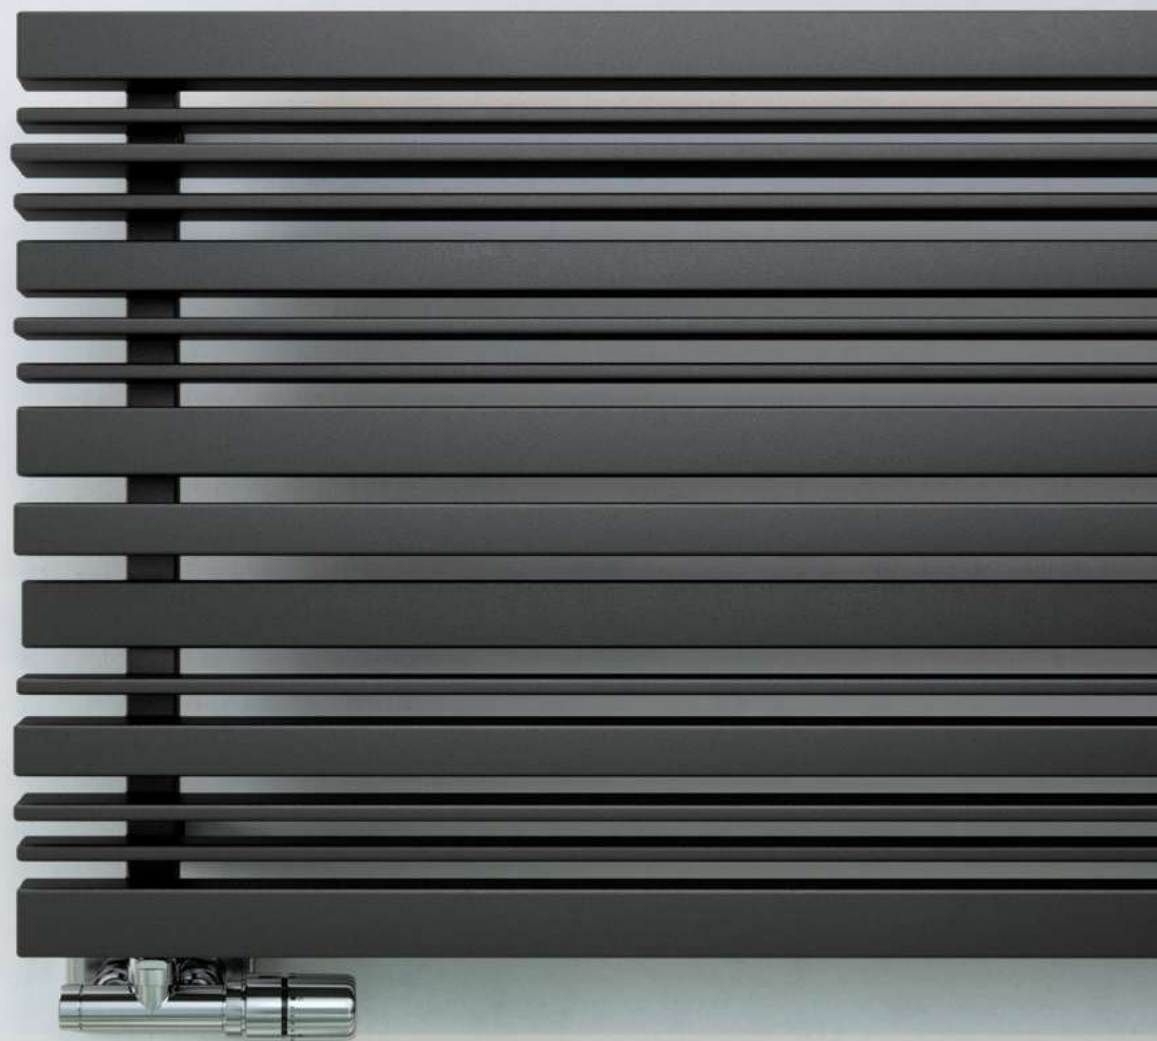

Simple ① s. 512

Simple One ① s. 516



Radiator (shown fitted as Dual Fuel)

Simple ONE 1200↑ x 500↔ S8, colour: noble brown, product and configuration code: WZSIE120050 KINBS8

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, left, chrome, WRZT5G5-CR

Integrated pipe masking set, chrome, TGPCR002

SIMPLE shelf, oak, WRPSIM050 DAB

Heating element

Built-in, integrated One heating element



Radiator

Simple 1680 ↑ x 500 ↔ E1, colour: copper, product and configuration code: WWSIE120050 KCOPE1KT3W

Valves and accessories

SIMPLE shelf, beech, WRPSIM050 KBUK

Heating element

KTX 4 BLUE heating element, chrome





Simple DW ① s. 520



Radiator

Simple DW 1995 ↓ x 500 ↔ ZX, colour: heban, product and configuration code: WGSBW199050 KIHEZX

Valves and accessories

Integrated thermostatic valve set, straight, right, satin, WRZT5G4-ST

Integrated pipe masking set, satin, TGPST003



Radiator

Simple DW 1755 ↑ x 500 ↔ ZX, colour: metallic black, product and configuration code: WGSDW175050 KMBCZXE

Valves and accessories

Integrated thermostatic valve set, straight, right, chrome, WRZT5G4-CR

Integrated pipe masking set, chrome, TGPCR002





Stand ^① s. 522



Radiator

Stand 1150↑ x 400↔ SX, colour: modern grey, product and configuration code: WGSCA115040 KDGRSX

Valves and accessories

STAND shelf, beech, WRPSCA040 KBUK


Connection set: 3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001



Triga s. 524

Triga E  s. 528

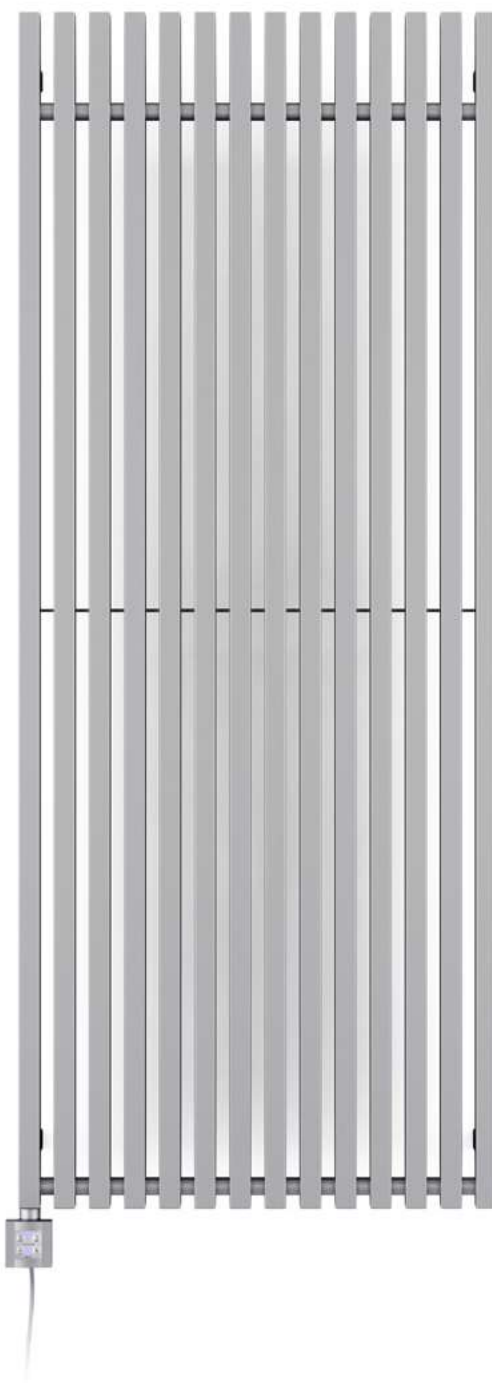

Radiator (shown fitted as an Electric Radiator)

Triga E 1700↑ x 680↔ E1, colour: silver matt, product and configuration code: WLTRG170068 KSMAE1K4BW

Heating element

KTX 4 BLUE heating element, chrome







Radiator

Triga 610 \updownarrow x 1080 \leftrightarrow SX, colour:
metallic stone, product and configuration
code: WGTRG061108 KMSTX

Valves and accessories

Connection set: 3-axis thermostatic
valve set, left, chrome, WRZTCG1-CR
Pipe masking set – 70 mm, chrome,
TGPCR001

Triga M ① s. 532

Triga M E ① s. 534



Radiator

Triga M 1700↑ x 780↔ SX, colour: modern grey, product and configuration code: WGTRL170078 KDGRSX

Valves and accessories


3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001



Triga AN s. 536

Triga AN E  s. 538

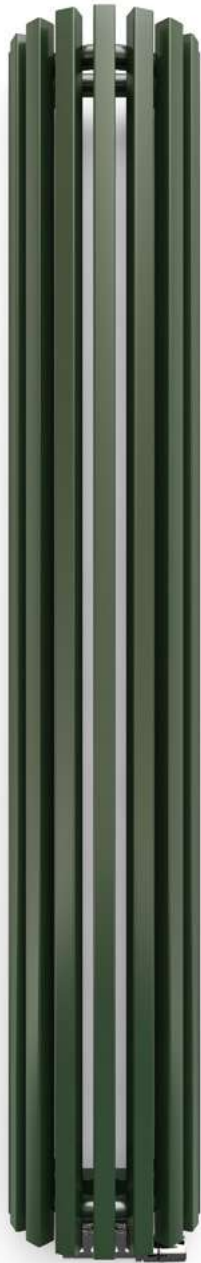


Radiator

Triga AN 1700↑ x 280↔ ZX, colour: RAL 7003, product and configuration code: WGVER170028 K703ZX

Valves and accessories


Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002

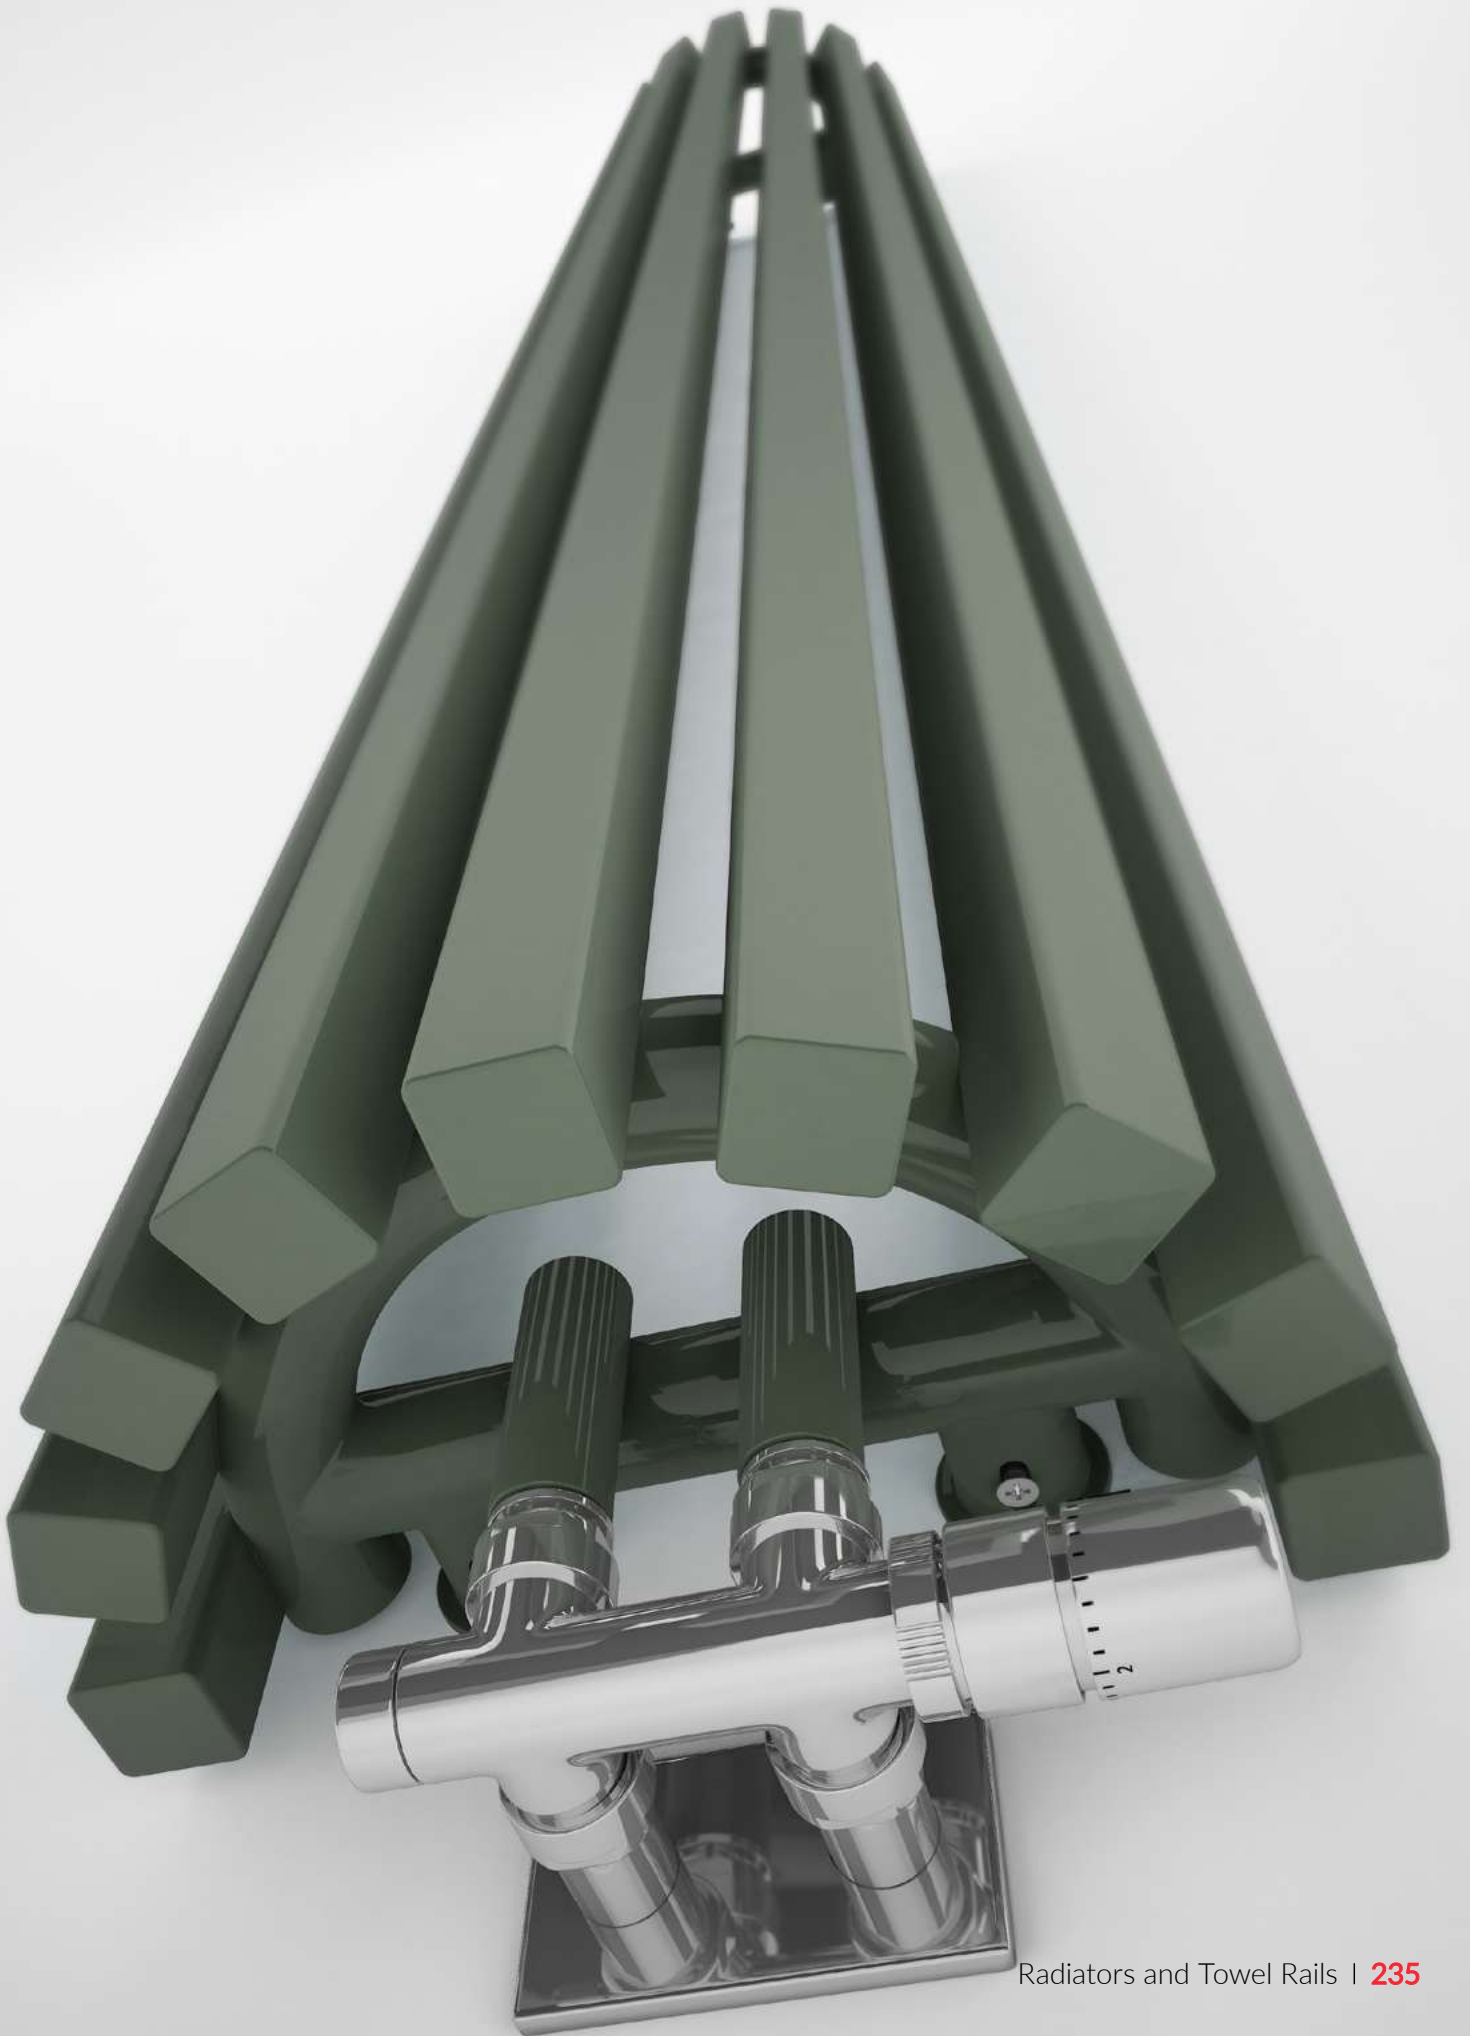

Triga ANC ^① s. 540

Triga ANC E ^① s. 542

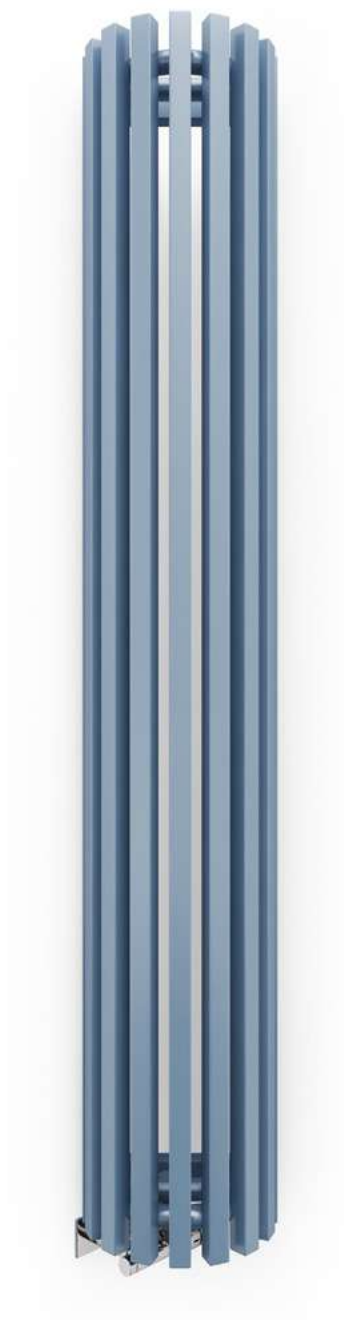

Radiator

Triga ANC 1700↕ x 280↔ YL, colour: RAL 5024, product and configuration code: WGVEC170028 K524YL


Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002



Triga AW [ⓘ] s. 544

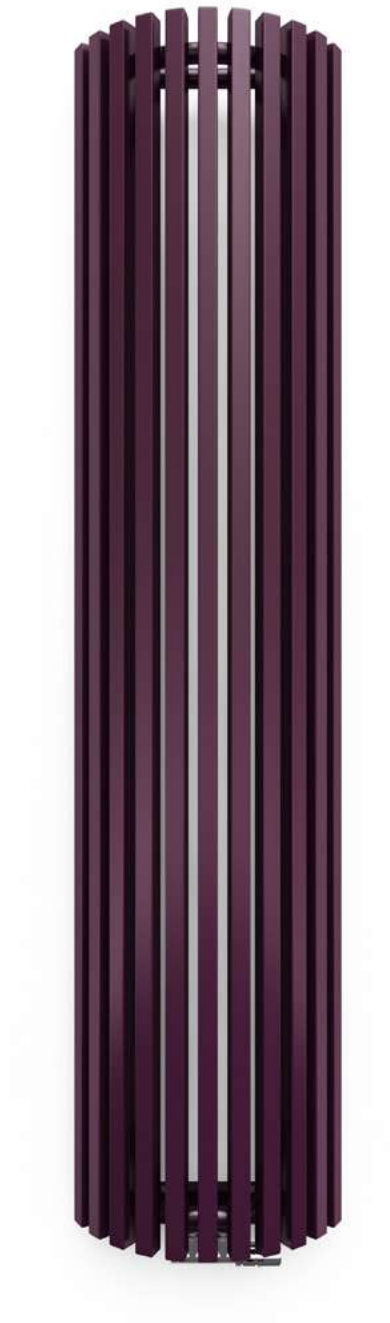


Radiator

Triga AW 1700↑ x 430↔ ZX, colour: RAL 4007, product and configuration code: WGVRA170043 K407ZX

Valves and accessories


Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002

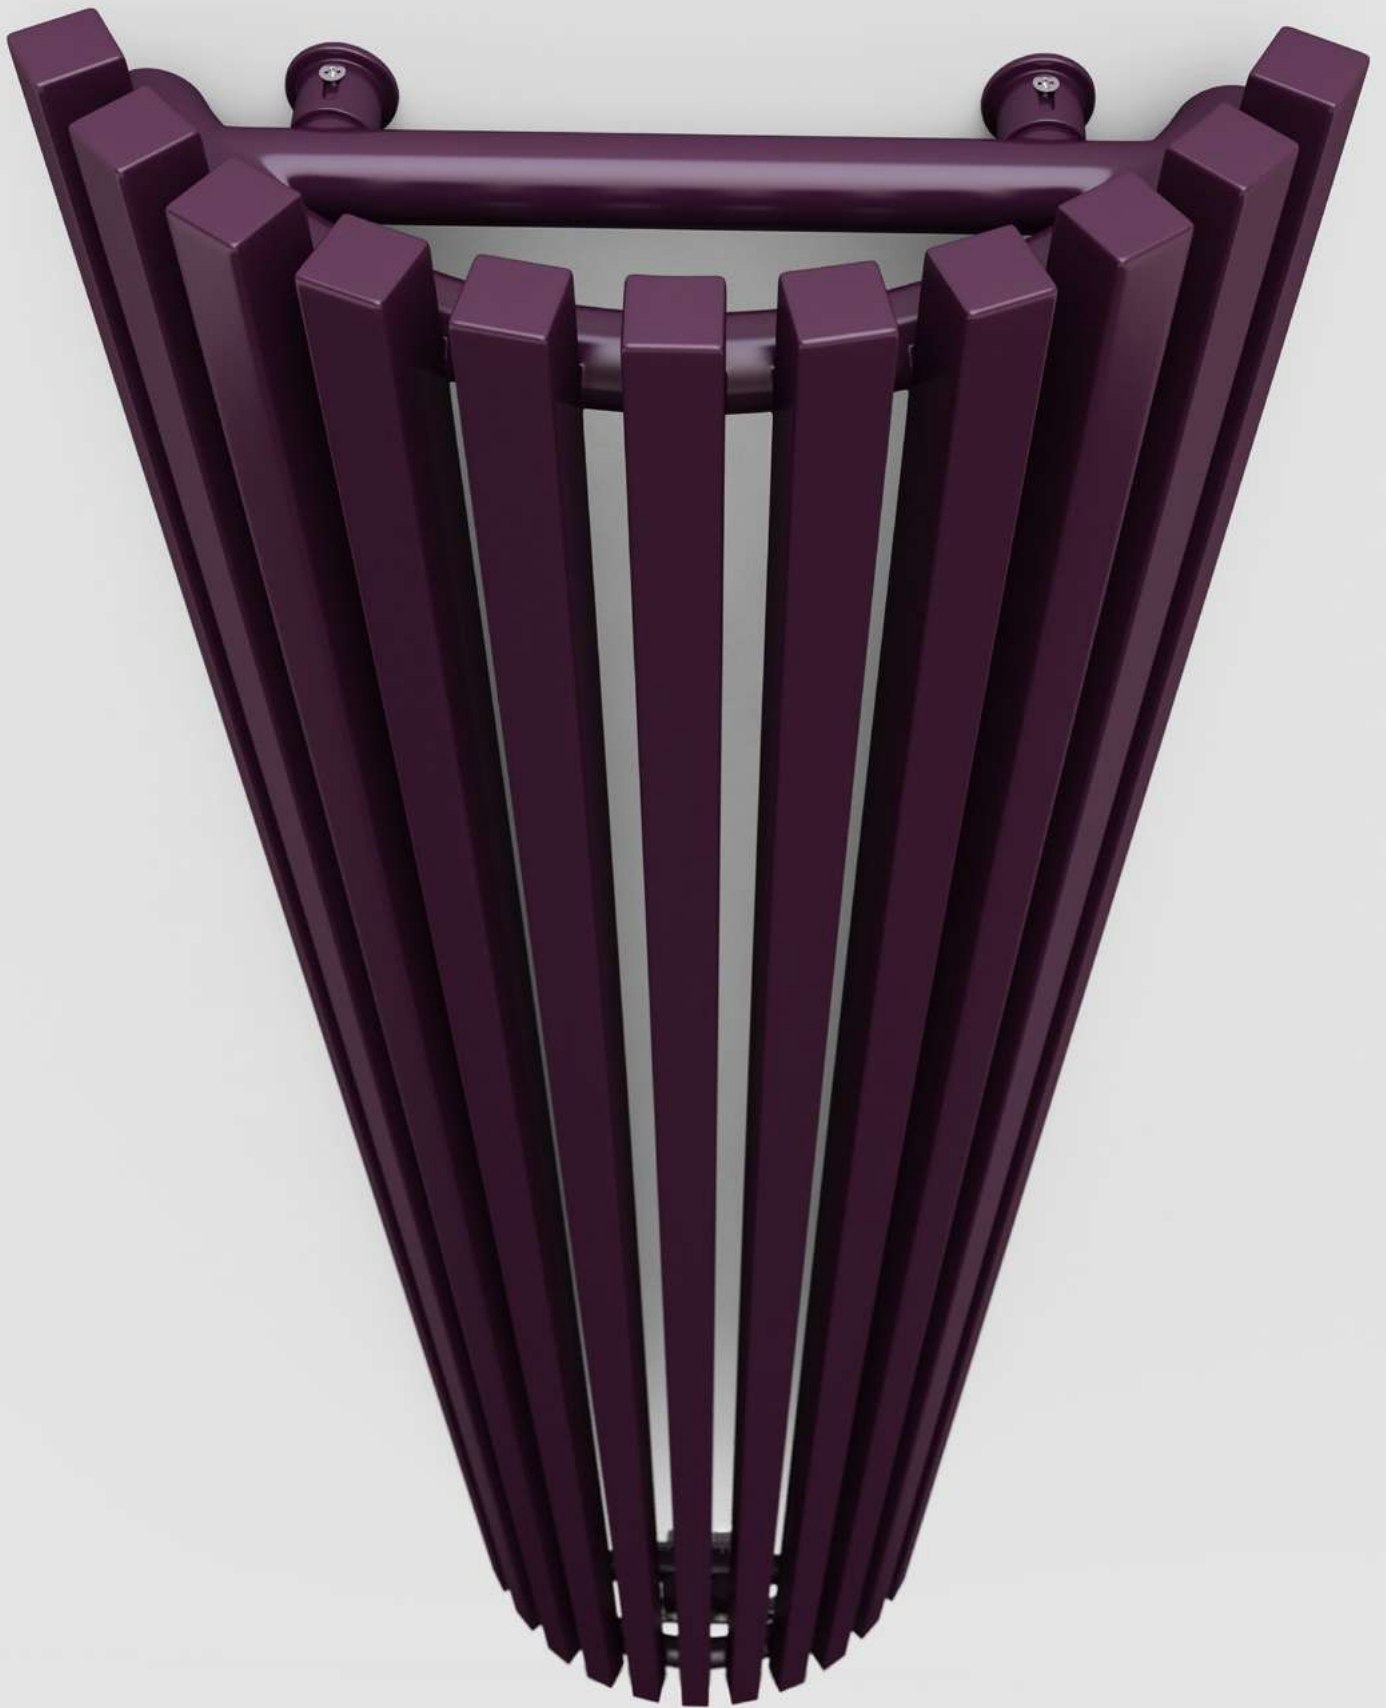

Tune VWD [ⓘ] s. 548

Tune VWD E [ⓘ] s. 552

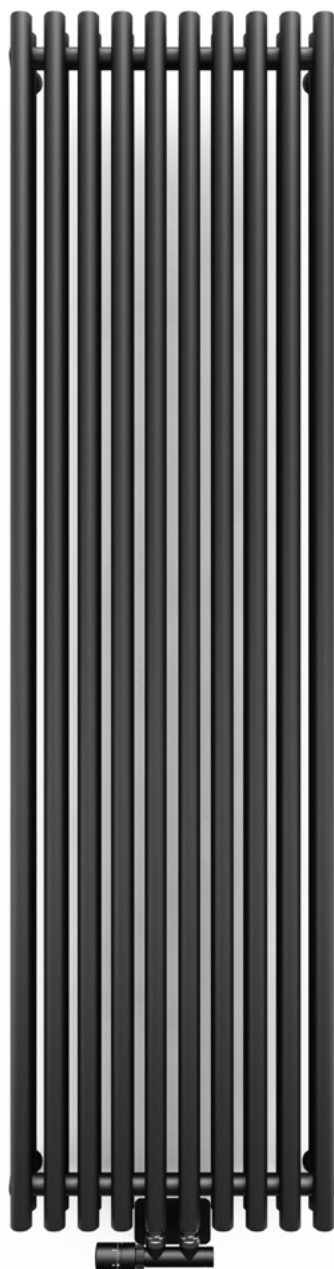

Radiator

Tune VWD 1800↕ x 490↔ ZX, colour: anodic black, product and configuration code: WGTUV180049 KABCZX

Valves and accessories

Integrated thermostatic valve, angled, right, black matt, TGZTCZ002


SLIM thermostatic head, black matt, TGGCM001

Integrated pipe masking set, black matt, TGPCM002



Tune VWS [ⓘ] s. 556

Tune VWS E [ⓘ] s. 560

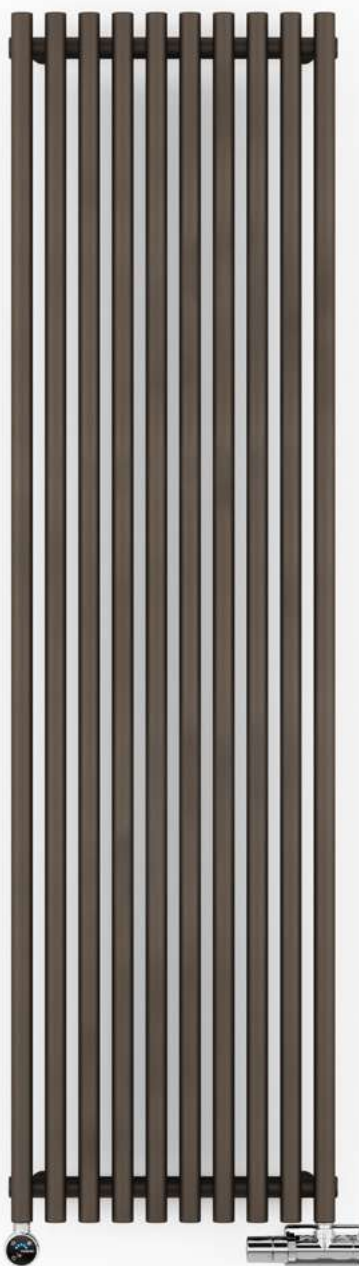

Radiator (shown fitted as Dual Fuel)

Tune VWS 1800↑ x 490↔ SX, colour: noble brown, product and configuration code: WGTSV180049 KINBSX

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR


Integrated pipe masking set, chrome, TGPCR002

Heating element

MOA IR heating element, chrome, WEMOR10 TCROW



Tune HSD ① s. 564

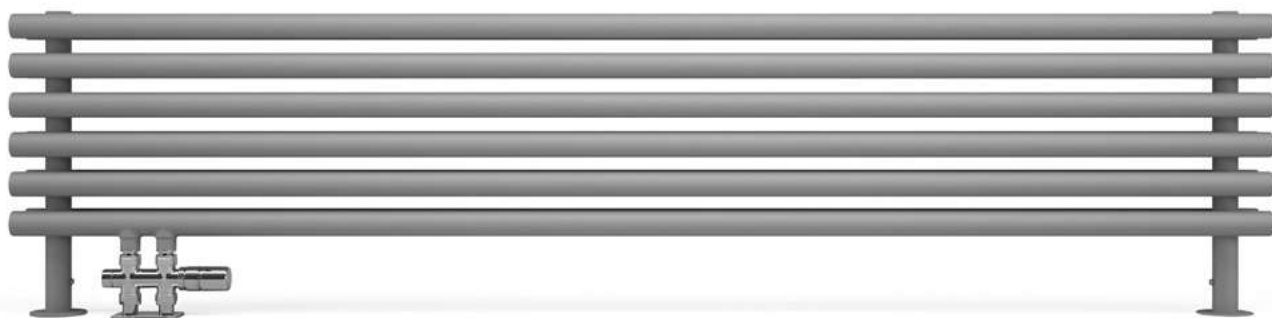

Radiator

Tune HSD 390↓ x 1400↔ YL, colour: silver matt, product and configuration code: WGTUH039140 KSMAYL

Valves and accessories

Integrated thermostatic valve set, inline, left, chrome, WRZT5G7-CR

Integrated pipe masking set, chrome, TGPCR002





Radiator

Tune HSD 390⇕ x 1400↔ YP, colour: RAL 3020, product and configuration code: WGTUH039140 K320YP

Valves and accessories

Integrated thermostatic valve set, inline, right, chrome, WRZT5G4-CR

Integrated pipe masking set, chrome, TGPCR002



Tytus [ⓘ] s. 566

Tytus One [ⓘ] s. 568



Radiator (shown fitted as an Electric Radiator)

Tytus One 1260↓ x 440↔ E1, colour: black pepper, product and configuration code: WWTYN126044 KCPEE1

Heating element

Built-in, integrated One heating element



Vipera ⓘ s. 570

Vipera One ⓘ s. 572



Radiator (shown fitted as Dual Fuel)

Vipera One 1470 ↑ x 600 ↔ S8, colour: anodic black, product and configuration code: WZVPN147060 KABCS8

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, left, chrome, WRZT5G5-CR

Integrated pipe masking set, chrome, TGPCR002

Heating element


Built-in, integrated One heating element



Vivo

① s. 574

Vivo One ① s. 578

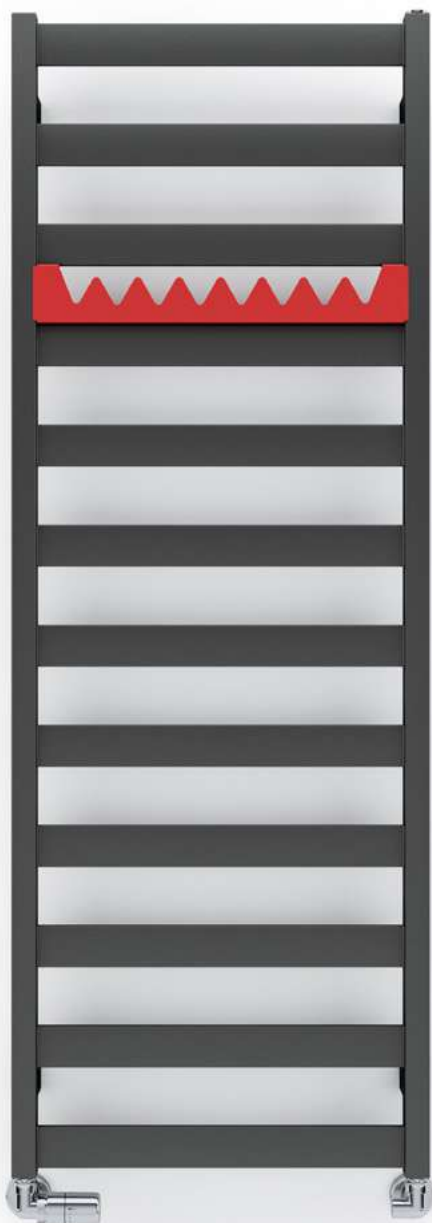

Radiator

Vivo 1390↑ x 500↔ SX, colour: metallic grey, product and configuration code: WGOV139050 KMGRSX

Valves and accessories


3-axis thermostatic valve set, left, chrome, WRZTCG1-CR

Pipe masking set – 70 mm, chrome, TGPCR001

HAPPY SHARK hanger, 500 mm, soft 3028, WRWH1A044 K328



Warp S [ⓘ] s. 582

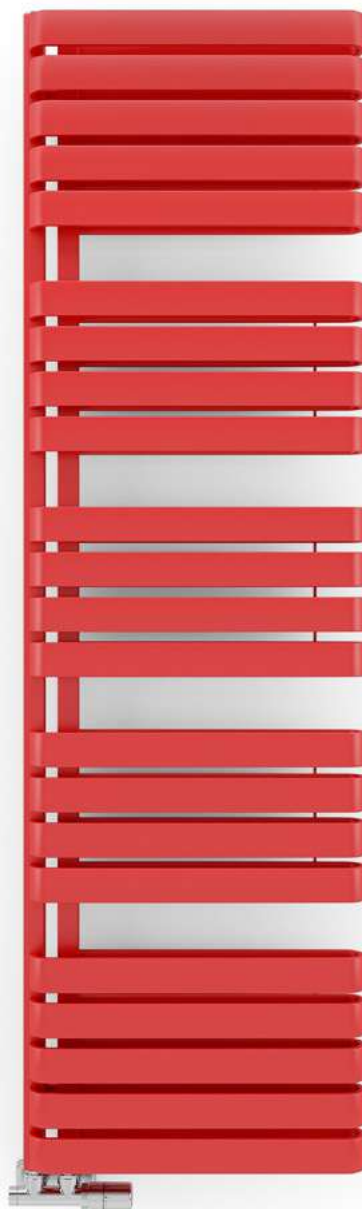

Radiator

Warp S 1695 ↑ x 500 ↔ GD, colour: soft 3028, product and configuration code: WGWAS169050 KS38GD

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR

Integrated pipe masking set, chrome, TGPCR002





Radiator

Warp S 1110 ↓ x 500 ↔ GD, colour: RAL 1018, product and configuration code: WGWAS111050 K118GD

Valves and accessories

Integrated thermostatic valve set, angled, left, chrome, WRZT5G1-CR
Integrated pipe masking set, chrome, TGPCR002





Warp T ① s. 584

Warp T One ① s. 586



Radiator (shown fitted as Dual Fuel)

Warp T 1110↑ x 500↔ SX, colour: RAL 3028, product and configuration code: WGWAT111050 K328SX


Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002

Heating element

KTX 1 heating element, chrome, WEKT1 KCROW

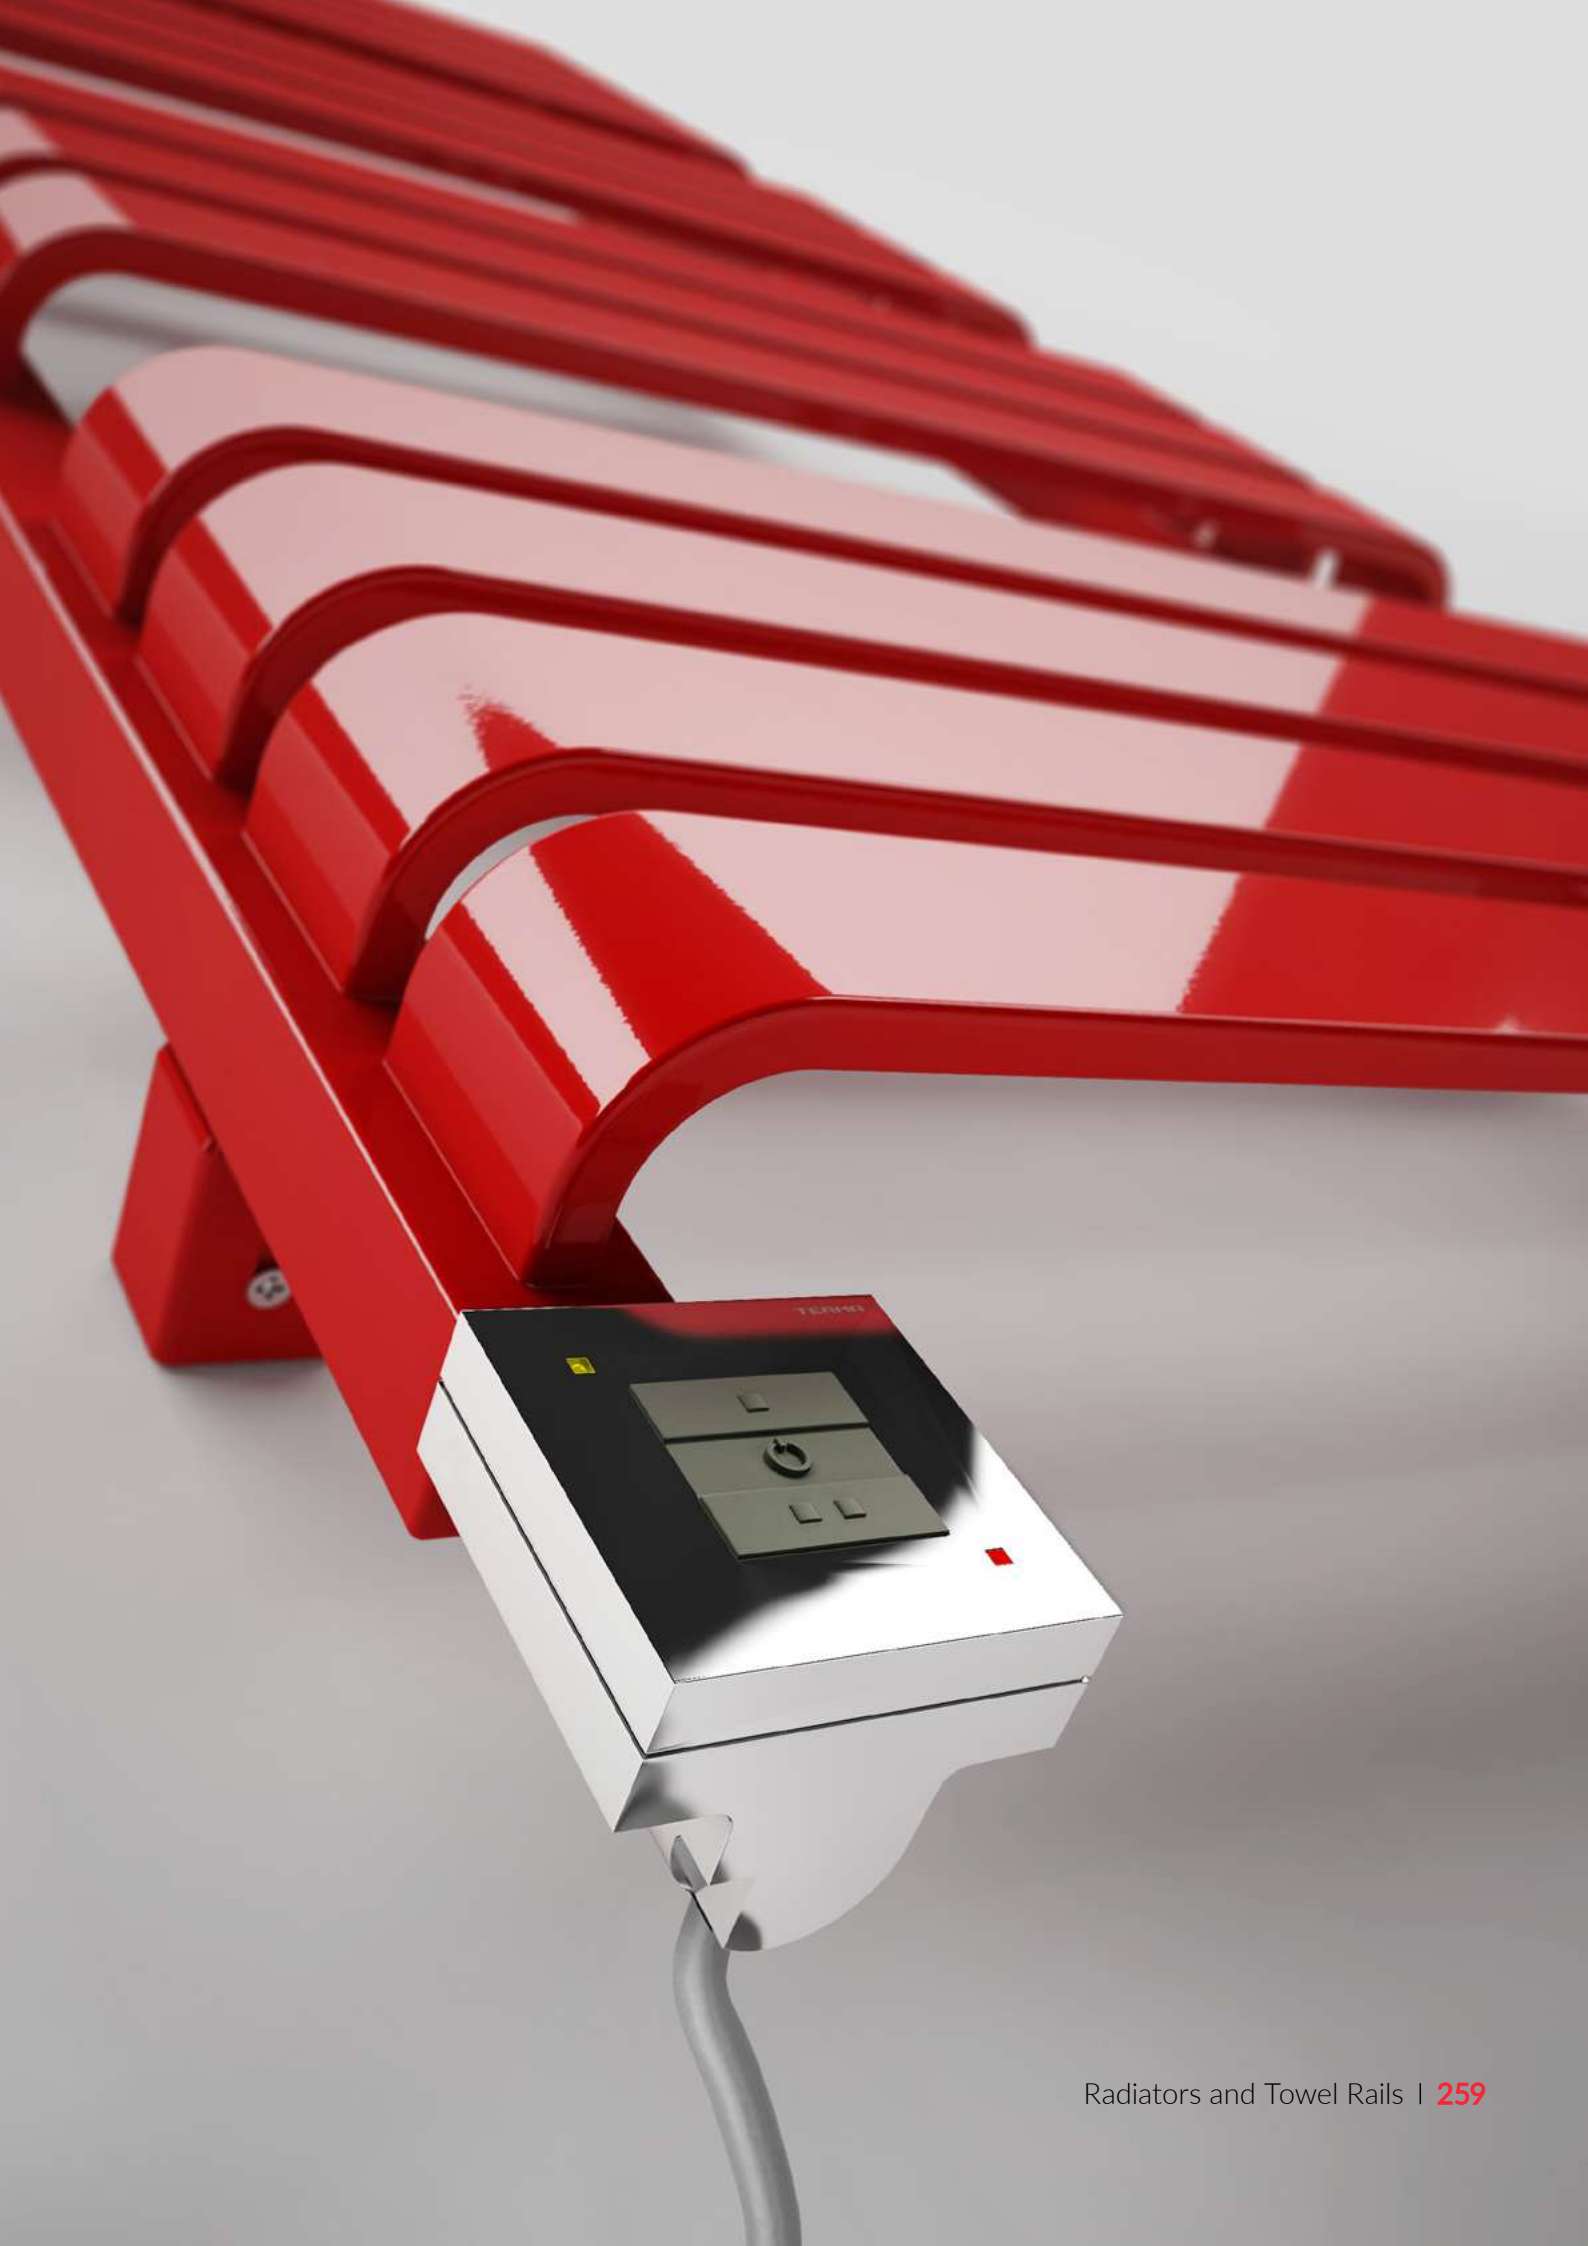

Warp T Bold [ⓘ] s. 588

Warp T Bold One [ⓘ] s. 590



Radiator (shown fitted as Dual Fuel)

Warp T Bold One 1110 ↑ x 500 ↔ S1, colour: RAL 5018, product and configuration code: WZWBN111050 K518S1


Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002

Heating element

Built-in, integrated One heating element

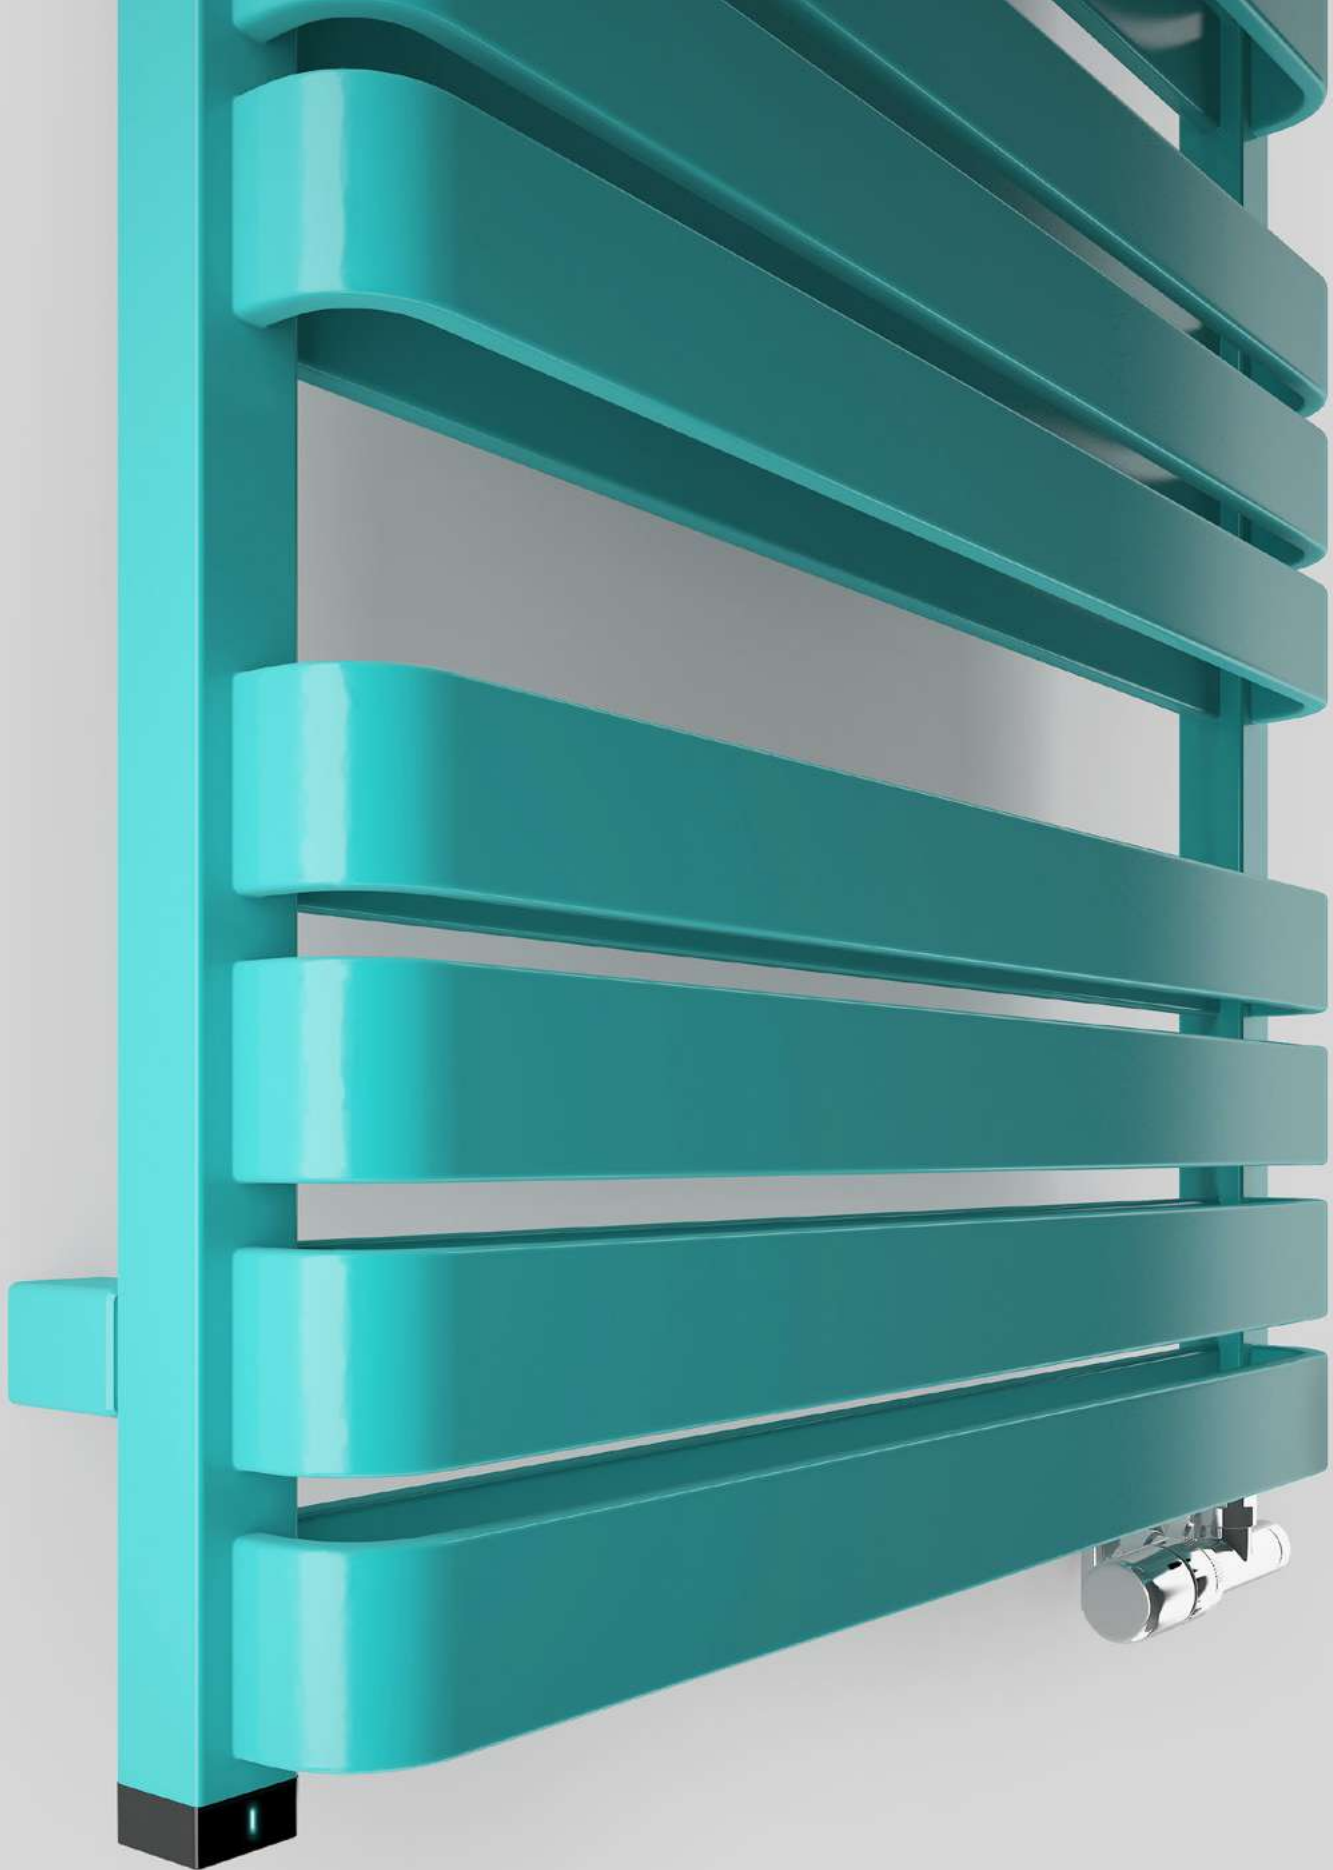





Radiator

Warp T Bold 1110 \updownarrow x 500 \leftrightarrow O8, colour: RAL 7002, product and configuration code: WGWTB111050 K70208

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR
Integrated pipe masking set, chrome, TGPCR002



Radiator (shown fitted as Dual Fuel)

ZigZag 1310 ↓ x 500 ↔ Z8, colour: soft 9005, product and configuration code: WZIG131050 KS95Z8

Valves and accessories

Integrated thermostatic valve, angled, right, black matt, TGZTCZ002

SLIM thermostatic head, black matt, TGGCM001

Integrated pipe masking set, black matt, TGPCM002

Heating element

MOA heating element, black, WEMOA06 K905W





Radiator (shown fitted as Dual Fuel)

ZigZag 1545 ↑ x 500 ↔ SX, colour: metallic red, product and configuration code: WGZIG154050 KMRESXE

Valves and accessories

Integrated thermostatic valve with immersion tube set, angled, right, chrome, WRZT5G6-CR

Integrated pipe masking set, chrome, TGPCR002

Heating element

MOA heating element, chrome, WEMOA06 TCROM



Cast iron radiators

Technical Information




Standard connections:




Available sizes:

Wall mounted

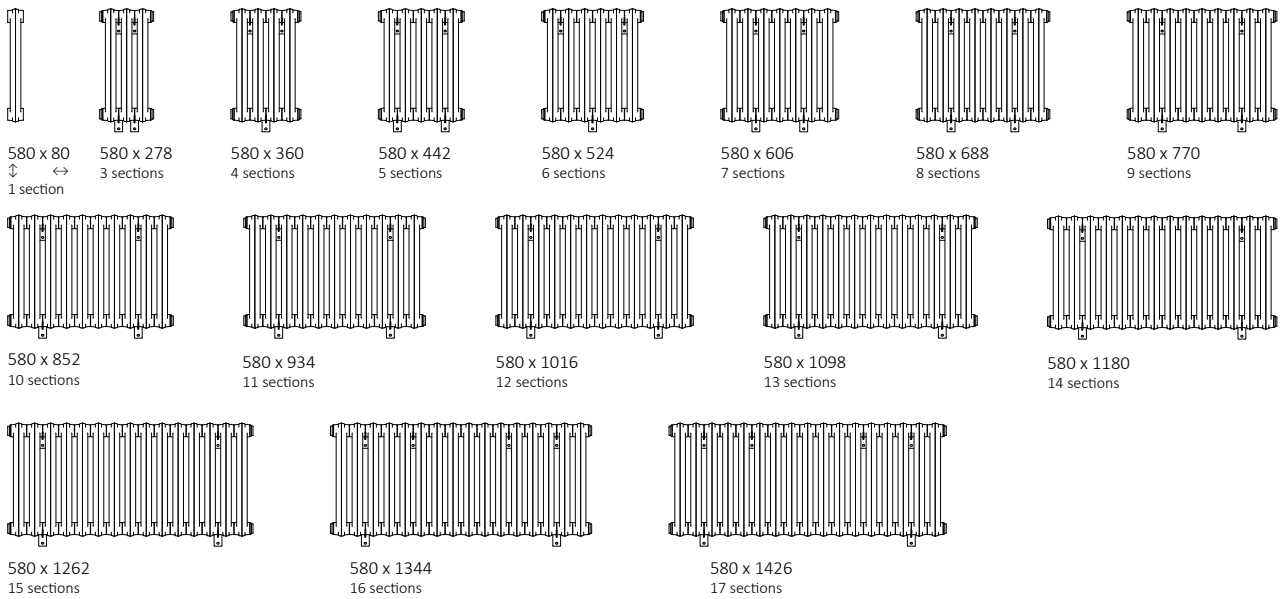

Free standing

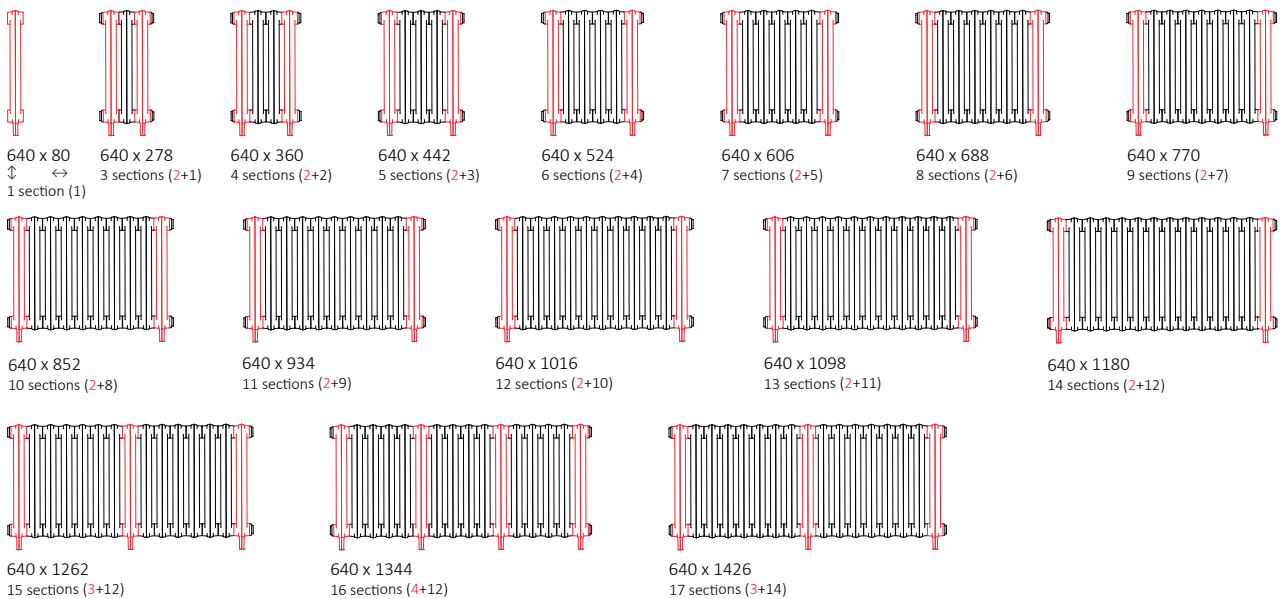

We recommend: Angled manual valve set Minimalist for LP connection – see page 678





Pipe masking set – 160 mm – see page 681




Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↑ [mm] | B ↔ [mm] | C [mm] | 75 65 20°C [W] | 55 45 20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|----------------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|--|--|--|
| Wall mounted | | | | | | | | | | |
| 580 | 80 | 500 | 73 | 39 | – | – | – | 0,68 | 4,6 | WGBRB058008 |
| 580 | 278 | 500 | 218 | 116 | 82 | 98 | – | 2,04 | 15,1 | WGBRB058027 |
| 580 | 360 | 500 | 291 | 154 | – | 98 | – | 2,72 | 19,9 | WGBRB058036 |
| 580 | 442 | 500 | 364 | 193 | 246 | 98 | – | 3,4 | 24,7 | WGBRB058044 |
| 580 | 524 | 500 | 436 | 232 | – | 98 | – | 4,08 | 29,5 | WGBRB058052 |
| 580 | 606 | 500 | 509 | 270 | 410 | 180 | – | 4,76 | 34,3 | WGBRB058060 |
| 580 | 688 | 500 | 582 | 309 | 492 | 180 | – | 5,44 | 39,1 | WGBRB058068 |
| 580 | 770 | 500 | 654 | 347 | 410 | 180 | – | 6,12 | 43,9 | WGBRB058077 |
| 580 | 852 | 500 | 727 | 386 | 492 | 180 | – | 6,8 | 48,7 | WGBRB058085 |
| 580 | 934 | 500 | 800 | 425 | 574 | 180 | – | 7,48 | 53,5 | WGBRB058093 |
| 580 | 1016 | 500 | 872 | 463 | 656 | 180 | – | 8,16 | 58,3 | WGBRB058101 |
| 580 | 1098 | 500 | 945 | 502 | 738 | 180 | – | 8,84 | 63,1 | WGBRB058109 |
| 580 | 1180 | 500 | 1018 | 540 | 820 | 180 | – | 9,52 | 67,9 | WGBRB058118 |
| 580 | 1262 | 500 | 1091 | 579 | 902 | 180 | – | 10,2 | 72,7 | WGBRB058126 |
| 580 | 1344 | 500 | 1163 | 618 | 984 | 180 | 246 | 10,88 | 77,5 | WGBRB058134 |
| 580 | 1426 | 500 | 1236 | 656 | 1066 | 180 | 246 | 11,56 | 82,3 | WGBRB058142 |
| Free standing | | | | | | | | | | |
| 640 | 80 | 500 | 73 | 39 | – | – | – | 0,68 | 5 | WGBRF064008 |
| 640 | 278 | 500 | 218 | 116 | – | – | – | 2,04 | 15,9 | WGBRF064027 |
| 640 | 360 | 500 | 291 | 154 | – | – | – | 2,72 | 20,7 | WGBRF064036 |
| 640 | 442 | 500 | 364 | 193 | – | – | – | 3,4 | 25,5 | WGBRF064044 |
| 640 | 524 | 500 | 436 | 232 | – | – | – | 4,08 | 30,3 | WGBRF064052 |
| 640 | 606 | 500 | 509 | 270 | – | – | – | 4,76 | 35,1 | WGBRF064060 |
| 640 | 688 | 500 | 582 | 309 | – | – | – | 5,44 | 39,9 | WGBRF064068 |
| 640 | 770 | 500 | 654 | 347 | – | – | – | 6,12 | 44,7 | WGBRF064077 |
| 640 | 852 | 500 | 727 | 386 | – | – | – | 6,8 | 49,5 | WGBRF064085 |
| 640 | 934 | 500 | 800 | 425 | – | – | – | 7,48 | 49,3 | WGBRF064093 |
| 640 | 1016 | 500 | 872 | 463 | – | – | – | 8,16 | 59,1 | WGBRF064101 |
| 640 | 1098 | 500 | 945 | 502 | – | – | – | 8,84 | 63,9 | WGBRF064109 |
| 640 | 1180 | 500 | 1018 | 540 | – | – | – | 9,52 | 68,7 | WGBRF064118 |
| 640 | 1262 | 500 | 1091 | 579 | – | – | – | 10,2 | 73,9 | WGBRF064126 |
| 640 | 1344 | 500 | 1163 | 618 | – | – | – | 10,88 | 79,1 | WGBRF064134 |
| 640 | 1426 | 500 | 1236 | 656 | – | – | – | 11,56 | 83,5 | WGBRF064142 |


Radiators made up of 13 sections and more are delivered in two or more batteries.

Wall mounted

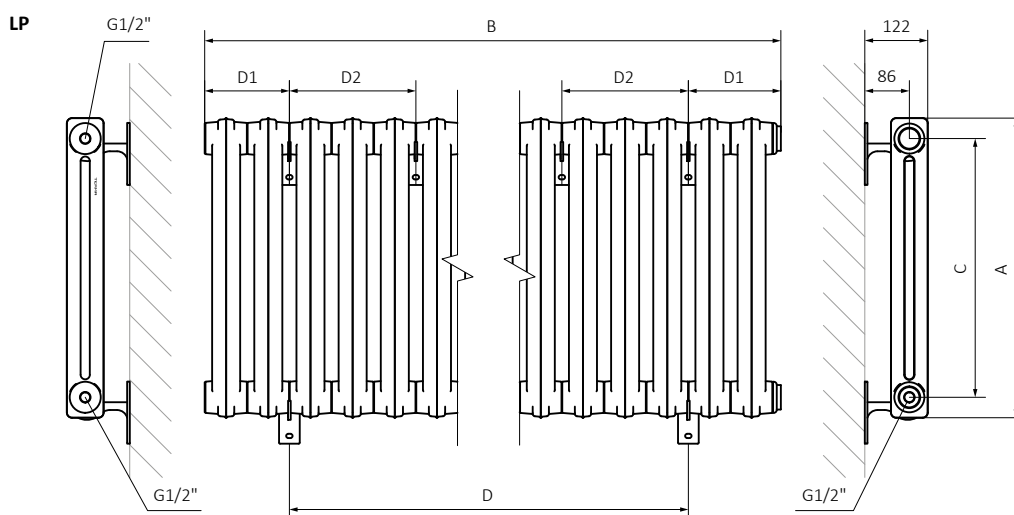

A – Height B – Width C – Distance between pipe centres D – Horizontal distance between mounting bracket centres

Free standing

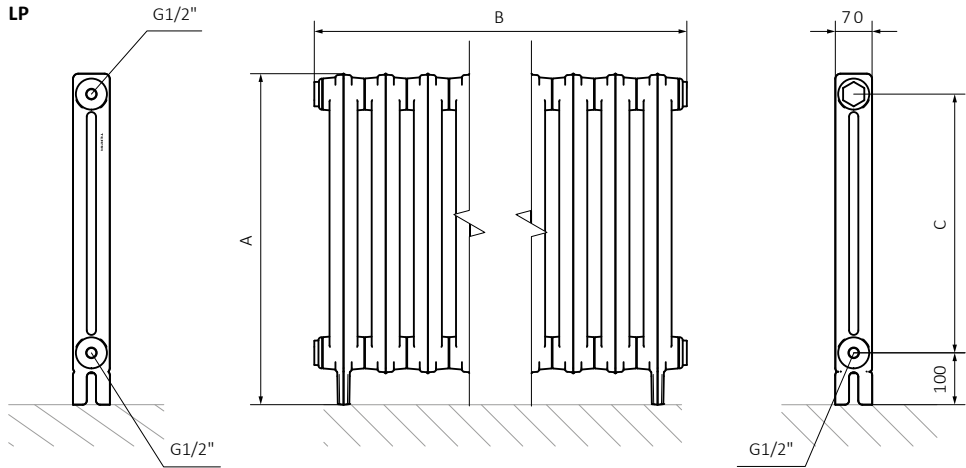




Standard connections:




Available sizes:


Wall mounted

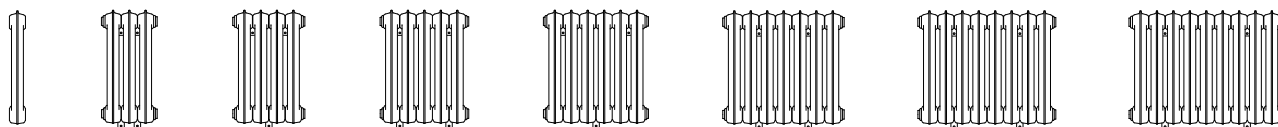


660 x 80 1 section 660 x 278 3 sections 660 x 360 4 sections 660 x 442 5 sections 660 x 524 6 sections 660 x 606 7 sections 660 x 688 8 sections 660 x 770 9 sections

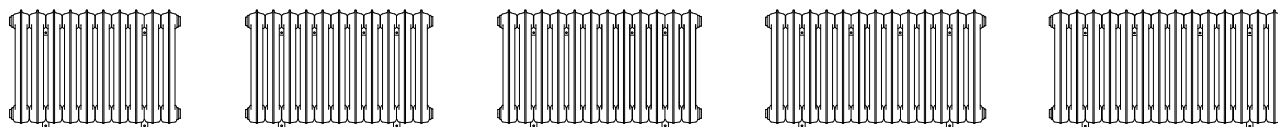


660 x 852 10 sections 660 x 934 11 sections 660 x 1016 12 sections 660 x 1098 13 sections 660 x 1180 14 sections

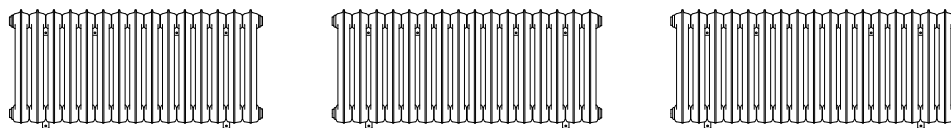


660 x 1262 15 sections 660 x 1344 16 sections 660 x 1426 17 sections

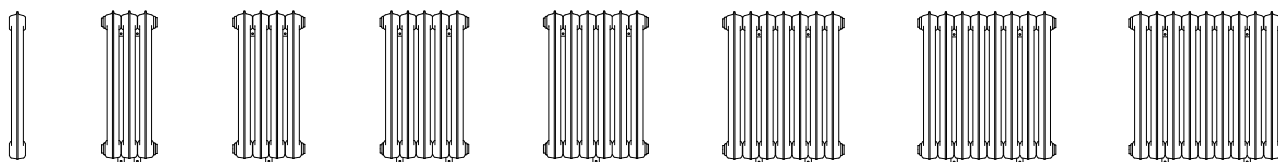

860 x 80 1 section 860 x 278 3 sections 860 x 360 4 sections 860 x 442 5 sections 860 x 524 6 sections 860 x 606 7 sections 860 x 688 8 sections 860 x 770 9 sections

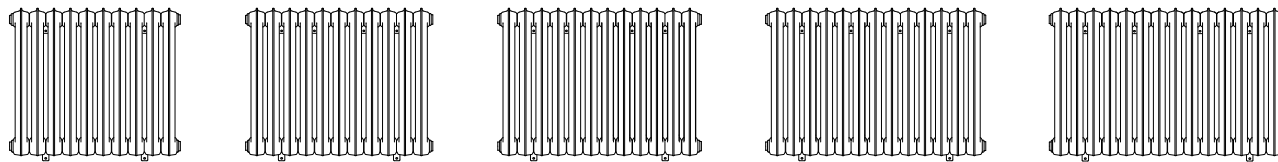

860 x 852 10 sections 860 x 934 11 sections 860 x 1016 12 sections 860 x 1098 13 sections 860 x 1180 14 sections

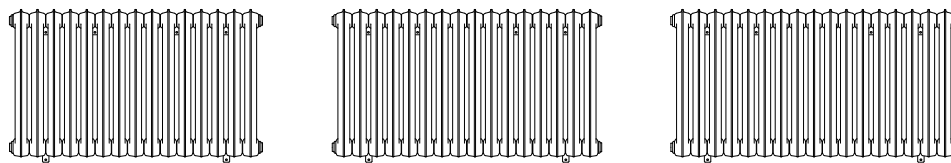

860 x 1262 15 sections 860 x 1344 16 sections 860 x 1426 17 sections

We recommend: Angled manual valve set Classic Art for LP connection – see page 677



Pipe masking set Artistic – see page 681





Free standing



Specifications:


Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|---------------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|---|---|--|
| Wall mounted | | | | | | | | | | |
| 660 | 80 | 560 | 120 | 65 | – | – | – | 3,05 | 10,8 | WGKAB066008 |
| 660 | 278 | 560 | 361 | 195 | 82 | 98 | – | 9,16 | 33,5 | WGKAB066027 |
| 660 | 360 | 560 | 481 | 260 | – | 98 | – | 12,21 | 44,3 | WGKAB066036 |
| 660 | 442 | 560 | 602 | 325 | 246 | 98 | – | 15,27 | 55,1 | WGKAB066044 |
| 660 | 524 | 560 | 722 | 391 | – | 98 | – | 18,32 | 65,9 | WGKAB066052 |
| 660 | 606 | 560 | 842 | 456 | 246 | 180 | – | 21,37 | 76,7 | WGKAB066060 |
| 660 | 688 | 560 | 962 | 521 | – | 180 | – | 24,42 | 87,5 | WGKAB066068 |
| 660 | 770 | 560 | 1083 | 586 | 410 | 180 | – | 27,48 | 98,3 | WGKAB066077 |
| 660 | 852 | 560 | 1203 | 651 | 492 | 180 | – | 30,53 | 109,1 | WGKAB066085 |
| 660 | 934 | 560 | 1323 | 716 | 574 | 180 | 164 | 33,58 | 119,9 | WGKAB066093 |
| 660 | 1016 | 560 | 1444 | 781 | 656 | 180 | 164 | 36,64 | 130,7 | WGKAB066101 |
| 660 | 1098 | 560 | 1564 | 846 | 738 | 180 | 246 | 39,69 | 141,5 | WGKAB066109 |
| 660 | 1180 | 560 | 1684 | 911 | 820 | 180 | 246 | 42,74 | 152,3 | WGKAB066118 |
| 660 | 1262 | 560 | 1805 | 976 | 902 | 180 | 246 | 45,8 | 163,1 | WGKAB066126 |
| 660 | 1344 | 560 | 1925 | 1041 | 984 | 180 | 246 | 48,85 | 173,9 | WGKAB066134 |
| 660 | 1426 | 560 | 2045 | 1107 | 1066 | 180 | 246 | 51,9 | 184,7 | WGKAB066142 |
| 860 | 80 | 760 | 149 | 80 | - | – | – | 4,14 | 14,0 | WGKAB086008 |
| 860 | 278 | 760 | 447 | 239 | 82 | 98 | – | 12,42 | 43,1 | WGKAB086027 |
| 860 | 360 | 760 | 596 | 318 | - | 98 | – | 16,56 | 57,1 | WGKAB086036 |
| 860 | 442 | 760 | 745 | 398 | 246 | 98 | – | 20,70 | 71,1 | WGKAB086044 |
| 860 | 524 | 760 | 894 | 477 | - | 98 | – | 24,84 | 85,1 | WGKAB086052 |
| 860 | 606 | 760 | 1043 | 557 | 246 | 180 | – | 28,98 | 99,1 | WGKAB086060 |
| 860 | 688 | 760 | 1192 | 636 | 328 | 180 | – | 33,12 | 113,1 | WGKAB086068 |
| 860 | 770 | 760 | 1341 | 716 | 410 | 180 | – | 37,26 | 127,1 | WGKAB086077 |
| 860 | 852 | 760 | 1490 | 795 | 492 | 180 | – | 41,40 | 141,1 | WGKAB086085 |
| 860 | 934 | 760 | 1639 | 875 | 574 | 180 | 164 | 45,54 | 155,1 | WGKAB086093 |
| 860 | 1016 | 760 | 1788 | 954 | 656 | 180 | 164 | 49,68 | 169,1 | WGKAB086101 |
| 860 | 1098 | 760 | 1937 | 1034 | 738 | 180 | 246 | 53,82 | 183,1 | WGKAB086109 |
| 860 | 1180 | 760 | 2086 | 1113 | 820 | 180 | 246 | 57,96 | 197,1 | WGKAB086118 |
| 860 | 1262 | 760 | 2235 | 1193 | 902 | 180 | 246 | 62,10 | 211,1 | WGKAB086126 |
| 860 | 1344 | 760 | 2384 | 1272 | 984 | 180 | 246 | 66,24 | 225,1 | WGKAB086134 |
| 860 | 1426 | 760 | 2533 | 1352 | 1066 | 180 | 246 | 70,38 | 239,1 | WGKAB086142 |

| A ↓ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|----------------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|--|---|--|
| Free standing | | | | | | | | | | |
| 720 | 80 | 560 | 120 | 65 | – | – | – | 3,05 | 11,3 | WGKAF072008 |
| 720 | 278 | 560 | 360 | 195 | – | – | – | 9,16 | 35,1 | WGKAF072027 |
| 720 | 360 | 560 | 480 | 260 | – | – | – | 12,21 | 46,1 | WGKAF072036 |
| 720 | 442 | 560 | 600 | 325 | – | – | – | 15,27 | 57,1 | WGKAF072044 |
| 720 | 524 | 560 | 720 | 390 | – | – | – | 18,32 | 68,1 | WGKAF072052 |
| 720 | 606 | 560 | 840 | 454 | – | – | – | 21,37 | 79,1 | WGKAF072060 |
| 720 | 688 | 560 | 960 | 519 | – | – | – | 24,42 | 90,1 | WGKAF072068 |
| 720 | 770 | 560 | 1080 | 584 | – | – | – | 27,48 | 101,1 | WGKAF072077 |
| 720 | 852 | 560 | 1200 | 649 | – | – | – | 30,53 | 112,1 | WGKAF072085 |
| 720 | 934 | 560 | 1320 | 714 | – | – | – | 33,58 | 123,1 | WGKAF072093 |
| 720 | 1016 | 560 | 1440 | 779 | – | – | – | 36,64 | 134,1 | WGKAF072101 |
| 720 | 1098 | 560 | 1560 | 844 | – | – | – | 39,69 | 145,6 | WGKAF072109 |
| 720 | 1180 | 560 | 1680 | 909 | – | – | – | 42,74 | 157,1 | WGKAF072118 |
| 720 | 1262 | 560 | 1800 | 974 | – | – | – | 45,8 | 167,6 | WGKAF072126 |
| 720 | 1344 | 560 | 1920 | 1039 | – | – | – | 48,85 | 179,1 | WGKAF072134 |
| 720 | 1426 | 560 | 2040 | 1104 | – | – | – | 51,9 | 189,6 | WGKAF072142 |
| 920 | 80 | 760 | 149 | 80 | – | – | – | 4,14 | 15,0 | WGKAF092008 |
| 920 | 278 | 760 | 447 | 239 | – | – | – | 12,42 | 45,7 | WGKAF092027 |
| 920 | 360 | 760 | 596 | 318 | – | – | – | 16,56 | 59,9 | WGKAF092036 |
| 920 | 442 | 760 | 745 | 398 | – | – | – | 20,70 | 74,1 | WGKAF092044 |
| 920 | 524 | 760 | 894 | 477 | – | – | – | 24,84 | 88,3 | WGKAF092052 |
| 920 | 606 | 760 | 1043 | 557 | – | – | – | 28,98 | 102,5 | WGKAF092060 |
| 920 | 688 | 760 | 1192 | 636 | – | – | – | 33,12 | 116,7 | WGKAF092068 |
| 920 | 770 | 760 | 1341 | 716 | – | – | – | 37,26 | 130,9 | WGKAF092077 |
| 920 | 852 | 760 | 1490 | 795 | – | – | – | 41,40 | 145,1 | WGKAF092085 |
| 920 | 934 | 760 | 1639 | 875 | – | – | – | 45,54 | 159,3 | WGKAF092093 |
| 920 | 1016 | 760 | 1788 | 954 | – | – | – | 49,68 | 173,5 | WGKAF092101 |
| 920 | 1098 | 760 | 1937 | 1034 | – | – | – | 53,82 | 188,7 | WGKAF092109 |
| 920 | 1180 | 760 | 2086 | 1113 | – | – | – | 57,96 | 203,9 | WGKAF092118 |
| 920 | 1262 | 760 | 2235 | 1193 | – | – | – | 62,10 | 217,1 | WGKAF092126 |
| 920 | 1344 | 760 | 2384 | 1272 | – | – | – | 66,24 | 232,3 | WGKAF092134 |
| 920 | 1426 | 760 | 2533 | 1352 | – | – | – | 70,38 | 245,5 | WGKAF092142 |


Radiators made up of 13 sections and more are delivered in two or more batteries.

Wall mounted

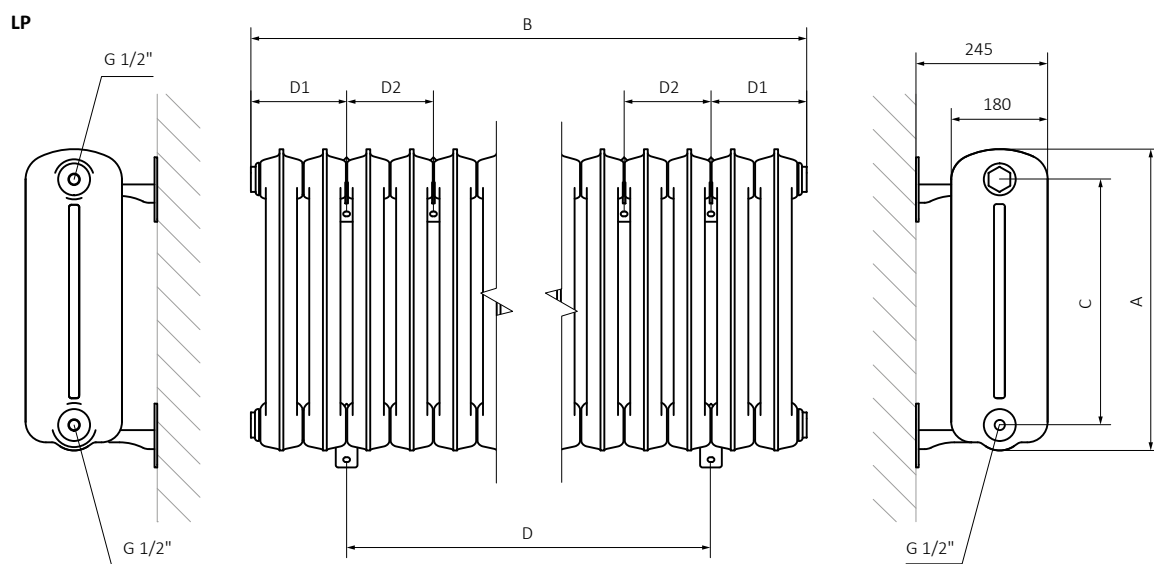

A – Height B – Width C – Distance between pipe centres D – Horizontal distance between mounting bracket centres

Free standing

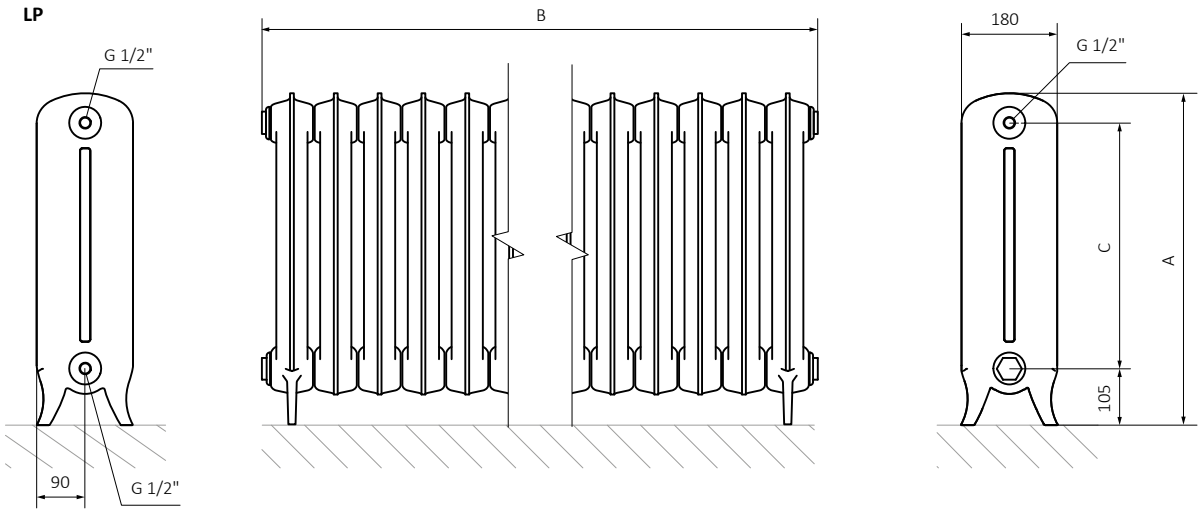




Standard connections:




Available sizes:


Wall mounted




410 x 80 1 section 410 x 278 3 sections 410 x 360 4 sections 410 x 442 5 sections 410 x 524 6 sections 410 x 606 7 sections 410 x 688 8 sections 410 x 770 9 sections




410 x 852 10 sections 410 x 934 11 sections 410 x 1016 12 sections 410 x 1098 13 sections 410 x 1180 14 sections




410 x 1262 15 sections 410 x 1344 16 sections 410 x 1426 17 sections

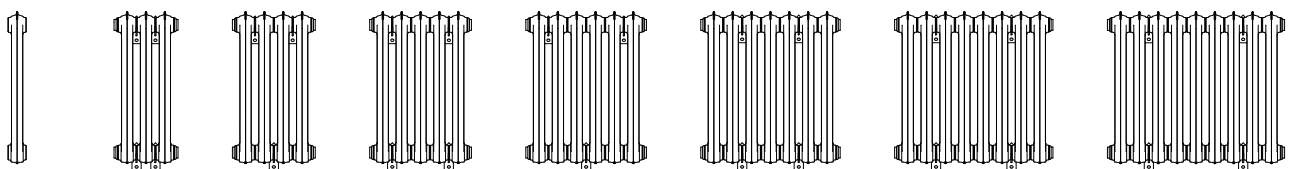

660 x 80 1 sections 660 x 278 3 sections 660 x 360 4 sections 660 x 442 5 sections 660 x 524 6 sections 660 x 606 7 sections 660 x 688 8 sections 660 x 770 9 sections

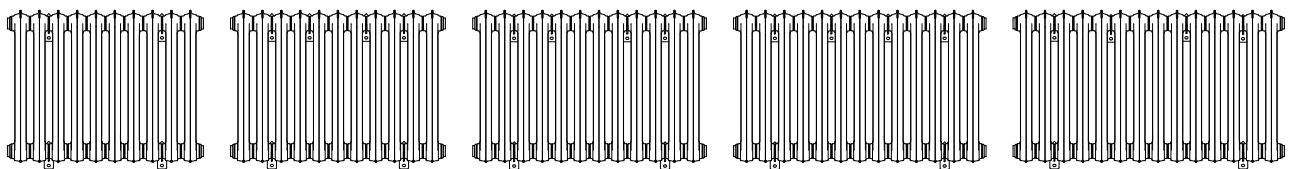

660 x 852 10 sections 660 x 934 11 sections 660 x 1016 12 sections 660 x 1098 13 sections 660 x 1180 14 sections

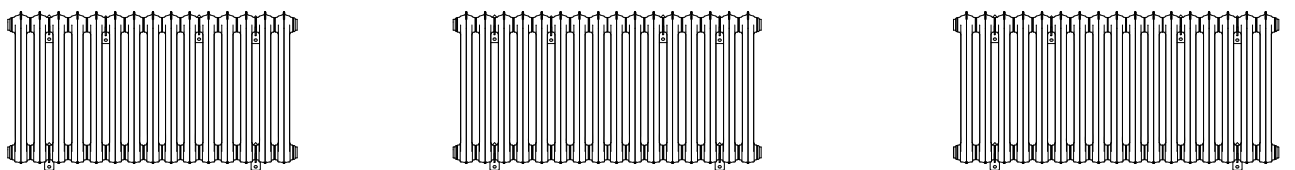

660 x 1262 15 sections 660 x 1344 16 sections 660 x 1426 17 sections


We recommend: Angled manual valve set Classic Art for LP connection – see page 677



Pipe masking set Artistic – see page 681



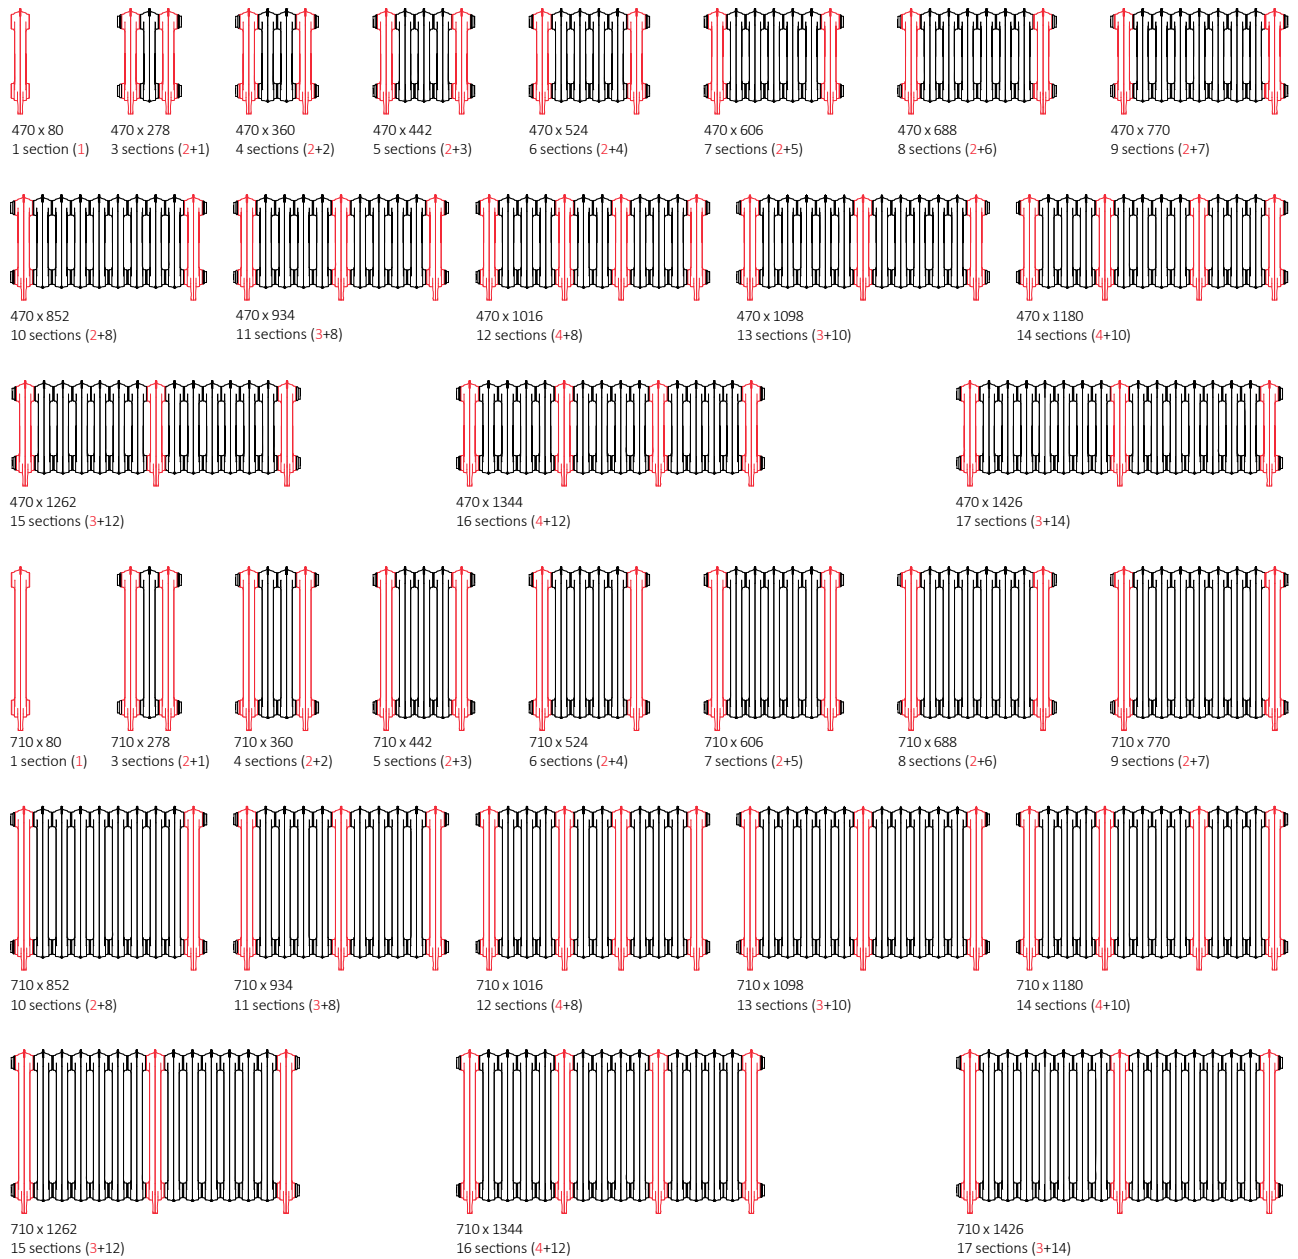

Free standing





Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C



| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|---------------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|---|---|--|
| Wall mounted | | | | | | | | | | |
| 410 | 80 | 297 | 86 | 44 | — | — | — | 1,65 | 8,10 | WGOXB041008 |
| 410 | 278 | 297 | 257 | 133 | 82 | 98 | — | 4,95 | 24,70 | WGOXB041027 |
| 410 | 360 | 297 | 343 | 177 | — | 98 | — | 6,60 | 33,00 | WGOXB041036 |
| 410 | 442 | 297 | 429 | 222 | 246 | 98 | — | 8,25 | 41,30 | WGOXB041044 |
| 410 | 524 | 297 | 515 | 266 | — | 98 | — | 9,90 | 49,60 | WGOXB041052 |
| 410 | 606 | 297 | 601 | 310 | 246 | 180 | — | 11,55 | 57,90 | WGOXB041060 |
| 410 | 688 | 297 | 686 | 355 | — | 180 | — | 13,20 | 66,20 | WGOXB041068 |
| 410 | 770 | 297 | 772 | 399 | 410 | 180 | — | 14,85 | 74,50 | WGOXB041077 |
| 410 | 852 | 297 | 858 | 443 | 492 | 180 | — | 16,50 | 82,80 | WGOXB041085 |
| 410 | 934 | 297 | 944 | 488 | 574 | 180 | — | 18,15 | 91,10 | WGOXB041093 |
| 410 | 1016 | 297 | 1030 | 532 | 656 | 180 | 164 | 19,80 | 99,40 | WGOXB041101 |
| 410 | 1098 | 297 | 1115 | 577 | 738 | 180 | 164 | 21,45 | 107,70 | WGOXB041109 |
| 410 | 1180 | 297 | 1201 | 621 | 820 | 180 | 246 | 23,10 | 116,00 | WGOXB041118 |
| 410 | 1262 | 297 | 1287 | 665 | 902 | 180 | 246 | 24,75 | 124,30 | WGOXB041126 |
| 410 | 1344 | 297 | 1373 | 710 | 984 | 180 | 246 | 26,40 | 132,60 | WGOXB041134 |
| 410 | 1426 | 297 | 1459 | 754 | 1066 | 180 | 246 | 28,05 | 140,90 | WGOXB041142 |
| 660 | 80 | 555 | 143 | 76 | — | — | — | 2,25 | 14,70 | WGOXB066008 |
| 660 | 278 | 555 | 429 | 227 | 82 | 98 | — | 6,75 | 44,50 | WGOXB066027 |
| 660 | 360 | 555 | 572 | 303 | — | 98 | — | 9,00 | 59,40 | WGOXB066036 |
| 660 | 442 | 555 | 715 | 379 | 246 | 98 | — | 11,25 | 74,30 | WGOXB066044 |
| 660 | 524 | 555 | 858 | 454 | — | 98 | — | 13,50 | 89,20 | WGOXB066052 |
| 660 | 606 | 555 | 1001 | 530 | 246 | 180 | — | 15,75 | 104,10 | WGOXB066060 |
| 660 | 688 | 555 | 1144 | 606 | 328 | 180 | — | 18,00 | 119,00 | WGOXB066068 |
| 660 | 770 | 555 | 1287 | 682 | 410 | 180 | — | 20,25 | 133,90 | WGOXB066077 |
| 660 | 852 | 555 | 1430 | 757 | 492 | 180 | — | 22,50 | 148,80 | WGOXB066085 |
| 660 | 934 | 555 | 1573 | 833 | 574 | 180 | 164 | 24,75 | 163,70 | WGOXB066093 |
| 660 | 1016 | 555 | 1716 | 909 | 656 | 180 | 164 | 27,00 | 178,60 | WGOXB066101 |
| 660 | 1098 | 555 | 1859 | 985 | 738 | 180 | 246 | 29,25 | 193,50 | WGOXB066109 |
| 660 | 1180 | 555 | 2002 | 1060 | 820 | 180 | 246 | 31,50 | 208,40 | WGOXB066118 |
| 660 | 1262 | 555 | 2145 | 1136 | 902 | 180 | 246 | 33,75 | 223,30 | WGOXB066126 |
| 660 | 1344 | 555 | 2288 | 1212 | 984 | 180 | 246 | 36,00 | 238,20 | WGOXB066134 |
| 660 | 1426 | 555 | 2431 | 1288 | 1066 | 180 | 246 | 38,25 | 253,10 | WGOXB066142 |

Radiators made up of 13 sections and more are delivered in two or more batteries.

| A ↓ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|----------------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|--|---|--|
| Free standing | | | | | | | | | | |
| 470 | 80 | 297 | 86 | 44 | – | – | – | 1,65 | 8,7 | WGOXF047008 |
| 470 | 278 | 297 | 257 | 133 | – | – | – | 4,95 | 25,9 | WGOXF047027 |
| 470 | 360 | 297 | 343 | 177 | – | – | – | 6,60 | 34,0 | WGOXF047036 |
| 470 | 442 | 297 | 429 | 222 | – | – | – | 8,25 | 42,1 | WGOXF047044 |
| 470 | 524 | 297 | 515 | 266 | – | – | – | 9,90 | 50,2 | WGOXF047052 |
| 470 | 606 | 297 | 601 | 310 | – | – | – | 11,55 | 58,3 | WGOXF047060 |
| 470 | 688 | 297 | 686 | 355 | – | – | – | 13,20 | 66,4 | WGOXF047068 |
| 470 | 770 | 297 | 772 | 399 | – | – | – | 14,85 | 74,5 | WGOXF047077 |
| 470 | 852 | 297 | 858 | 443 | – | – | – | 16,50 | 82,6 | WGOXF047085 |
| 470 | 934 | 297 | 944 | 488 | – | – | – | 18,15 | 90,7 | WGOXF047093 |
| 470 | 1016 | 297 | 1030 | 532 | – | – | – | 19,80 | 98,8 | WGOXF047101 |
| 470 | 1098 | 297 | 1115 | 577 | – | – | – | 21,45 | 107,5 | WGOXF047109 |
| 470 | 1180 | 297 | 1201 | 621 | – | – | – | 23,10 | 116,2 | WGOXF047118 |
| 470 | 1262 | 297 | 1287 | 665 | – | – | – | 24,75 | 115,6 | WGOXF047126 |
| 470 | 1344 | 297 | 1373 | 710 | – | – | – | 26,40 | 132,4 | WGOXF047134 |
| 470 | 1426 | 297 | 1459 | 754 | – | – | – | 28,05 | 139,9 | WGOXF047142 |
| 710 | 80 | 555 | 143 | 76 | – | – | – | 2,25 | 15,3 | WGOXF071008 |
| 710 | 278 | 555 | 429 | 227 | – | – | – | 6,75 | 45,7 | WGOXF071027 |
| 710 | 360 | 555 | 572 | 303 | – | – | – | 9,00 | 60,4 | WGOXF071036 |
| 710 | 442 | 555 | 715 | 379 | – | – | – | 11,25 | 75,1 | WGOXF071044 |
| 710 | 524 | 555 | 858 | 454 | – | – | – | 13,50 | 89,8 | WGOXF071052 |
| 710 | 606 | 555 | 1001 | 530 | – | – | – | 15,75 | 104,5 | WGOXF071060 |
| 710 | 688 | 555 | 1144 | 606 | – | – | – | 18,00 | 119,2 | WGOXF071068 |
| 710 | 770 | 555 | 1287 | 682 | – | – | – | 20,25 | 133,9 | WGOXF071077 |
| 710 | 852 | 555 | 1430 | 757 | – | – | – | 22,50 | 148,6 | WGOXF071085 |
| 710 | 934 | 555 | 1573 | 833 | – | – | – | 24,75 | 163,3 | WGOXF071093 |
| 710 | 1016 | 555 | 1716 | 909 | – | – | – | 27,00 | 178,0 | WGOXF071101 |
| 710 | 1098 | 555 | 1859 | 985 | – | – | – | 29,25 | 193,3 | WGOXF071109 |
| 710 | 1180 | 555 | 2002 | 1060 | – | – | – | 31,50 | 208,6 | WGOXF071118 |
| 710 | 1262 | 555 | 2145 | 1136 | – | – | – | 33,75 | 208,0 | WGOXF071126 |
| 710 | 1344 | 555 | 2288 | 1212 | – | – | – | 36,00 | 238,0 | WGOXF071134 |
| 710 | 1426 | 555 | 2431 | 1288 | – | – | – | 38,25 | 252,1 | WGOXF071142 |



Radiators made up of 13 sections and more are delivered in two or more batteries.

Wall mounted

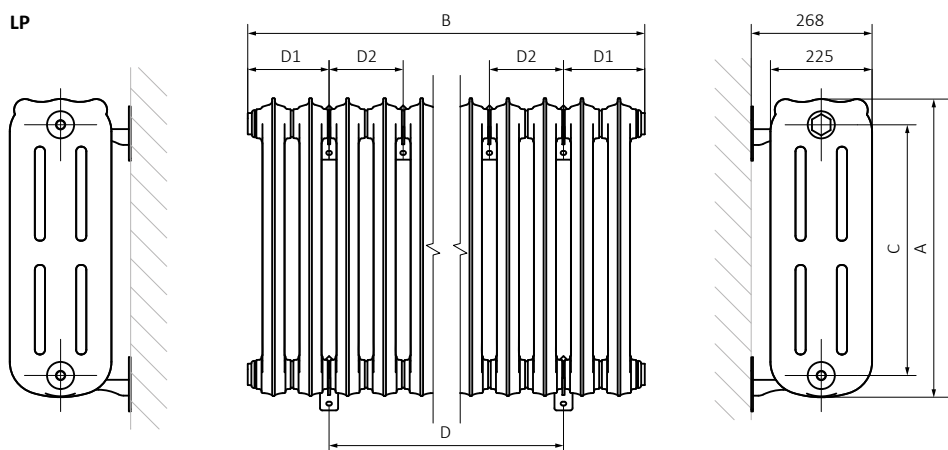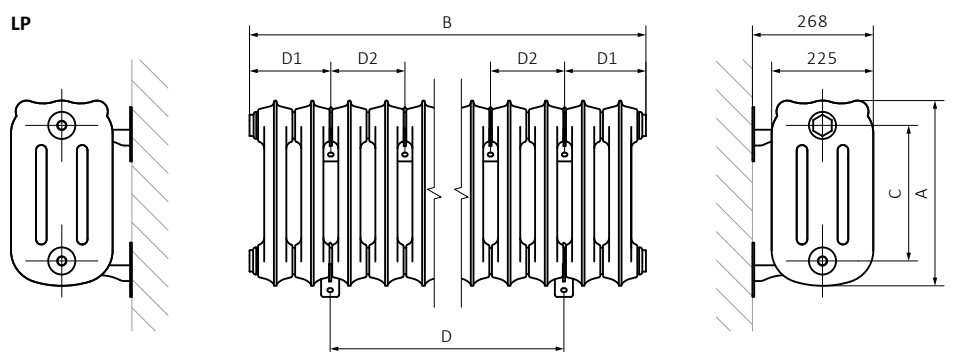

A – Height B – Width C – Distance between pipe centres D – Horizontal distance between mounting bracket centres

Free standing

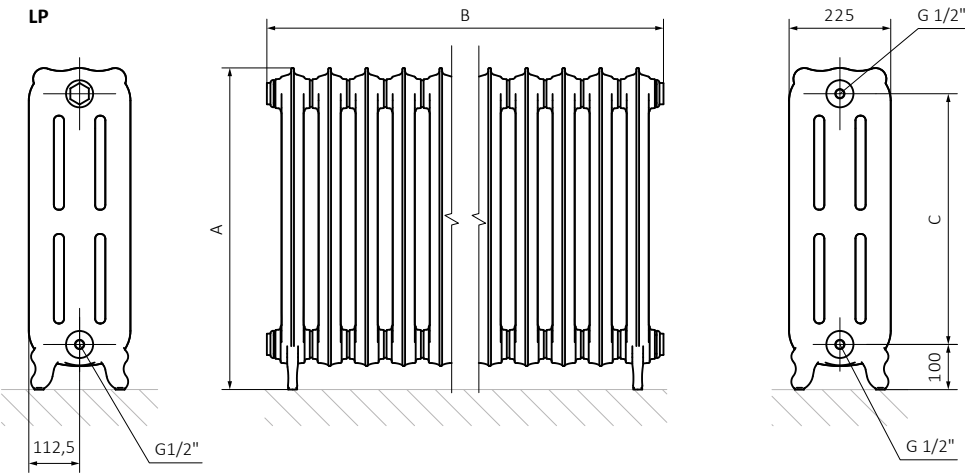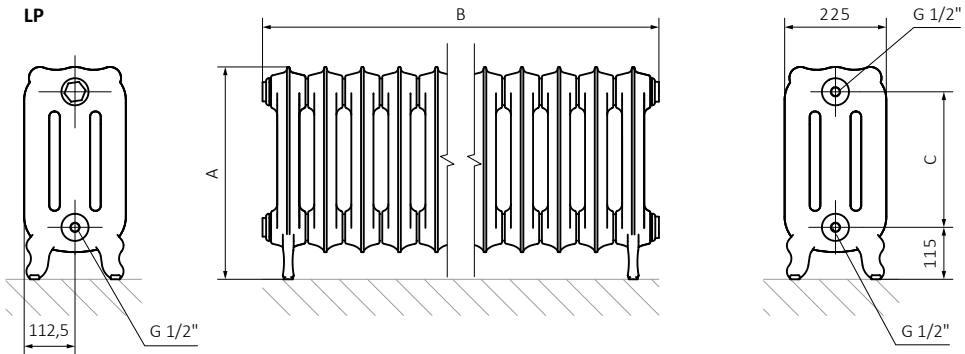



Standard connections:




Available sizes:


Wall mounted




460 x 80
1 section




460 x 278
3 sections




460 x 360
4 sections




460 x 442
5 sections




460 x 524
6 sections




460 x 606
7 sections




460 x 688
8 sections




460 x 770
9 sections




460 x 852
10 sections




460 x 934
11 sections




460 x 1016
12 sections




460 x 1098
13 sections




460 x 1180
14 sections



460 x 1262
15 sections




460 x 1344
16 sections



460 x 1426
17 sections




560 x 80
1 section




560 x 278
3 sections




560 x 360
4 sections




560 x 442
5 sections




560 x 524
6 sections




560 x 606
7 sections




560 x 688
8 sections




560 x 770
9 sections




560 x 852
10 sections




560 x 934
11 sections




560 x 1016
12 sections




560 x 1098
13 sections




560 x 1180
14 sections



560 x 1262
15 sections



560 x 1344
16 sections



560 x 1426
17 sections


We recommend: Angled manual valve set Minimalist for LP connection – see page 678




Pipe masking set – 160 mm – see page 681




660 x 80
1 section




660 x 278
3 sections




660 x 360
4 sections




660 x 442
5 sections




660 x 524
6 sections




660 x 606
7 sections




660 x 688
8 sections




660 x 770
9 sections




660 x 852
10 sections




660 x 934
11 sections




660 x 1016
12 sections




660 x 1098
13 sections




660 x 1180
14 sections



660 x 1262
15 sections




660 x 1344
16 sections

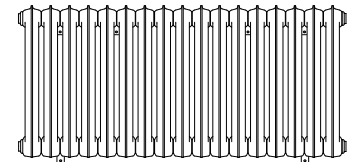


660 x 1426
17 sections




860 x 80
1 section




860 x 278
3 sections




860 x 360
4 sections




860 x 442
5 sections




860 x 524
6 sections




860 x 606
7 sections




860 x 688
8 sections




860 x 770
9 sections




860 x 852
10 sections




860 x 934
11 sections




860 x 1016
12 sections




860 x 1098
13 sections




860 x 1180
14 sections



860 x 1262
15 sections















860 x 1344
16 sections

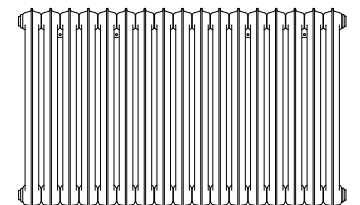

860 x 1426
17 sections

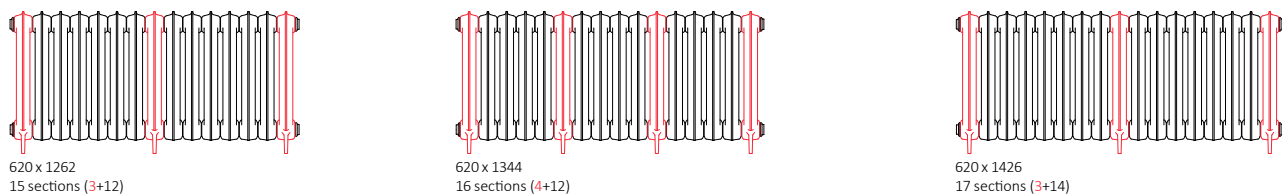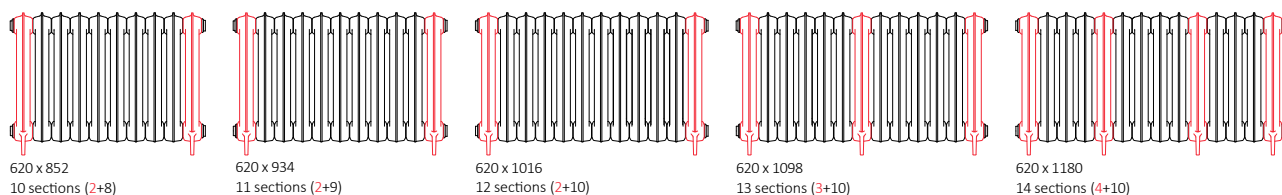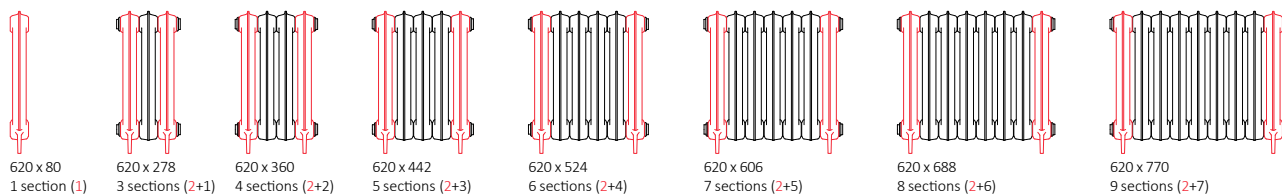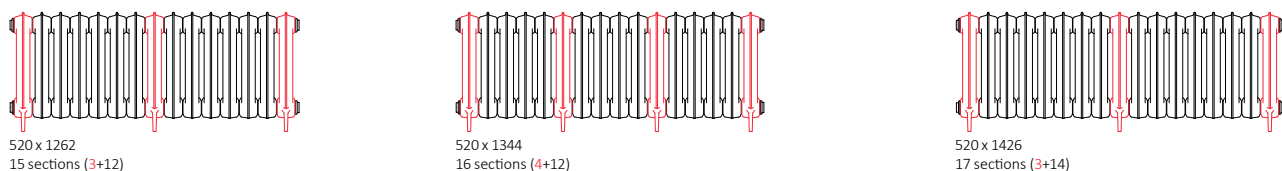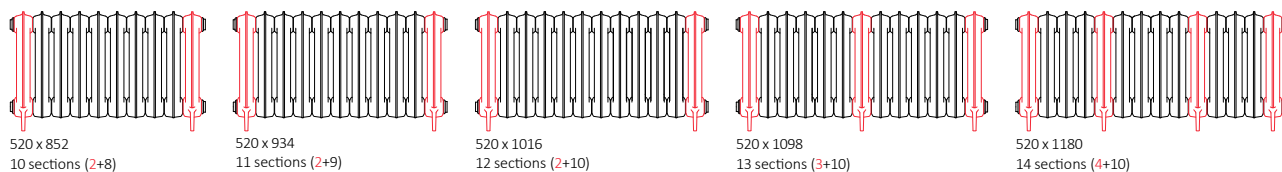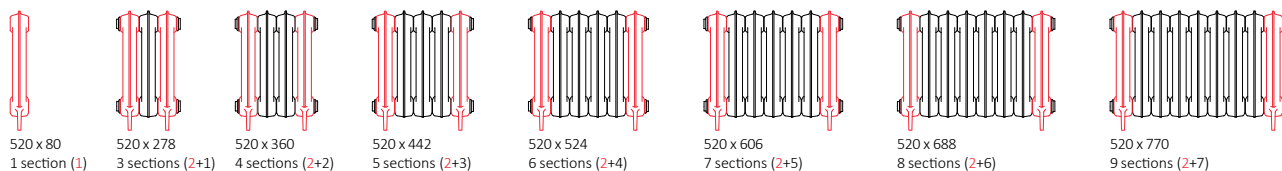

Free standing

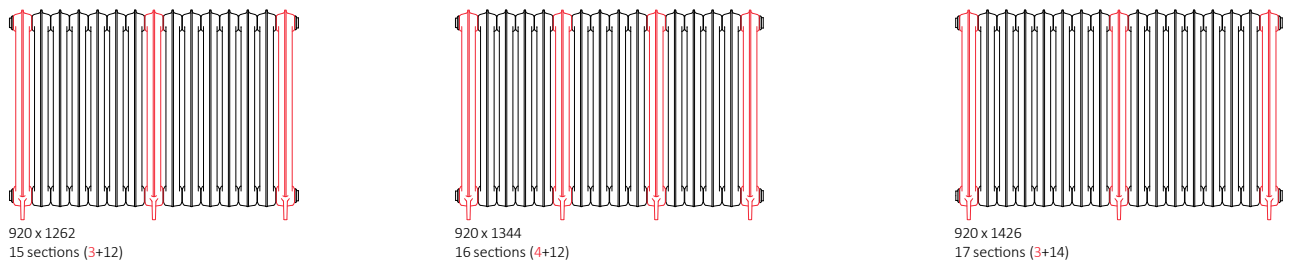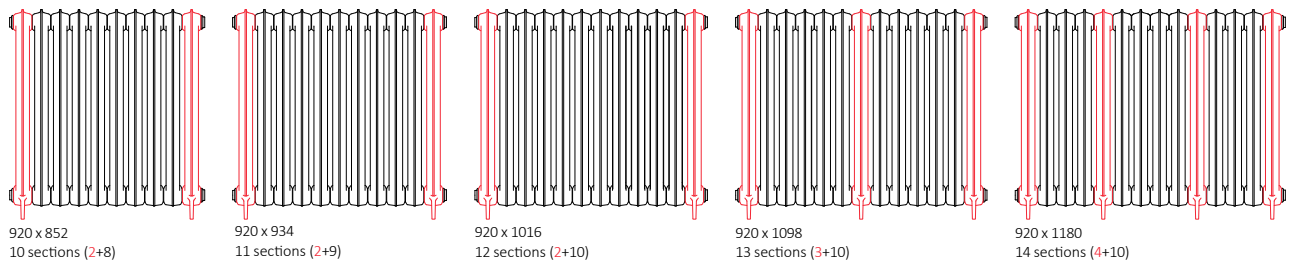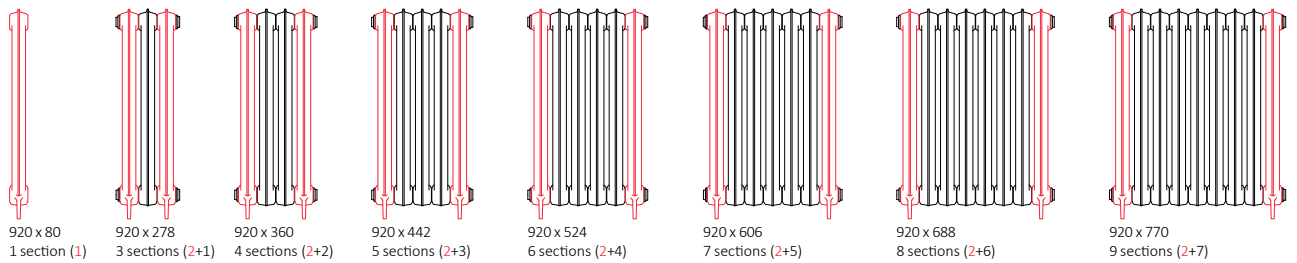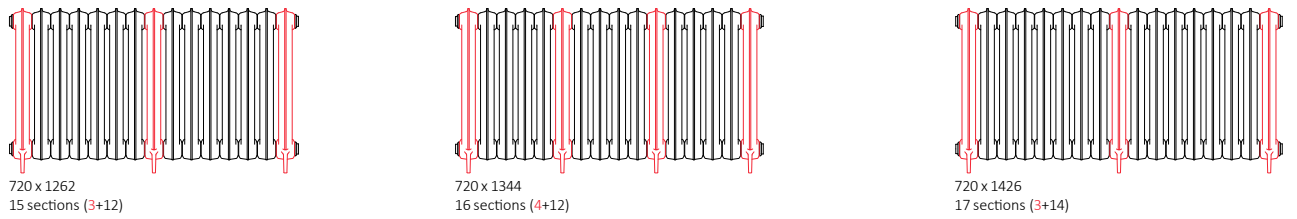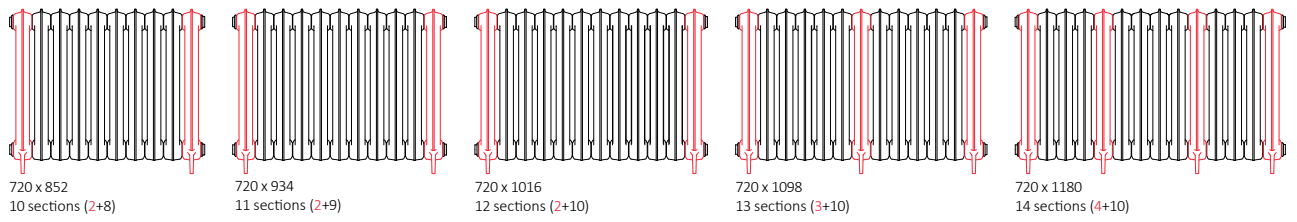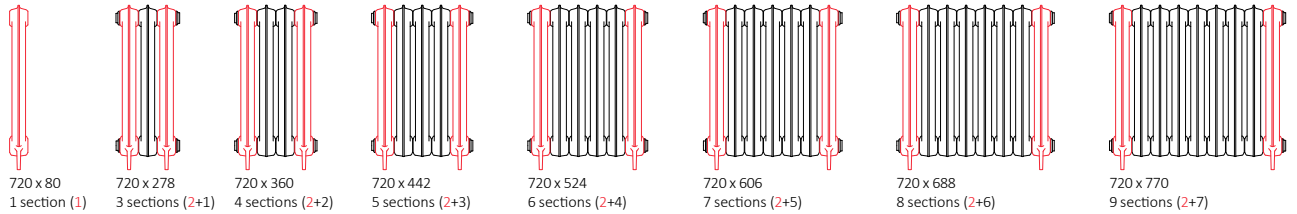







Specifications:



Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|---------------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|---|---|--|
| Wall mounted | | | | | | | | | | |
| 460 | 80 | 360 | 86 | 46 | — | — | — | 2,13 | 7,30 | WGPLB046008 |
| 460 | 278 | 360 | 259 | 137 | 82 | 98 | — | 6,38 | 23,00 | WGPLB046027 |
| 460 | 360 | 360 | 345 | 183 | — | 98 | — | 8,50 | 30,30 | WGPLB046036 |
| 460 | 442 | 360 | 432 | 228 | 246 | 98 | — | 10,63 | 37,60 | WGPLB046044 |
| 460 | 524 | 360 | 518 | 274 | — | 98 | — | 12,75 | 44,90 | WGPLB046052 |
| 460 | 606 | 360 | 604 | 320 | 246 | 180 | — | 14,88 | 52,20 | WGPLB046060 |
| 460 | 688 | 360 | 690 | 365 | 328 | 180 | — | 17,01 | 59,50 | WGPLB046068 |
| 460 | 770 | 360 | 777 | 411 | 410 | 180 | — | 19,13 | 66,80 | WGPLB046077 |
| 460 | 852 | 360 | 863 | 457 | 492 | 180 | — | 21,26 | 74,10 | WGPLB046085 |
| 460 | 934 | 360 | 949 | 503 | 574 | 180 | — | 23,38 | 81,40 | WGPLB046093 |
| 460 | 1016 | 360 | 1036 | 548 | 656 | 180 | — | 25,51 | 88,70 | WGPLB046101 |
| 460 | 1098 | 360 | 1122 | 594 | 738 | 180 | 246 | 27,63 | 96,00 | WGPLB046109 |
| 460 | 1180 | 360 | 1208 | 640 | 820 | 180 | 246 | 29,76 | 103,30 | WGPLB046118 |
| 460 | 1262 | 360 | 1295 | 685 | 902 | 180 | 246 | 31,89 | 110,60 | WGPLB046126 |
| 460 | 1344 | 360 | 1381 | 731 | 984 | 180 | 246 | 34,01 | 117,90 | WGPLB046134 |
| 460 | 1426 | 360 | 1467 | 777 | 1066 | 180 | 246 | 36,14 | 125,20 | WGPLB046142 |
| 560 | 80 | 460 | 103 | 54 | — | — | — | 2,61 | 8,90 | WGPLB056008 |
| 560 | 278 | 460 | 308 | 163 | 82 | 98 | — | 7,82 | 23,00 | WGPLB056027 |
| 560 | 360 | 460 | 410 | 217 | — | 98 | — | 10,42 | 30,30 | WGPLB056036 |
| 560 | 442 | 460 | 513 | 271 | 246 | 98 | — | 13,03 | 37,60 | WGPLB056044 |
| 560 | 524 | 460 | 615 | 325 | — | 98 | — | 15,63 | 44,90 | WGPLB056052 |
| 560 | 606 | 460 | 718 | 379 | 246 | 180 | — | 18,24 | 52,20 | WGPLB056060 |
| 560 | 688 | 460 | 820 | 434 | 328 | 180 | — | 20,85 | 59,50 | WGPLB056068 |
| 560 | 770 | 460 | 923 | 488 | 410 | 180 | — | 23,45 | 66,80 | WGPLB056077 |
| 560 | 852 | 460 | 1025 | 542 | 492 | 180 | — | 26,06 | 74,10 | WGPLB056085 |
| 560 | 934 | 460 | 1128 | 596 | 574 | 180 | 164 | 28,66 | 81,40 | WGPLB056093 |
| 560 | 1016 | 460 | 1230 | 650 | 656 | 180 | 164 | 31,27 | 88,70 | WGPLB056101 |
| 560 | 1098 | 460 | 1333 | 705 | 738 | 180 | 246 | 33,87 | 96,00 | WGPLB056109 |
| 560 | 1180 | 460 | 1435 | 759 | 820 | 180 | 246 | 36,48 | 103,30 | WGPLB056118 |
| 560 | 1262 | 460 | 1538 | 813 | 902 | 180 | 246 | 39,09 | 110,60 | WGPLB056126 |
| 560 | 1344 | 460 | 1640 | 867 | 984 | 180 | 246 | 41,69 | 117,90 | WGPLB056134 |
| 560 | 1426 | 460 | 1743 | 921 | 1066 | 180 | 246 | 44,30 | 125,20 | WGPLB056142 |
| 660 | 80 | 560 | 124 | 66 | — | — | — | 3,05 | 9,50 | WGPLB066008 |
| 660 | 278 | 560 | 372 | 198 | 82 | 98 | — | 9,16 | 29,60 | WGPLB066027 |
| 660 | 360 | 560 | 496 | 265 | — | 98 | — | 12,21 | 39,10 | WGPLB066036 |

| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|----------------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|---|---|--|
| 660 | 442 | 560 | 620 | 331 | 246 | 98 | – | 15,27 | 48,60 | WGPLB066044 |
| 660 | 524 | 560 | 744 | 397 | – | 98 | – | 18,32 | 58,10 | WGPLB066052 |
| 660 | 606 | 560 | 868 | 463 | 246 | 180 | – | 21,37 | 67,60 | WGPLB066060 |
| 660 | 688 | 560 | 992 | 529 | 328 | 180 | – | 24,42 | 77,10 | WGPLB066068 |
| 660 | 770 | 560 | 1116 | 595 | 410 | 180 | – | 27,48 | 86,60 | WGPLB066077 |
| 660 | 852 | 560 | 1240 | 661 | 492 | 180 | – | 30,53 | 96,10 | WGPLB066085 |
| 660 | 934 | 560 | 1364 | 728 | 574 | 180 | 164 | 33,58 | 105,60 | WGPLB066093 |
| 660 | 1016 | 560 | 1488 | 794 | 656 | 180 | 164 | 36,64 | 115,10 | WGPLB066101 |
| 660 | 1098 | 560 | 1612 | 860 | 738 | 180 | 246 | 39,69 | 124,60 | WGPLB066109 |
| 660 | 1180 | 560 | 1736 | 926 | 820 | 180 | 246 | 42,74 | 134,10 | WGPLB066118 |
| 660 | 1262 | 560 | 1860 | 992 | 902 | 180 | 246 | 45,80 | 143,60 | WGPLB066126 |
| 660 | 1344 | 560 | 1984 | 1058 | 984 | 180 | 246 | 48,85 | 153,10 | WGPLB066134 |
| 660 | 1426 | 560 | 2108 | 1124 | 1066 | 180 | 246 | 51,90 | 162,60 | WGPLB066142 |
| 860 | 80 | 760 | 149 | 80 | – | – | – | 4,14 | 11,70 | WGPLB086008 |
| 860 | 278 | 760 | 447 | 239 | 82 | 98 | – | 12,42 | 36,20 | WGPLB086027 |
| 860 | 360 | 760 | 596 | 318 | – | 98 | – | 16,56 | 47,90 | WGPLB086036 |
| 860 | 442 | 760 | 745 | 398 | 246 | 98 | – | 20,70 | 59,60 | WGPLB086044 |
| 860 | 524 | 760 | 894 | 477 | – | 98 | – | 24,84 | 71,30 | WGPLB086052 |
| 860 | 606 | 760 | 1043 | 557 | 246 | 180 | – | 28,98 | 83,00 | WGPLB086060 |
| 860 | 688 | 760 | 1192 | 636 | 328 | 180 | – | 33,12 | 94,70 | WGPLB086068 |
| 860 | 770 | 760 | 1341 | 716 | 410 | 180 | – | 37,26 | 106,40 | WGPLB086077 |
| 860 | 852 | 760 | 1490 | 795 | 492 | 180 | – | 41,40 | 118,10 | WGPLB086085 |
| 860 | 934 | 760 | 1639 | 875 | 574 | 180 | 164 | 45,54 | 129,80 | WGPLB086093 |
| 860 | 1016 | 760 | 1788 | 954 | 656 | 180 | 164 | 49,68 | 141,50 | WGPLB086101 |
| 860 | 1098 | 760 | 1937 | 1034 | 738 | 180 | 246 | 53,82 | 153,20 | WGPLB086109 |
| 860 | 1180 | 760 | 2086 | 1113 | 820 | 180 | 246 | 57,96 | 164,90 | WGPLB086118 |
| 860 | 1262 | 760 | 2235 | 1193 | 902 | 180 | 246 | 62,10 | 176,60 | WGPLB086126 |
| 860 | 1344 | 760 | 2384 | 1272 | 984 | 180 | 246 | 66,24 | 188,30 | WGPLB086134 |
| 860 | 1426 | 760 | 2533 | 1352 | 1066 | 180 | 246 | 70,38 | 200,00 | WGPLB086142 |
| Free standing | | | | | | | | | | |
| 520 | 80 | 360 | 86 | 46 | – | – | – | 2,13 | 7,70 | WGPLF052008 |
| 520 | 278 | 360 | 259 | 137 | – | – | – | 6,38 | 23,80 | WGPLF052027 |
| 520 | 360 | 360 | 345 | 183 | – | – | – | 8,50 | 31,10 | WGPLF052036 |
| 520 | 442 | 360 | 432 | 228 | – | – | – | 10,63 | 38,40 | WGPLF052044 |
| 520 | 524 | 360 | 518 | 274 | – | – | – | 12,75 | 45,70 | WGPLF052052 |
| 520 | 606 | 360 | 604 | 320 | – | – | – | 14,88 | 53,00 | WGPLF052060 |
| 520 | 688 | 360 | 690 | 365 | – | – | – | 17,01 | 60,30 | WGPLF052068 |
| 520 | 770 | 360 | 777 | 411 | – | – | – | 19,13 | 67,60 | WGPLF052077 |
| 520 | 852 | 360 | 863 | 457 | – | – | – | 21,26 | 74,90 | WGPLF052085 |


Plain s. 32

| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|--|---|--|
| 520 | 934 | 360 | 949 | 503 | — | — | — | 23,38 | 82,20 | WGPLF052093 |
| 520 | 1016 | 360 | 1036 | 548 | — | — | — | 25,51 | 89,50 | WGPLF052101 |
| 520 | 1098 | 360 | 1122 | 594 | — | — | — | 27,63 | 97,20 | WGPLF052109 |
| 520 | 1180 | 360 | 1208 | 640 | — | — | — | 29,76 | 104,90 | WGPLF052118 |
| 520 | 1262 | 360 | 1295 | 685 | — | — | — | 31,89 | 111,80 | WGPLF052126 |
| 520 | 1344 | 360 | 1381 | 731 | — | — | — | 34,01 | 119,50 | WGPLF052134 |
| 520 | 1426 | 360 | 1467 | 777 | — | — | — | 36,14 | 126,40 | WGPLF052142 |
| 620 | 80 | 460 | 103 | 54 | — | — | — | 2,61 | 9,30 | WGPLF062008 |
| 620 | 278 | 460 | 308 | 163 | — | — | — | 7,82 | 27,50 | WGPLF062027 |
| 620 | 360 | 460 | 410 | 217 | — | — | — | 10,42 | 36,40 | WGPLF062036 |
| 620 | 442 | 460 | 513 | 271 | — | — | — | 13,03 | 45,30 | WGPLF062044 |
| 620 | 524 | 460 | 615 | 325 | — | — | — | 15,63 | 54,20 | WGPLF062052 |
| 620 | 606 | 460 | 718 | 379 | — | — | — | 18,24 | 63,10 | WGPLF062060 |
| 620 | 688 | 460 | 820 | 434 | — | — | — | 20,85 | 72,00 | WGPLF062068 |
| 620 | 770 | 460 | 923 | 488 | — | — | — | 23,45 | 80,90 | WGPLF062077 |
| 620 | 852 | 460 | 1025 | 542 | — | — | — | 26,06 | 89,80 | WGPLF062085 |
| 620 | 934 | 460 | 1128 | 596 | — | — | — | 28,66 | 98,70 | WGPLF062093 |
| 620 | 1016 | 460 | 1230 | 650 | — | — | — | 31,27 | 107,60 | WGPLF062101 |
| 620 | 1098 | 460 | 1333 | 705 | — | — | — | 33,87 | 116,90 | WGPLF062109 |
| 620 | 1180 | 460 | 1435 | 759 | — | — | — | 36,48 | 126,20 | WGPLF062118 |
| 620 | 1262 | 460 | 1538 | 813 | — | — | — | 39,09 | 134,70 | WGPLF062126 |
| 620 | 1344 | 460 | 1640 | 867 | — | — | — | 41,69 | 144,00 | WGPLF062134 |
| 620 | 1426 | 460 | 1743 | 921 | — | — | — | 44,30 | 152,50 | WGPLF062142 |
| 720 | 80 | 560 | 124 | 66 | — | — | — | 3,05 | 10,10 | WGPLF072008 |
| 720 | 278 | 560 | 372 | 198 | — | — | — | 9,16 | 30,80 | WGPLF072027 |
| 720 | 360 | 560 | 496 | 265 | — | — | — | 12,21 | 40,30 | WGPLF072036 |
| 720 | 442 | 560 | 620 | 331 | — | — | — | 15,27 | 49,80 | WGPLF072044 |
| 720 | 524 | 560 | 744 | 397 | — | — | — | 18,32 | 59,30 | WGPLF072052 |
| 720 | 606 | 560 | 868 | 463 | — | — | — | 21,37 | 68,80 | WGPLF072060 |
| 720 | 688 | 560 | 992 | 529 | — | — | — | 24,42 | 78,30 | WGPLF072068 |
| 720 | 770 | 560 | 1116 | 595 | — | — | — | 27,48 | 87,80 | WGPLF072077 |
| 720 | 852 | 560 | 1240 | 661 | — | — | — | 30,53 | 97,30 | WGPLF072085 |
| 720 | 934 | 560 | 1364 | 728 | — | — | — | 33,58 | 106,80 | WGPLF072093 |
| 720 | 1016 | 560 | 1488 | 794 | — | — | — | 36,64 | 116,30 | WGPLF072101 |
| 720 | 1098 | 560 | 1612 | 860 | — | — | — | 39,69 | 126,40 | WGPLF072109 |
| 720 | 1180 | 560 | 1736 | 926 | — | — | — | 42,74 | 136,50 | WGPLF072118 |
| 720 | 1262 | 560 | 1860 | 992 | — | — | — | 45,80 | 145,40 | WGPLF072126 |
| 720 | 1344 | 560 | 1984 | 1058 | — | — | — | 48,85 | 155,50 | WGPLF072134 |
| 720 | 1426 | 560 | 2108 | 1124 | — | — | — | 51,90 | 164,40 | WGPLF072142 |

| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65 [W] 20°C | 55/45 [W] 20°C | D [mm] | D1 [mm] | D2 [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|-----------|----------------------|----------------------|-----------|------------|------------|---|---|--|
| 920 | 80 | 760 | 149 | 80 | — | — | — | 4,14 | 12,50 | WGPLF092008 |
| 920 | 278 | 760 | 447 | 239 | — | — | — | 12,42 | 37,80 | WGPLF092027 |
| 920 | 360 | 760 | 596 | 318 | — | — | — | 16,56 | 49,50 | WGPLF092036 |
| 920 | 442 | 760 | 745 | 398 | — | — | — | 20,70 | 61,20 | WGPLF092044 |
| 920 | 524 | 760 | 894 | 477 | — | — | — | 24,84 | 72,90 | WGPLF092052 |
| 920 | 606 | 760 | 1043 | 557 | — | — | — | 28,98 | 84,60 | WGPLF092060 |
| 920 | 688 | 760 | 1192 | 636 | — | — | — | 33,12 | 96,30 | WGPLF092068 |
| 920 | 770 | 760 | 1341 | 716 | — | — | — | 37,26 | 108,00 | WGPLF092077 |
| 920 | 852 | 760 | 1490 | 795 | — | — | — | 41,40 | 119,70 | WGPLF092085 |
| 920 | 934 | 760 | 1639 | 875 | — | — | — | 45,54 | 132,20 | WGPLF092093 |
| 920 | 1016 | 760 | 1788 | 954 | — | — | — | 49,68 | 144,70 | WGPLF092101 |
| 920 | 1098 | 760 | 1937 | 1034 | — | — | — | 53,82 | 155,60 | WGPLF092109 |
| 920 | 1180 | 760 | 2086 | 1113 | — | — | — | 57,96 | 168,10 | WGPLF092118 |
| 920 | 1262 | 760 | 2235 | 1193 | — | — | — | 62,10 | 179,00 | WGPLF092126 |
| 920 | 1344 | 760 | 2384 | 1272 | — | — | — | 66,24 | 191,50 | WGPLF092134 |
| 920 | 1426 | 760 | 2533 | 1352 | — | — | — | 70,38 | 202,40 | WGPLF092142 |


Radiators made up of 13 sections and more are delivered in two or more batteries.

Wall mounted

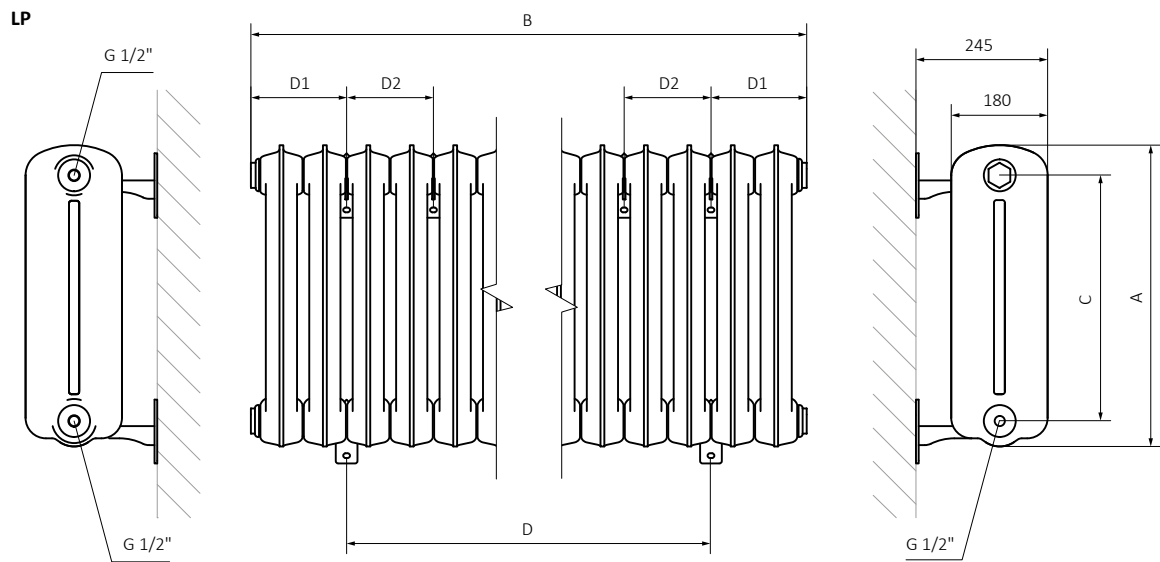

A – Height B – Width C – Distance between pipe centres D – Horizontal distance between mounting bracket centres

Free standing

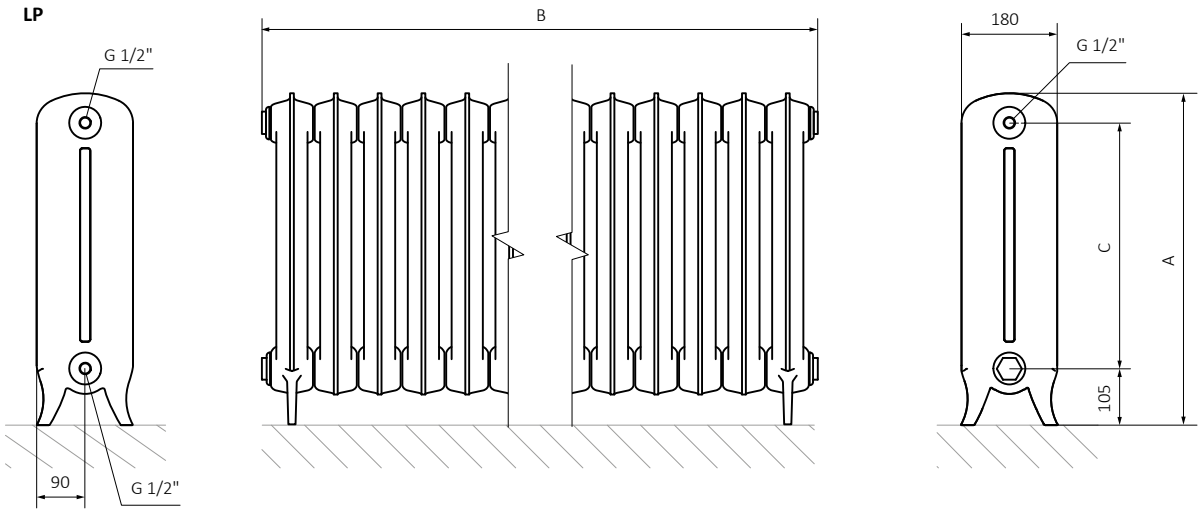

Plain 3 column s. 34




design: *Terma*

Standard connections:




Available sizes:


Wall mounted




560 x 80 1 section 560 x 278 3 sections 560 x 360 4 sections 560 x 442 5 sections 560 x 524 6 sections 560 x 606 7 sections 560 x 688 8 sections 560 x 770 9 sections




560 x 852 10 sections 560 x 934 11 sections 560 x 1016 12 sections 560 x 1098 13 sections 560 x 1180 14 sections

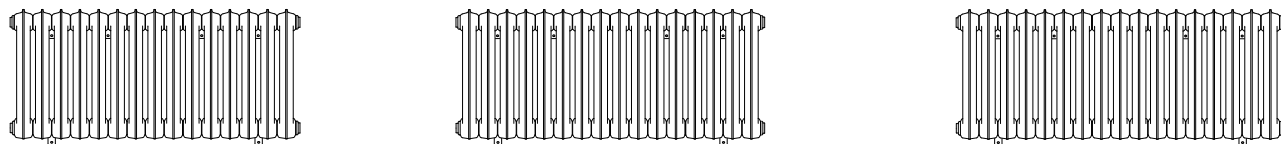

560 x 1262 15 sections 560 x 1344 16 sections 560 x 1426 17 sections



660 x 80 1 section 660 x 278 3 sections 660 x 360 4 sections 660 x 442 5 sections 660 x 524 6 sections 660 x 606 7 sections 660 x 688 8 sections 660 x 770 9 sections




660 x 852 10 sections 660 x 934 11 sections 660 x 1016 12 sections 660 x 1098 13 sections 660 x 1180 14 sections


We recommend: WOOD thermostatic angled valve set
for LP connection – see page 680




Pipe masking set – 160 mm
– see page 681



660 x 1262
15 sections




660 x 1344
16 sections

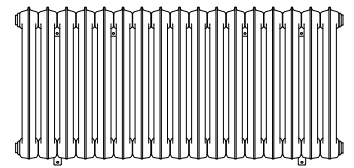


660 x 1426
17 sections




860 x 80
1 section




860 x 278
3 sections




860 x 360
4 sections




860 x 442
5 sections




860 x 524
6 sections




860 x 606
7 sections




860 x 688
8 sections




860 x 770
9 sections




860 x 852
10 sections




860 x 934
11 sections




860 x 1016
12 sections




860 x 1098
13 sections




860 x 1180
14 sections



860 x 1262
15 sections




860 x 1344
16 sections

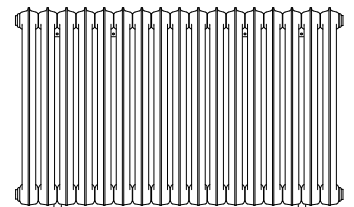

860 x 1426
17 sections

Plain 3 column s. 34

Free standing

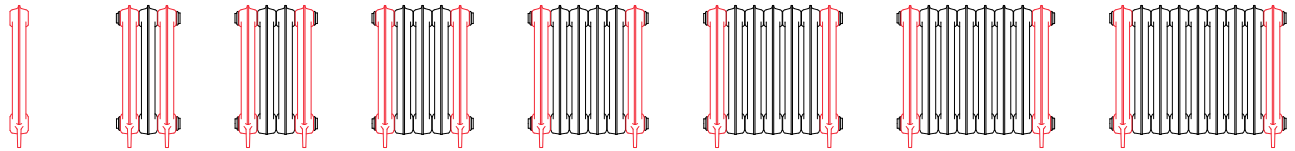

620 x 80
1 section (1)

620 x 278
3 sections (2+1)

620 x 360
4 sections (2+2)


620 x 442
5 sections (2+3)

620 x 524
6 sections (2+4)

620 x 606
7 sections (2+5)

620 x 688
8 sections (2+6)

620 x 770
9 sections (2+7)

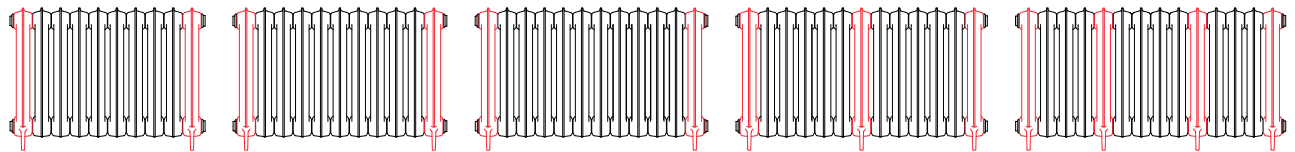


620 x 852
10 sections (2+8)

620 x 934
11 sections (2+9)

620 x 1016
12 sections (2+10)

620 x 1098
13 sections (3+10)


620 x 1180
14 sections (4+10)

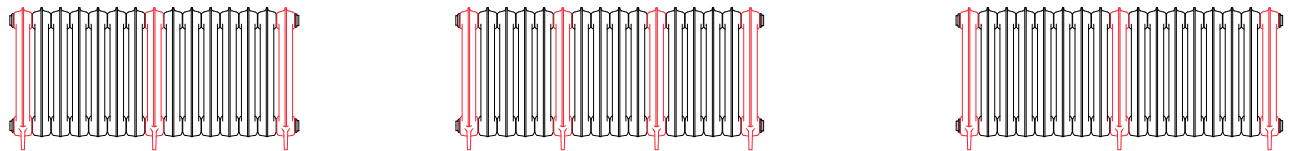

620 x 1262
15 sections (3+12)

620 x 1344
16 sections (4+12)

620 x 1426
17 sections (3+14)

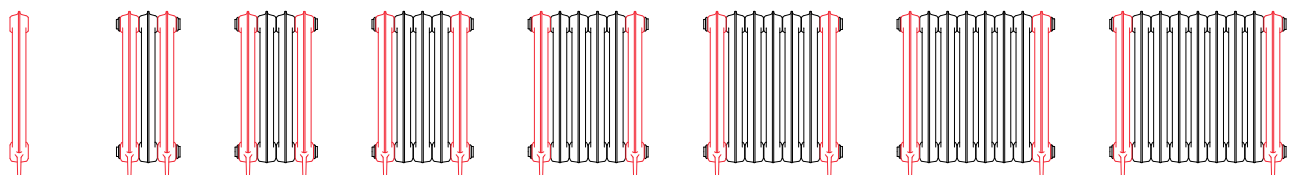

720 x 80
1 section (1)

720 x 278
3 sections (2+1)

720 x 360
4 sections (2+2)


720 x 442
5 sections (2+3)

720 x 524
6 sections (2+4)

720 x 606
7 sections (2+5)

720 x 688
8 sections (2+6)

720 x 770
9 sections (2+7)

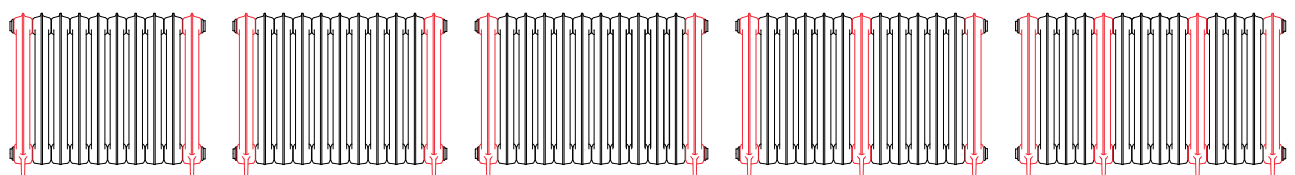


720 x 852
10 sections (2+8)

720 x 934
11 sections (2+9)

720 x 1016
12 sections (2+10)

720 x 1098
13 sections (3+10)

720 x 1180
14 sections (4+10)

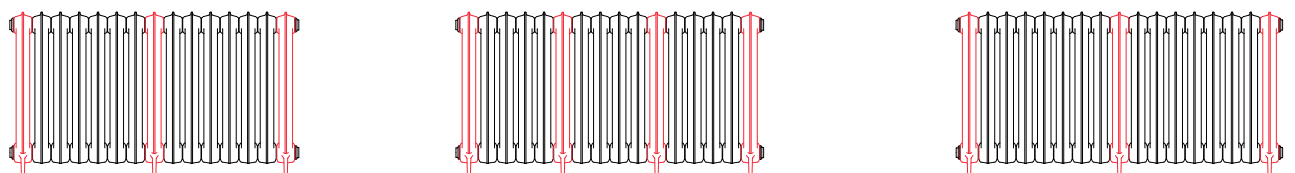


720 x 1262
15 sections (3+12)

720 x 1344
16 sections (4+12)

720 x 1426
17 sections (3+14)



920 x 80
1 section (1)




920 x 278
3 sections (2+1)




920 x 360
4 sections (2+2)




920 x 442
5 sections (2+3)




920 x 524
6 sections (2+4)




920 x 606
7 sections (2+5)




920 x 688
8 sections (2+6)




920 x 770
9 sections (2+7)




920 x 852
10 sections (2+8)




920 x 934
11 sections (2+9)




920 x 1016
12 sections (2+10)




920 x 1098
13 sections (3+10)




920 x 1180
14 sections (4+10)



920 x 1262
15 sections (3+12)



920 x 1344
16 sections (4+12)

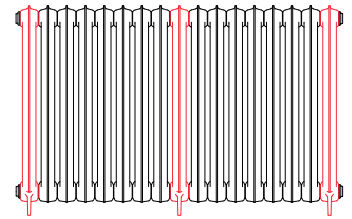





920 x 1426
17 sections (3+14)

Plain 3 column s. 34



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A \updownarrow [mm] | B \leftrightarrow [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|--------------------------|-----------------------------|-----------|-------------------|-------------------|-----------|------------|------------|---|---|--|
| Wall mounted | | | | | | | | | | |
| 560 | 80 | 460 | 119 | 63 | – | – | – | 2,60 | 9,92 | WGP3B056008 |
| 560 | 278 | 460 | 357 | 190 | 82 | 98 | – | 7,80 | 31,07 | WGP3B056027 |
| 560 | 360 | 460 | 476 | 253 | – | 98 | – | 10,40 | 41,19 | WGP3B056036 |
| 560 | 442 | 460 | 595 | 316 | 246 | 98 | – | 13,00 | 51,31 | WGP3B056044 |
| 560 | 524 | 460 | 714 | 380 | – | 98 | – | 15,60 | 61,42 | WGP3B056052 |
| 560 | 606 | 460 | 833 | 443 | 246 | 180 | – | 18,20 | 71,54 | WGP3B056060 |
| 560 | 688 | 460 | 952 | 506 | 328 | 180 | – | 20,80 | 81,66 | WGP3B056068 |
| 560 | 770 | 460 | 1071 | 569 | 410 | 180 | – | 23,40 | 91,77 | WGP3B056077 |
| 560 | 852 | 460 | 1190 | 633 | 492 | 180 | – | 26,00 | 101,89 | WGP3B056085 |
| 560 | 934 | 460 | 1309 | 696 | 574 | 180 | 164 | 28,60 | 112,01 | WGP3B056093 |
| 560 | 1016 | 460 | 1428 | 759 | 656 | 180 | 164 | 31,20 | 122,13 | WGP3B056101 |
| 560 | 1098 | 460 | 1547 | 822 | 738 | 180 | 246 | 33,80 | 132,24 | WGP3B056109 |
| 560 | 1180 | 460 | 1666 | 886 | 820 | 180 | 246 | 36,40 | 142,36 | WGP3B056118 |
| 560 | 1262 | 460 | 1785 | 949 | 902 | 180 | 246 | 39,00 | 152,48 | WGP3B056126 |
| 560 | 1344 | 460 | 1904 | 1012 | 984 | 180 | 246 | 41,60 | 162,60 | WGP3B056134 |
| 560 | 1426 | 460 | 2023 | 1075 | 1066 | 180 | 246 | 44,20 | 172,71 | WGP3B056142 |
| 660 | 80 | 560 | 138 | 72 | – | – | – | 2,90 | 11,84 | WGP3B066008 |
| 660 | 278 | 560 | 414 | 217 | 82 | 98 | – | 8,70 | 36,84 | WGP3B066027 |
| 660 | 360 | 560 | 552 | 290 | – | 98 | – | 11,60 | 48,87 | WGP3B066036 |
| 660 | 442 | 560 | 690 | 362 | 246 | 98 | – | 14,50 | 60,91 | WGP3B066044 |
| 660 | 524 | 560 | 828 | 435 | – | 98 | – | 17,40 | 72,95 | WGP3B066052 |
| 660 | 606 | 560 | 966 | 507 | 246 | 180 | – | 20,30 | 84,99 | WGP3B066060 |
| 660 | 688 | 560 | 1104 | 580 | 328 | 180 | – | 23,20 | 97,03 | WGP3B066068 |
| 660 | 770 | 560 | 1242 | 652 | 410 | 180 | – | 26,10 | 109,07 | WGP3B066077 |
| 660 | 852 | 560 | 1380 | 725 | 492 | 180 | – | 29,00 | 121,10 | WGP3B066085 |
| 660 | 934 | 560 | 1518 | 797 | 574 | 180 | 164 | 31,90 | 133,14 | WGP3B066093 |
| 660 | 1016 | 560 | 1656 | 870 | 656 | 180 | 164 | 34,80 | 145,18 | WGP3B066101 |
| 660 | 1098 | 560 | 1794 | 942 | 738 | 180 | 246 | 37,70 | 157,22 | WGP3B066109 |
| 660 | 1180 | 560 | 1932 | 1015 | 820 | 180 | 246 | 40,60 | 169,26 | WGP3B066118 |
| 660 | 1262 | 560 | 2070 | 1087 | 902 | 180 | 246 | 43,50 | 181,30 | WGP3B066126 |
| 660 | 1344 | 560 | 2208 | 1160 | 984 | 180 | 246 | 46,40 | 193,33 | WGP3B066134 |
| 660 | 1426 | 560 | 2346 | 1232 | 1066 | 180 | 246 | 49,30 | 205,37 | WGP3B066142 |
| 860 | 80 | 760 | 176 | 92 | – | – | – | 3,80 | 15,38 | WGP3B086008 |
| 860 | 278 | 760 | 528 | 277 | 82 | 98 | – | 11,40 | 47,46 | WGP3B086027 |
| 860 | 360 | 760 | 704 | 369 | – | 98 | – | 15,20 | 63,04 | WGP3B086036 |


| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65 [W] | 55/45 [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|----------------------|-------------|-----------|--------------|--------------|-----------|------------|------------|--|---|--|
| 860 | 442 | 760 | 880 | 462 | 246 | 98 | – | 19,00 | 78,62 | WGP3B086044 |
| 860 | 524 | 760 | 1056 | 554 | – | 98 | – | 22,80 | 94,20 | WGP3B086052 |
| 860 | 606 | 760 | 1232 | 647 | 246 | 180 | – | 26,60 | 109,78 | WGP3B086060 |
| 860 | 688 | 760 | 1408 | 739 | 328 | 180 | – | 30,40 | 125,36 | WGP3B086068 |
| 860 | 770 | 760 | 1584 | 831 | 410 | 180 | – | 34,20 | 140,94 | WGP3B086077 |
| 860 | 852 | 760 | 1760 | 924 | 492 | 180 | – | 38,00 | 156,52 | WGP3B086085 |
| 860 | 934 | 760 | 1936 | 1016 | 574 | 180 | 164 | 41,80 | 172,10 | WGP3B086093 |
| 860 | 1016 | 760 | 2112 | 1108 | 656 | 180 | 164 | 45,60 | 187,68 | WGP3B086101 |
| 860 | 1098 | 760 | 2288 | 1201 | 738 | 180 | 246 | 49,40 | 203,25 | WGP3B086109 |
| 860 | 1180 | 760 | 2464 | 1293 | 820 | 180 | 246 | 53,20 | 218,83 | WGP3B086118 |
| 860 | 1262 | 760 | 2640 | 1385 | 902 | 180 | 246 | 57,00 | 234,41 | WGP3B086126 |
| 860 | 1344 | 760 | 2816 | 1478 | 984 | 180 | 246 | 60,80 | 249,99 | WGP3B086134 |
| 860 | 1426 | 760 | 2992 | 1570 | 1066 | 180 | 246 | 64,60 | 265,57 | WGP3B086142 |
| Free standing | | | | | | | | | | |
| 620 | 80 | 460 | 119 | 63 | – | – | – | 2,60 | 10,52 | WGP3F062008 |
| 620 | 278 | 460 | 357 | 190 | – | – | – | 7,80 | 32,27 | WGP3F062027 |
| 620 | 360 | 460 | 476 | 253 | – | – | – | 10,40 | 42,39 | WGP3F062036 |
| 620 | 442 | 460 | 595 | 316 | – | – | – | 13,00 | 52,51 | WGP3F062044 |
| 620 | 524 | 460 | 714 | 380 | – | – | – | 15,60 | 62,62 | WGP3F062052 |
| 620 | 606 | 460 | 833 | 443 | – | – | – | 18,20 | 72,74 | WGP3F062060 |
| 620 | 688 | 460 | 952 | 506 | – | – | – | 20,80 | 82,86 | WGP3F062068 |
| 620 | 770 | 460 | 1071 | 569 | – | – | – | 23,40 | 92,97 | WGP3F062077 |
| 620 | 852 | 460 | 1190 | 633 | – | – | – | 26,00 | 103,09 | WGP3F062085 |
| 620 | 934 | 460 | 1309 | 696 | – | – | – | 28,60 | 113,21 | WGP3F062093 |
| 620 | 1016 | 460 | 1428 | 759 | – | – | – | 31,20 | 123,33 | WGP3F062101 |
| 620 | 1098 | 460 | 1547 | 822 | – | – | – | 33,80 | 134,04 | WGP3F062109 |
| 620 | 1180 | 460 | 1666 | 886 | – | – | – | 36,40 | 144,76 | WGP3F062118 |
| 620 | 1262 | 460 | 1785 | 949 | – | – | – | 39,00 | 154,28 | WGP3F062126 |
| 620 | 1344 | 460 | 1904 | 1012 | – | – | – | 41,60 | 165,00 | WGP3F062134 |
| 620 | 1426 | 460 | 2023 | 1075 | – | – | – | 44,20 | 174,51 | WGP3F062142 |
| 720 | 80 | 560 | 138 | 72 | – | – | – | 2,90 | 12,64 | WGP3F072008 |
| 720 | 278 | 560 | 414 | 217 | – | – | – | 8,70 | 34,24 | WGP3F072027 |
| 720 | 360 | 560 | 552 | 290 | – | – | – | 11,60 | 46,27 | WGP3F072036 |
| 720 | 442 | 560 | 690 | 362 | – | – | – | 14,50 | 58,31 | WGP3F072044 |
| 720 | 524 | 560 | 828 | 435 | – | – | – | 17,40 | 70,35 | WGP3F072052 |
| 720 | 606 | 560 | 966 | 507 | – | – | – | 20,30 | 82,39 | WGP3F072060 |
| 720 | 688 | 560 | 1104 | 580 | – | – | – | 23,20 | 94,43 | WGP3F072068 |
| 720 | 770 | 560 | 1242 | 652 | – | – | – | 26,10 | 106,47 | WGP3F072077 |
| 720 | 852 | 560 | 1380 | 725 | – | – | – | 29,00 | 118,50 | WGP3F072085 |

Plain 3 column s. 34


| A ↑ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | D1 [mm] | D2 [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|-----------|-------------------|-------------------|-----------|------------|------------|---|---|--|
| 720 | 934 | 560 | 1518 | 797 | – | – | – | 31,90 | 130,54 | WGP3F072093 |
| 720 | 1016 | 560 | 1656 | 870 | – | – | – | 34,80 | 142,58 | WGP3F072101 |
| 720 | 1098 | 560 | 1794 | 942 | – | – | – | 37,70 | 153,32 | WGP3F072109 |
| 720 | 1180 | 560 | 1932 | 1015 | – | – | – | 40,60 | 164,06 | WGP3F072118 |
| 720 | 1262 | 560 | 2070 | 1087 | – | – | – | 43,50 | 177,40 | WGP3F072126 |
| 720 | 1344 | 560 | 2208 | 1160 | – | – | – | 46,40 | 188,13 | WGP3F072134 |
| 720 | 1426 | 560 | 2346 | 1232 | – | – | – | 49,30 | 201,47 | WGP3F072142 |
| 920 | 80 | 760 | 176 | 92 | – | – | – | 3,80 | 16,18 | WGP3F092008 |
| 920 | 278 | 760 | 528 | 277 | – | – | – | 11,40 | 49,06 | WGP3F092027 |
| 920 | 360 | 760 | 704 | 369 | – | – | – | 15,20 | 64,64 | WGP3F092036 |
| 920 | 442 | 760 | 880 | 462 | – | – | – | 19,00 | 80,22 | WGP3F092044 |
| 920 | 524 | 760 | 1056 | 554 | – | – | – | 22,80 | 95,80 | WGP3F092052 |
| 920 | 606 | 760 | 1232 | 647 | – | – | – | 26,60 | 111,38 | WGP3F092060 |
| 920 | 688 | 760 | 1408 | 739 | – | – | – | 30,40 | 126,96 | WGP3F092068 |
| 920 | 770 | 760 | 1584 | 831 | – | – | – | 34,20 | 142,54 | WGP3F092077 |
| 920 | 852 | 760 | 1760 | 924 | – | – | – | 38,00 | 158,12 | WGP3F092085 |
| 920 | 934 | 760 | 1936 | 1016 | – | – | – | 41,80 | 173,70 | WGP3F092093 |
| 920 | 1016 | 760 | 2112 | 1108 | – | – | – | 45,60 | 189,28 | WGP3F092101 |
| 920 | 1098 | 760 | 2288 | 1201 | – | – | – | 49,40 | 205,65 | WGP3F092109 |
| 920 | 1180 | 760 | 2464 | 1293 | – | – | – | 53,20 | 222,03 | WGP3F092118 |
| 920 | 1262 | 760 | 2640 | 1385 | – | – | – | 57,00 | 236,81 | WGP3F092126 |
| 920 | 1344 | 760 | 2816 | 1478 | – | – | – | 60,80 | 253,19 | WGP3F092134 |
| 920 | 1426 | 760 | 2992 | 1570 | – | – | – | 64,60 | 267,97 | WGP3F092142 |

Radiators made up of 13 sections and more are delivered in two or more batteries.

Wall mounted

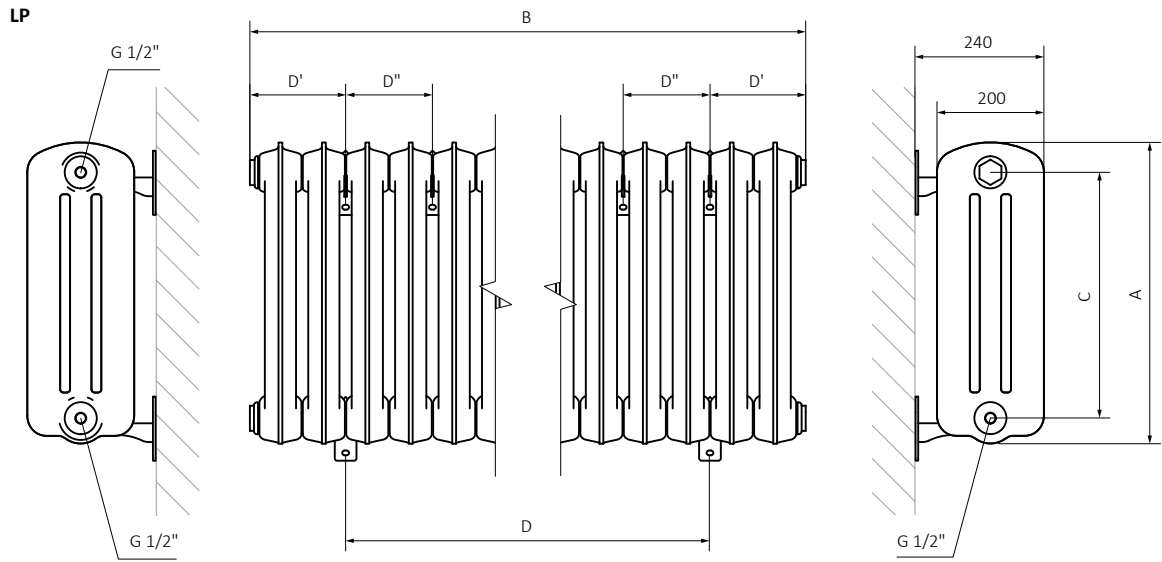

Free standing

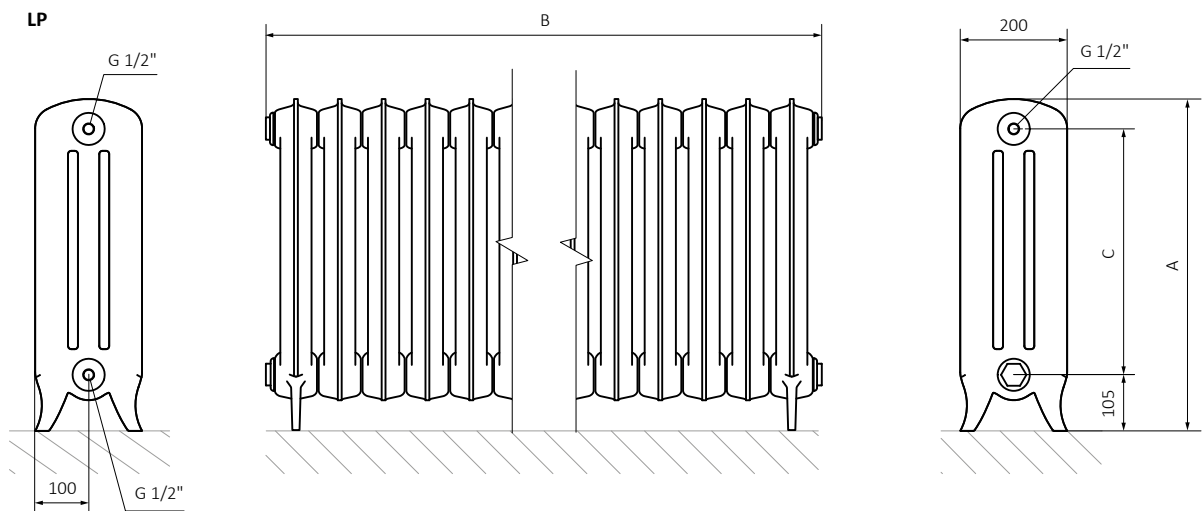

A – Height B – Width C – Distance between pipe centres D – Horizontal distance between mounting bracket centres

Plain Towel Rail s. 38




design: *Terma*

Standard connections:



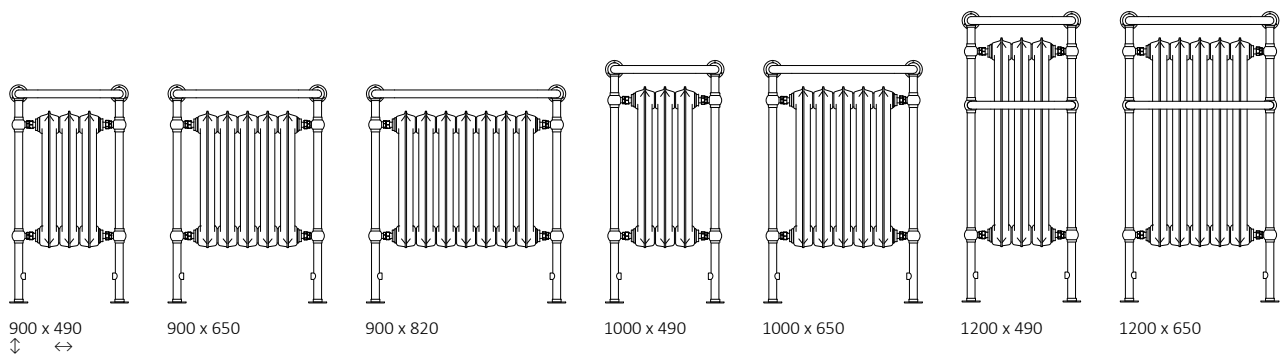

Available sizes:




Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|-----------|-------------------|-------------------|---|---|--|
| 900 | 490 | 366 | 357 | 190 | 9,62 | 37.00 | WGNTR090049 |
| 900 | 650 | 530 | 595 | 317 | 14,93 | 55.00 | WGNTR090065 |
| 900 | 820 | 694 | 834 | 445 | 20,24 | 73.00 | WGNTR090082 |
| 1000 | 490 | 366 | 416 | 221 | 11,06 | 40.00 | WGNTR100049 |
| 1000 | 650 | 530 | 694 | 368 | 17,37 | 61.00 | WGNTR100065 |
| 1200 | 490 | 366 | 619 | 324 | 15,02 | 50.00 | WGNTR120049 |
| 1200 | 650 | 530 | 1031 | 539 | 23,60 | 73.00 | WGNTR120065 |

We recommend: Angled manual valve set Minimalist for LP connection – see page 678

Pipe masking set – 160 mm – see page 681

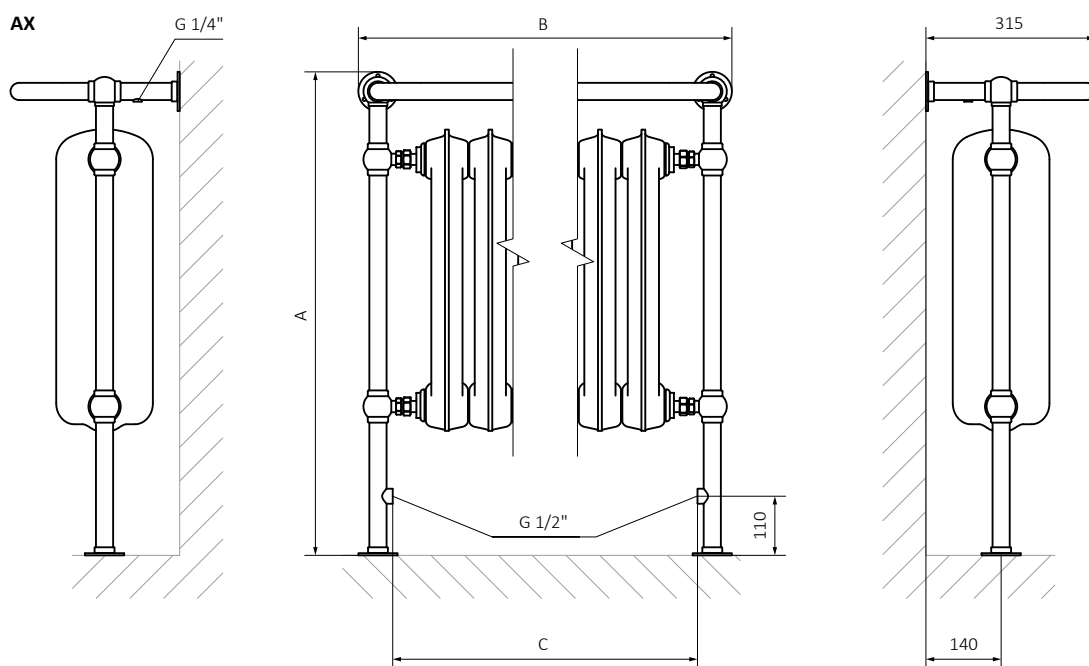

A – Height B – Width C – Distance between pipe centres

Radiators


Technical Information

Aero V s. 44


  Colour included in the price

design: Jacek Ryń


Standard connections:



Optional connections:



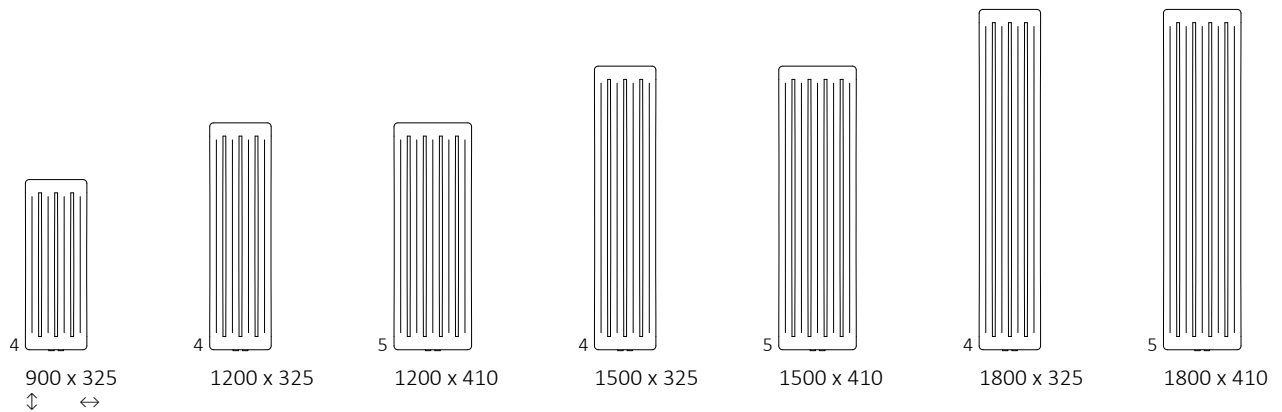

Available sizes:



Specifications:

Working pressure: 700 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 900 | 325 | 50 | 255 | 286 | 149 | 255 | 745 | 77,5 | 3,25 | 8,97 | WGARV090032 |
| 1200 | 325 | 50 | 255 | 366 | 190 | 255 | 1045 | 77,5 | 4,57 | 11,88 | WGARV120032 |
| 1200 | 410 | 50 | 340 | 458 | 237 | 340 | 1045 | 77,5 | 5,72 | 14,87 | WGARV120041 |
| 1500 | 325 | 50 | 255 | 446 | 229 | 255 | 1345 | 77,5 | 5,90 | 14,79 | WGARV150032 |
| 1500 | 410 | 50 | 340 | 558 | 286 | 340 | 1345 | 77,5 | 7,37 | 18,51 | WGARV150041 |
| 1800 | 325 | 50 | 255 | 526 | 268 | 255 | 1645 | 77,5 | 7,22 | 17,70 | WGARV180032 |
| 1800 | 410 | 50 | 340 | 657 | 334 | 340 | 1645 | 77,5 | 9,03 | 22,15 | WGARV180041 |


We recommend: A set of integrated thermostatic valves for ZX connection – see page 652





Integrated pipe masking set – see page 675



ZX

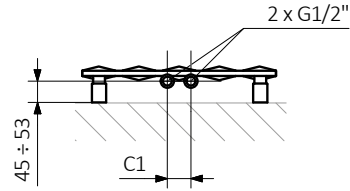


SX

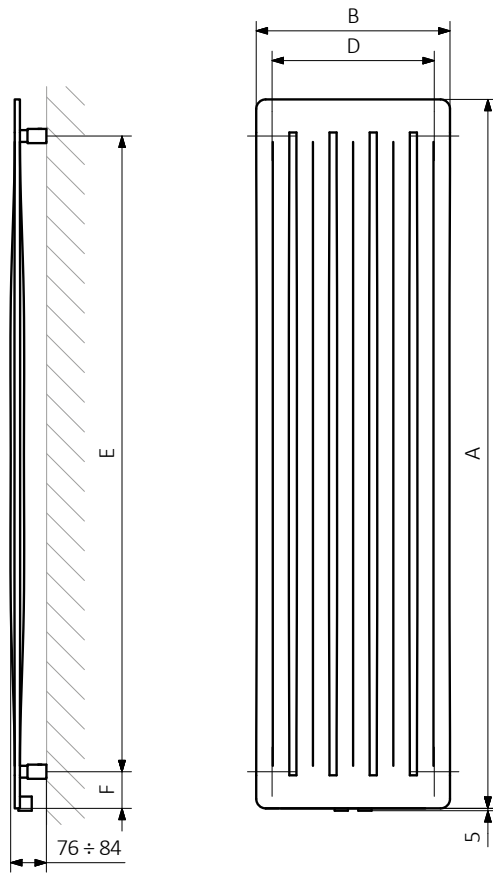

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




Aero H s. 48


  Colour included in the price

design: Jacek Ryn


Standard connections:



Optional connections:



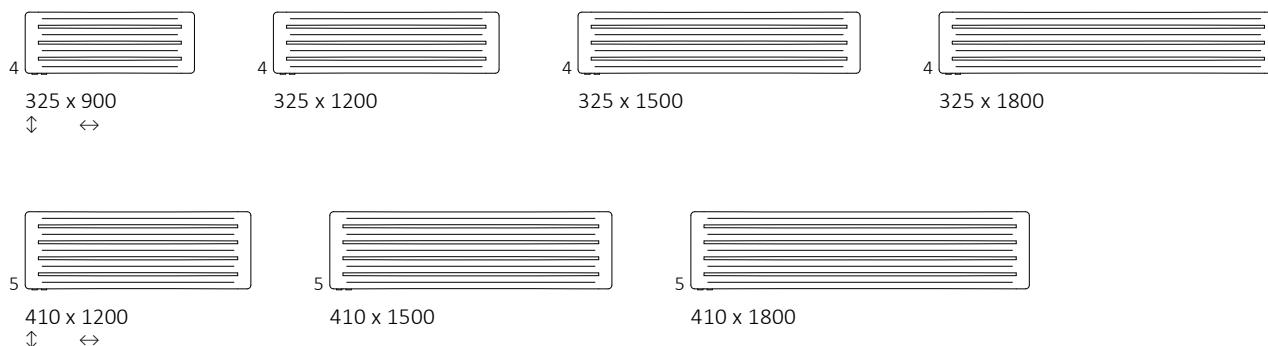

Available sizes:



Specifications:

Working pressure: 700 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75 65 20°C [W] | 55 45 20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 325 | 900 | 50 | 830 | 290 | 160 | 830 | 170 | 77,5 | 3,25 | 8,97 | WGARH032090 |
| 325 | 1200 | 50 | 1130 | 388 | 214 | 1130 | 170 | 77,5 | 4,57 | 11,88 | WGARH032120 |
| 325 | 1500 | 50 | 1430 | 485 | 267 | 1430 | 170 | 77,5 | 5,90 | 14,79 | WGARH032150 |
| 325 | 1800 | 50 | 1730 | 582 | 320 | 1730 | 170 | 77,5 | 7,22 | 17,70 | WGARH032180 |
| 410 | 1200 | 50 | 1130 | 480 | 265 | 1130 | 255 | 77,5 | 5,72 | 14,87 | WGARH041120 |
| 410 | 1500 | 50 | 1430 | 600 | 330 | 1430 | 255 | 77,5 | 7,37 | 18,51 | WGARH041150 |
| 410 | 1800 | 50 | 1730 | 720 | 396 | 1730 | 255 | 77,5 | 9,03 | 22,15 | WGARH041180 |

We recommend: A set of integrated thermostatic valves for YL and YP connections – see page 652




Integrated pipe masking set – see page 675




Yo! hanger – see page 636





YP

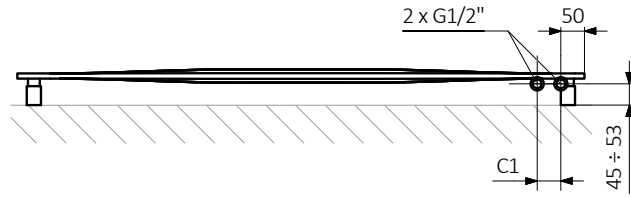

YL

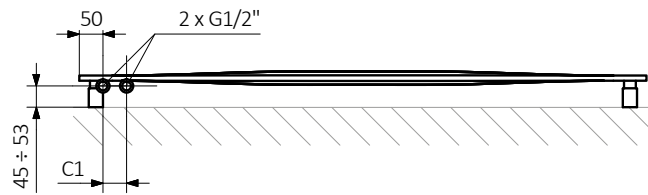


SX

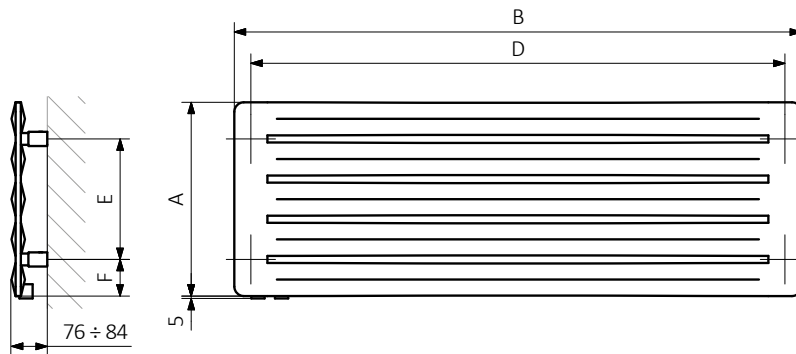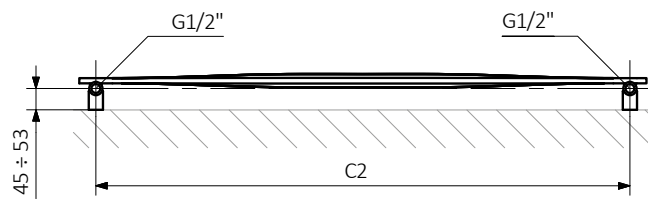

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




Aero HG s. 52


  Colour included in the price

design: Jacek Ryn


Standard connections:



Optional connections:



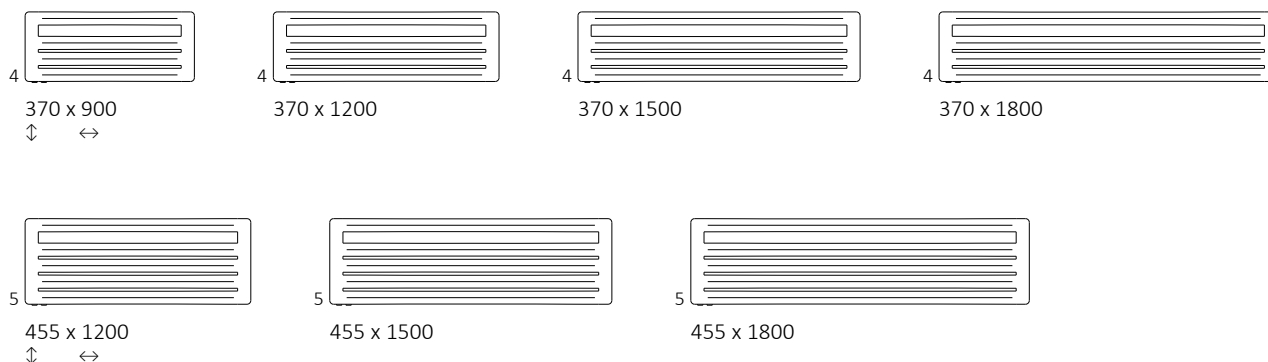

Available sizes:



Specifications:

Working pressure: 700 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75 65 20°C [W] | 55 45 20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 370 | 900 | 50 | 830 | 290 | 160 | 830 | 215 | 77,5 | 3,25 | 8,97 | WGARG037090 |
| 370 | 1200 | 50 | 1130 | 388 | 214 | 1130 | 215 | 77,5 | 4,57 | 11,88 | WGARG037120 |
| 370 | 1500 | 50 | 1430 | 485 | 267 | 1430 | 215 | 77,5 | 5,90 | 14,79 | WGARG037150 |
| 370 | 1800 | 50 | 1730 | 582 | 320 | 1730 | 215 | 77,5 | 7,22 | 17,70 | WGARG037180 |
| 455 | 1200 | 50 | 1130 | 480 | 265 | 1130 | 300 | 77,5 | 5,72 | 14,87 | WGARG045120 |
| 455 | 1500 | 50 | 1430 | 600 | 330 | 1430 | 300 | 77,5 | 7,37 | 18,51 | WGARG045150 |
| 455 | 1800 | 50 | 1730 | 720 | 396 | 1730 | 300 | 77,5 | 9,03 | 22,15 | WGARG045180 |

We recommend: A set of integrated thermostatic valves for YL and YP connections – see page 652




Integrated pipe masking set – see page 675




Yo! hanger – see page 636





YP

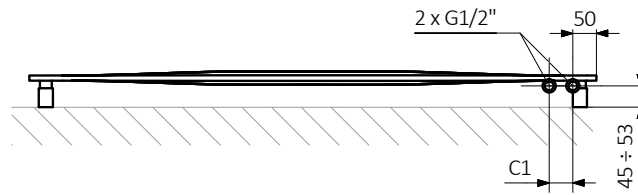

YL

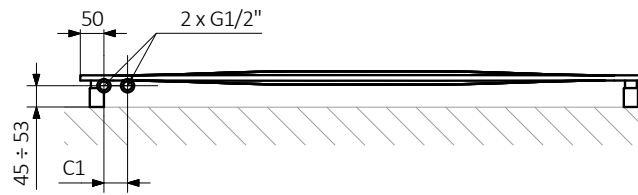


SX

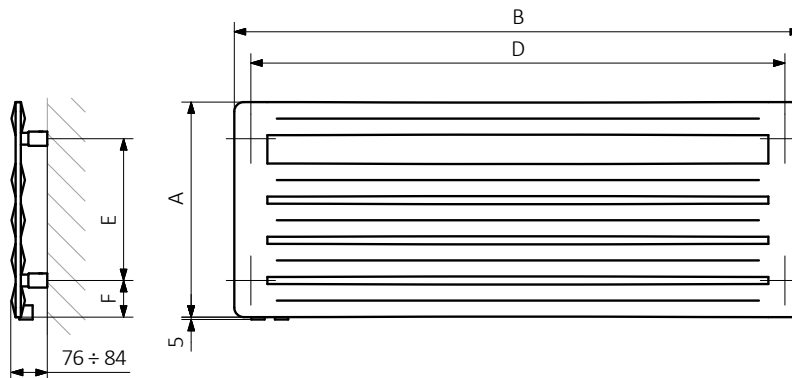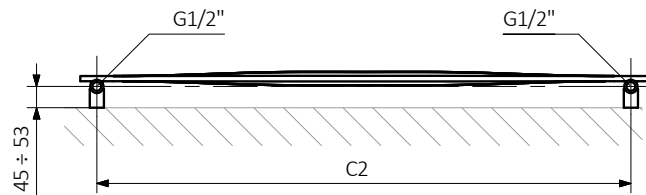


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:








Standard connections:
















Electric radiators: see page 599.



Optional connections:



Available sizes:

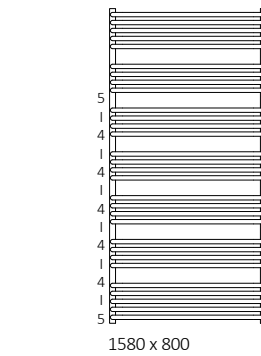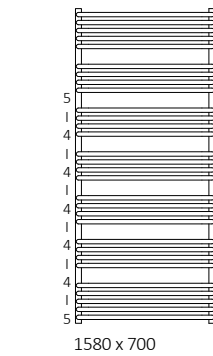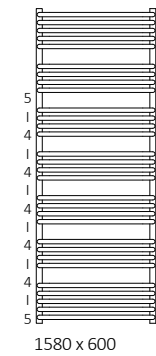

We recommend: 3-axis thermostatic valve for SX connection – see page 648



Pipe masking set – 70 mm – see page 673



MOA heating element – see page 702



Yo! hanger – see page 636




Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C



| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☺ [W] | D [mm] | E [mm] | F [mm] | H [dm³] | ⬆ [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|-----------|--|
| Powder coating | | | | | | | | | | | | |
| 540 | 300 | 50 | 270 | 180 | 99 | 200 | 270 | 360 | 90 | 1,75 | 3,71 | WGALE054030 |
| 540 | 400 | 50 | 370 | 238 | 129 | 200 | 370 | 360 | 90 | 2,04 | 4,38 | WGALE054040 |
| 540 | 500 | 50 | 470 | 299 | 161 | 300 | 470 | 360 | 90 | 2,32 | 5,04 | WGALE054050 |
| 540 | 600 | 50 | 570 | 355 | 190 | 400 | 570 | 360 | 90 | 2,60 | 5,71 | WGALE054060 |
| 760 | 300 | 50 | 270 | 257 | 138 | 300 | 270 | 580 | 90 | 2,46 | 5,15 | WGALE076030 |
| 760 | 400 | 50 | 370 | 330 | 177 | 300 | 370 | 580 | 90 | 2,85 | 6,08 | WGALE076040 |
| 760 | 500 | 50 | 470 | 412 | 220 | 400 | 470 | 580 | 90 | 3,25 | 7,02 | WGALE076050 |
| 760 | 600 | 50 | 570 | 481 | 257 | 600 | 570 | 580 | 90 | 3,65 | 7,95 | WGALE076060 |
| 1140 | 300 | 50 | 270 | 362 | 194 | 400 | 270 | 960 | 90 | 3,78 | 7,86 | WGALE114030 |
| 1140 | 400 | 50 | 370 | 479 | 257 | 400 | 370 | 960 | 90 | 4,41 | 9,33 | WGALE114040 |
| 1140 | 500 | 50 | 470 | 591 | 313 | 600 | 470 | 960 | 90 | 5,03 | 10,8 | WGALE114050 |
| 1140 | 600 | 50 | 570 | 711 | 380 | 800 | 570 | 960 | 90 | 5,65 | 12,27 | WGALE114060 |
| 1580 | 500 | 50 | 470 | 793 | 425 | 800 | 470 | 1400 | 90 | 6,90 | 14,74 | WGALE158050 |
| 1580 | 600 | 50 | 570 | 949 | 508 | 1000 | 570 | 1400 | 90 | 7,75 | 16,75 | WGALE158060 |
| 1580 | 700 | 50 | 670 | 1104 | 591 | 1000 | 670 | 1400 | 90 | 8,60 | 18,75 | WGALE158070 |
| 1580 | 800 | 50 | 770 | 1253 | 670 | 1200 | 770 | 1400 | 90 | 9,45 | 20,76 | WGALE158080 |
| Plated finishes | | | | | | | | | | | | |
| 540 | 300 | 50 | 270 | 126 | 64 | 120 | 270 | 360 | 90 | 1,75 | 3,57 | WGALE054030 |
| 540 | 400 | 50 | 370 | 167 | 85 | 200 | 370 | 360 | 90 | 2,04 | 4,21 | WGALE054040 |
| 540 | 500 | 50 | 470 | 209 | 107 | 200 | 470 | 360 | 90 | 2,32 | 4,85 | WGALE054050 |
| 540 | 600 | 50 | 570 | 249 | 127 | 300 | 570 | 360 | 90 | 2,60 | 5,49 | WGALE054060 |
| 760 | 300 | 50 | 270 | 180 | 92 | 200 | 270 | 580 | 90 | 2,46 | 4,95 | WGALE076030 |
| 760 | 400 | 50 | 370 | 231 | 118 | 200 | 370 | 580 | 90 | 2,85 | 5,85 | WGALE076040 |
| 760 | 500 | 50 | 470 | 288 | 147 | 300 | 470 | 580 | 90 | 3,25 | 6,74 | WGALE076050 |
| 760 | 600 | 50 | 570 | 337 | 172 | 400 | 570 | 580 | 90 | 3,65 | 7,64 | WGALE076060 |
| 1140 | 300 | 50 | 270 | 253 | 129 | 300 | 270 | 960 | 90 | 3,78 | 7,56 | WGALE114030 |
| 1140 | 400 | 50 | 370 | 335 | 171 | 400 | 370 | 960 | 90 | 4,41 | 8,97 | WGALE114040 |
| 1140 | 500 | 50 | 470 | 414 | 211 | 400 | 470 | 960 | 90 | 5,03 | 10,38 | WGALE114050 |
| 1140 | 600 | 50 | 570 | 498 | 254 | 600 | 570 | 960 | 90 | 5,65 | 11,79 | WGALE114060 |
| 1580 | 500 | 50 | 470 | 555 | 283 | 600 | 470 | 1400 | 90 | 6,90 | 14,17 | WGALE158050 |
| 1580 | 600 | 50 | 570 | 664 | 339 | 600 | 570 | 1400 | 90 | 7,75 | 16,09 | WGALE158060 |
| 1580 | 700 | 50 | 670 | 773 | 394 | 800 | 670 | 1400 | 90 | 8,60 | 18,01 | WGALE158070 |

Please note: Size 1580x800 is not available in the galvanic coating.



SX

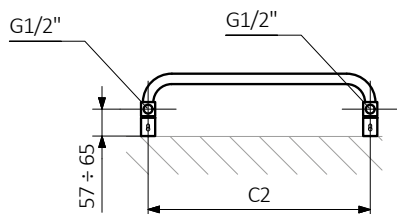

Z1

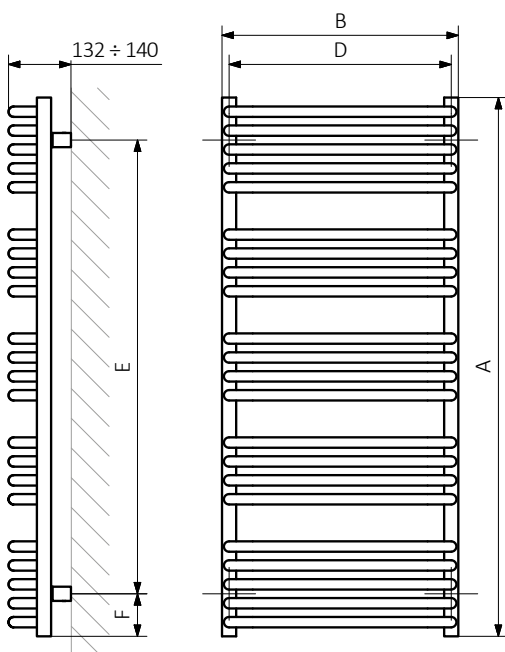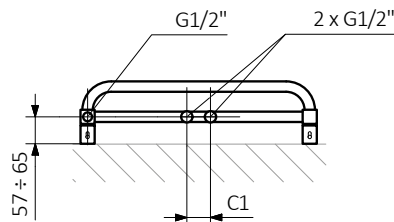



Z8




A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:






Alex One s. 54

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:














Electric radiators: see page 599.



Optional connections:



Available sizes:

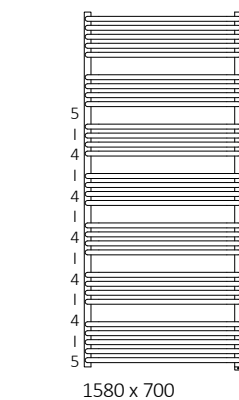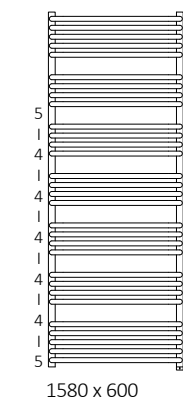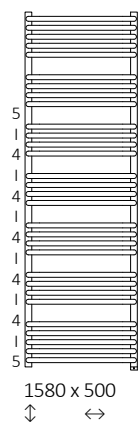

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654






Integrated pipe masking set – see page 675




Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C




| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | | |
| 760 | 300 | 257 | 137 | 300 | 270 | 620 | 70 | 2,39 | 5,15 | WZALN076030 |
| 760 | 400 | 330 | 177 | 300 | 370 | 620 | 70 | 2,79 | 6,08 | WZALN076040 |
| 760 | 500 | 412 | 220 | 400 | 470 | 620 | 70 | 3,19 | 7,02 | WZALN076050 |
| 760 | 600 | 481 | 257 | 600 | 570 | 620 | 70 | 3,58 | 7,95 | WZALN076060 |
| 1140 | 300 | 362 | 194 | 400 | 270 | 1000 | 70 | 3,72 | 7,86 | WZALN114030 |
| 1140 | 400 | 479 | 257 | 400 | 370 | 1000 | 70 | 4,34 | 9,33 | WZALN114040 |
| 1140 | 500 | 591 | 313 | 600 | 470 | 1000 | 70 | 4,97 | 10,8 | WZALN114050 |
| 1140 | 600 | 711 | 380 | 800 | 570 | 1000 | 70 | 5,59 | 12,27 | WZALN114060 |
| 1580 | 500 | 793 | 425 | 800 | 470 | 1440 | 70 | 6,83 | 14,74 | WZALN158050 |
| 1580 | 600 | 949 | 508 | 1000 | 570 | 1440 | 70 | 7,68 | 16,75 | WZALN158060 |
| 1580 | 700 | 1104 | 591 | 1000 | 670 | 1440 | 70 | 8,60 | 18,75 | WZALN158070 |
| Plated finishes | | | | | | | | | | |
| 760 | 300 | 180 | 92 | 200 | 270 | 620 | 70 | 2,39 | 4,95 | WZALN076030 |
| 760 | 400 | 231 | 118 | 200 | 370 | 620 | 70 | 2,79 | 5,85 | WZALN076040 |
| 760 | 500 | 288 | 147 | 300 | 470 | 620 | 70 | 3,19 | 6,74 | WZALN076050 |
| 760 | 600 | 337 | 172 | 400 | 570 | 620 | 70 | 3,58 | 7,64 | WZALN076060 |
| 1140 | 300 | 253 | 129 | 300 | 270 | 1000 | 70 | 3,72 | 7,56 | WZALN114030 |
| 1140 | 400 | 335 | 171 | 400 | 370 | 1000 | 70 | 4,34 | 8,97 | WZALN114040 |
| 1140 | 500 | 414 | 211 | 400 | 470 | 1000 | 70 | 4,97 | 10,38 | WZALN114050 |
| 1140 | 600 | 498 | 254 | 600 | 570 | 1000 | 70 | 5,59 | 11,79 | WZALN114060 |
| 1580 | 500 | 555 | 283 | 600 | 470 | 1440 | 70 | 6,83 | 14,17 | WZALN158050 |
| 1580 | 600 | 664 | 339 | 600 | 570 | 1440 | 70 | 7,68 | 16,09 | WZALN158060 |
| 1580 | 700 | 773 | 394 | 800 | 670 | 1440 | 70 | 8,60 | 18,01 | WZALN158070 |

Alex One s. 54

S1

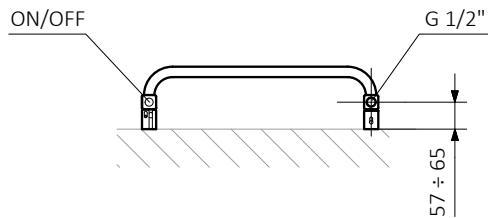



S8

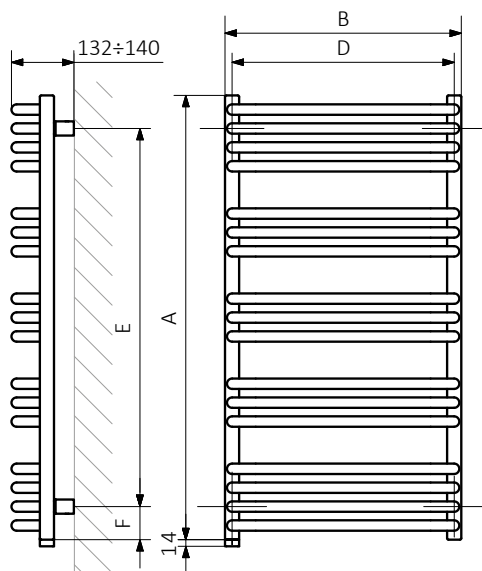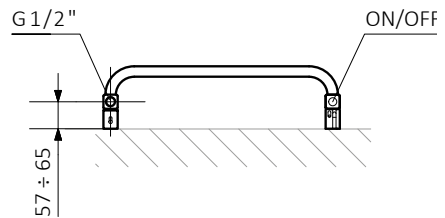

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:


Pipe:






Angus V s. 58




 Colour included in the price

design: Artes Design


Standard connections:



Optional connections:

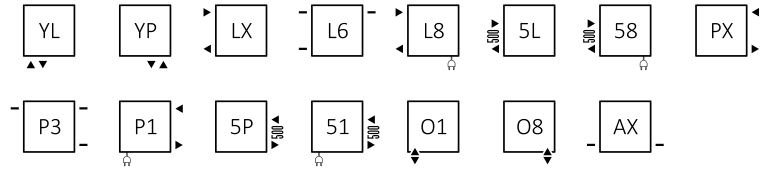

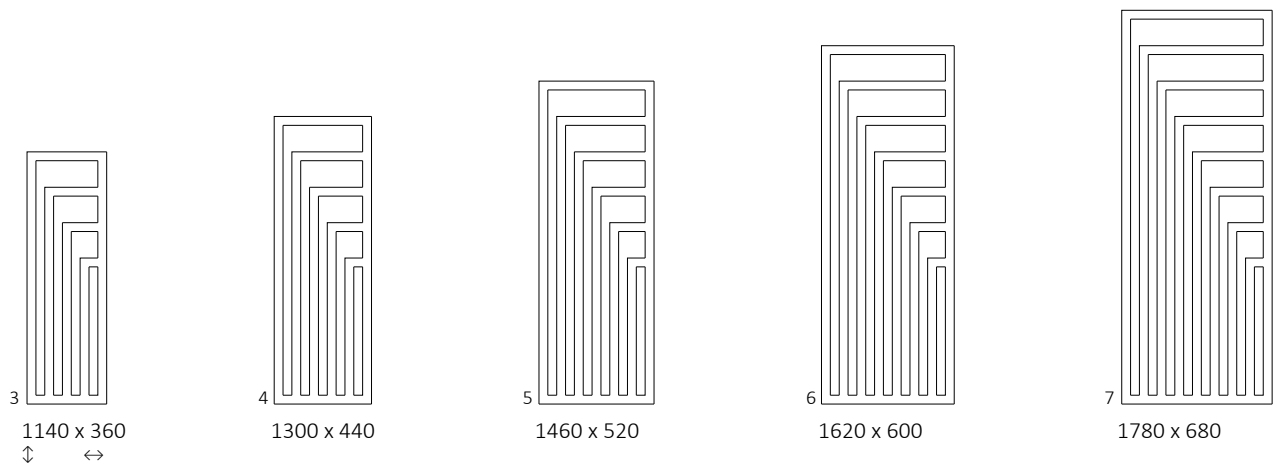


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|--|---|--|
| 1140 | 360 | 50 | 320 | 421 | 224 | 400 | 320 | 960 | 90 | 5,18 | 11,50 | WGANG114036 |
| 1300 | 440 | 50 | 400 | 557 | 293 | 600 | 400 | 1120 | 90 | 6,92 | 15,36 | WGANG130044 |
| 1460 | 520 | 50 | 480 | 711 | 372 | 800 | 480 | 1280 | 90 | 8,88 | 19,71 | WGANG146052 |
| 1620 | 600 | 50 | 560 | 905 | 472 | 1000 | 560 | 1440 | 90 | 11,07 | 24,57 | WGANG162060 |
| 1780 | 680 | 50 | 640 | 1116 | 580 | 1200 | 640 | 1600 | 90 | 13,48 | 29,92 | WGANG178068 |

We recommend: 3-axis thermostatic valve and lockshield integrated with T-piece set for SX connection – see page 651



Pipe masking set – 70 mm – see page 673




REG 3 heating element – see page 714





ZIP V 30 hanger – see page 637




SX

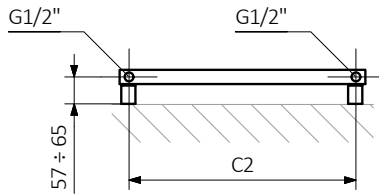


ZX

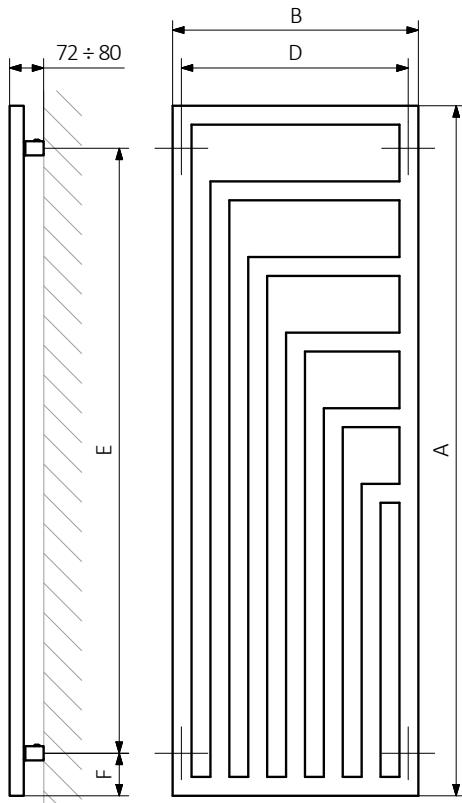

Y1

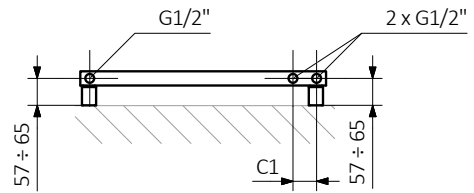


Y8

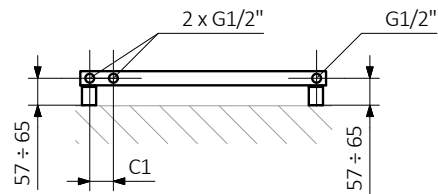

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




Angus V E s. 58



Colour included
in the price


design: Artes Design

Standard connections:






Water version, see page 322.

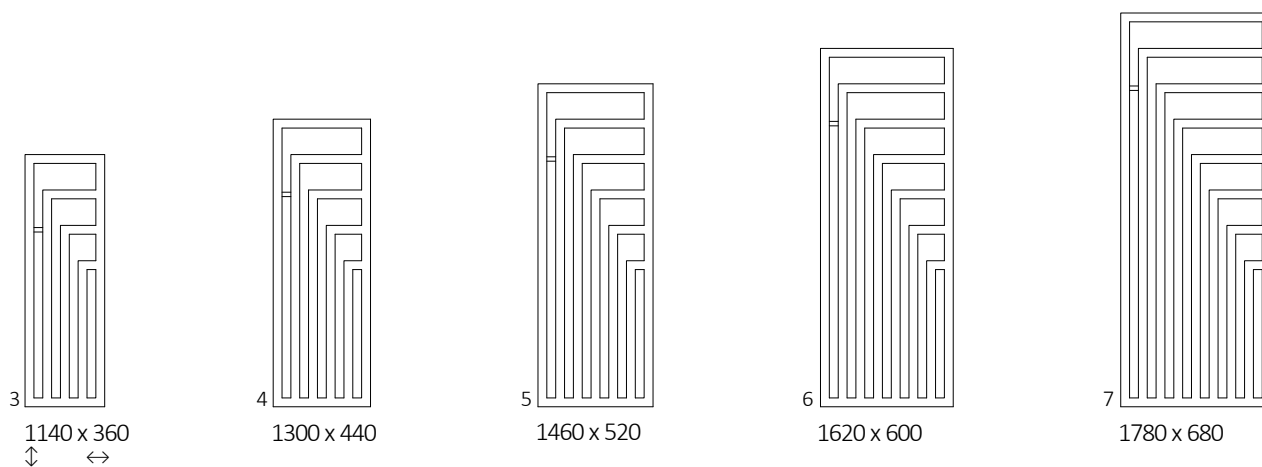Available sizes:




Specifications:

| A ↓ [mm] | B ↔ [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-------------|-------------|---|-----------|-----------|-----------|--|--|--|
| 1140 | 360 | 400 | 320 | 960 | 90 | 5,18 | 15,70 | WLANG114036 |
| 1300 | 440 | 600 | 400 | 1120 | 90 | 6,92 | 20,97 | WLANG130044 |
| 1460 | 520 | 800 | 480 | 1280 | 90 | 8,88 | 26,90 | WLANG146052 |
| 1620 | 600 | 1000 | 560 | 1440 | 90 | 11,07 | 33,54 | WLANG162060 |
| 1780 | 680 | 1200 | 640 | 1600 | 90 | 13,48 | 40,84 | WLANG178068 |



We recommend: KTX 4 BLUE heating element – see page 694



E8




E1

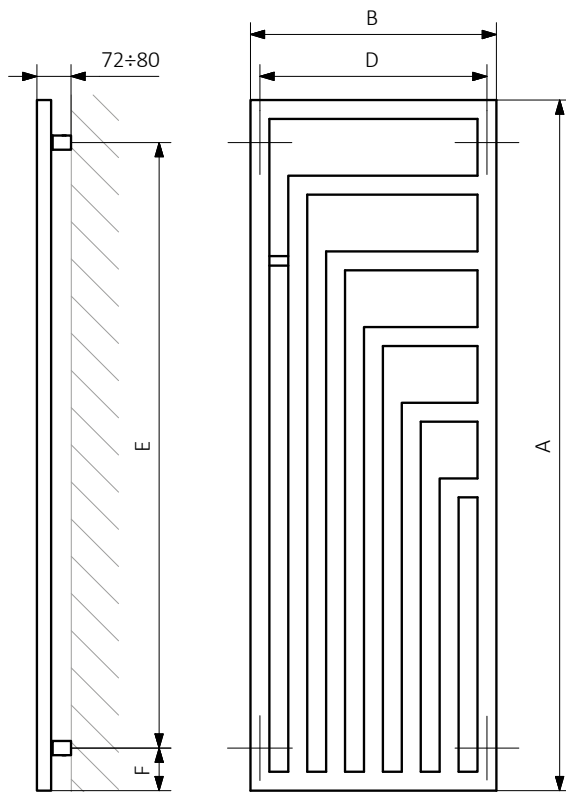

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Pipe:







 Colour included in the price

design: Artes Design


Standard connections:



Optional connections:



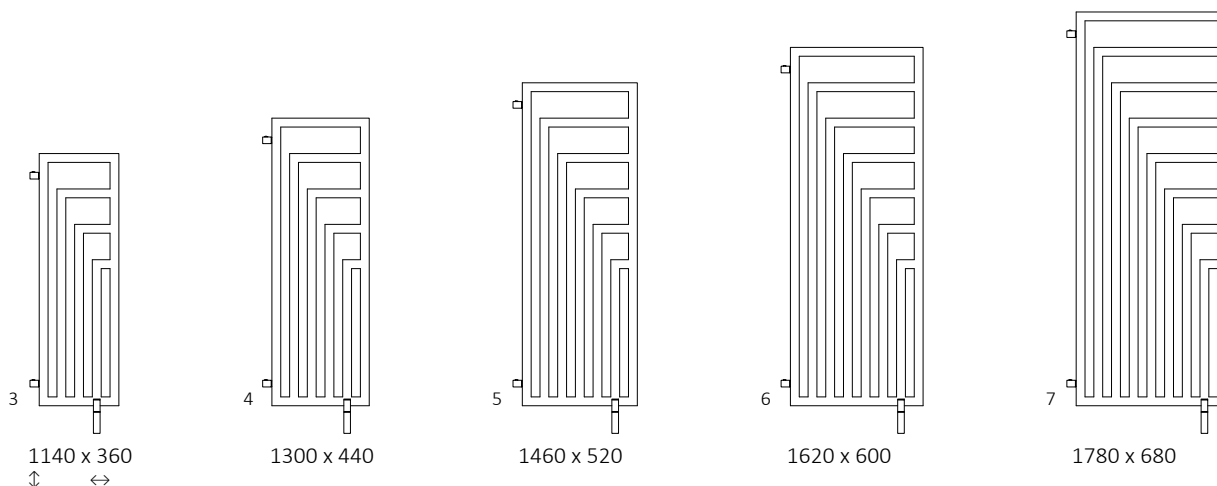


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|---|--|--|
| 1140 | 360 | 50 | 320 | 421 | 224 | 400 | 940 | 100 | 5,18 | 11,50 | WGANS114036 |
| 1300 | 440 | 50 | 400 | 557 | 293 | 600 | 1100 | 100 | 6,92 | 15,36 | WGANS130044 |
| 1460 | 520 | 50 | 480 | 711 | 372 | 800 | 1260 | 100 | 8,88 | 19,71 | WGANS146052 |
| 1620 | 600 | 50 | 560 | 905 | 472 | 1000 | 1420 | 100 | 11,07 | 24,57 | WGANS162060 |
| 1780 | 680 | 50 | 640 | 1116 | 580 | 1200 | 1580 | 100 | 13,48 | 29,92 | WGANS178068 |

We recommend: A set of integrated thermostatic valves for ZX, Y1 and Y8 connections – see page 652



Integrated pipe masking set – see page 675




KTX 4 BLUE heating element – see page 694





ZIP V 30 hanger – see page 637




ZX

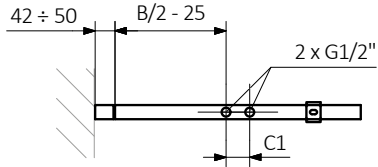


SX

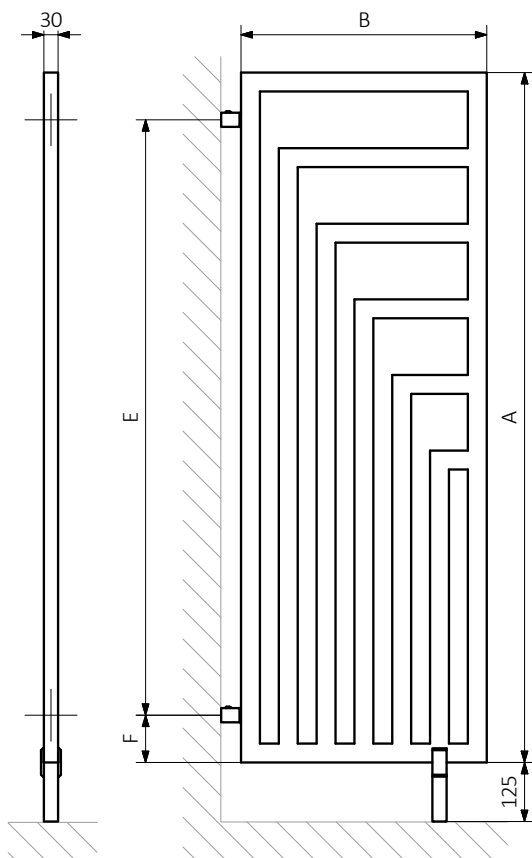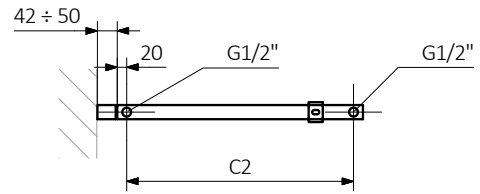

Y1

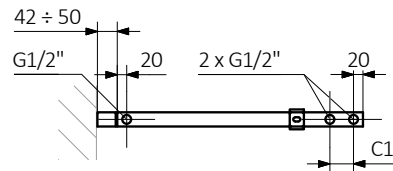


Y8

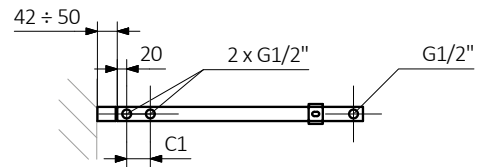

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




Angus DW E s. 62



Colour included
in the price


design: Artes Design

Standard connections:






Water version, see page 322.

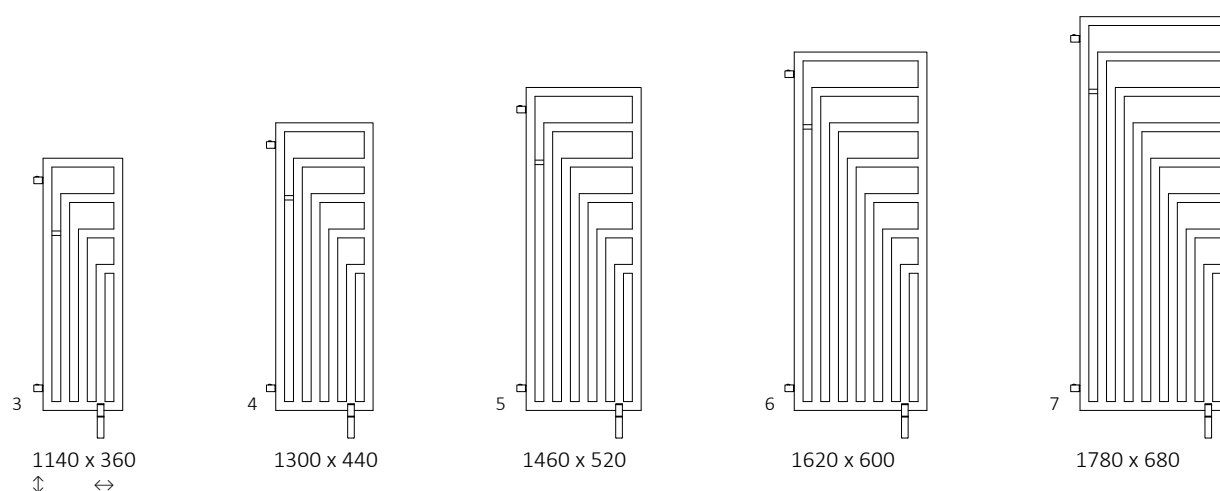Available sizes:





Specifications:

| A ↕ [mm] | B ↔ [mm] |  [W] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-------------|-------------|--|-----------|-----------|---|---|--|
| 1140 | 360 | 400 | 940 | 100 | 5,18 | 15,70 | WLANS114036 |
| 1300 | 440 | 600 | 1100 | 100 | 6,92 | 20,97 | WLANS130044 |
| 1460 | 520 | 800 | 1260 | 100 | 8,88 | 26,90 | WLANS146052 |
| 1620 | 600 | 1000 | 1420 | 100 | 11,07 | 33,54 | WLANS162060 |
| 1780 | 680 | 1200 | 1580 | 100 | 13,48 | 40,84 | WLANS178068 |

We recommend: KTX 4 BLUE heating element – see page 694




ZX

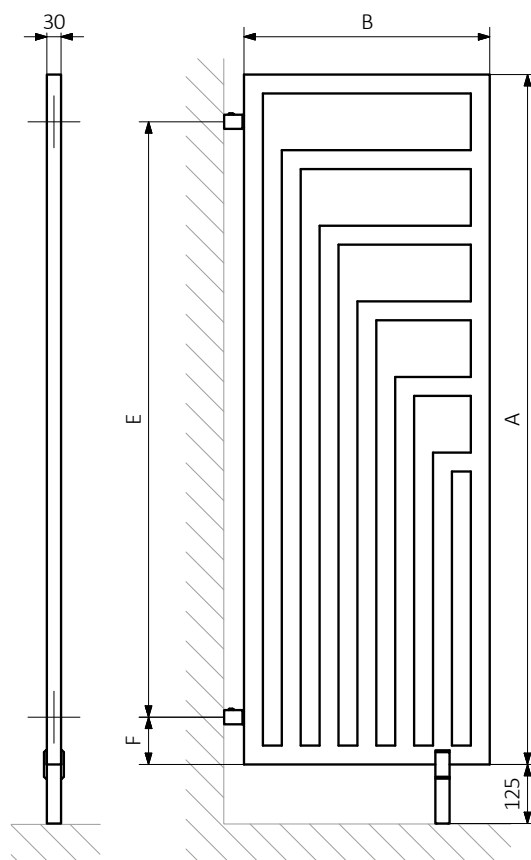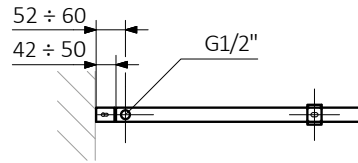

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




Angus H s. 66




design: Artes Design

Standard connections:

A ↓ 360÷680:





Electric radiators: see page 599:



Optional connections:


A ↓ 360÷680:



A ↓ 600÷680:



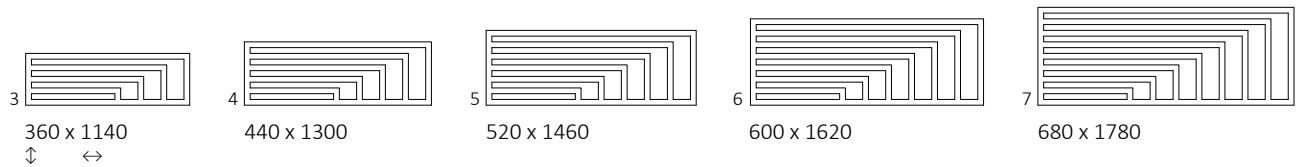


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 360 | 1140 | 50 | 1100 | 416 | 227 | 400 | 1100 | 160 | 100 | 5,18 | 11,50 | WGANH036114 |
| 440 | 1300 | 50 | 1260 | 538 | 292 | 600 | 1260 | 240 | 100 | 6,92 | 15,36 | WGANH044130 |
| 520 | 1460 | 50 | 1420 | 680 | 366 | 800 | 1420 | 320 | 100 | 8,88 | 19,71 | WGANH052146 |
| 600 | 1620 | 50 | 1580 | 841 | 449 | 800 | 1580 | 400 | 100 | 11,07 | 24,57 | WGANH060162 |
| 680 | 1780 | 50 | 1740 | 1022 | 540 | 1000 | 1740 | 480 | 100 | 13,48 | 29,92 | WGANH068178 |

We recommend: A set of integrated thermostatic valves for YL and YP connections – see page 652




Integrated pipe masking set – see page 675




KTX 4 BLUE heating element – see page 694




YP

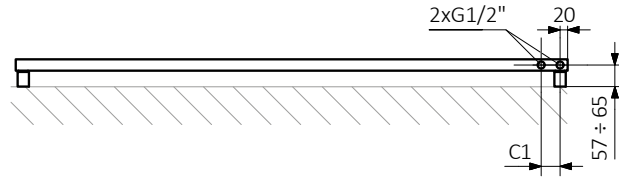

YL

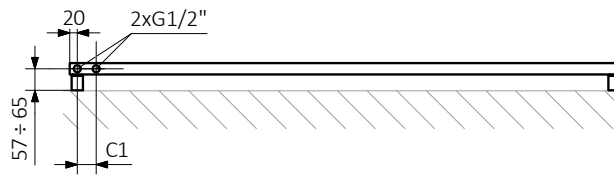


SX

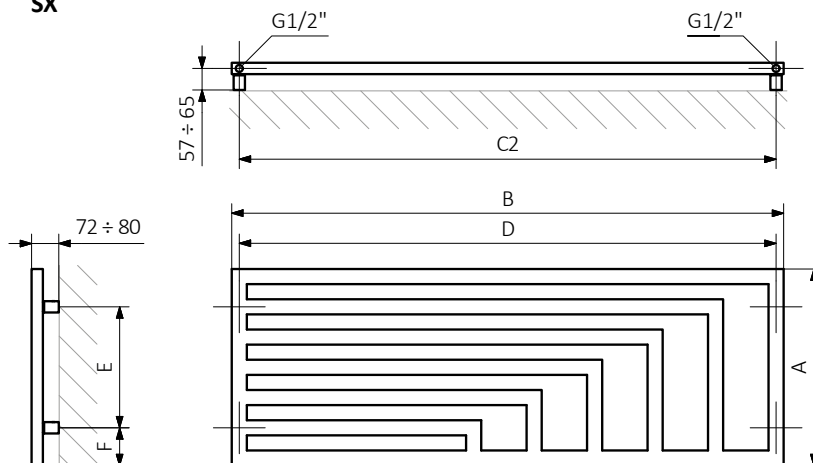


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




Angus H s. 66

Y2

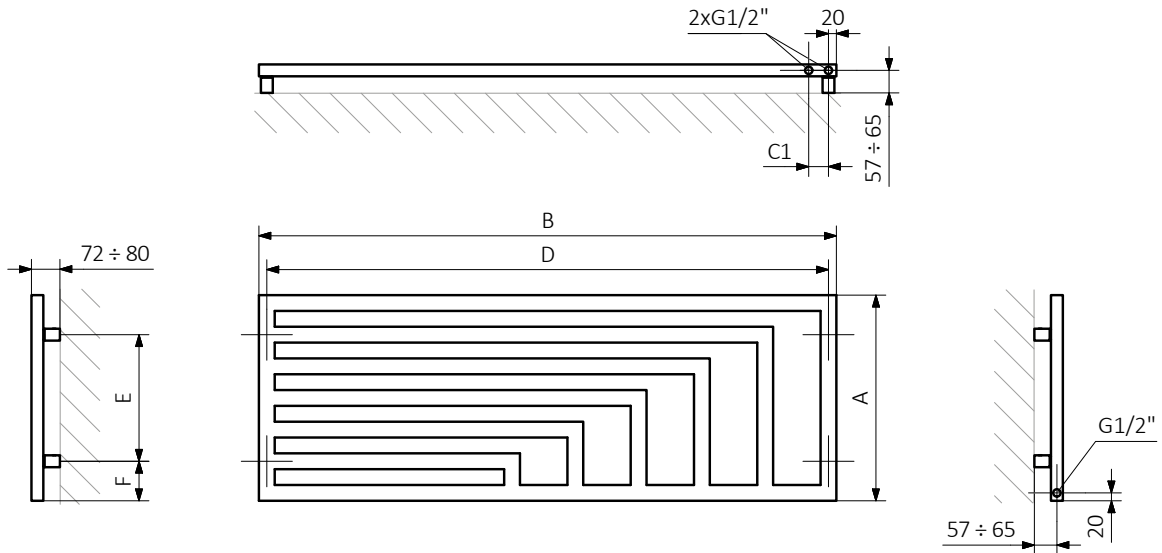


Y7

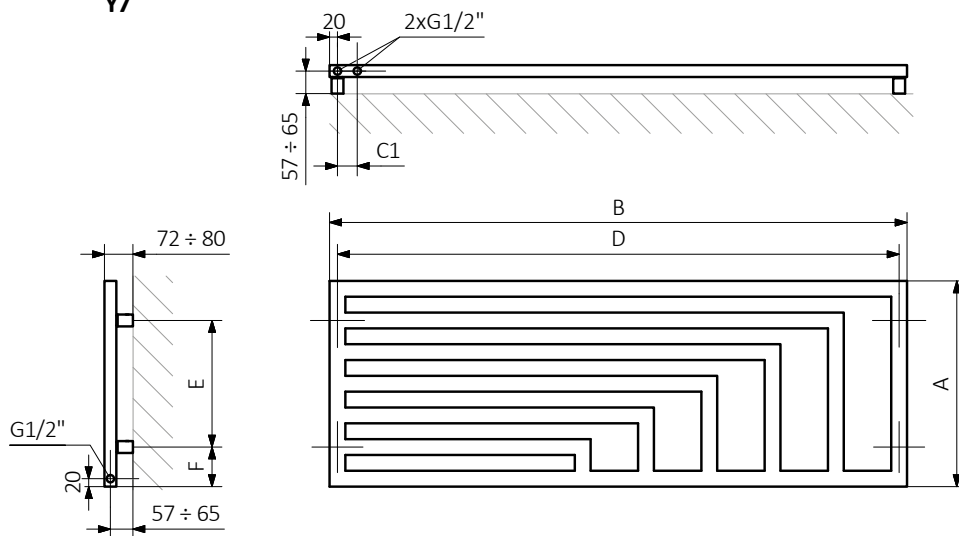

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Pipe:









Standard connections:




Electric radiators: see page 599.



Optional connections:

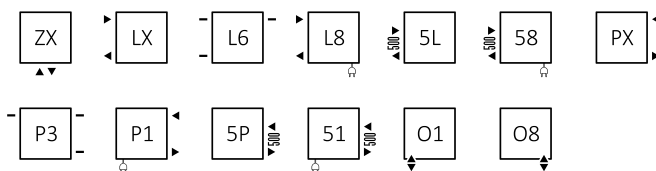

Available sizes:

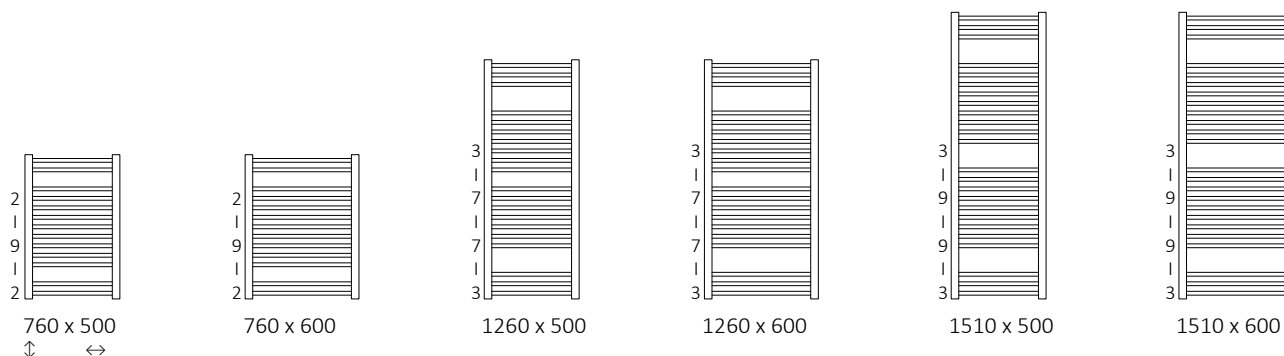

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | Ⓢ [W] | D [mm] | E [mm] | F [mm] | H [dm ²] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|------------|--|
| Powder coating | | | | | | | | | | | | |
| 760 | 500 | 50 | 460 | 320 | 173 | 300 | 460 | 580 | 90 | 3,09 | 7,34 | WGBON076050 |
| 760 | 600 | 50 | 560 | 384 | 208 | 400 | 560 | 580 | 90 | 3,46 | 8,47 | WGBON076060 |
| 1260 | 500 | 50 | 460 | 503 | 271 | 600 | 460 | 1080 | 90 | 4,93 | 11,45 | WGBON126050 |
| 1260 | 600 | 50 | 560 | 603 | 325 | 600 | 560 | 1080 | 90 | 5,51 | 13,19 | WGBON126060 |
| 1510 | 500 | 50 | 460 | 607 | 323 | 600 | 460 | 1330 | 90 | 5,92 | 13,68 | WGBON151050 |
| 1510 | 600 | 50 | 560 | 728 | 387 | 800 | 560 | 1330 | 90 | 6,61 | 15,78 | WGBON151060 |
| Plated finishes | | | | | | | | | | | | |
| 760 | 500 | 50 | 460 | 224 | 121 | 200 | 460 | 580 | 90 | 3,09 | 7,09 | WGBON076050 |
| 760 | 600 | 50 | 560 | 269 | 145 | 300 | 560 | 580 | 90 | 3,46 | 8,19 | WGBON076060 |
| 1260 | 500 | 50 | 460 | 352 | 190 | 400 | 460 | 1080 | 90 | 4,93 | 11,06 | WGBON126050 |
| 1260 | 600 | 50 | 560 | 422 | 227 | 400 | 560 | 1080 | 90 | 5,51 | 12,75 | WGBON126060 |
| 1510 | 500 | 50 | 460 | 425 | 226 | 400 | 460 | 1330 | 90 | 5,92 | 13,22 | WGBON151050 |
| 1510 | 600 | 50 | 560 | 510 | 271 | 600 | 560 | 1330 | 90 | 6,61 | 15,24 | WGBON151060 |

We recommend: 3-axis thermostatic valve and lockshield integrated with T-piece set for SX connection – see page 651



Pipe masking set – 70 mm – see page 673




ONE heating element – see page 690





ZIP H 20 hanger – see page 636




SX

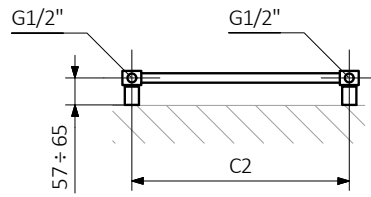

Z1

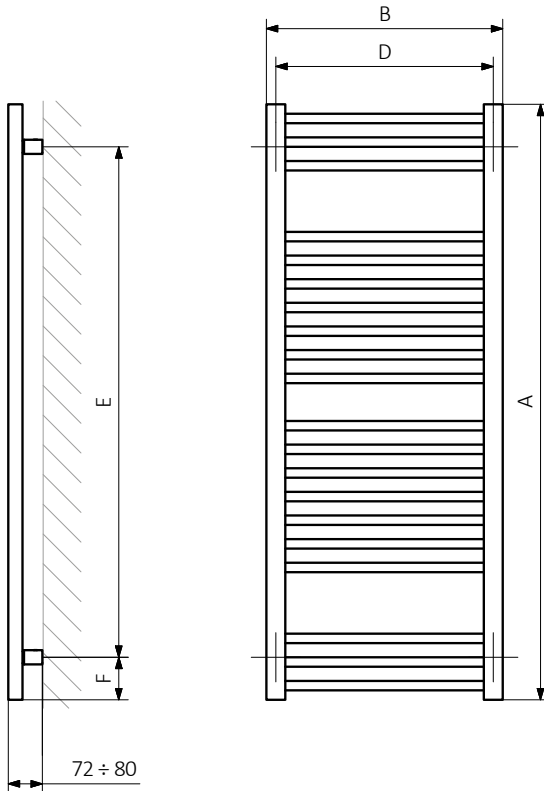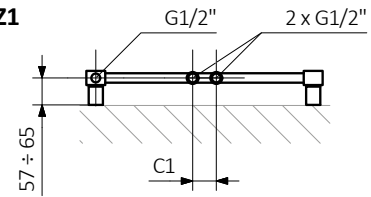


Z8

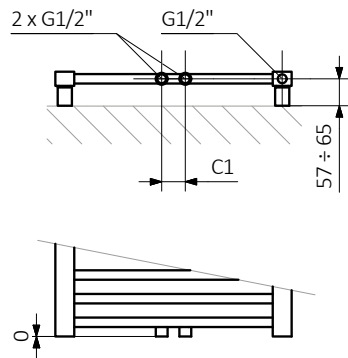


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:






design: *Terma*


Standard connections:




Electric radiators: see page 599.



Optional connections:



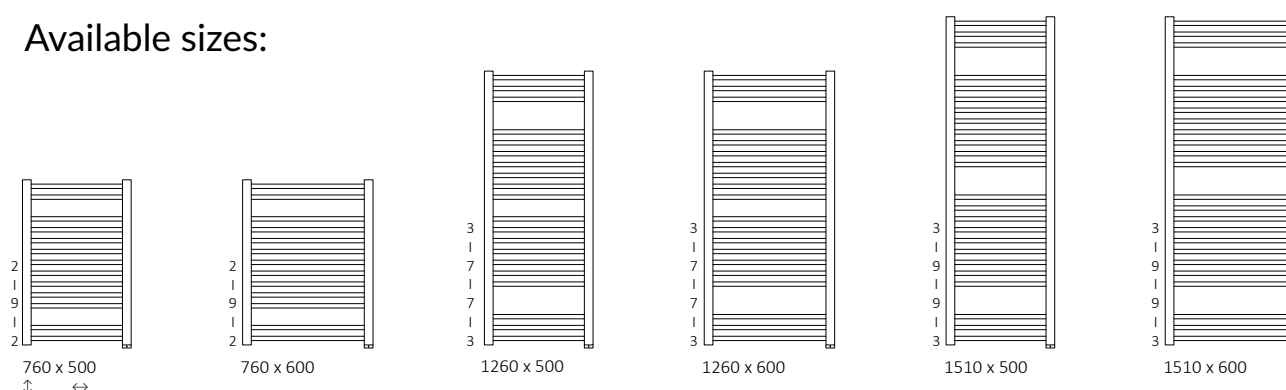


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 82°C

| A \updownarrow [mm] | B \leftrightarrow [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|--------------------------|-----------------------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| Powder coating | | | | | | | | | | |
| 760 | 500 | 320 | 173 | 300 | 460 | 620 | 70 | 2,99 | 7,34 | WZBNN076050 |
| 760 | 600 | 384 | 208 | 400 | 560 | 620 | 70 | 3,37 | 8,47 | WZBNN076060 |
| 1260 | 500 | 503 | 271 | 600 | 460 | 1120 | 70 | 4,84 | 11,45 | WZBNN126050 |
| 1260 | 600 | 603 | 325 | 600 | 560 | 1120 | 70 | 5,41 | 13,19 | WZBNN126060 |
| 1510 | 500 | 607 | 323 | 600 | 460 | 1370 | 70 | 5,82 | 13,68 | WZBNN151050 |
| 1510 | 600 | 728 | 387 | 800 | 560 | 1370 | 70 | 6,51 | 15,78 | WZBNN151060 |
| Plated finishes | | | | | | | | | | |
| 760 | 500 | 224 | 121 | 200 | 460 | 620 | 70 | 2,99 | 7,09 | WZBNN076050 |
| 760 | 600 | 269 | 145 | 300 | 560 | 620 | 70 | 3,37 | 8,19 | WZBNN076060 |
| 1260 | 500 | 352 | 190 | 400 | 460 | 1120 | 70 | 4,84 | 11,06 | WZBNN126050 |
| 1260 | 600 | 422 | 227 | 400 | 560 | 1120 | 70 | 5,41 | 12,75 | WZBNN126060 |
| 1510 | 500 | 425 | 226 | 400 | 460 | 1370 | 70 | 5,82 | 13,22 | WZBNN151050 |
| 1510 | 600 | 510 | 271 | 600 | 560 | 1370 | 70 | 6,51 | 15,24 | WZBNN151060 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675





ZIP H 20 hanger – see page 636



S8

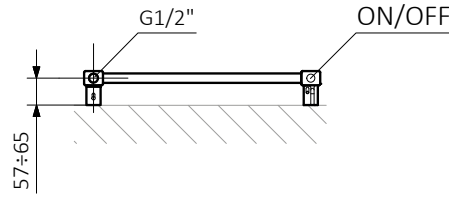


S1

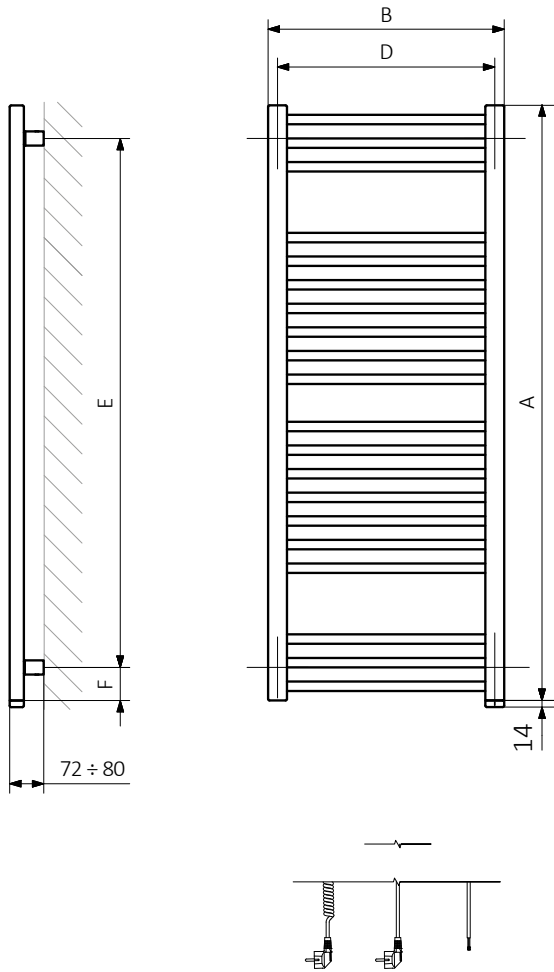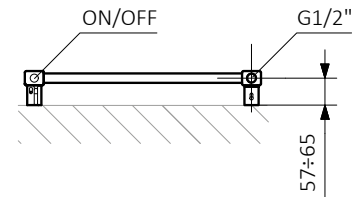


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Bone DW s. 70



design: *Terma*

Standard connections:




Electric radiators: see page 599.



Optional connections:



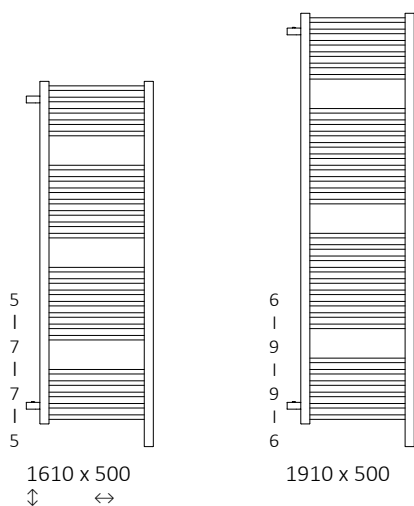


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|--|---|--|
| 1610 | 500 | 50 | 607 | 323 | 600 | 1350 | 80 | 5,92 | 13,68 | WGBSD161050 |
| 1910 | 500 | 50 | 764 | 404 | 800 | 1650 | 80 | 7,24 | 16,80 | WGBSD191050 |

We recommend: A set of integrated thermostatic valves for Z1 connection – see page 652



Integrated pipe masking set – see page 675




KTX 4 heating element – see page 692






ZIP H 20 hanger – see page 636



O1




Z1

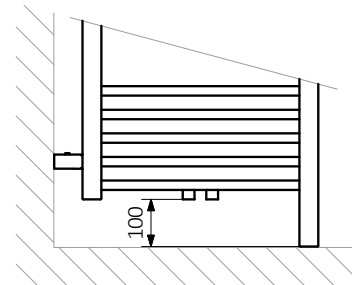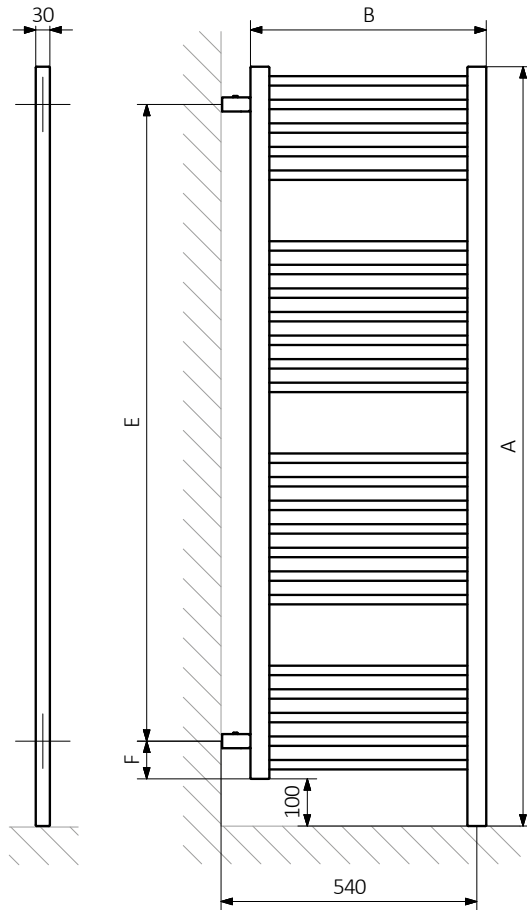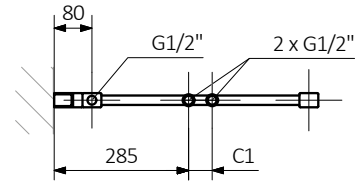


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Standard connections:




Electric radiators: see page 602.

Note: The electric version is supplied with the TS1 heating probe and KTX 4 Blue controller combination only. It is not available with any other types of Terma heating element.



Available sizes:



Specifications:

Working pressure: 2000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C4 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | [dm³] | [kg] | Product code <small>(Configuration code p. 7)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|------|-------|------|--|
| 575 | 800 | 500 | 800 | 1060 | 550 | 1000 | 3,1 | 12,1 | WGCAM057080 |

We recommend: Angled thermostatic valve set for LP connection – see page 648






Pipe masking set – 70 mm – see page 673



KTX 4 BLUE heating element – see page 694



LP

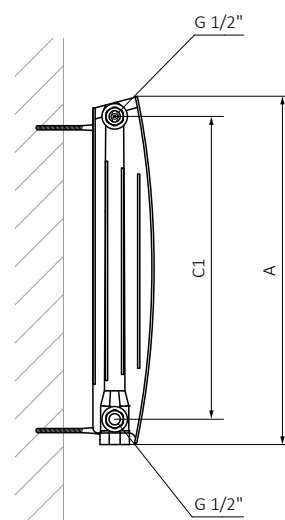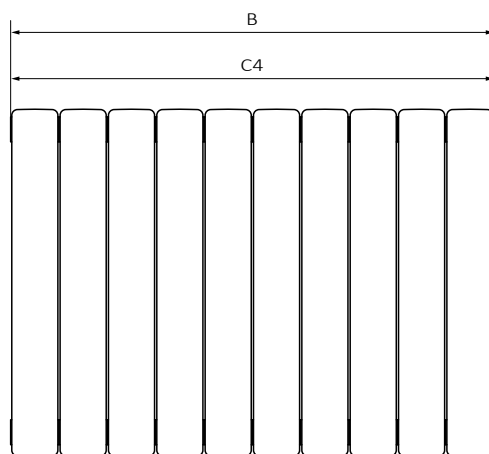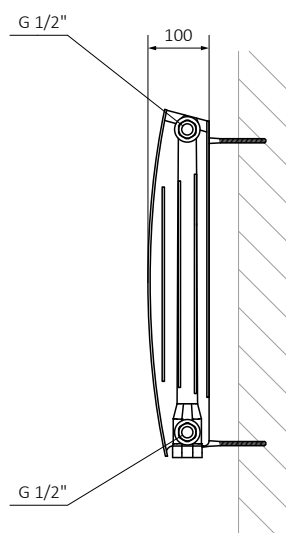


A – Height B – Width C1, C4 – Distance between pipe centres




Colour included
in the price

design: Jacek Ryń

Standard connections:




Optional connections:






Electric radiators: see page 344.

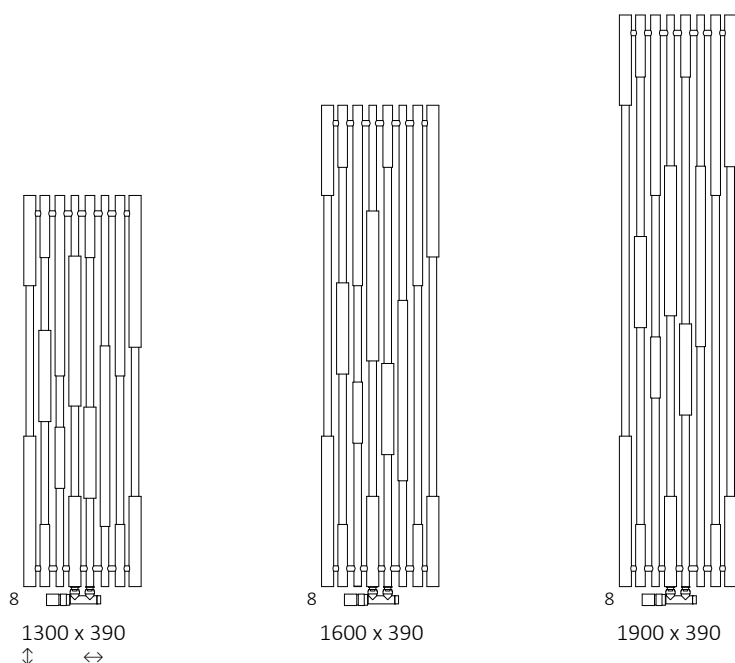Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| 1300 | 390 | 50 | 569 | 300 | 600 | 250 | 1180 | 60 | 6,77 | 13,53 | WGCAN130039 |
| 1600 | 390 | 50 | 670 | 354 | 800 | 250 | 1480 | 60 | 7,69 | 15,30 | WGCAN160039 |
| 1900 | 390 | 50 | 768 | 405 | 800 | 250 | 1780 | 60 | 8,56 | 17,78 | WGCAN190039 |

Included components: The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.



We recommend: REG 2 heating element
 – see page 716




ZX

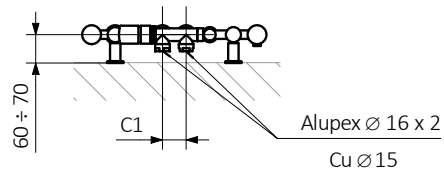

Z1

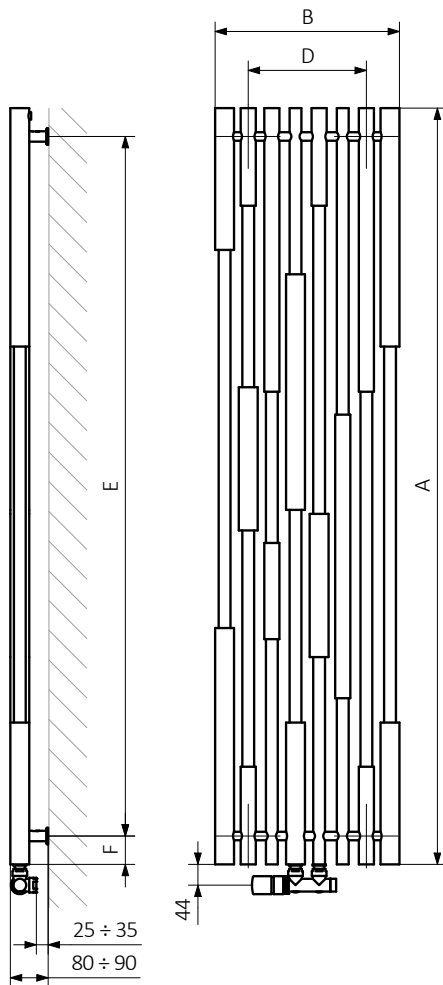


Z8

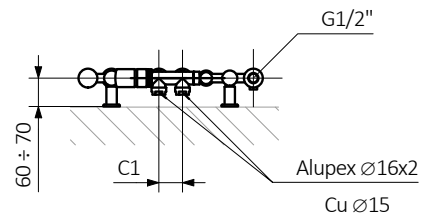

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:

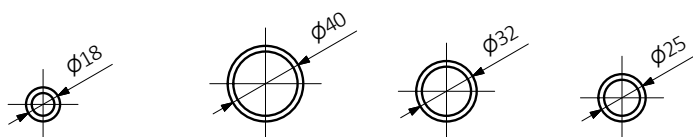


Cane E s. 76

  Colour included in the price


design: Jacek Ryn

Standard connections:






Water version, see page 342.

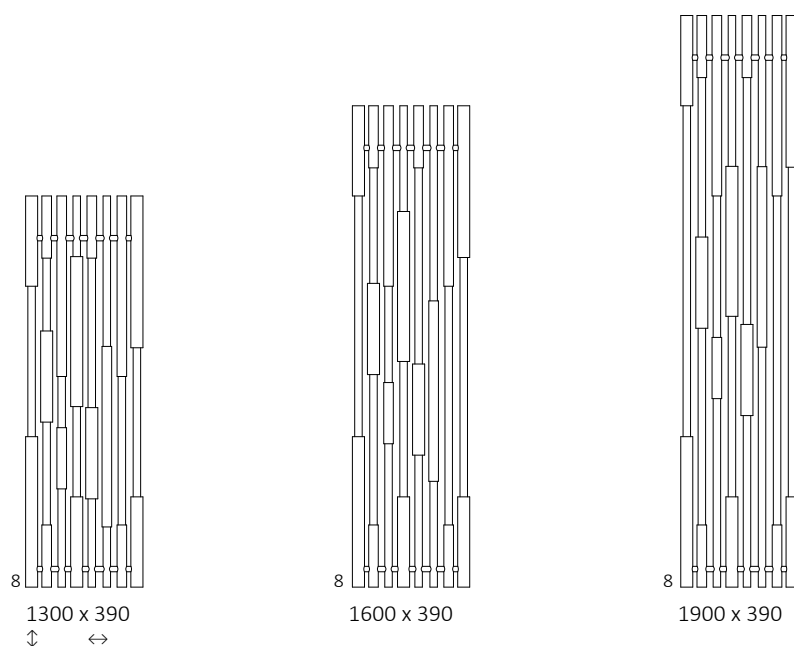Available sizes:



Specifications:


Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| 1300 | 390 | 600 | 250 | 1100 | 60 | 6,77 | 19,01 | WLCAN130039 |
| 1600 | 390 | 800 | 250 | 1400 | 60 | 7,69 | 21,53 | WLCAN160039 |
| 1900 | 390 | 800 | 250 | 1700 | 60 | 8,56 | 24,71 | WLCAN190039 |



We recommend: REG 2 heating element
 – see page 716



E1




E8

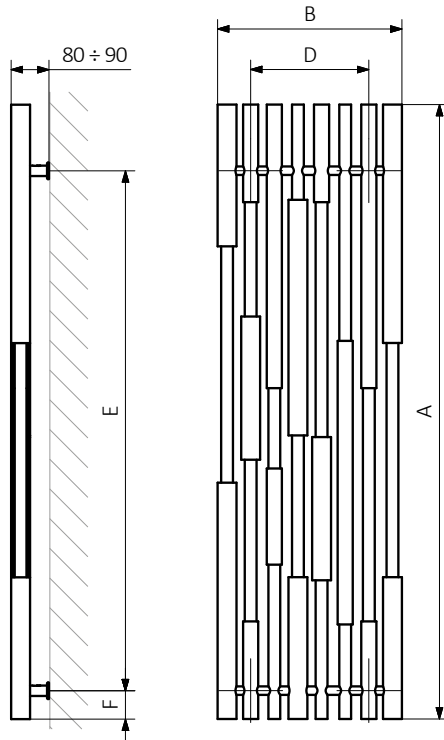

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:

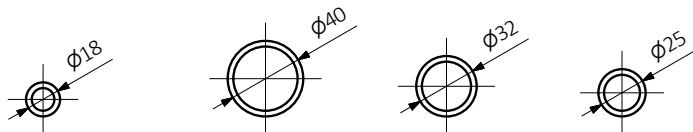


Case Slim s. 78


    Colour included in the price

Standard connections:


A ↓ 585:



A ↓ 1360÷1810:



Electric radiators: see page 599.



Optional connections:

A ↓ 585÷1810:




Case Slim towel rail.


The first hanger bought with the radiator is available at a bonus price of 1 EUR, each next at a regular price. Special offer includes the following widths: 420 mm, 520 mm, 620 mm.



Available sizes:



585 x 900




585 x 1100




585 x 1300

NOTE: Case Slim radiators ↓ 585 mm high are available only in hydronic version



1360 x 420
↓ ↔




1360 x 520




1360 x 620



1585 x 420



1585 x 520



1585 x 620



1810 x 420



1810 x 520



1810 x 620

We recommend: Integrated pipe masking set – see page 675






ONE heating element – see page 690






Specifications:

Working pressure: 800 kPa







Maximum operating temperature: 95°C

| A ↓ | B ↔ | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|---------------|--------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| Metal | | | | | | | | | | | |
| 585 | 900 | 50 | 438 | 229 | – | 650 | 415 | 30 | 3,93 | 25,98 | WGCSS058090 |
| 585 | 1100 | 50 | 536 | 281 | – | 850 | 415 | 30 | 4,69 | 32,76 | WGCSS058110 |
| 585 | 1300 | 50 | 634 | 332 | – | 1050 | 415 | 30 | 5,44 | 38,41 | WGCSS058130 |
| 1360 | 420 | 50 | 422 | 219 | 400 | 170 | 1190 | 30 | 5,26 | 30,12 | WGCSS136042 |
| 1360 | 520 | 50 | 523 | 271 | 600 | 270 | 1190 | 30 | 6,23 | 36,67 | WGCSS136052 |
| 1360 | 620 | 50 | 624 | 324 | 600 | 370 | 1190 | 30 | 7,19 | 43,21 | WGCSS136062 |
| 1585 | 420 | 50 | 470 | 243 | 400 | 170 | 1415 | 30 | 6,18 | 34,92 | WGCSS158042 |
| 1585 | 520 | 50 | 580 | 300 | 600 | 270 | 1415 | 30 | 7,31 | 42,56 | WGCSS158052 |
| 1585 | 620 | 50 | 693 | 358 | 800 | 370 | 1415 | 30 | 8,45 | 50,19 | WGCSS158062 |
| 1810 | 420 | 50 | 516 | 266 | 600 | 170 | 1640 | 30 | 7,09 | 39,73 | WGCSS181042 |
| 1810 | 520 | 50 | 639 | 330 | 600 | 270 | 1640 | 30 | 8,40 | 48,44 | WGCSS181052 |
| 1810 | 620 | 50 | 762 | 393 | 800 | 370 | 1640 | 30 | 9,70 | 57,16 | WGCSS181062 |
| Glass | | | | | | | | | | | |
| 585 | 900 | 50 | 438 | 229 | – | 650 | 415 | 30 | 3,93 | 32,59 | WGCSG058090 |
| 585 | 1100 | 50 | 536 | 281 | – | 850 | 415 | 30 | 4,69 | 39,37 | WGCSG058110 |
| 585 | 1300 | 50 | 634 | 332 | – | 1050 | 415 | 30 | 5,44 | 46,16 | WGCSG058130 |
| 1360 | 420 | 50 | 422 | 219 | 400 | 170 | 1190 | 30 | 5,26 | 37,23 | WGCSG136042 |
| 1360 | 520 | 50 | 523 | 271 | 600 | 270 | 1190 | 30 | 6,23 | 45,49 | WGCSG136052 |
| 1360 | 620 | 50 | 624 | 324 | 600 | 370 | 1190 | 30 | 7,19 | 53,81 | WGCSG136062 |
| 1585 | 420 | 50 | 470 | 243 | 400 | 170 | 1415 | 30 | 6,18 | 43,29 | WGCSG158042 |
| 1585 | 520 | 50 | 580 | 300 | 600 | 270 | 1415 | 30 | 7,31 | 52,91 | WGCSG158052 |
| 1585 | 620 | 50 | 693 | 358 | 800 | 370 | 1415 | 30 | 8,45 | 62,52 | WGCSG158062 |
| 1810 | 420 | 50 | 516 | 266 | 600 | 170 | 1640 | 30 | 7,09 | 49,27 | WGCSG181042 |
| 1810 | 520 | 50 | 639 | 330 | 600 | 270 | 1640 | 30 | 8,40 | 60,25 | WGCSG181052 |
| 1810 | 620 | 50 | 762 | 393 | 800 | 370 | 1640 | 30 | 9,70 | 71,23 | WGCSG181062 |
| Mirror | | | | | | | | | | | |
| 585 | 900 | 50 | 438 | 229 | – | 650 | 415 | 30 | 3,93 | 32,59 | WGCSM058090 |
| 585 | 1100 | 50 | 536 | 281 | – | 850 | 415 | 30 | 4,69 | 39,37 | WGCSM058110 |
| 585 | 1300 | 50 | 634 | 332 | – | 1050 | 415 | 30 | 5,44 | 46,16 | WGCSM058130 |
| 1360 | 420 | 50 | 422 | 219 | 400 | 170 | 1190 | 30 | 5,26 | 37,23 | WGCSM136042 |
| 1360 | 520 | 50 | 523 | 271 | 600 | 270 | 1190 | 30 | 6,23 | 45,49 | WGCSM136052 |
| 1360 | 620 | 50 | 624 | 324 | 600 | 370 | 1190 | 30 | 7,19 | 53,81 | WGCSM136062 |
| 1585 | 420 | 50 | 470 | 243 | 400 | 170 | 1415 | 30 | 6,18 | 43,29 | WGCSM158042 |
| 1585 | 520 | 50 | 580 | 300 | 600 | 270 | 1415 | 30 | 7,31 | 52,91 | WGCSM158052 |
| 1585 | 620 | 50 | 693 | 358 | 800 | 370 | 1415 | 30 | 8,45 | 62,52 | WGCSM158062 |
| 1810 | 420 | 50 | 516 | 266 | 600 | 170 | 1640 | 30 | 7,09 | 49,27 | WGCSM181042 |
| 1810 | 520 | 50 | 639 | 330 | 600 | 270 | 1640 | 30 | 8,40 | 60,25 | WGCSM181052 |
| 1810 | 620 | 50 | 762 | 393 | 800 | 370 | 1640 | 30 | 9,70 | 71,23 | WGCSM181062 |



Case Slim s. 78

| A ↓ | B ↔ | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-----------------|--------|------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Graphics | | | | | | | | | | | |
| 585 | 900 | 50 | 438 | 229 | - | 650 | 415 | 30 | 3,93 | 32,59 | WGCSPO58090 |
| 585 | 1100 | 50 | 536 | 281 | - | 850 | 415 | 30 | 4,69 | 39,37 | WGCSPO58110 |
| 585 | 1300 | 50 | 634 | 332 | - | 1050 | 415 | 30 | 5,44 | 46,16 | WGCSPO58130 |
| 1360 | 420 | 50 | 422 | 219 | 400 | 170 | 1190 | 30 | 5,26 | 37,23 | WGCSPO136042 |
| 1360 | 520 | 50 | 523 | 271 | 600 | 270 | 1190 | 30 | 6,23 | 45,49 | WGCSPO136052 |
| 1360 | 620 | 50 | 624 | 324 | 600 | 370 | 1190 | 30 | 7,19 | 53,81 | WGCSPO136062 |
| 1585 | 420 | 50 | 470 | 243 | 400 | 170 | 1415 | 30 | 6,18 | 43,29 | WGCSPO158042 |
| 1585 | 520 | 50 | 580 | 300 | 600 | 270 | 1415 | 30 | 7,31 | 52,91 | WGCSPO158052 |
| 1585 | 620 | 50 | 693 | 358 | 800 | 370 | 1415 | 30 | 8,45 | 62,52 | WGCSPO158062 |
| 1810 | 420 | 50 | 516 | 266 | 600 | 170 | 1640 | 30 | 7,09 | 49,27 | WGCSPO181042 |
| 1810 | 520 | 50 | 639 | 330 | 600 | 270 | 1640 | 30 | 8,40 | 60,25 | WGCSPO181052 |
| 1810 | 620 | 50 | 762 | 393 | 800 | 370 | 1640 | 30 | 9,70 | 71,23 | WGCSPO181062 |
| Concrete | | | | | | | | | | | |
| 585 | 900 | 50 | 438 | 229 | - | 650 | 415 | 30 | 3,93 | 27,98 | WGCSB058090 |
| 585 | 1100 | 50 | 536 | 281 | - | 850 | 415 | 30 | 4,69 | 33,72 | WGCSB058110 |
| 585 | 1300 | 50 | 634 | 332 | - | 1050 | 415 | 30 | 5,44 | 39,46 | WGCSB058130 |
| 1360 | 420 | 50 | 422 | 219 | 400 | 170 | 1190 | 30 | 5,26 | 32,21 | WGCSB136042 |
| 1360 | 520 | 50 | 523 | 271 | 600 | 270 | 1190 | 30 | 6,23 | 39,22 | WGCSB136052 |
| 1360 | 620 | 50 | 624 | 324 | 600 | 370 | 1190 | 30 | 7,19 | 46,29 | WGCSB136062 |
| 1585 | 420 | 50 | 470 | 243 | 400 | 170 | 1415 | 30 | 6,18 | 37,42 | WGCSB158042 |
| 1585 | 520 | 50 | 580 | 300 | 600 | 270 | 1415 | 30 | 7,31 | 45,58 | WGCSB158052 |
| 1585 | 620 | 50 | 693 | 358 | 800 | 370 | 1415 | 30 | 8,45 | 53,73 | WGCSB158062 |
| 1810 | 420 | 50 | 516 | 266 | 600 | 170 | 1640 | 30 | 7,09 | 42,56 | WGCSB181042 |
| 1810 | 520 | 50 | 639 | 330 | 600 | 270 | 1640 | 30 | 8,40 | 51,87 | WGCSB181052 |
| 1810 | 620 | 50 | 762 | 393 | 800 | 370 | 1640 | 30 | 9,70 | 61,17 | WGCSB181062 |

Included components: Angled integrated thermostatic valve, SLIM thermostatic head, alupex Ø 16x2 and copper Ø 15 compression fittings for ZX, Z1 and Z8 connections. Please consult the manufacturer in order to select the appropriate set for the SX connection. All plumbing accessories are chrome-plated.

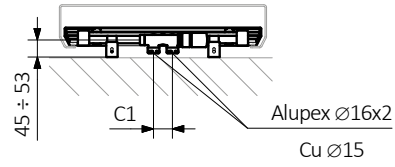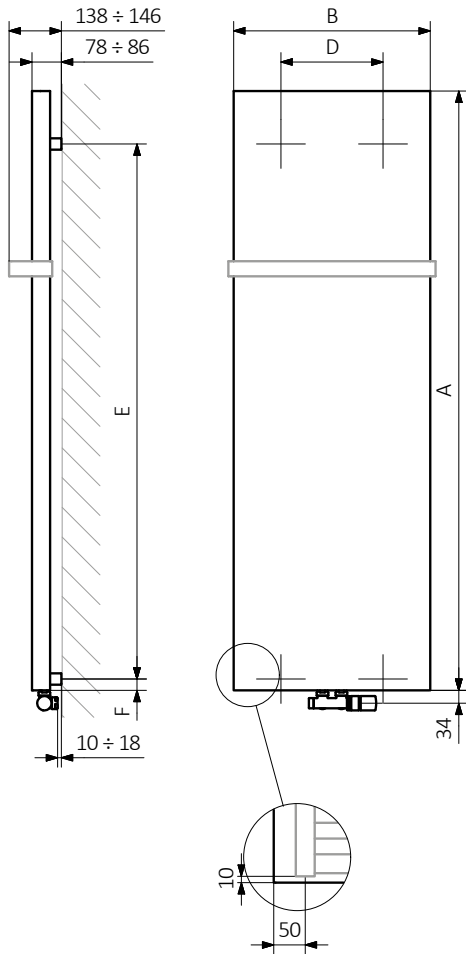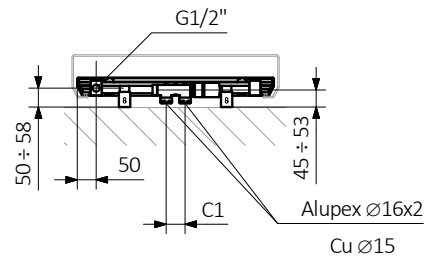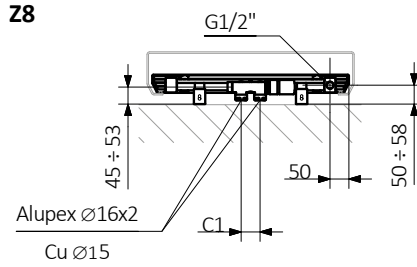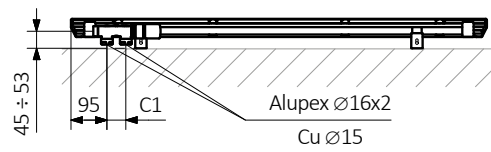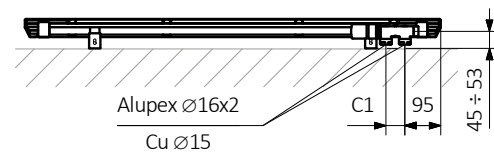ZX**Z1****Z8****YL****YP**

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:**Pipe:**




Colour included in the price

design: Jacek Ryń

Standard connections:




Electric radiators: see page 599.




Optional connections:


A ↓ 510÷1860:

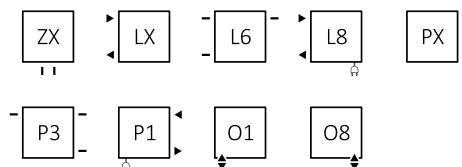

A ↓ 780-1860:



Available sizes:

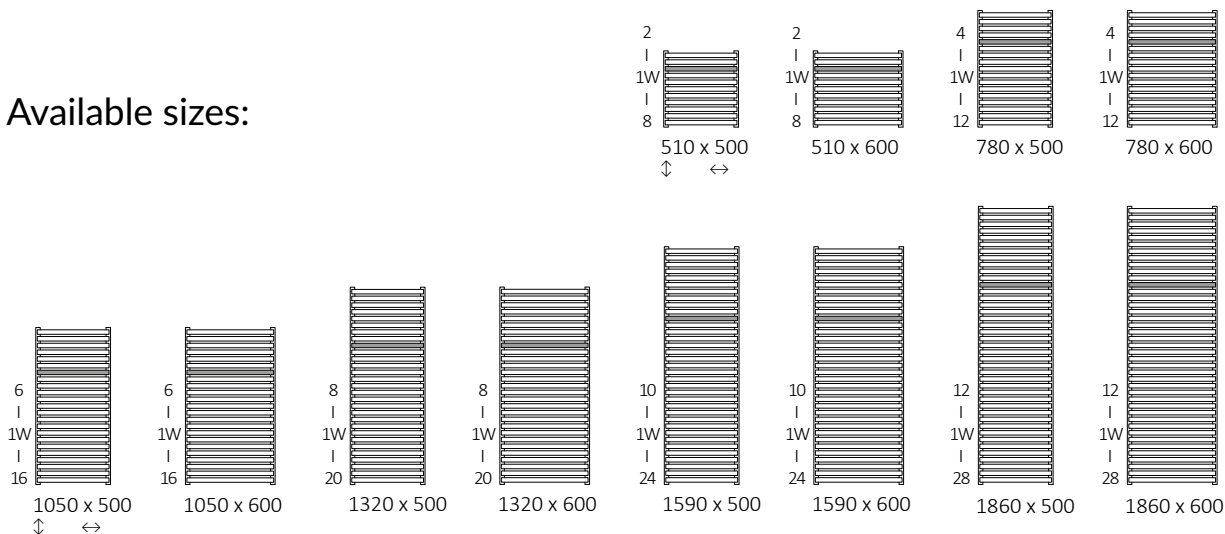

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---------|-----------|-----------|-----------|-----------|----------|--|
| 510 | 500 | 50 | 470 | 304 | 164 | 300 | 470 | 330 | 90 | 1,82 | 6,59 | WGCIT051050 |
| 510 | 600 | 50 | 570 | 362 | 195 | 400 | 570 | 330 | 90 | 2,03 | 7,57 | WGCIT051060 |
| 780 | 500 | 50 | 470 | 455 | 245 | 400 | 470 | 600 | 90 | 2,81 | 10,12 | WGCIT078050 |
| 780 | 600 | 50 | 570 | 541 | 291 | 600 | 570 | 600 | 90 | 3,13 | 11,63 | WGCIT078060 |
| 1050 | 500 | 50 | 470 | 600 | 323 | 600 | 470 | 870 | 90 | 3,79 | 13,64 | WGCIT105050 |
| 1050 | 600 | 50 | 570 | 714 | 384 | 800 | 570 | 870 | 90 | 4,23 | 15,69 | WGCIT105060 |
| 1320 | 500 | 50 | 470 | 739 | 397 | 800 | 470 | 1140 | 90 | 4,78 | 17,17 | WGCIT132050 |
| 1320 | 600 | 50 | 570 | 879 | 473 | 800 | 570 | 1140 | 90 | 5,32 | 19,76 | WGCIT132060 |
| 1590 | 500 | 50 | 470 | 887 | 476 | 800 | 470 | 1410 | 90 | 5,66 | 20,26 | WGCIT159050 |
| 1590 | 600 | 50 | 570 | 1055 | 566 | 1000 | 570 | 1410 | 90 | 6,30 | 23,30 | WGCIT159060 |
| 1860 | 500 | 50 | 470 | 1032 | 553 | 1000 | 470 | 1680 | 90 | 6,74 | 24,29 | WGCIT186050 |
| 1860 | 600 | 50 | 570 | 1227 | 657 | 1200 | 570 | 1680 | 90 | 7,52 | 27,95 | WGCIT186060 |

We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652




Integrated pipe masking set – see page 675




KTX 4 heating element – see page 692




SX

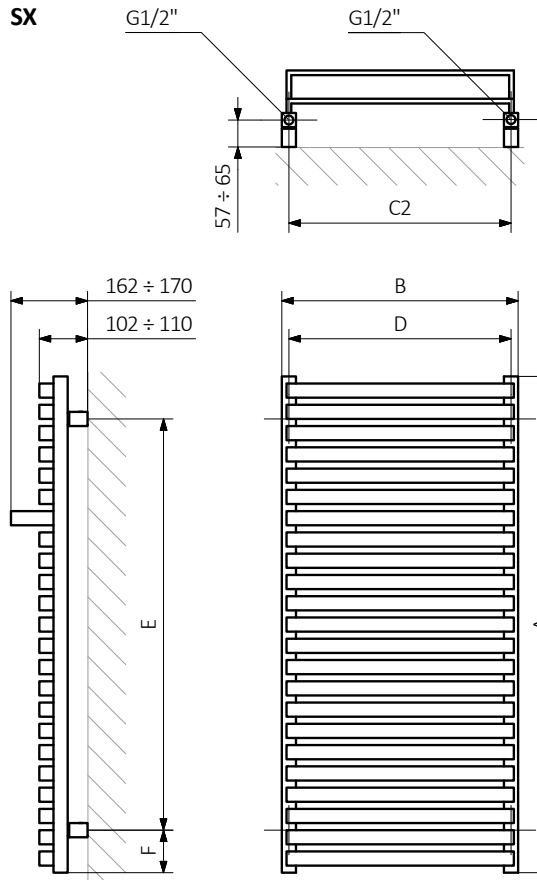

Z1

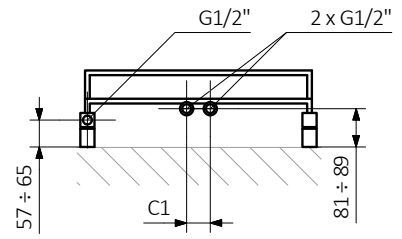


Z8

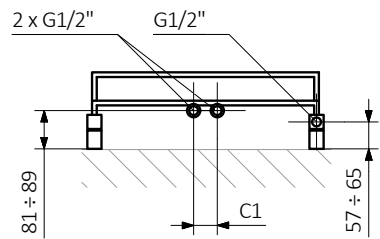


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:




Pipe:



Standard connections:

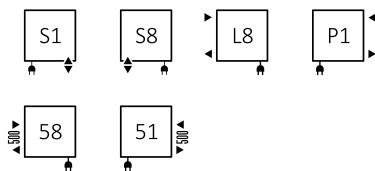

Electric radiators: see page 599.



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | C3 [mm] | C5 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☉ [W] | D [mm] | E [mm] | F [mm] | ⏏ [dm³] | ⚖ [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|-----------|--|
| 780 | 500 | 740 | 500 | 455 | 245 | 400 | 470 | 630 | 75 | 2,74 | 10,12 | WZCIN078050 |
| 780 | 600 | 740 | 500 | 541 | 291 | 600 | 570 | 630 | 75 | 3,06 | 11,63 | WZCIN078060 |
| 1050 | 500 | 1010 | 500 | 600 | 323 | 600 | 470 | 900 | 75 | 3,72 | 13,64 | WZCIN105050 |
| 1050 | 600 | 1010 | 500 | 714 | 384 | 800 | 570 | 900 | 75 | 4,16 | 15,69 | WZCIN105060 |
| 1320 | 500 | 1280 | 500 | 739 | 397 | 800 | 470 | 1170 | 75 | 4,71 | 17,17 | WZCIN132050 |
| 1320 | 600 | 1280 | 500 | 879 | 473 | 800 | 570 | 1170 | 75 | 5,25 | 19,76 | WZCIN132060 |
| 1590 | 500 | 1550 | 500 | 887 | 476 | 800 | 470 | 1440 | 75 | 5,59 | 20,26 | WZCIN159050 |
| 1590 | 600 | 1550 | 500 | 1055 | 566 | 1000 | 570 | 1440 | 75 | 6,23 | 23,30 | WZCIN159060 |
| 1860 | 500 | 1820 | 500 | 1032 | 553 | 1000 | 470 | 1710 | 75 | 6,67 | 24,29 | WZCIN186050 |


We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675




Available sizes:

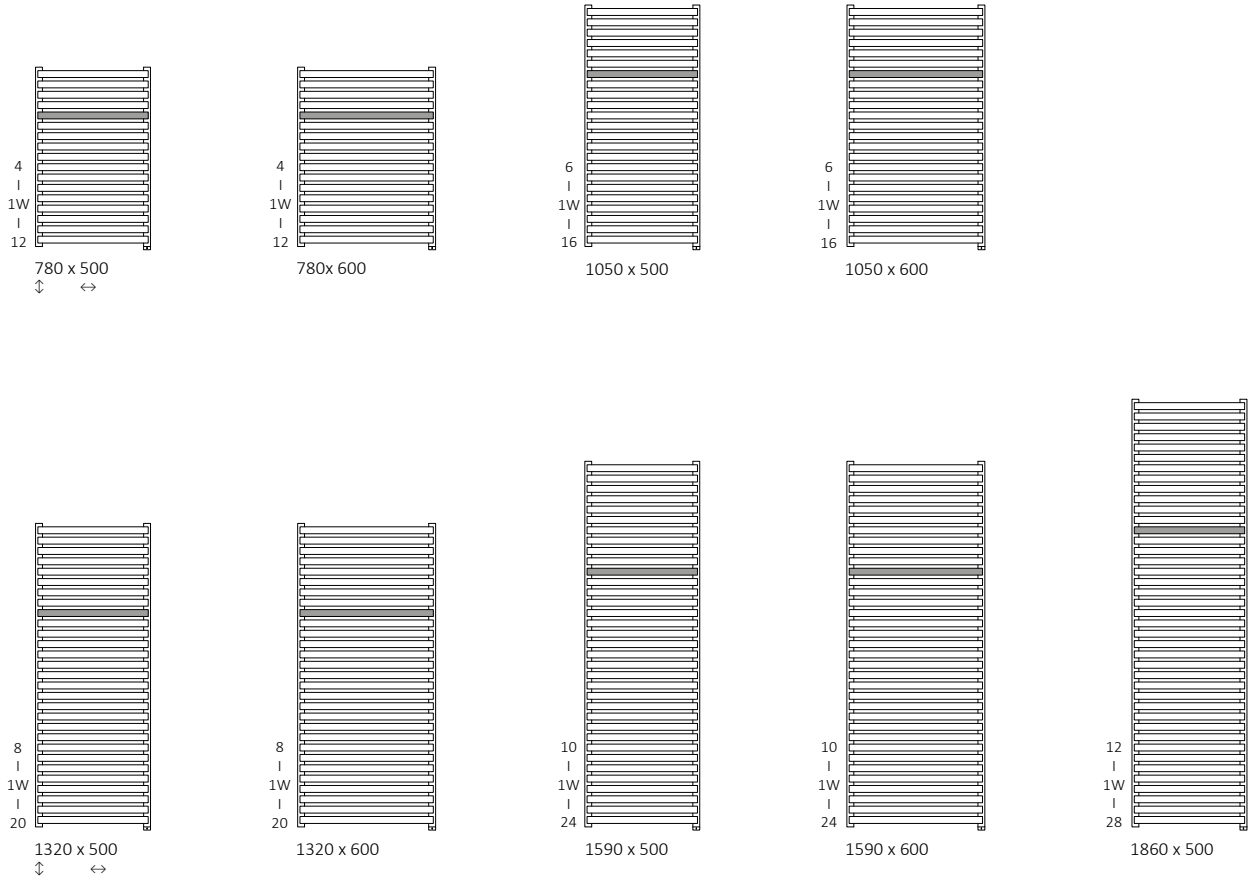


S8











S1



51




58

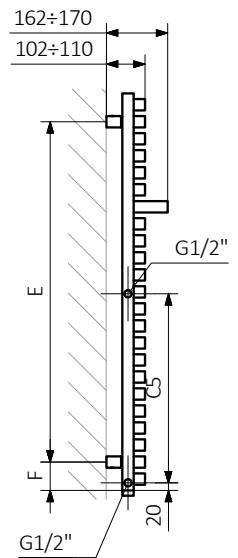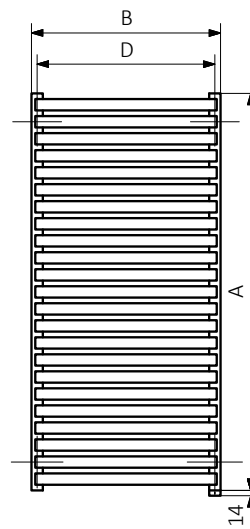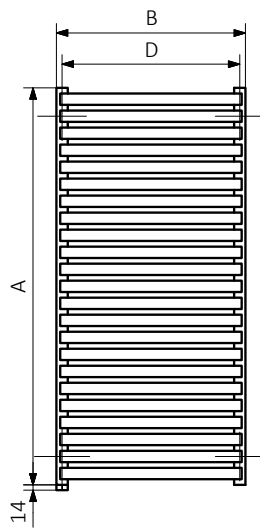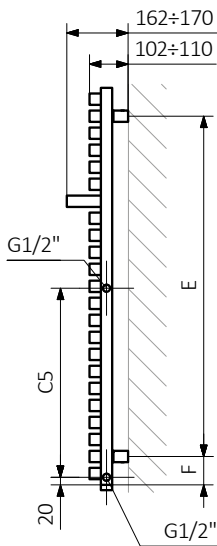


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator





Collector:







Pipe:



P1

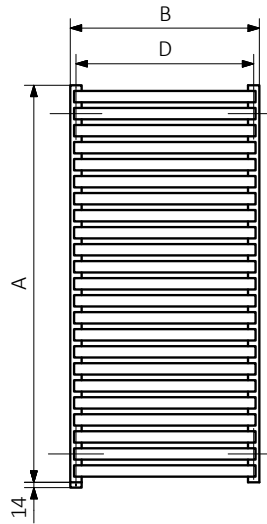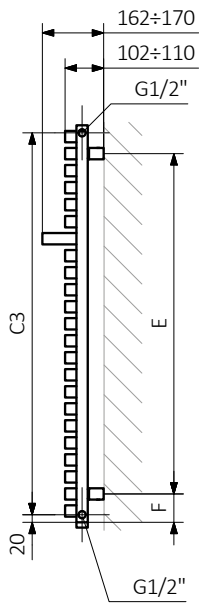

L8

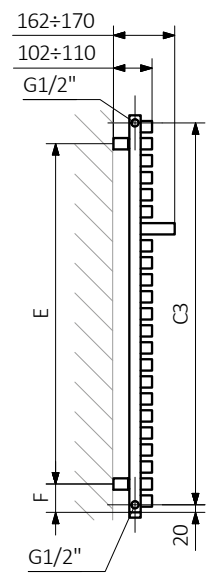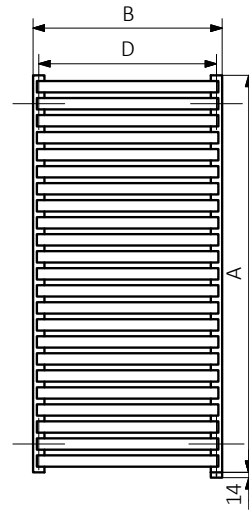


Cyklon V s. 86


  Colour included in the price

design: Maja Zalewska, Marek Kostykievicz (M4M)

Standard connections:



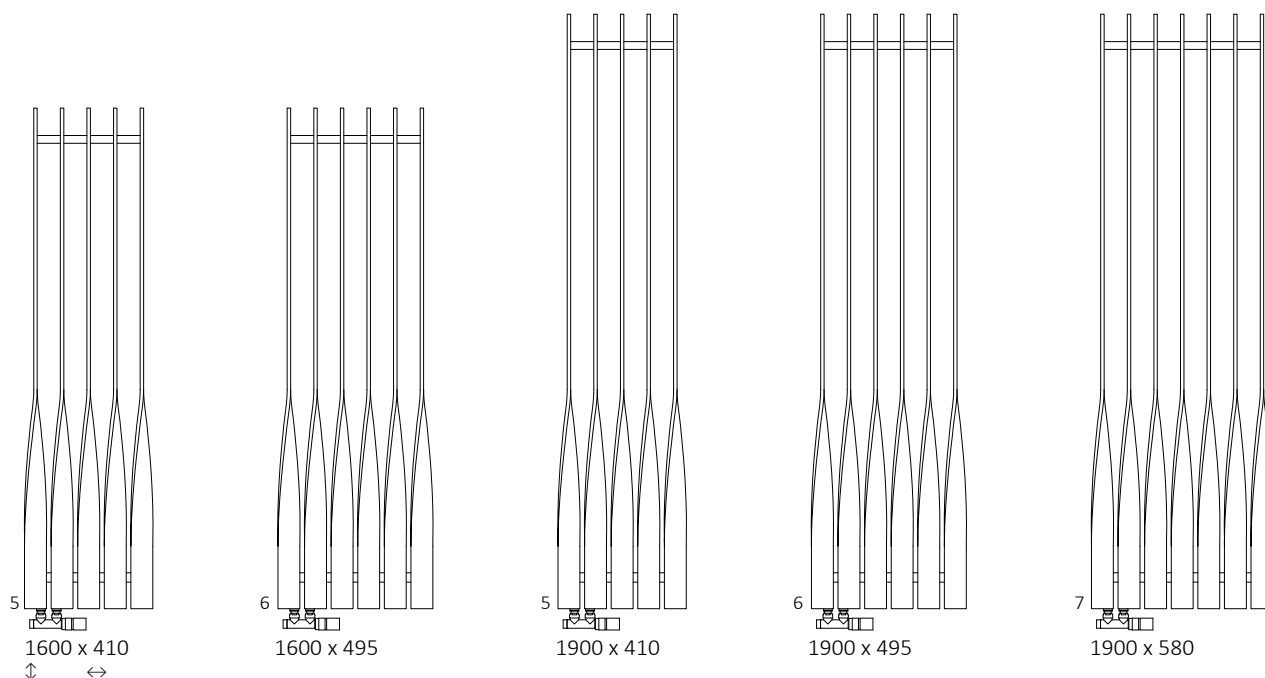

Available sizes:



Specifications:





Working pressure: 700 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 1600 | 410 | 50 | 704 | 375 | 170 | 1400 | 100 | 3,98 | 21,07 | WGCVV160041 |
| 1600 | 495 | 50 | 845 | 451 | 255 | 1400 | 100 | 4,78 | 25,31 | WGCVV160049 |
| 1900 | 410 | 50 | 832 | 439 | 170 | 1700 | 100 | 4,67 | 24,75 | WGCVV190041 |
| 1900 | 495 | 50 | 999 | 528 | 255 | 1700 | 100 | 5,61 | 29,73 | WGCVV190049 |
| 1900 | 580 | 50 | 1166 | 616 | 340 | 1700 | 100 | 6,56 | 34,71 | WGCVV190058 |

Included components: The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

We recommend: Integrated pipe masking set – see page 675


KUKA 70 x 11 hanger – see page 635

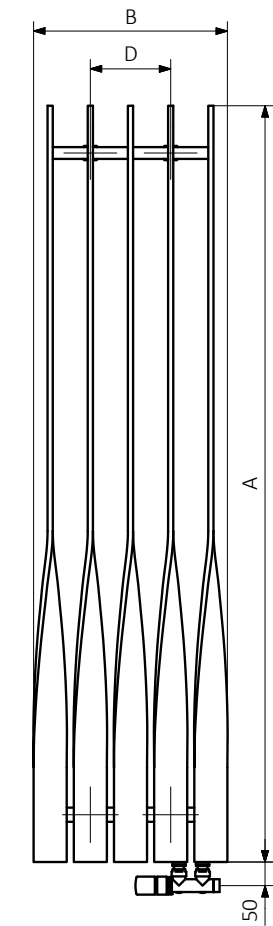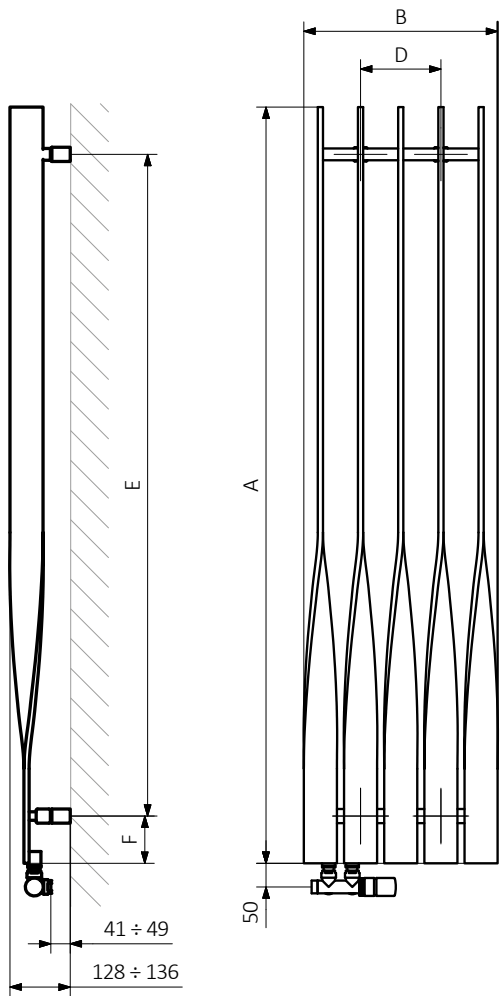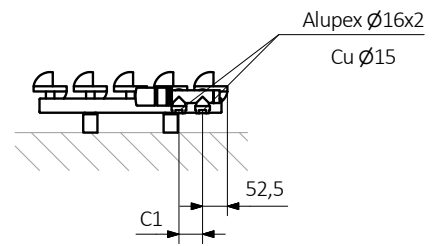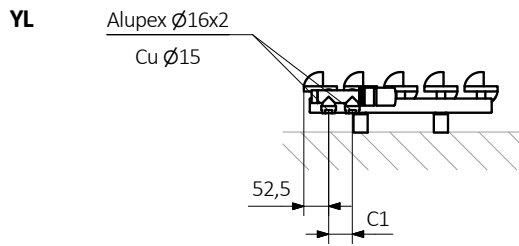

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:

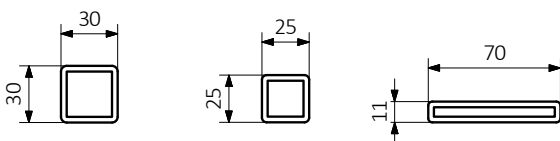


Cyklon H s. 88


  Colour included in the price

design: Maja Zalewska, Marek Kostykiewicz (M4M)

Standard connections:



Available sizes:

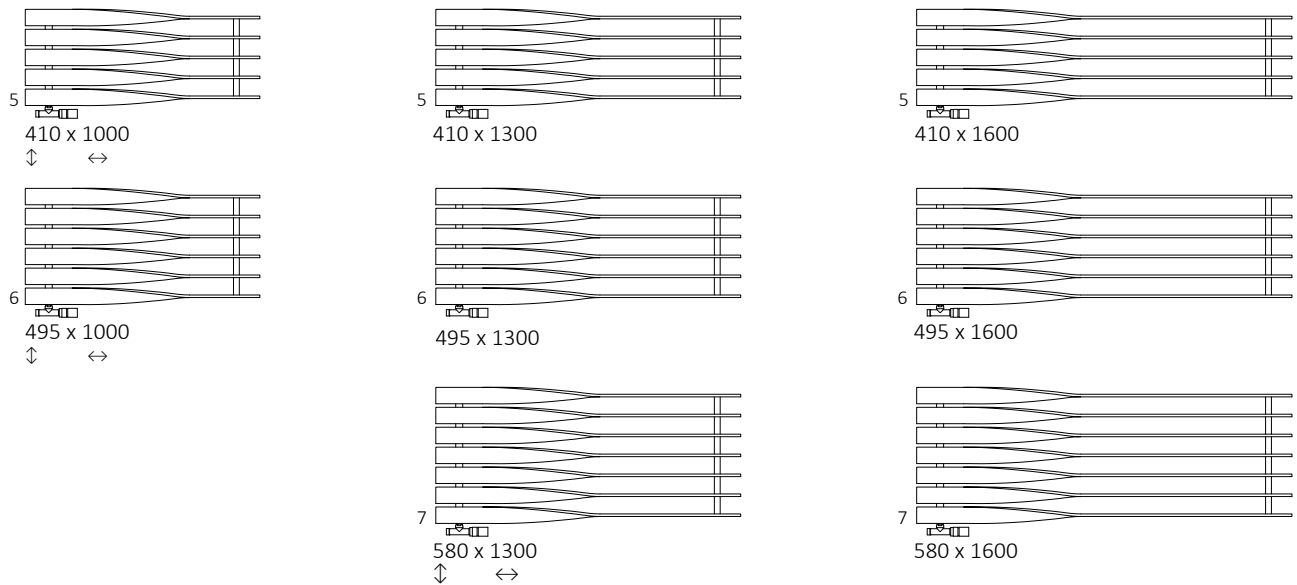

Specifications:

Working pressure: 700 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|--|---|--|
| 410 | 1000 | 50 | 408 | 212 | 800 | 170 | 120 | 2,59 | 13,40 | WGCYH041100 |
| 410 | 1300 | 50 | 497 | 255 | 1100 | 170 | 120 | 3,29 | 17,09 | WGCYH041130 |
| 410 | 1600 | 50 | 587 | 298 | 1400 | 170 | 120 | 3,98 | 20,78 | WGCYH041160 |
| 495 | 1000 | 50 | 490 | 249 | 800 | 255 | 120 | 3,12 | 16,10 | WGCYH049100 |
| 495 | 1300 | 50 | 597 | 299 | 1100 | 255 | 120 | 3,95 | 20,53 | WGCYH049130 |
| 495 | 1600 | 50 | 704 | 349 | 1400 | 255 | 120 | 4,78 | 24,96 | WGCYH049160 |
| 580 | 1300 | 50 | 697 | 342 | 1100 | 340 | 120 | 4,62 | 23,97 | WGCYH058130 |
| 580 | 1600 | 50 | 821 | 399 | 1400 | 340 | 120 | 5,59 | 29,13 | WGCYH058160 |

Included components: The radiator is sold with an integrated, angled thermostatic valve with immersion tube, SLIM thermostatic head and adapters for installation (Alupez Ø 16x2 and copper Ø 15). All valve components are finished in chrome.


We recommend: Integrated pipe masking set – see page 675




KUKA 70 x 11 hanger – see page 635



O1

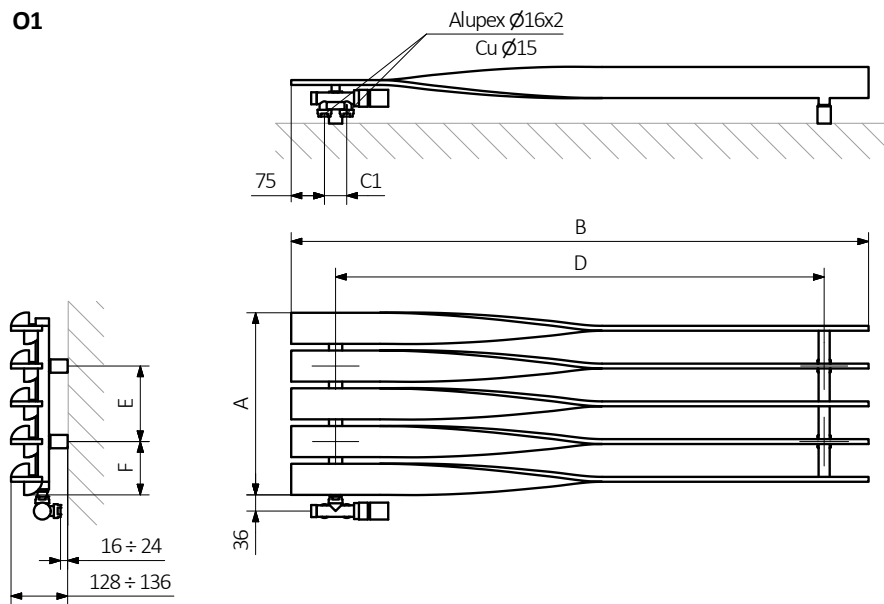


O8


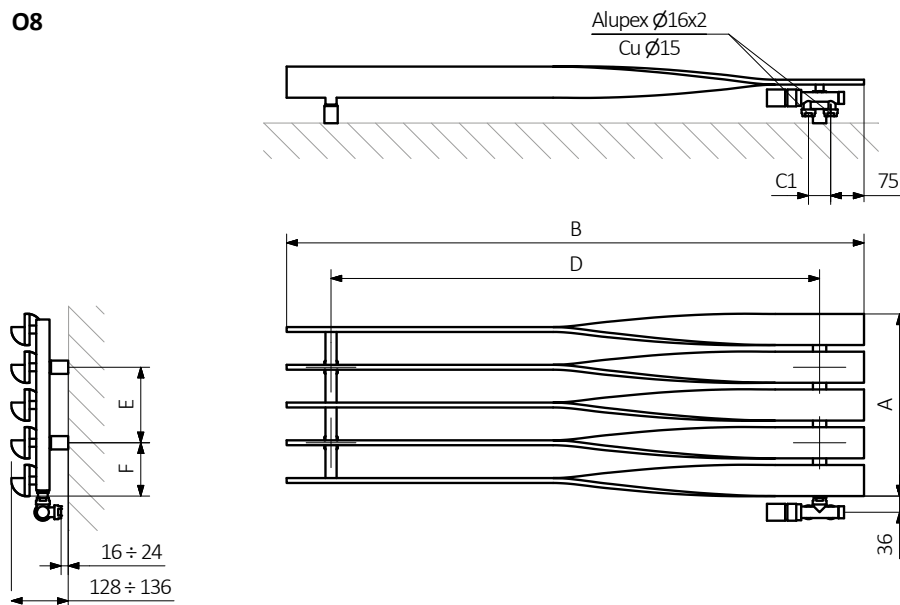


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:




Standard connections:


A ↓ 440÷2000:



A ↓ 440÷640:



A ↓ 1800÷2000:



Electric radiators: see page 599. A ↓ 440÷640:




Optional connections:


A ↓ 440÷2000:



A ↓ 440÷640:






A ↓ 1800÷2000:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | C3 [mm] | C4 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| 440 | 820 | 50 | 780 | 400 | 820 | 705 | 370 | 800 | 710 | 400 | 20 | 6,41 | 14,30 | WGDLF044082 |
| 440 | 1020 | 50 | 980 | 400 | 1020 | 885 | 465 | 800 | 910 | 400 | 20 | 8,01 | 17,82 | WGDLF044102 |
| 440 | 1220 | 50 | 1180 | 400 | 1220 | 1061 | 556 | 1000 | 1110 | 400 | 20 | 9,60 | 21,34 | WGDLF044122 |
| 540 | 820 | 50 | 780 | 500 | 820 | 846 | 442 | 800 | 710 | 500 | 20 | 7,61 | 16,97 | WGDLF054082 |
| 540 | 1020 | 50 | 980 | 500 | 1020 | 1057 | 553 | 1000 | 910 | 500 | 20 | 9,50 | 21,16 | WGDLF054102 |
| 540 | 1220 | 50 | 1180 | 500 | 1220 | 1264 | 661 | 1200 | 1110 | 500 | 20 | 11,39 | 25,35 | WGDLF054122 |
| 640 | 820 | 50 | 780 | 600 | 820 | 986 | 514 | 1000 | 710 | 600 | 20 | 8,80 | 19,65 | WGDLF064082 |
| 640 | 1020 | 50 | 980 | 600 | 1020 | 1233 | 644 | 1200 | 910 | 600 | 20 | 10,99 | 24,50 | WGDLF064102 |
| 640 | 1220 | 50 | 1180 | 600 | 1220 | 1458 | 760 | 1500 | 1110 | 600 | 20 | 13,19 | 29,36 | WGDLF064122 |
| 1800 | 500 | 50 | 460 | 1760 | 500 | 1403 | 717 | - | 390 | 1760 | 20 | 13,61 | 30,48 | WGDLF180050 |
| 1800 | 580 | 50 | 540 | 1760 | 580 | 1623 | 830 | - | 470 | 1760 | 20 | 15,87 | 35,52 | WGDLF180058 |
| 2000 | 500 | 50 | 460 | 1960 | 500 | 1556 | 802 | - | 390 | 1960 | 20 | 15,04 | 33,68 | WGDLF200050 |
| 2000 | 580 | 50 | 540 | 1960 | 580 | 1774 | 909 | - | 470 | 1960 | 20 | 17,55 | 39,26 | WGDLF200058 |














We recommend: *Integrated lockshield valve set for VL and VP connections – see page 655*




Integrated pipe masking set – see page 675




Available sizes:

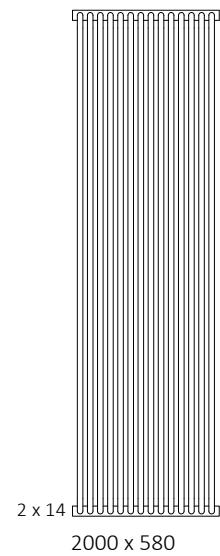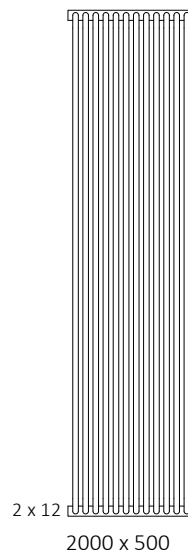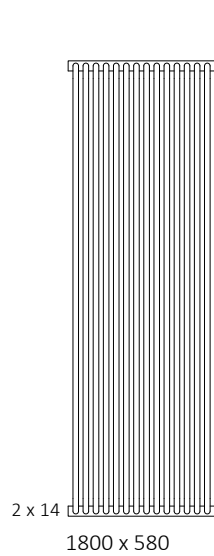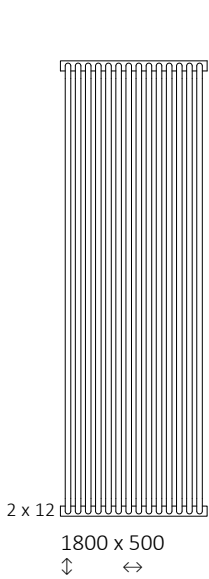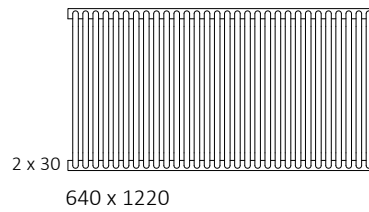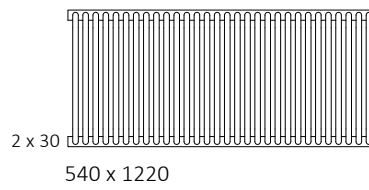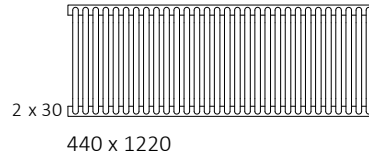


L6

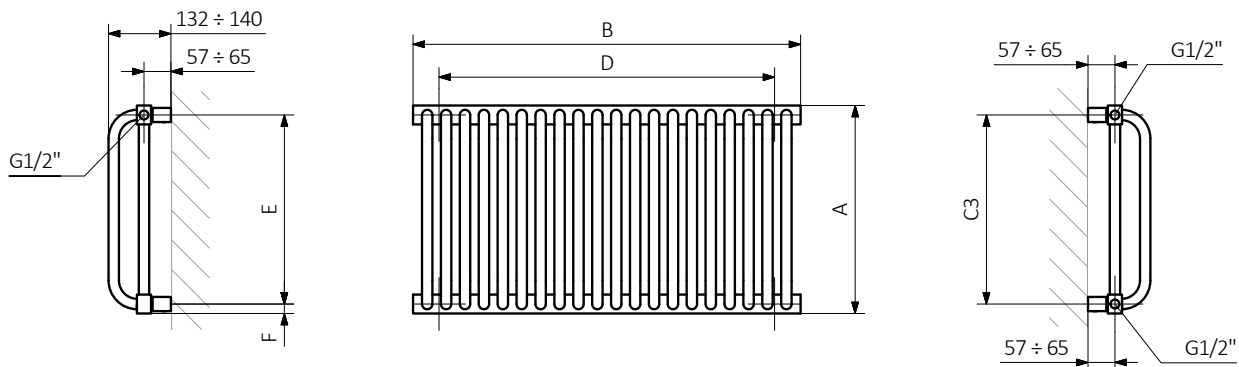


P3

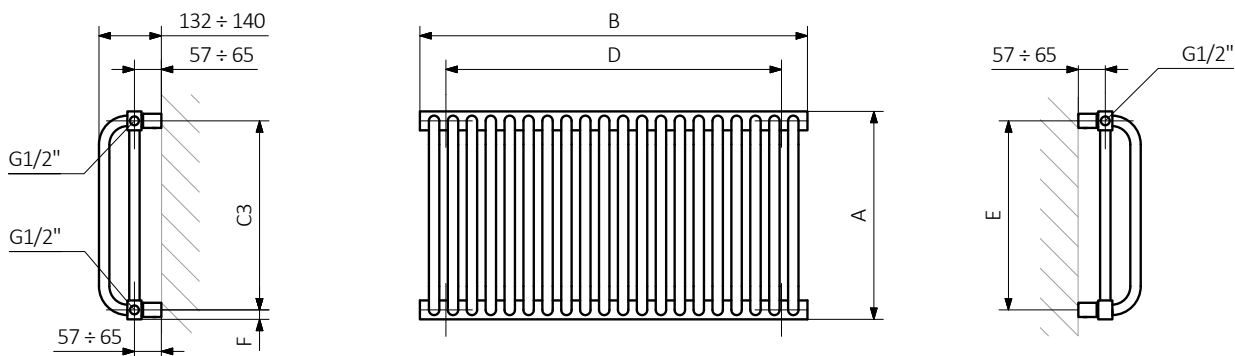

YL

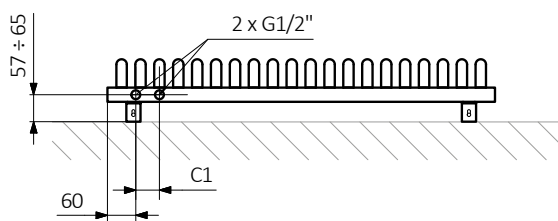


YP

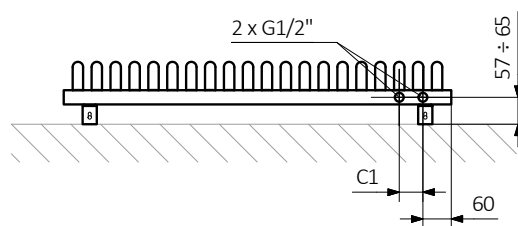


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:




Pipe:




VL

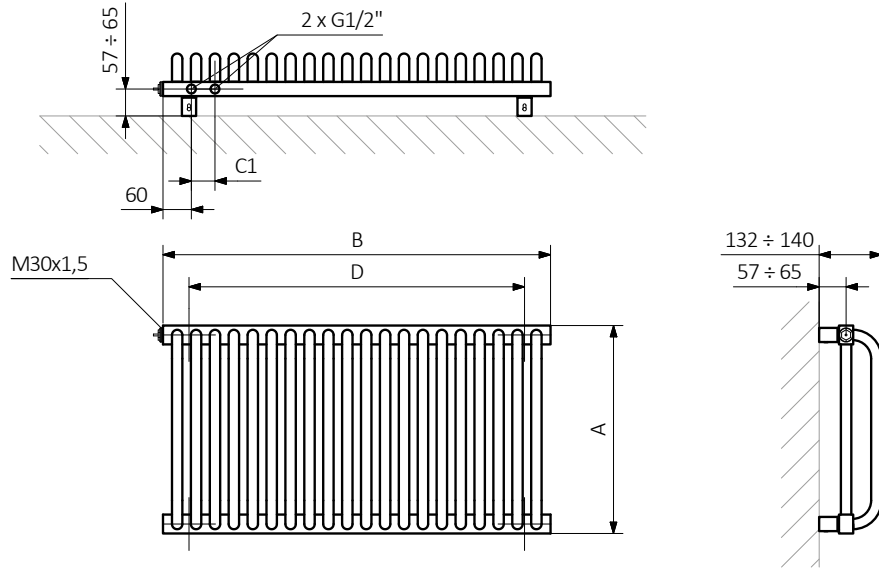

VP


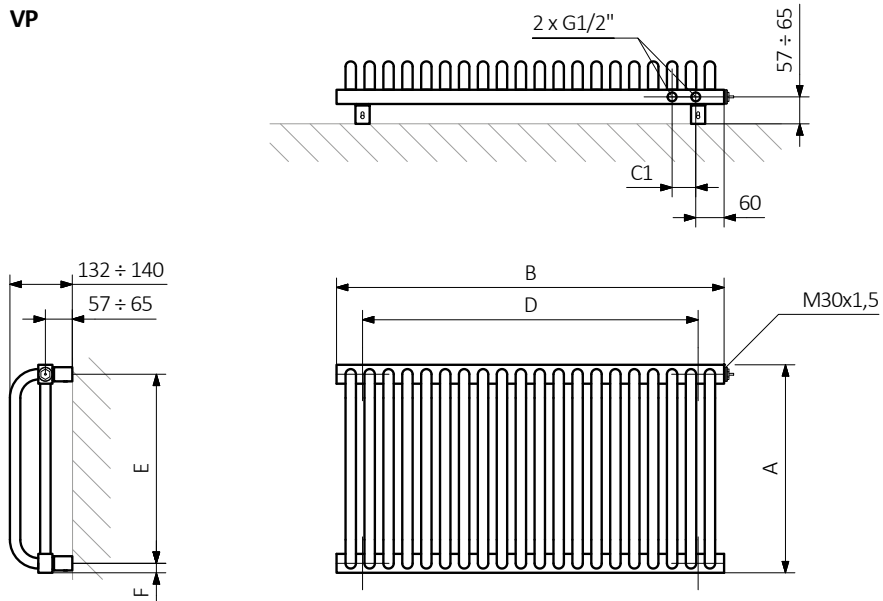


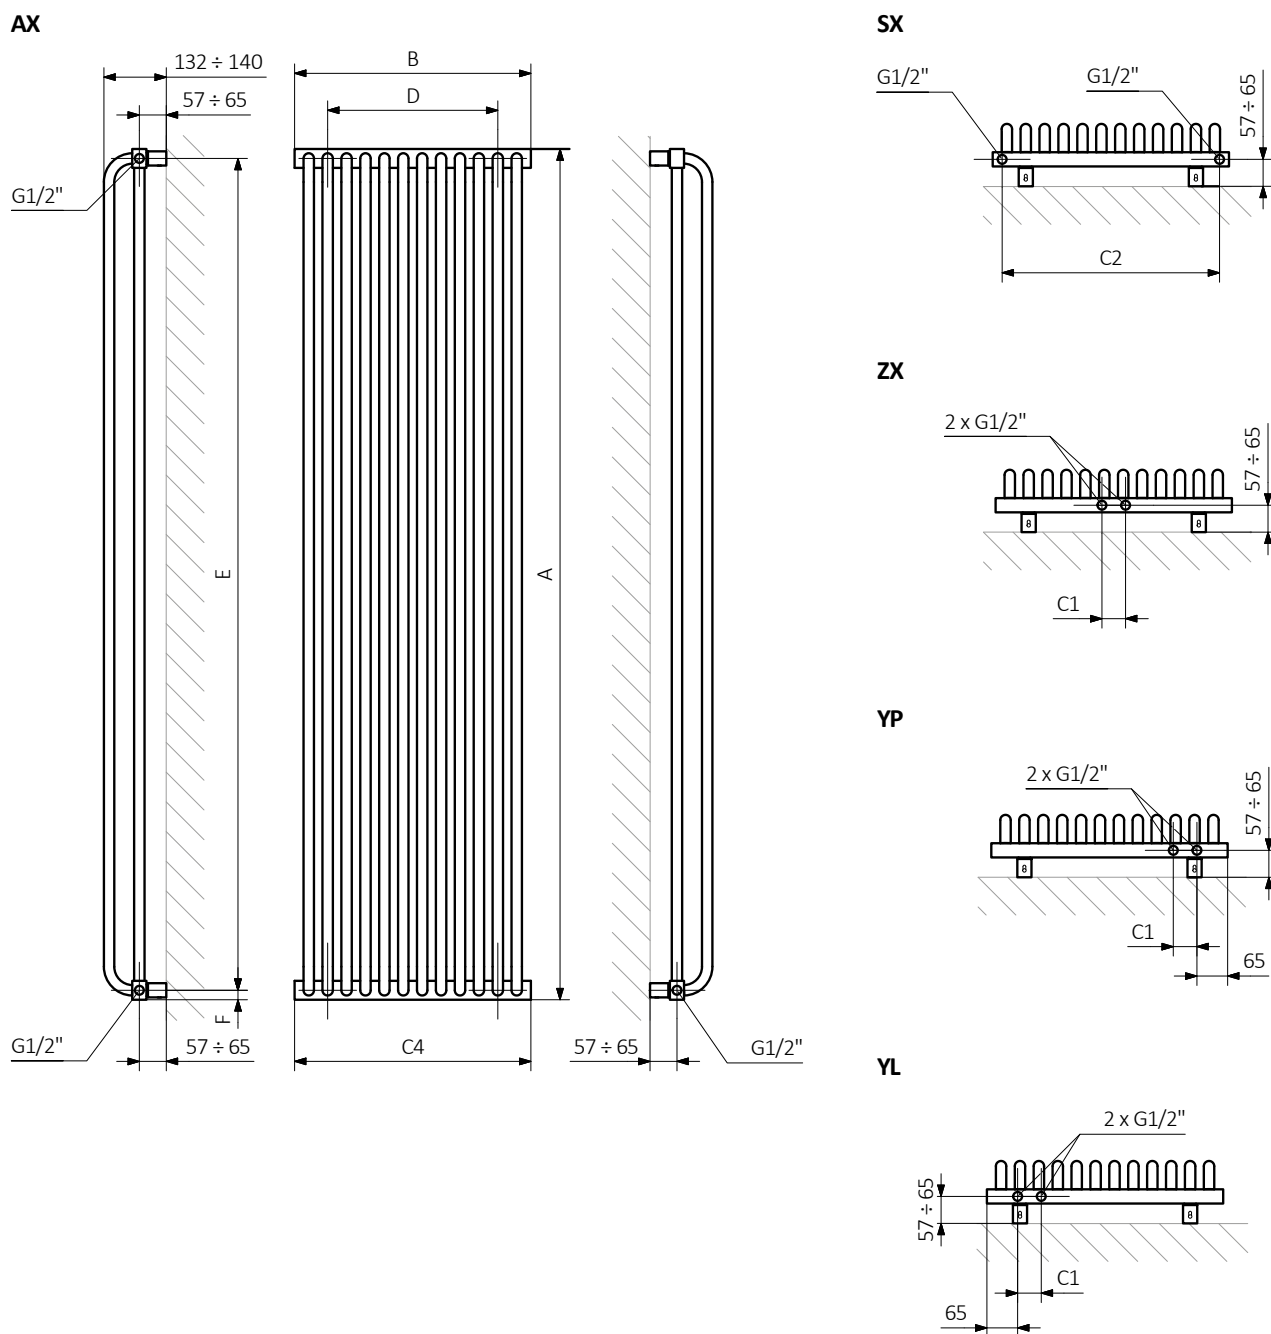


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:











Standard connections:

Optional connections:

Electric radiators: see page 599.



Available sizes:

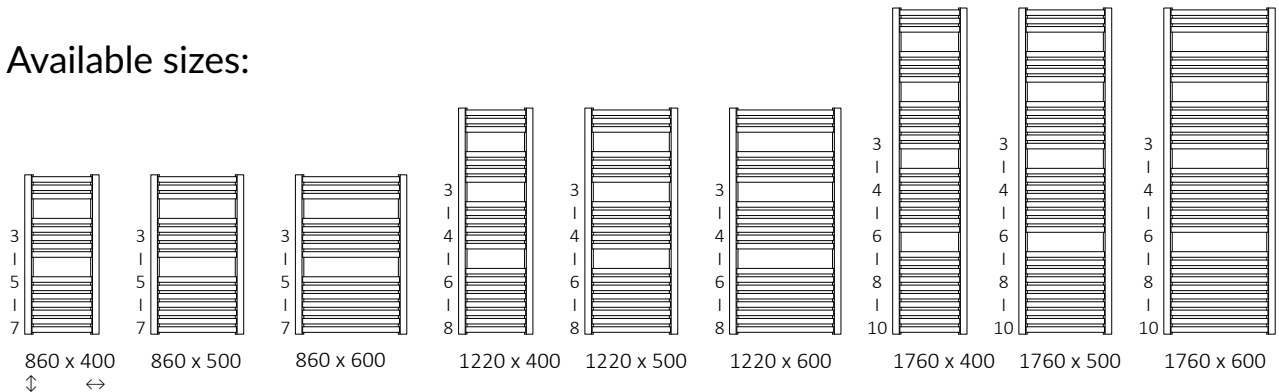

Specifications:

Working pressure: 800 kPa

Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm ²] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|------|-----------|-----------|-----------|--------------------|-------|--|
| Powder coating | | | | | | | | | | | | |
| 860 | 400 | 50 | 357 | 323 | 174 | 300 | 350 | 680 | 90 | 2,70 | 7,32 | WGDEX086040 |
| 860 | 500 | 50 | 457 | 394 | 212 | 400 | 450 | 680 | 90 | 2,99 | 8,65 | WGDEX086050 |
| 860 | 600 | 50 | 557 | 464 | 250 | 400 | 550 | 680 | 90 | 3,27 | 9,99 | WGDEX086060 |
| 1220 | 400 | 50 | 357 | 440 | 237 | 400 | 350 | 1040 | 90 | 3,82 | 10,24 | WGDEX122040 |
| 1220 | 500 | 50 | 457 | 541 | 291 | 600 | 450 | 1040 | 90 | 4,21 | 12,11 | WGDEX122050 |
| 1220 | 600 | 50 | 557 | 640 | 344 | 600 | 550 | 1040 | 90 | 4,61 | 13,97 | WGDEX122060 |
| 1760 | 400 | 50 | 357 | 618 | 332 | 600 | 350 | 1580 | 90 | 5,55 | 14,91 | WGDEX176040 |
| 1760 | 500 | 50 | 457 | 762 | 409 | 800 | 450 | 1580 | 90 | 6,14 | 17,67 | WGDEX176050 |
| 1760 | 600 | 50 | 557 | 906 | 487 | 1000 | 550 | 1580 | 90 | 6,72 | 20,42 | WGDEX176060 |
| Plated finishes | | | | | | | | | | | | |
| 860 | 400 | 50 | 357 | 225 | 117 | 200 | 350 | 680 | 90 | 2,70 | 7,07 | WGDEX086040 |
| 860 | 500 | 50 | 457 | 281 | 147 | 300 | 450 | 680 | 90 | 2,99 | 8,35 | WGDEX086050 |
| 860 | 600 | 50 | 557 | 337 | 176 | 400 | 550 | 680 | 90 | 3,27 | 9,64 | WGDEX086060 |
| 1220 | 400 | 50 | 357 | 298 | 155 | 300 | 350 | 1040 | 90 | 3,82 | 9,89 | WGDEX122040 |
| 1220 | 500 | 50 | 457 | 373 | 194 | 400 | 450 | 1040 | 90 | 4,21 | 11,69 | WGDEX122050 |
| 1220 | 600 | 50 | 557 | 448 | 233 | 400 | 550 | 1040 | 90 | 4,61 | 13,49 | WGDEX122060 |
| 1760 | 400 | 50 | 357 | 421 | 218 | 400 | 350 | 1580 | 90 | 5,55 | 14,40 | WGDEX176040 |
| 1760 | 500 | 50 | 457 | 526 | 273 | 600 | 450 | 1580 | 90 | 6,14 | 17,05 | WGDEX176050 |
| 1760 | 600 | 50 | 557 | 631 | 327 | 600 | 550 | 1580 | 90 | 6,72 | 19,71 | WGDEX176060 |


We recommend: Dexter thermostatic valve set for SX connection – see page 644

Pipe masking set – 70 mm – see page 673



ZIP H 10 hanger – see page 636




SX

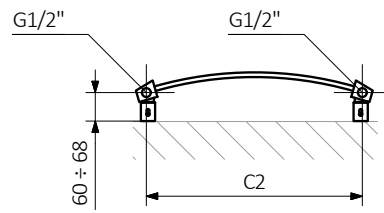

Z1

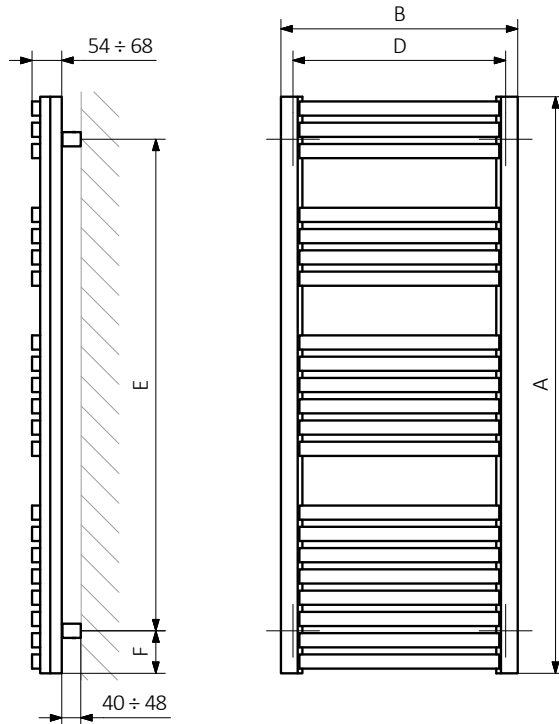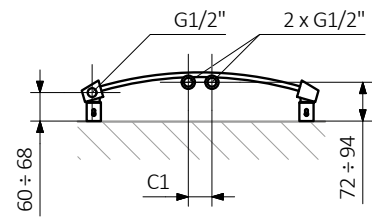



Z8

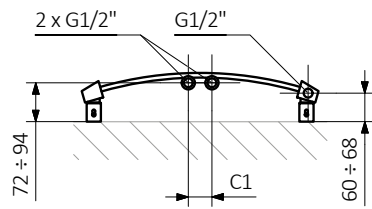

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:



Dexter One s. 94

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: Darek Berus, Daniel Dawidowski

Standard connections:

Electric radiators: see page 599.



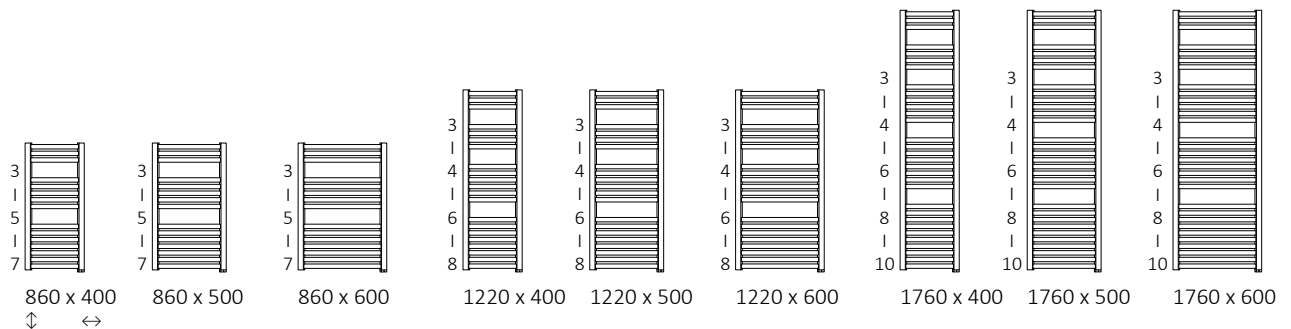


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | | |
| 860 | 400 | 323 | 174 | 300 | 350 | 720 | 70 | 2,61 | 7,32 | WZDEN086040 |
| 860 | 500 | 394 | 212 | 400 | 450 | 720 | 70 | 2,90 | 8,65 | WZDEN086050 |
| 860 | 600 | 464 | 250 | 400 | 550 | 720 | 70 | 3,18 | 9,99 | WZDEN086060 |
| 1220 | 400 | 440 | 237 | 400 | 350 | 1080 | 70 | 3,73 | 10,24 | WZDEN122040 |
| 1220 | 500 | 541 | 291 | 600 | 450 | 1080 | 70 | 4,12 | 12,11 | WZDEN122050 |
| 1220 | 600 | 640 | 344 | 600 | 550 | 1080 | 70 | 4,52 | 13,97 | WZDEN122060 |
| 1760 | 400 | 618 | 332 | 600 | 350 | 1620 | 70 | 5,46 | 14,91 | WZDEN176040 |
| 1760 | 500 | 762 | 409 | 800 | 450 | 1620 | 70 | 6,05 | 17,67 | WZDEN176050 |
| 1760 | 600 | 906 | 487 | 1000 | 550 | 1620 | 70 | 6,63 | 20,42 | WZDEN176060 |
| Plated finishes | | | | | | | | | | |
| 860 | 400 | 225 | 117 | 200 | 350 | 720 | 70 | 2,61 | 7,07 | WZDEN086040 |
| 860 | 500 | 281 | 147 | 300 | 450 | 720 | 70 | 2,90 | 8,35 | WZDEN086050 |
| 860 | 600 | 337 | 176 | 400 | 550 | 720 | 70 | 3,18 | 9,64 | WZDEN086060 |
| 1220 | 400 | 298 | 155 | 300 | 350 | 1080 | 70 | 3,73 | 9,89 | WZDEN122040 |
| 1220 | 500 | 373 | 194 | 400 | 450 | 1080 | 70 | 4,12 | 11,69 | WZDEN122050 |
| 1220 | 600 | 448 | 233 | 400 | 550 | 1080 | 70 | 4,52 | 13,49 | WZDEN122060 |
| 1760 | 400 | 421 | 218 | 400 | 350 | 1620 | 70 | 5,46 | 14,40 | WZDEN176040 |
| 1760 | 500 | 526 | 273 | 600 | 450 | 1620 | 70 | 6,05 | 17,05 | WZDEN176050 |
| 1760 | 600 | 631 | 327 | 600 | 550 | 1620 | 70 | 6,63 | 19,71 | WZDEN176060 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675




ZIP H 10 hanger – see page 636





S8

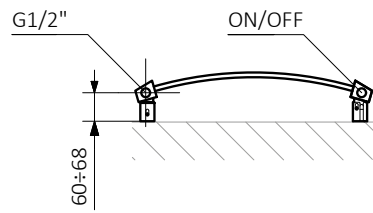

S1

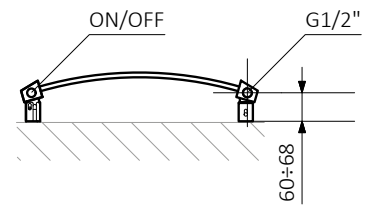


100÷108 (B=400)
107÷115 (B=600)
114÷122 (B=600)

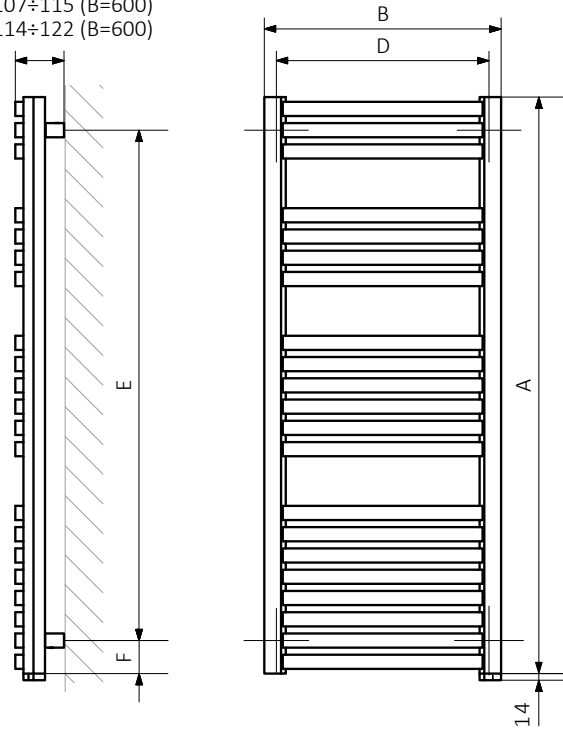


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Dexter Pro s. 98



design: Darek Berus, Daniel Dawidowski


Standard connections:



Optional connections:



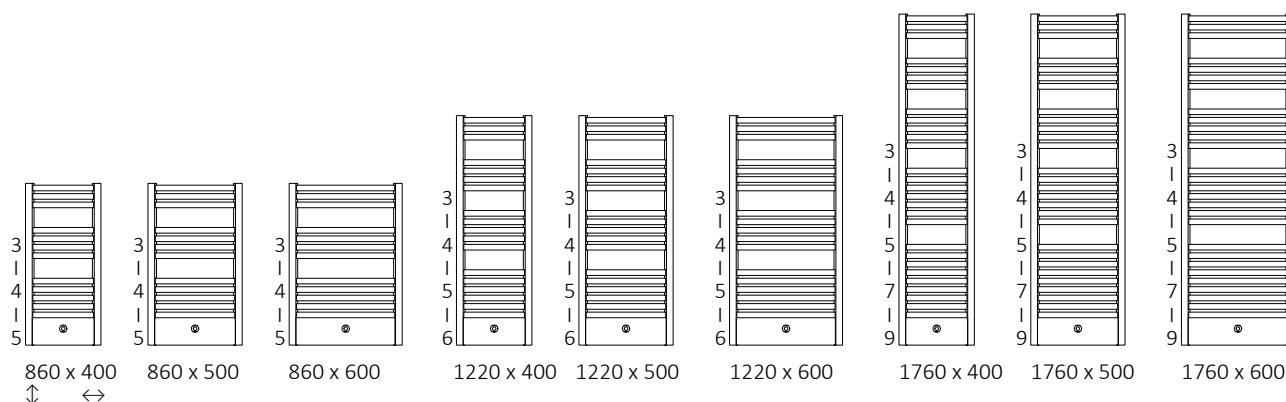


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| 860 | 400 | 50 | 326 | 173 | 300 | 350 | 680 | 90 | 2,64 | 7,68 | WGDEP086040 |
| 860 | 500 | 50 | 408 | 216 | 400 | 450 | 680 | 90 | 2,90 | 8,93 | WGDEP086050 |
| 860 | 600 | 50 | 488 | 259 | 600 | 550 | 680 | 90 | 3,17 | 10,17 | WGDEP086060 |
| 1220 | 400 | 50 | 429 | 232 | 400 | 350 | 1040 | 90 | 3,75 | 10,60 | WGDEP122040 |
| 1220 | 500 | 50 | 536 | 289 | 600 | 450 | 1040 | 90 | 4,13 | 12,38 | WGDEP122050 |
| 1220 | 600 | 50 | 645 | 348 | 600 | 550 | 1040 | 90 | 4,51 | 14,15 | WGDEP122060 |
| 1760 | 400 | 50 | 601 | 323 | 600 | 350 | 1580 | 90 | 5,49 | 15,27 | WGDEP176040 |
| 1760 | 500 | 50 | 751 | 403 | 800 | 450 | 1580 | 90 | 6,05 | 17,94 | WGDEP176050 |
| 1760 | 600 | 50 | 900 | 483 | 1000 | 550 | 1580 | 90 | 6,62 | 20,60 | WGDEP176060 |

Included components: The radiator is sold with two angled lockshield valves with female thread and NOBLE thermostatic (white and silver for corresponding colours and chrome for all others).




We recommend: REG 2 heating element – see page 716 ZIP H 10 hanger – see page 636



ZX

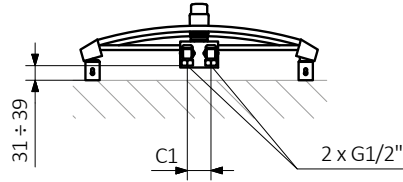



Z8

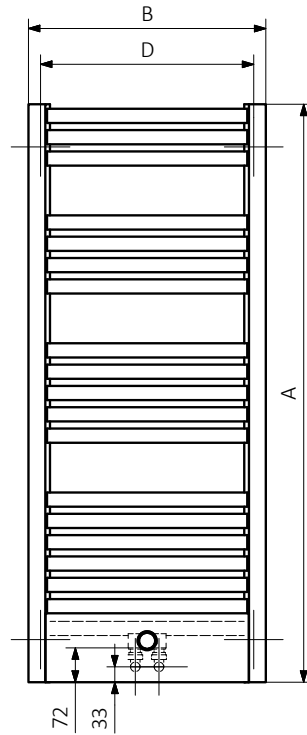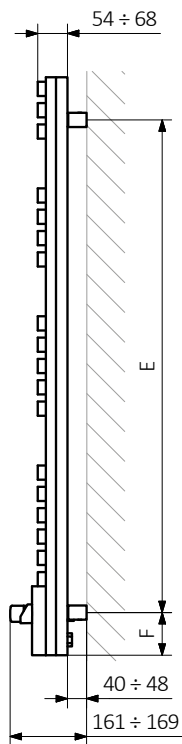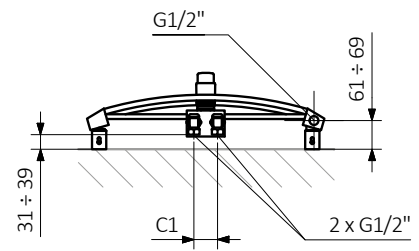

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:




Dexter Pro One s. 98

The radiator has a built-in ONE heating element. Functions of the ONE heating element: see page 724.




design: Darek Berus, Daniel Dawidowski

Standard connections:



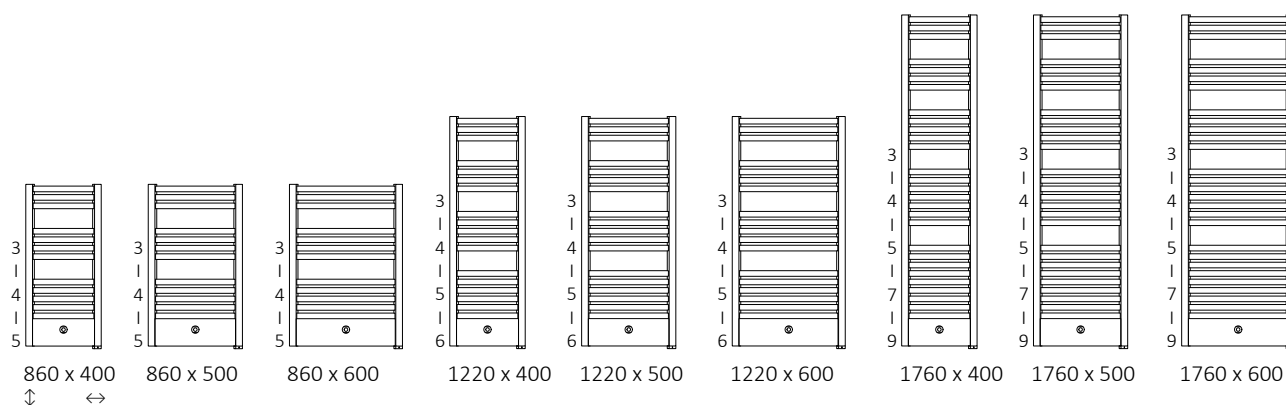


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 82°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|--|---|--|
| 860 | 400 | 50 | 326 | 173 | 300 | 350 | 720 | 70 | 2,55 | 7,68 | WZDPN086040 |
| 860 | 500 | 50 | 408 | 216 | 400 | 450 | 720 | 70 | 2,81 | 8,93 | WZDPN086050 |
| 860 | 600 | 50 | 488 | 259 | 600 | 550 | 720 | 70 | 3,08 | 10,17 | WZDPN086060 |
| 1220 | 400 | 50 | 429 | 232 | 400 | 350 | 1080 | 70 | 3,66 | 10,60 | WZDPN122040 |
| 1220 | 500 | 50 | 536 | 289 | 600 | 450 | 1080 | 70 | 4,04 | 12,38 | WZDPN122050 |
| 1220 | 600 | 50 | 645 | 348 | 600 | 550 | 1080 | 70 | 4,42 | 14,15 | WZDPN122060 |
| 1760 | 400 | 50 | 601 | 323 | 600 | 350 | 1620 | 70 | 5,40 | 15,27 | WZDPN176040 |
| 1760 | 500 | 50 | 751 | 403 | 800 | 450 | 1620 | 70 | 5,96 | 17,94 | WZDPN176050 |
| 1760 | 600 | 50 | 900 | 483 | 1000 | 550 | 1620 | 70 | 6,53 | 20,60 | WZDPN176060 |

Included components: The radiator is sold with two angled lockshield valves with female thread and NOBLE thermostatic (white and silver for corresponding colours and chrome for all others).


We recommend: ZIP H 10 hanger
 – see page 636






Z8

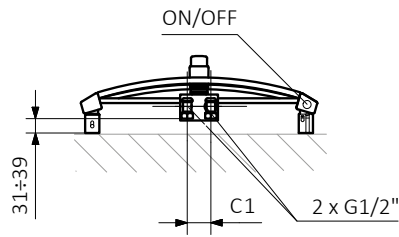

Z1

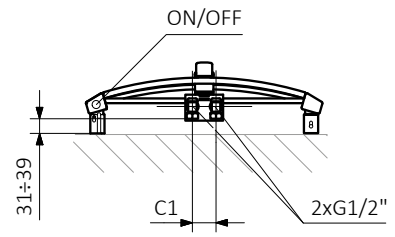


100÷108 (B=400)
 107÷115 (B=500)
 114÷122 (B=600)

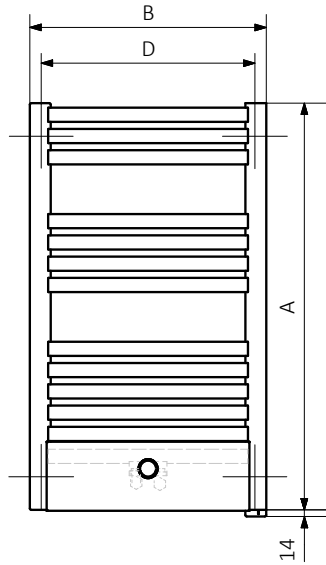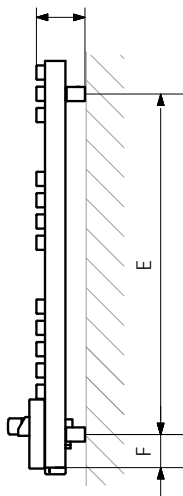

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:




Diamond s. 100




 Colour included in the price

design: Darek Berus


Standard connections:



Electric radiators: see page 599.



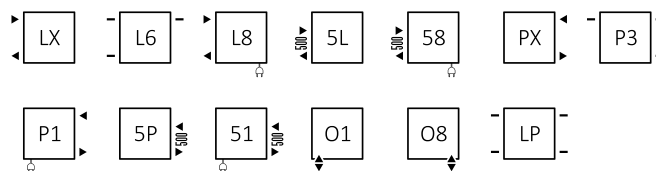


Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| Powder coating | | | | | | | | | | | | |
| 880 | 400 | 50 | 360 | 270 | 146 | 300 | 360 | 720 | 80 | 2,58 | 5,51 | WGDIM088040 |
| 880 | 500 | 50 | 460 | 320 | 174 | 300 | 460 | 720 | 80 | 2,97 | 6,40 | WGDIM088050 |
| 880 | 600 | 50 | 560 | 367 | 199 | 400 | 560 | 720 | 80 | 3,36 | 7,29 | WGDIM088060 |
| 1120 | 400 | 50 | 360 | 340 | 184 | 300 | 360 | 960 | 80 | 3,26 | 6,87 | WGDIM112040 |
| 1120 | 500 | 50 | 460 | 400 | 217 | 400 | 460 | 960 | 80 | 3,74 | 7,99 | WGDIM112050 |
| 1120 | 600 | 50 | 560 | 461 | 249 | 400 | 560 | 960 | 80 | 4,22 | 9,10 | WGDIM112060 |
| 1360 | 400 | 50 | 360 | 410 | 221 | 400 | 360 | 1200 | 80 | 3,93 | 8,25 | WGDIM136040 |
| 1360 | 500 | 50 | 460 | 484 | 261 | 400 | 460 | 1200 | 80 | 4,51 | 9,59 | WGDIM136050 |
| 1360 | 600 | 50 | 560 | 554 | 299 | 600 | 560 | 1200 | 80 | 5,09 | 10,91 | WGDIM136060 |
| 1600 | 400 | 50 | 360 | 480 | 259 | 400 | 360 | 1440 | 80 | 4,61 | 9,62 | WGDIM160040 |
| 1600 | 500 | 50 | 460 | 563 | 304 | 600 | 460 | 1440 | 80 | 5,28 | 11,18 | WGDIM160050 |
| 1600 | 600 | 50 | 560 | 647 | 349 | 600 | 560 | 1440 | 80 | 5,96 | 12,74 | WGDIM160060 |
| Plated finishes | | | | | | | | | | | | |
| 880 | 400 | 50 | 360 | 189 | 102 | 200 | 360 | 720 | 80 | 2,58 | 5,33 | WGDIM088040 |
| 880 | 500 | 50 | 460 | 224 | 122 | 200 | 460 | 720 | 80 | 2,97 | 6,19 | WGDIM088050 |
| 880 | 600 | 50 | 560 | 257 | 139 | 300 | 560 | 720 | 80 | 3,36 | 7,05 | WGDIM088060 |
| 1120 | 400 | 50 | 360 | 238 | 129 | 200 | 360 | 960 | 80 | 3,26 | 6,65 | WGDIM112040 |
| 1120 | 500 | 50 | 460 | 280 | 152 | 300 | 460 | 960 | 80 | 3,74 | 7,73 | WGDIM112050 |
| 1120 | 600 | 50 | 560 | 323 | 174 | 300 | 560 | 960 | 80 | 4,22 | 8,80 | WGDIM112060 |
| 1360 | 400 | 50 | 360 | 287 | 155 | 300 | 360 | 1200 | 80 | 3,93 | 7,98 | WGDIM136040 |
| 1360 | 500 | 50 | 460 | 339 | 183 | 300 | 460 | 1200 | 80 | 4,51 | 9,27 | WGDIM136050 |
| 1360 | 600 | 50 | 560 | 388 | 209 | 400 | 560 | 1200 | 80 | 5,09 | 10,55 | WGDIM136060 |
| 1600 | 400 | 50 | 360 | 336 | 181 | 300 | 360 | 1440 | 80 | 4,61 | 9,30 | WGDIM160040 |
| 1600 | 500 | 50 | 460 | 394 | 213 | 400 | 460 | 1440 | 80 | 5,28 | 10,81 | WGDIM160050 |
| 1600 | 600 | 50 | 560 | 453 | 244 | 400 | 560 | 1440 | 80 | 5,96 | 12,31 | WGDIM160060 |


We recommend: 3-axis thermostatic valve for SX connection – see page 648

Pipe masking set – 70 mm – see page 673


Spark hanger – see page 635




Available sizes:




6
880 x 400
⇕ ⇔




6
880 x 500




6
880 x 600




8
1120 x 400




8
1120 x 500




8
1120 x 600




10
1360 x 400
⇕ ⇔

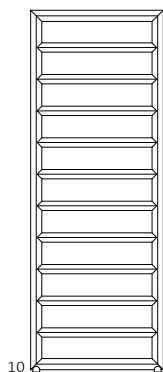


10
1360 x 500

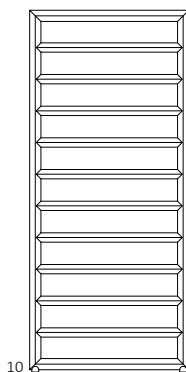


10
1360 x 600



12
1600 x 400

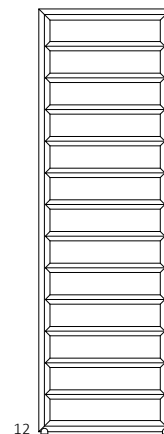


12
1600 x 500


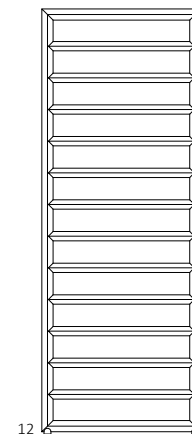


12
1600 x 600


SX

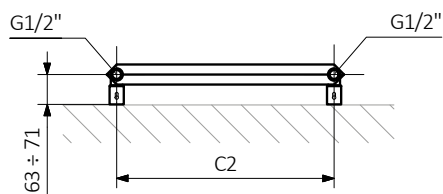


ZX

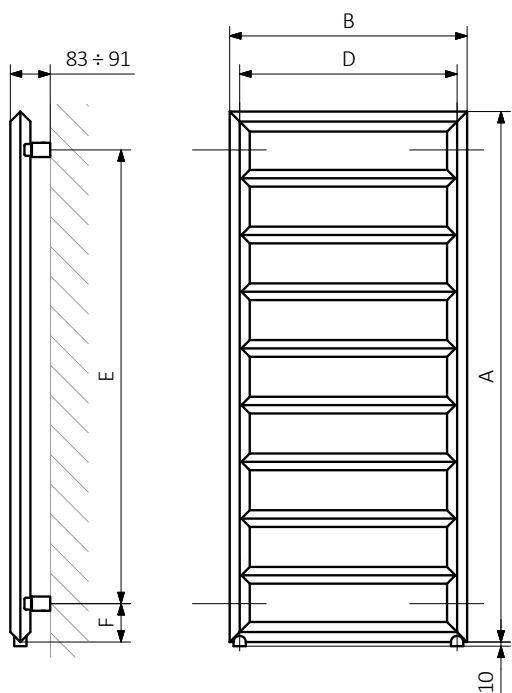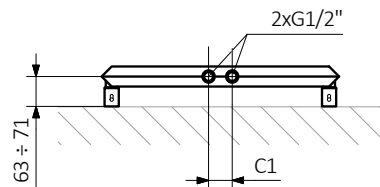

Z1

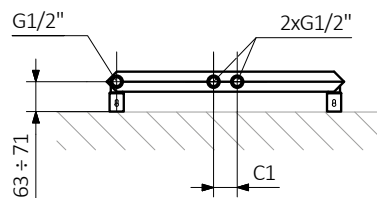


Z8

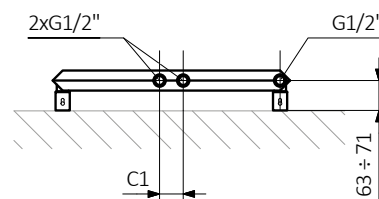



A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:








Standard connections:

Optional connections:

Electric radiators: see page 599.



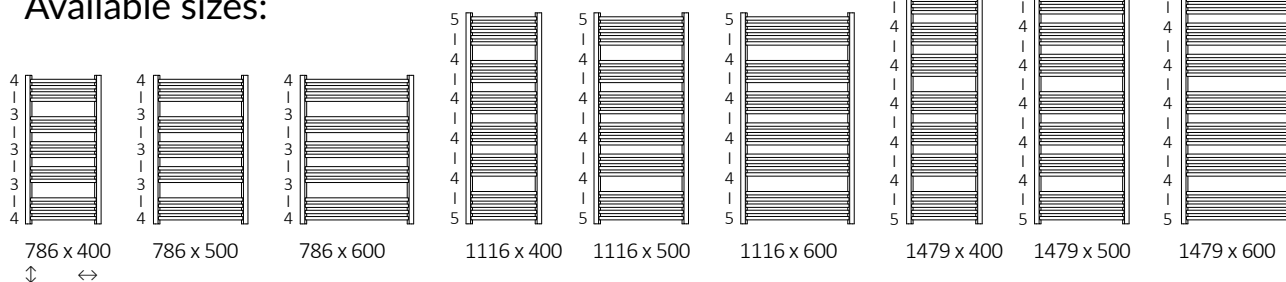


Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| Powder coating | | | | | | | | | | | |
| 786 | 400 | 370 | 296 | 161 | 300 | 240 | 626 | 80 | 2,13 | 4,77 | WGDOM078040 |
| 786 | 500 | 470 | 369 | 199 | 400 | 340 | 626 | 80 | 2,54 | 5,69 | WGDOM078050 |
| 786 | 600 | 570 | 435 | 235 | 400 | 440 | 626 | 80 | 2,86 | 6,61 | WGDOM078060 |
| 1116 | 400 | 370 | 413 | 222 | 400 | 240 | 956 | 80 | 3,27 | 7,09 | WGDOM111040 |
| 1116 | 500 | 470 | 513 | 274 | 600 | 340 | 956 | 80 | 3,76 | 8,49 | WGDOM111050 |
| 1116 | 600 | 570 | 620 | 331 | 600 | 440 | 956 | 80 | 4,25 | 9,89 | WGDOM111060 |
| 1479 | 400 | 370 | 533 | 284 | 600 | 240 | 1319 | 80 | 4,31 | 9,28 | WGDOM147040 |
| 1479 | 500 | 470 | 663 | 346 | 600 | 340 | 1319 | 80 | 4,95 | 11,12 | WGDOM147050 |
| 1479 | 600 | 570 | 800 | 425 | 800 | 440 | 1319 | 80 | 5,59 | 12,95 | WGDOM147060 |
| Plated finishes | | | | | | | | | | | |
| 786 | 400 | 370 | 207 | 106 | 200 | 240 | 626 | 80 | 2,13 | 4,58 | WGDOM078040 |
| 786 | 500 | 470 | 258 | 132 | 300 | 340 | 626 | 80 | 2,54 | 5,45 | WGDOM078050 |
| 786 | 600 | 570 | 305 | 155 | 300 | 440 | 626 | 80 | 2,86 | 6,33 | WGDOM078060 |
| 1116 | 400 | 370 | 289 | 147 | 300 | 240 | 956 | 80 | 3,27 | 6,79 | WGDOM111040 |
| 1116 | 500 | 470 | 359 | 183 | 400 | 340 | 956 | 80 | 3,76 | 8,14 | WGDOM111050 |
| 1116 | 600 | 570 | 434 | 221 | 400 | 440 | 956 | 80 | 4,25 | 9,48 | WGDOM111060 |
| 1479 | 400 | 370 | 373 | 190 | 400 | 240 | 1319 | 80 | 4,31 | 8,90 | WGDOM147040 |
| 1479 | 500 | 470 | 464 | 237 | 400 | 340 | 1319 | 80 | 4,95 | 10,66 | WGDOM147050 |
| 1479 | 600 | 570 | 560 | 286 | 600 | 440 | 1319 | 80 | 5,59 | 12,42 | WGDOM147060 |

We recommend: 3-axis thermostatic valve and lockshield integrated with T-piece set for SX connection – see page 651



Pipe masking set – 70 mm – see page 673





REG 3 heating element – see page 714



Yo! hanger – see page 636




SX

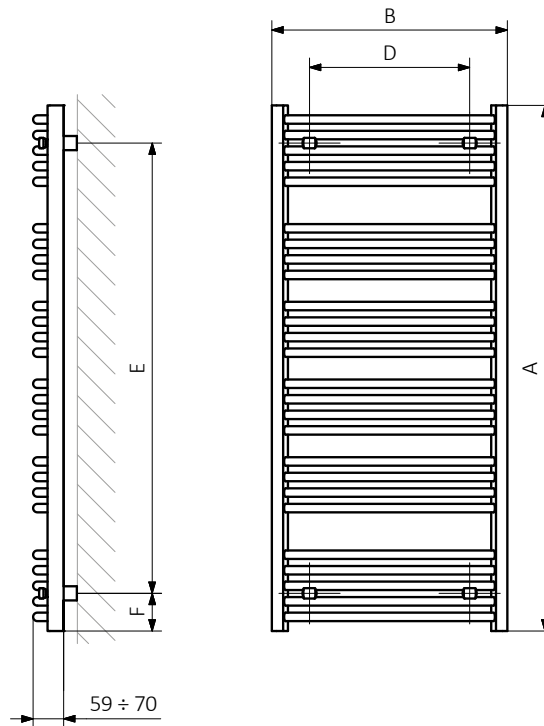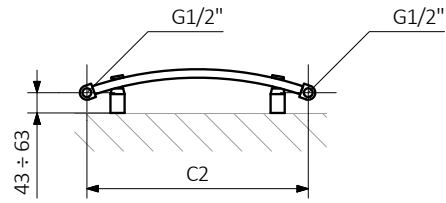


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:







Standard connections:




Electric radiators: see page 599.



Optional connections:



Available sizes:

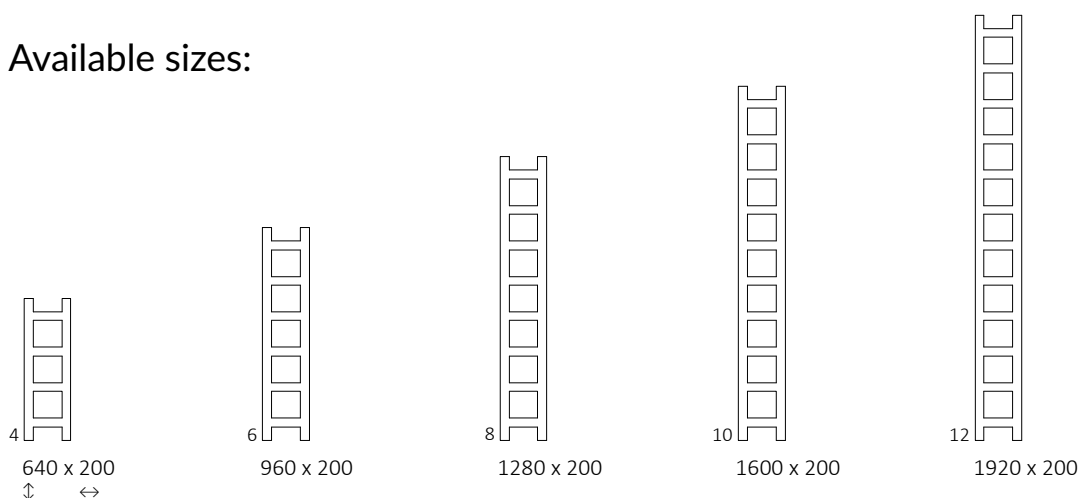

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|-----|-----------|-----------|-----------|-------|------|--|
| Powder coating | | | | | | | | | | | |
| 640 | 200 | 160 | 124 | 68 | 120 | 160 | 320 | 160 | 1,76 | 3,01 | WGEAS064020 |
| 960 | 200 | 160 | 187 | 102 | 200 | 160 | 640 | 160 | 2,64 | 4,40 | WGEAS096020 |
| 1280 | 200 | 160 | 251 | 136 | 300 | 160 | 960 | 160 | 3,52 | 5,78 | WGEAS128020 |
| 1600 | 200 | 160 | 314 | 170 | 300 | 160 | 1280 | 160 | 4,40 | 7,17 | WGEAS160020 |
| 1920 | 200 | 160 | 378 | 204 | 400 | 160 | 1600 | 160 | 5,27 | 8,55 | WGEAS192020 |
| Plated finishes | | | | | | | | | | | |
| 640 | 200 | 160 | 87 | 44 | 120 | 160 | 320 | 160 | 1,76 | 2,92 | WGEAS064020 |
| 960 | 200 | 160 | 131 | 67 | 120 | 160 | 640 | 160 | 2,64 | 4,26 | WGEAS096020 |
| 1280 | 200 | 160 | 176 | 90 | 200 | 160 | 960 | 160 | 3,52 | 5,60 | WGEAS128020 |
| 1600 | 200 | 160 | 220 | 112 | 200 | 160 | 1280 | 160 | 4,40 | 6,94 | WGEAS160020 |

We recommend: KTX 4 heating element
– see page 692




ZIP V 30 hanger
– see page 637



EASY shelf –
see page 631




SX

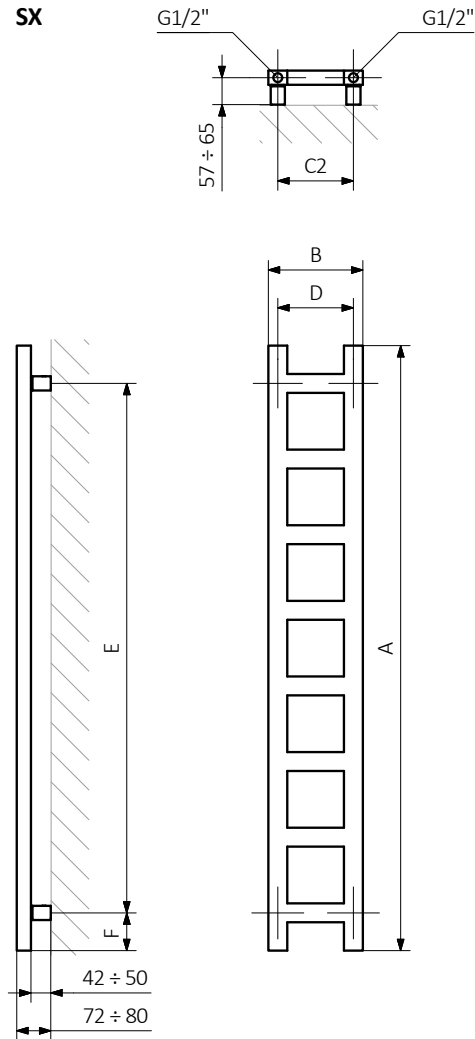


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




Easy One s. 106

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:



Electric radiators: see page 599.



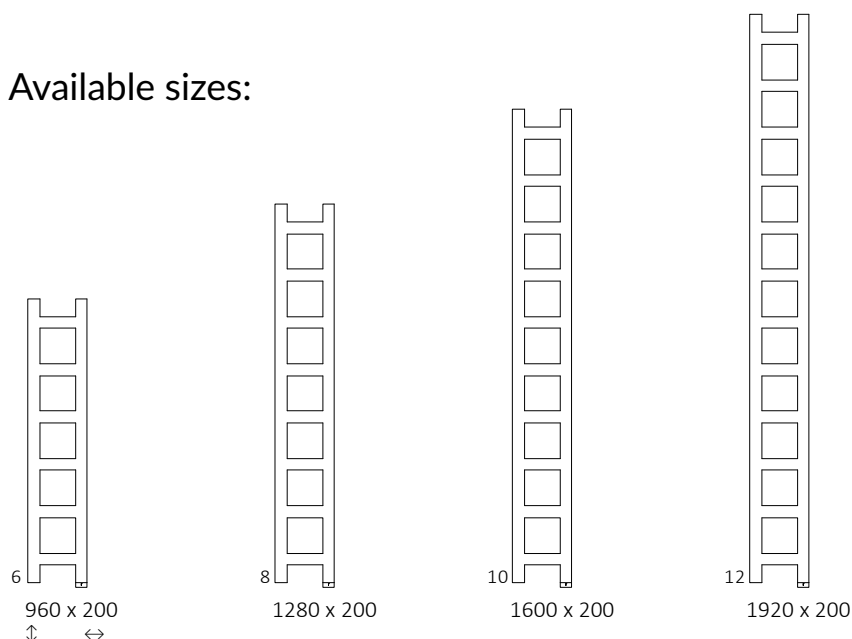


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | | |
| 960 | 200 | 187 | 102 | 200 | 160 | 800 | 80 | 2,53 | 4,40 | WZEAN096020 |
| 1280 | 200 | 251 | 136 | 300 | 160 | 1120 | 80 | 3,41 | 5,78 | WZEAN128020 |
| 1600 | 200 | 314 | 170 | 300 | 160 | 1440 | 80 | 4,29 | 7,17 | WZEAN160020 |
| 1920 | 200 | 378 | 204 | 400 | 160 | 1760 | 80 | 5,16 | 8,55 | WZEAN192020 |
| Plated finishes | | | | | | | | | | |
| 960 | 200 | 131 | 67 | 120 | 160 | 800 | 80 | 2,53 | 4,26 | WZEAN096020 |
| 1280 | 200 | 176 | 90 | 200 | 160 | 1120 | 80 | 3,41 | 5,60 | WZEAN128020 |
| 1600 | 200 | 220 | 112 | 200 | 160 | 1440 | 80 | 4,29 | 6,94 | WZEAN160020 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654







Integrated pipe masking set – see page 675



ZIP V 30 hanger – see page 637




EASY shelf – see page 631

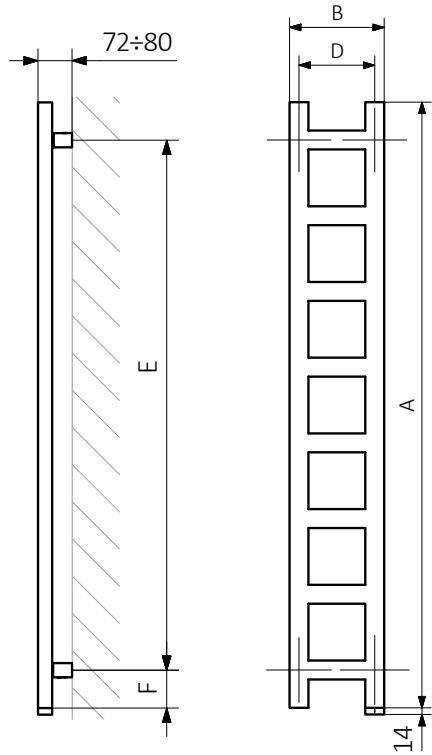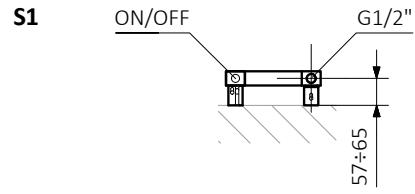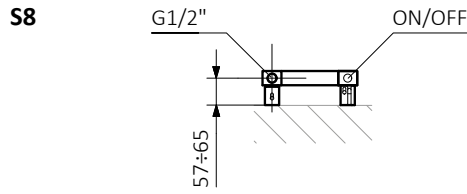

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Pipe:



Easy DW s. 110

   Colour included in the price

design: *Terma*


Standard connections:



Electric radiators: see page 599.



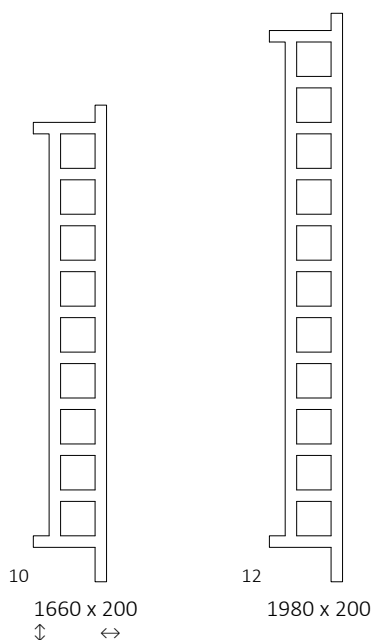


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|-------------------|-------------------|---|-----------|-----------|---|--|--|
| 1660 | 200 | 314 | 170 | 300 | 1440 | 21 | 4,40 | 7,17 | WGEGAW166020 |
| 1980 | 200 | 378 | 204 | 400 | 1760 | 21 | 5,27 | 8,55 | WGEGAW198020 |

We recommend: set of integrated thermostatic valves with immersion tube for O1 connection – see page 654




Integrated pipe masking set – see page 675




ZIP V 30 hanger – see page 637



Ablage Easy – see page 631




O1

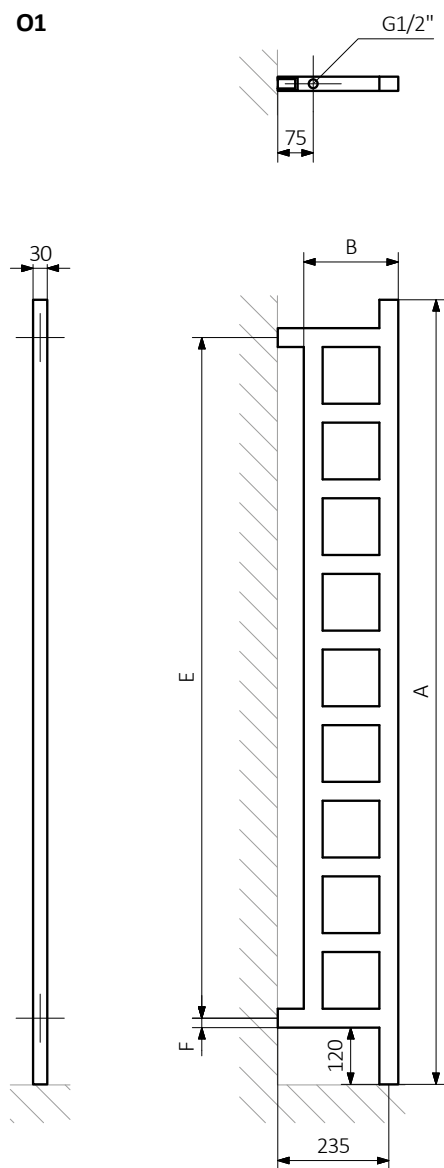

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:





Standard connections:



Electric radiators: see page 599.






Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-----------------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| Powder coating | | | | | | | | | | | |
| 660 | 400 | 370 | 241 | 128 | 300 | 370 | 480 | 90 | 2,18 | 4,48 | WGFIN066040 |
| 660 | 430 | 400 | 255 | 136 | 300 | 400 | 480 | 90 | 2,29 | 4,72 | WGFIN066043 |
| 660 | 480 | 450 | 280 | 149 | 300 | 450 | 480 | 90 | 2,46 | 5,12 | WGFIN066048 |
| 660 | 500 | 470 | 289 | 154 | 300 | 470 | 480 | 90 | 2,54 | 5,27 | WGFIN066050 |
| 660 | 530 | 500 | 304 | 162 | 300 | 500 | 480 | 90 | 2,64 | 5,52 | WGFIN066053 |
| 660 | 580 | 550 | 327 | 175 | 300 | 550 | 480 | 90 | 2,82 | 5,92 | WGFIN066058 |
| 660 | 600 | 570 | 336 | 180 | 400 | 570 | 480 | 90 | 2,89 | 6,08 | WGFIN066060 |
| 660 | 630 | 600 | 350 | 188 | 400 | 600 | 480 | 90 | 3,00 | 6,32 | WGFIN066063 |
| 660 | 680 | 650 | 373 | 200 | 400 | 650 | 480 | 90 | 3,18 | 6,76 | WGFIN066068 |
| 900 | 400 | 370 | 322 | 172 | 300 | 370 | 720 | 90 | 2,93 | 6,00 | WGFIN090040 |
| 900 | 430 | 400 | 342 | 182 | 400 | 400 | 720 | 90 | 3,08 | 6,32 | WGFIN090043 |
| 900 | 480 | 450 | 375 | 200 | 400 | 450 | 720 | 90 | 3,32 | 6,85 | WGFIN090048 |
| 900 | 500 | 470 | 388 | 206 | 400 | 470 | 720 | 90 | 3,41 | 7,06 | WGFIN090050 |
| 900 | 530 | 500 | 407 | 217 | 400 | 500 | 720 | 90 | 3,55 | 7,39 | WGFIN090053 |
| 900 | 580 | 550 | 438 | 234 | 400 | 550 | 720 | 90 | 3,79 | 7,92 | WGFIN090058 |
| 900 | 600 | 570 | 451 | 241 | 400 | 570 | 720 | 90 | 3,89 | 8,14 | WGFIN090060 |
| 900 | 630 | 600 | 469 | 251 | 400 | 600 | 720 | 90 | 4,03 | 8,46 | WGFIN090063 |
| 900 | 680 | 650 | 500 | 267 | 600 | 650 | 720 | 90 | 4,27 | 8,95 | WGFIN090068 |
| 1140 | 400 | 370 | 405 | 216 | 400 | 370 | 960 | 90 | 3,69 | 7,52 | WGFIN114040 |
| 1140 | 430 | 400 | 430 | 228 | 400 | 400 | 960 | 90 | 3,87 | 7,92 | WGFIN114043 |
| 1140 | 480 | 450 | 471 | 250 | 400 | 450 | 960 | 90 | 4,17 | 8,59 | WGFIN114048 |
| 1140 | 500 | 470 | 487 | 259 | 600 | 470 | 960 | 90 | 4,29 | 8,86 | WGFIN114050 |
| 1140 | 530 | 500 | 511 | 272 | 600 | 500 | 960 | 90 | 4,47 | 9,26 | WGFIN114053 |
| 1140 | 580 | 550 | 550 | 293 | 600 | 550 | 960 | 90 | 4,76 | 9,93 | WGFIN114058 |
| 1140 | 600 | 570 | 566 | 301 | 600 | 570 | 960 | 90 | 4,88 | 10,20 | WGFIN114060 |
| 1140 | 630 | 600 | 589 | 314 | 600 | 600 | 960 | 90 | 5,06 | 10,59 | WGFIN114063 |
| 1140 | 680 | 650 | 628 | 335 | 600 | 650 | 960 | 90 | 5,36 | 11,24 | WGFIN114068 |
| 1380 | 400 | 370 | 488 | 260 | 600 | 370 | 1200 | 90 | 4,44 | 9,04 | WGFIN138040 |

We recommend: 3-axis thermostatic valve and lockshield integrated with T-piece set for SX connection – see page 651



Pipe masking set – 70 mm – see page 673






Yo! hanger – see page 636




| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ⊕ [W] | D [mm] | E [mm] | F [mm] | H [dm ³] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|------------|--|
| 1380 | 430 | 400 | 518 | 275 | 600 | 400 | 1200 | 90 | 4,66 | 9,53 | WGFIN138043 |
| 1380 | 480 | 450 | 568 | 301 | 600 | 450 | 1200 | 90 | 5,02 | 10,33 | WGFIN138048 |
| 1380 | 500 | 470 | 587 | 311 | 600 | 470 | 1200 | 90 | 5,16 | 10,65 | WGFIN138050 |
| 1380 | 530 | 500 | 616 | 327 | 600 | 500 | 1200 | 90 | 5,38 | 11,13 | WGFIN138053 |
| 1380 | 580 | 550 | 664 | 352 | 600 | 550 | 1200 | 90 | 5,73 | 11,93 | WGFIN138058 |
| 1380 | 600 | 570 | 683 | 363 | 800 | 570 | 1200 | 90 | 5,88 | 12,25 | WGFIN138060 |
| 1380 | 630 | 600 | 711 | 378 | 800 | 600 | 1200 | 90 | 6,09 | 12,73 | WGFIN138063 |
| 1380 | 680 | 650 | 757 | 402 | 800 | 650 | 1200 | 90 | 6,45 | 13,53 | WGFIN138068 |
| 1620 | 400 | 370 | 573 | 304 | 600 | 370 | 1440 | 90 | 5,20 | 10,56 | WGFIN162040 |
| 1620 | 430 | 400 | 608 | 322 | 600 | 400 | 1440 | 90 | 5,45 | 11,13 | WGFIN162043 |
| 1620 | 480 | 450 | 666 | 353 | 600 | 450 | 1440 | 90 | 5,87 | 12,06 | WGFIN162048 |
| 1620 | 500 | 470 | 689 | 365 | 800 | 470 | 1440 | 90 | 6,04 | 12,44 | WGFIN162050 |
| 1620 | 530 | 500 | 723 | 383 | 800 | 500 | 1440 | 90 | 6,29 | 13,00 | WGFIN162053 |
| 1620 | 580 | 550 | 779 | 413 | 800 | 550 | 1440 | 90 | 6,70 | 13,93 | WGFIN162058 |
| 1620 | 600 | 570 | 801 | 424 | 800 | 570 | 1440 | 90 | 6,87 | 14,31 | WGFIN162060 |
| 1620 | 630 | 600 | 834 | 442 | 800 | 600 | 1440 | 90 | 7,12 | 14,87 | WGFIN162063 |
| 1620 | 680 | 650 | 889 | 471 | 1000 | 650 | 1440 | 90 | 7,54 | 15,82 | WGFIN162068 |
| 1860 | 400 | 370 | 660 | 350 | 600 | 370 | 1680 | 90 | 5,95 | 12,09 | WGFIN186040 |
| 1860 | 430 | 400 | 700 | 370 | 800 | 400 | 1680 | 90 | 6,24 | 12,73 | WGFIN186043 |
| 1860 | 480 | 450 | 767 | 405 | 800 | 450 | 1680 | 90 | 6,72 | 13,80 | WGFIN186048 |
| 1860 | 500 | 470 | 793 | 419 | 800 | 470 | 1680 | 90 | 6,91 | 14,23 | WGFIN186050 |
| 1860 | 530 | 500 | 832 | 440 | 800 | 500 | 1680 | 90 | 7,20 | 14,87 | WGFIN186053 |
| 1860 | 580 | 550 | 897 | 474 | 1000 | 550 | 1680 | 90 | 7,67 | 15,94 | WGFIN186058 |
| 1860 | 600 | 570 | 922 | 487 | 1000 | 570 | 1680 | 90 | 7,87 | 16,37 | WGFIN186060 |
| 1860 | 630 | 600 | 960 | 507 | 1000 | 600 | 1680 | 90 | 8,15 | 17,01 | WGFIN186063 |
| 1860 | 680 | 650 | 1023 | 541 | 1000 | 650 | 1680 | 90 | 8,63 | 18,11 | WGFIN186068 |


Plated finishes

| | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|----|------|------|-------------|
| 660 | 400 | 370 | 169 | 90 | 200 | 370 | 480 | 90 | 2,18 | 4,31 | WGFIN066040 |
| 660 | 430 | 400 | 179 | 95 | 200 | 400 | 480 | 90 | 2,29 | 4,54 | WGFIN066043 |
| 660 | 480 | 450 | 196 | 104 | 200 | 450 | 480 | 90 | 2,46 | 4,92 | WGFIN066048 |
| 660 | 500 | 470 | 202 | 108 | 200 | 470 | 480 | 90 | 2,54 | 5,07 | WGFIN066050 |
| 660 | 530 | 500 | 212 | 113 | 200 | 500 | 480 | 90 | 2,64 | 5,30 | WGFIN066053 |
| 660 | 580 | 550 | 229 | 123 | 200 | 550 | 480 | 90 | 2,82 | 5,69 | WGFIN066058 |
| 660 | 600 | 570 | 235 | 126 | 200 | 570 | 480 | 90 | 2,89 | 5,84 | WGFIN066060 |
| 660 | 630 | 600 | 245 | 132 | 300 | 600 | 480 | 90 | 3,00 | 6,07 | WGFIN066063 |
| 660 | 680 | 650 | 261 | 140 | 300 | 650 | 480 | 90 | 3,18 | 6,50 | WGFIN066068 |
| 900 | 400 | 370 | 225 | 120 | 200 | 370 | 720 | 90 | 2,93 | 5,77 | WGFIN090040 |
| 900 | 430 | 400 | 240 | 127 | 300 | 400 | 720 | 90 | 3,08 | 6,08 | WGFIN090043 |
| 900 | 480 | 450 | 262 | 140 | 300 | 450 | 720 | 90 | 3,32 | 6,59 | WGFIN090048 |
| 900 | 500 | 470 | 272 | 144 | 300 | 470 | 720 | 90 | 3,41 | 6,79 | WGFIN090050 |
| 900 | 530 | 500 | 285 | 152 | 300 | 500 | 720 | 90 | 3,55 | 7,10 | WGFIN090053 |

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| Plated finishes | | | | | | | | | | | |
| 900 | 580 | 550 | 307 | 164 | 300 | 550 | 720 | 90 | 3,79 | 7,61 | WGFIN090058 |
| 900 | 600 | 570 | 316 | 169 | 300 | 570 | 720 | 90 | 3,89 | 7,82 | WGFIN090060 |
| 900 | 630 | 600 | 329 | 176 | 300 | 600 | 720 | 90 | 4,03 | 8,13 | WGFIN090063 |
| 900 | 680 | 650 | 350 | 187 | 400 | 650 | 720 | 90 | 4,27 | 8,60 | WGFIN090068 |
| 1140 | 400 | 370 | 284 | 151 | 300 | 370 | 960 | 90 | 3,69 | 7,23 | WGFIN114040 |
| 1140 | 430 | 400 | 301 | 160 | 300 | 400 | 960 | 90 | 3,87 | 7,62 | WGFIN114043 |
| 1140 | 480 | 450 | 329 | 175 | 300 | 450 | 960 | 90 | 4,17 | 8,26 | WGFIN114048 |
| 1140 | 500 | 470 | 341 | 181 | 400 | 470 | 960 | 90 | 4,29 | 8,52 | WGFIN114050 |
| 1140 | 530 | 500 | 358 | 190 | 400 | 500 | 960 | 90 | 4,47 | 8,90 | WGFIN114053 |
| 1140 | 580 | 550 | 385 | 205 | 400 | 550 | 960 | 90 | 4,76 | 9,54 | WGFIN114058 |
| 1140 | 600 | 570 | 396 | 211 | 400 | 570 | 960 | 90 | 4,88 | 9,80 | WGFIN114060 |
| 1140 | 630 | 600 | 413 | 220 | 400 | 600 | 960 | 90 | 5,06 | 10,18 | WGFIN114063 |
| 1140 | 680 | 650 | 440 | 235 | 400 | 650 | 960 | 90 | 5,36 | 10,8 | WGFIN114068 |
| 1380 | 400 | 370 | 342 | 182 | 400 | 370 | 1200 | 90 | 4,44 | 8,70 | WGFIN138040 |
| 1380 | 430 | 400 | 363 | 193 | 400 | 400 | 1200 | 90 | 4,66 | 9,16 | WGFIN138043 |
| 1380 | 480 | 450 | 397 | 211 | 400 | 450 | 1200 | 90 | 5,02 | 9,93 | WGFIN138048 |
| 1380 | 500 | 470 | 411 | 218 | 400 | 470 | 1200 | 90 | 5,16 | 10,24 | WGFIN138050 |
| 1380 | 530 | 500 | 431 | 229 | 400 | 500 | 1200 | 90 | 5,38 | 10,70 | WGFIN138053 |
| 1380 | 580 | 550 | 465 | 246 | 400 | 550 | 1200 | 90 | 5,73 | 11,47 | WGFIN138058 |
| 1380 | 600 | 570 | 478 | 254 | 400 | 570 | 1200 | 90 | 5,88 | 11,77 | WGFIN138060 |
| 1380 | 630 | 600 | 498 | 265 | 600 | 600 | 1200 | 90 | 6,09 | 12,23 | WGFIN138063 |
| 1380 | 680 | 650 | 530 | 281 | 600 | 650 | 1200 | 90 | 6,45 | 13,00 | WGFIN138068 |
| 1620 | 400 | 370 | 401 | 213 | 400 | 370 | 1440 | 90 | 5,20 | 10,16 | WGFIN162040 |
| 1620 | 430 | 400 | 426 | 225 | 400 | 400 | 1440 | 90 | 5,45 | 10,70 | WGFIN162043 |
| 1620 | 480 | 450 | 466 | 247 | 400 | 450 | 1440 | 90 | 5,87 | 11,60 | WGFIN162048 |
| 1620 | 500 | 470 | 482 | 256 | 600 | 470 | 1440 | 90 | 6,04 | 11,96 | WGFIN162050 |
| 1620 | 530 | 500 | 506 | 268 | 600 | 500 | 1440 | 90 | 6,29 | 12,49 | WGFIN162053 |
| 1620 | 580 | 550 | 545 | 289 | 600 | 550 | 1440 | 90 | 6,70 | 13,39 | WGFIN162058 |
| 1620 | 600 | 570 | 561 | 297 | 600 | 570 | 1440 | 90 | 6,87 | 13,75 | WGFIN162060 |
| 1620 | 630 | 600 | 584 | 309 | 600 | 600 | 1440 | 90 | 7,12 | 14,29 | WGFIN162063 |
| 1620 | 680 | 650 | 622 | 330 | 600 | 650 | 1440 | 90 | 7,54 | 15,20 | WGFIN162068 |


Available sizes:

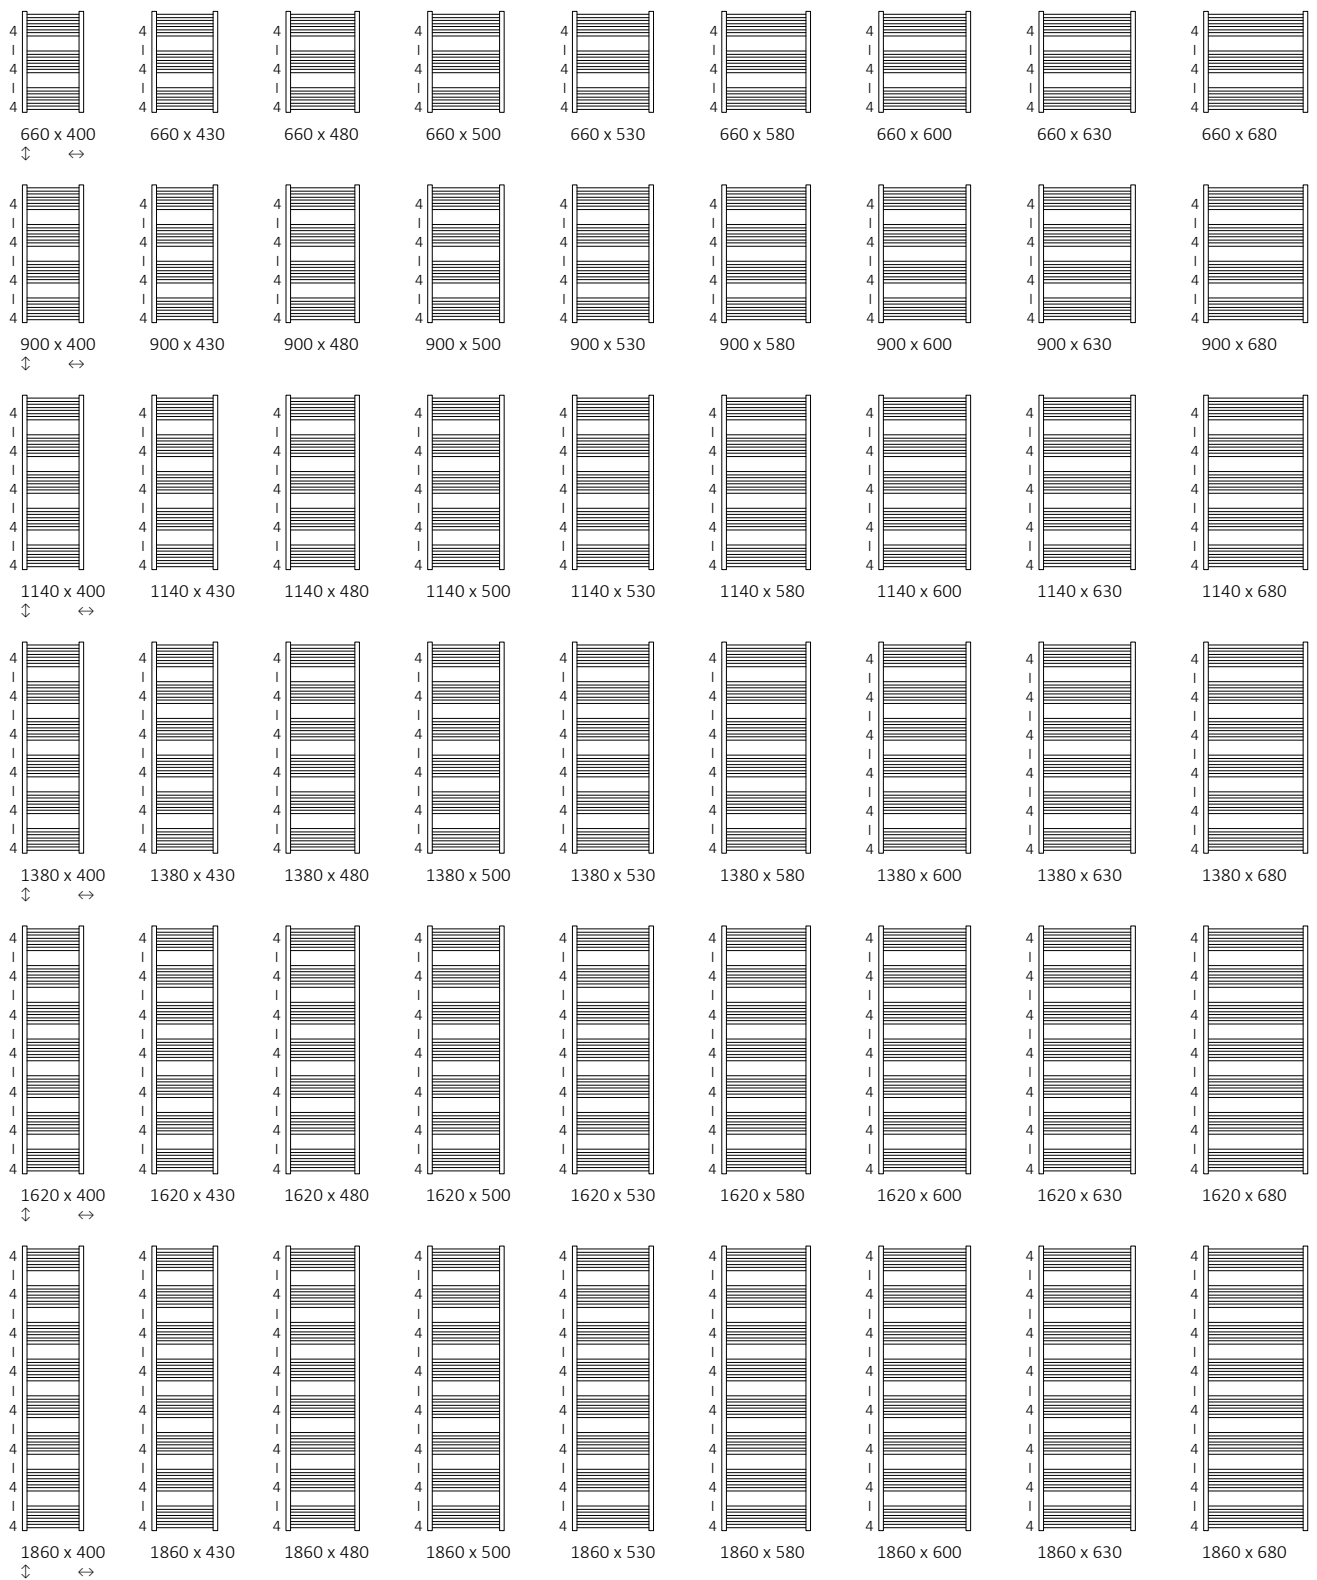

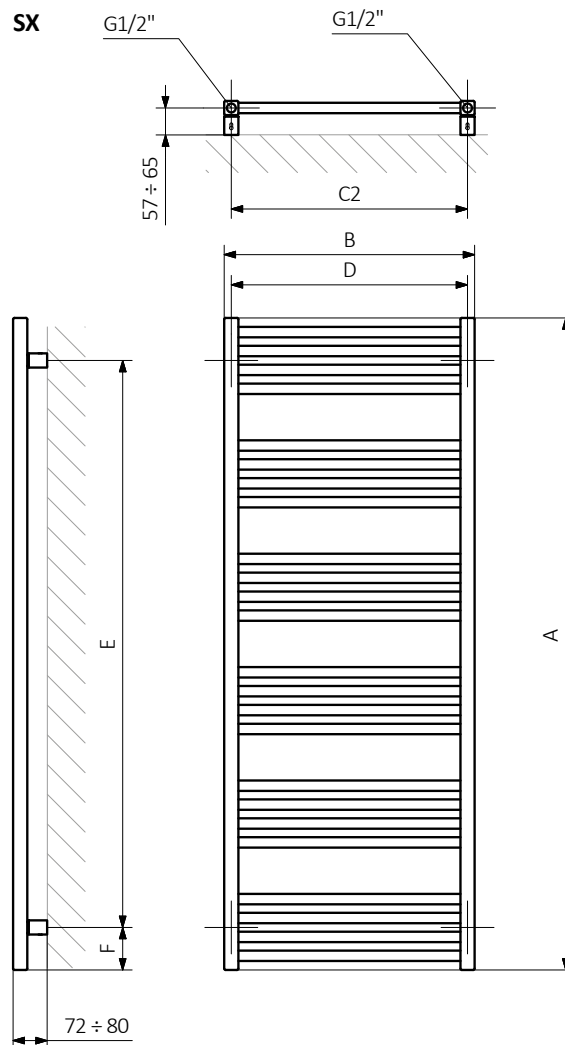


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Fiona One

📷 s. 114

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.






design: Terma

Standard connections:

Optional connections:

Electric radiators: see page 599.



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☺ [W] | D [mm] | E [mm] | F [mm] | U [dm³] | ⚖️ [kg] | Product code <small>(Configuration code p. 788)</small> |
|-----------------------|-------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|------------|--|
| Powder coating | | | | | | | | | | |
| 900 | 400 | 305 | 162 | 400 | 370 | 760 | 70 | 2,87 | 6,00 | WZFIE090040 |
| 900 | 430 | 342 | 182 | 400 | 400 | 760 | 70 | 3,01 | 6,32 | WZFIE090043 |
| 900 | 480 | 375 | 200 | 400 | 450 | 760 | 70 | 3,25 | 6,85 | WZFIE090048 |
| 900 | 500 | 382 | 203 | 400 | 470 | 760 | 70 | 3,35 | 7,07 | WZFIE090050 |
| 900 | 530 | 407 | 217 | 400 | 500 | 760 | 70 | 3,49 | 7,39 | WZFIE090053 |
| 900 | 580 | 438 | 234 | 400 | 550 | 760 | 70 | 3,73 | 7,92 | WZFIE090058 |
| 900 | 600 | 458 | 244 | 400 | 570 | 760 | 70 | 3,82 | 8,14 | WZFIE090060 |
| 900 | 630 | 469 | 251 | 400 | 600 | 760 | 70 | 3,97 | 8,46 | WZFIE090063 |
| 900 | 680 | 500 | 267 | 400 | 650 | 760 | 70 | 4,21 | 8,99 | WZFIE090068 |
| 1140 | 400 | 385 | 204 | 400 | 370 | 1000 | 70 | 3,62 | 7,52 | WZFIE114040 |
| 1140 | 430 | 430 | 228 | 400 | 400 | 1000 | 70 | 3,80 | 7,92 | WZFIE114043 |
| 1140 | 480 | 471 | 250 | 400 | 450 | 1000 | 70 | 4,10 | 8,59 | WZFIE114048 |
| 1140 | 500 | 481 | 256 | 400 | 470 | 1000 | 70 | 4,22 | 8,86 | WZFIE114050 |
| 1140 | 530 | 511 | 272 | 600 | 500 | 1000 | 70 | 4,40 | 9,26 | WZFIE114053 |
| 1140 | 580 | 550 | 293 | 600 | 550 | 1000 | 70 | 4,70 | 9,93 | WZFIE114058 |
| 1140 | 600 | 577 | 307 | 600 | 570 | 1000 | 70 | 4,82 | 10,19 | WZFIE114060 |
| 1140 | 630 | 589 | 314 | 600 | 600 | 1000 | 70 | 5,00 | 10,59 | WZFIE114063 |
| 1140 | 680 | 628 | 335 | 600 | 650 | 1000 | 70 | 5,30 | 11,26 | WZFIE114068 |
| 1380 | 400 | 464 | 246 | 600 | 370 | 1240 | 70 | 4,38 | 9,04 | WZFIE138040 |
| 1380 | 430 | 518 | 275 | 600 | 400 | 1240 | 70 | 4,59 | 9,53 | WZFIE138043 |
| 1380 | 480 | 568 | 301 | 600 | 450 | 1240 | 70 | 4,95 | 10,33 | WZFIE138048 |
| 1380 | 500 | 580 | 308 | 600 | 470 | 1240 | 70 | 5,09 | 10,65 | WZFIE138050 |
| 1380 | 530 | 616 | 327 | 600 | 500 | 1240 | 70 | 5,31 | 11,13 | WZFIE138053 |
| 1380 | 580 | 664 | 352 | 600 | 550 | 1240 | 70 | 5,67 | 11,93 | WZFIE138058 |
| 1380 | 600 | 696 | 370 | 600 | 570 | 1240 | 70 | 5,81 | 12,25 | WZFIE138060 |
| 1380 | 630 | 711 | 378 | 800 | 600 | 1240 | 70 | 6,03 | 12,73 | WZFIE138063 |
| 1380 | 680 | 757 | 402 | 800 | 650 | 1240 | 70 | 6,38 | 13,53 | WZFIE138068 |
| 1620 | 400 | 543 | 287 | 800 | 370 | 1480 | 70 | 5,13 | 10,57 | WZFIE162040 |
| 1620 | 430 | 608 | 322 | 600 | 400 | 1480 | 70 | 5,38 | 11,13 | WZFIE162043 |
| 1620 | 480 | 666 | 353 | 600 | 450 | 1480 | 70 | 5,80 | 12,06 | WZFIE162048 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654



Integrated pipe masking set – see page 675






Yo! hanger – see page 636








| A ↑ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | H [dm ²] | [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|-------------------|-------------------|---------|-----------|-----------|-----------|-------------------------|----------|--|
| 1620 | 500 | 679 | 359 | 600 | 470 | 1480 | 70 | 5,97 | 12,44 | WZFIE162050 |
| 1620 | 530 | 723 | 383 | 800 | 500 | 1480 | 70 | 6,22 | 13,00 | WZFIE162053 |
| 1620 | 580 | 779 | 413 | 800 | 550 | 1480 | 70 | 6,64 | 13,93 | WZFIE162058 |
| 1620 | 600 | 815 | 432 | 800 | 570 | 1480 | 70 | 6,81 | 14,31 | WZFIE162060 |
| 1620 | 630 | 834 | 442 | 800 | 600 | 1480 | 70 | 7,06 | 14,87 | WZFIE162063 |
| 1620 | 680 | 889 | 471 | 800 | 650 | 1480 | 70 | 7,47 | 15,80 | WZFIE162068 |
| 1860 | 400 | 623 | 329 | 800 | 370 | 1720 | 70 | 5,89 | 12,09 | WZFIE186040 |
| 1860 | 430 | 700 | 370 | 800 | 400 | 1720 | 70 | 6,18 | 12,73 | WZFIE186043 |
| 1860 | 480 | 767 | 405 | 800 | 450 | 1720 | 70 | 6,65 | 13,80 | WZFIE186048 |
| 1860 | 500 | 778 | 411 | 800 | 470 | 1720 | 70 | 6,84 | 14,23 | WZFIE186050 |
| 1860 | 530 | 832 | 440 | 800 | 500 | 1720 | 70 | 7,13 | 14,87 | WZFIE186053 |
| 1860 | 580 | 897 | 474 | 1000 | 550 | 1720 | 70 | 7,61 | 15,94 | WZFIE186058 |
| 1860 | 600 | 934 | 493 | 1000 | 570 | 1720 | 70 | 7,80 | 16,37 | WZFIE186060 |
| 1860 | 630 | 960 | 507 | 1000 | 600 | 1720 | 70 | 8,09 | 17,01 | WZFIE186063 |
| 1860 | 680 | 1023 | 541 | 1000 | 650 | 1720 | 70 | 8,56 | 18,08 | WZFIE186068 |
| Plated finishes | | | | | | | | | | |
| 900 | 400 | 214 | 113 | 200 | 370 | 760 | 70 | 2,87 | 5,77 | WZFIE090040 |
| 900 | 430 | 240 | 127 | 300 | 400 | 760 | 70 | 3,01 | 6,08 | WZFIE090043 |
| 900 | 480 | 262 | 140 | 300 | 450 | 760 | 70 | 3,25 | 6,59 | WZFIE090048 |
| 900 | 500 | 267 | 142 | 300 | 470 | 760 | 70 | 3,35 | 6,79 | WZFIE090050 |
| 900 | 530 | 285 | 152 | 300 | 500 | 760 | 70 | 3,49 | 7,10 | WZFIE090053 |
| 900 | 580 | 307 | 164 | 300 | 550 | 760 | 70 | 3,73 | 7,61 | WZFIE090058 |
| 900 | 600 | 321 | 171 | 300 | 570 | 760 | 70 | 3,82 | 7,82 | WZFIE090060 |
| 900 | 630 | 329 | 176 | 300 | 600 | 760 | 70 | 3,97 | 8,13 | WZFIE090063 |
| 900 | 680 | 350 | 187 | 300 | 650 | 760 | 70 | 4,21 | 8,64 | WZFIE090068 |
| 1140 | 400 | 270 | 143 | 300 | 370 | 1000 | 70 | 3,62 | 7,23 | WZFIE114040 |
| 1140 | 430 | 301 | 160 | 300 | 400 | 1000 | 70 | 3,80 | 7,62 | WZFIE114043 |
| 1140 | 480 | 329 | 175 | 300 | 450 | 1000 | 70 | 4,10 | 8,26 | WZFIE114048 |
| 1140 | 500 | 337 | 179 | 400 | 470 | 1000 | 70 | 4,22 | 8,52 | WZFIE114050 |
| 1140 | 530 | 358 | 190 | 400 | 500 | 1000 | 70 | 4,40 | 8,90 | WZFIE114053 |
| 1140 | 580 | 385 | 205 | 400 | 550 | 1000 | 70 | 4,70 | 9,54 | WZFIE114058 |
| 1140 | 600 | 404 | 215 | 400 | 570 | 1000 | 70 | 4,82 | 9,80 | WZFIE114060 |
| 1140 | 630 | 413 | 220 | 400 | 600 | 1000 | 70 | 5,00 | 10,18 | WZFIE114063 |
| 1140 | 680 | 440 | 235 | 400 | 650 | 1000 | 70 | 5,30 | 10,82 | WZFIE114068 |
| 1380 | 400 | 325 | 172 | 400 | 370 | 1240 | 70 | 4,38 | 8,70 | WZFIE138040 |
| 1380 | 430 | 363 | 193 | 400 | 400 | 1240 | 70 | 4,59 | 9,16 | WZFIE138043 |
| 1380 | 480 | 397 | 211 | 400 | 450 | 1240 | 70 | 4,95 | 9,93 | WZFIE138048 |
| 1380 | 500 | 406 | 216 | 400 | 470 | 1240 | 70 | 5,09 | 10,24 | WZFIE138050 |
| 1380 | 530 | 431 | 229 | 400 | 500 | 1240 | 70 | 5,31 | 10,70 | WZFIE138053 |
| 1380 | 580 | 465 | 246 | 400 | 550 | 1240 | 70 | 5,67 | 11,47 | WZFIE138058 |


Fiona One s. 114

| A \updownarrow [mm] | B \leftrightarrow [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|--------------------------|-----------------------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Plated finishes | | | | | | | | | | |
| 1380 | 600 | 487 | 259 | 400 | 570 | 1240 | 70 | 5,81 | 11,77 | WZFI138060 |
| 1380 | 630 | 498 | 265 | 600 | 600 | 1240 | 70 | 6,03 | 12,23 | WZFI138063 |
| 1380 | 680 | 530 | 281 | 600 | 650 | 1240 | 70 | 6,38 | 13,00 | WZFI138068 |
| 1620 | 400 | 380 | 201 | 400 | 370 | 1480 | 70 | 5,13 | 10,16 | WZFI162040 |
| 1620 | 430 | 426 | 225 | 400 | 400 | 1480 | 70 | 5,38 | 10,70 | WZFI162043 |
| 1620 | 480 | 466 | 247 | 400 | 450 | 1480 | 70 | 5,80 | 11,60 | WZFI162048 |
| 1620 | 500 | 475 | 251 | 600 | 470 | 1480 | 70 | 5,97 | 11,96 | WZFI162050 |
| 1620 | 530 | 506 | 268 | 600 | 500 | 1480 | 70 | 6,22 | 12,49 | WZFI162053 |
| 1620 | 580 | 545 | 289 | 600 | 550 | 1480 | 70 | 6,64 | 13,39 | WZFI162058 |
| 1620 | 600 | 571 | 302 | 600 | 570 | 1480 | 70 | 6,81 | 13,75 | WZFI162060 |
| 1620 | 630 | 584 | 309 | 600 | 600 | 1480 | 70 | 7,06 | 14,29 | WZFI162063 |
| 1620 | 680 | 622 | 330 | 600 | 650 | 1480 | 70 | 7,47 | 15,18 | WZFI162068 |

Available sizes:

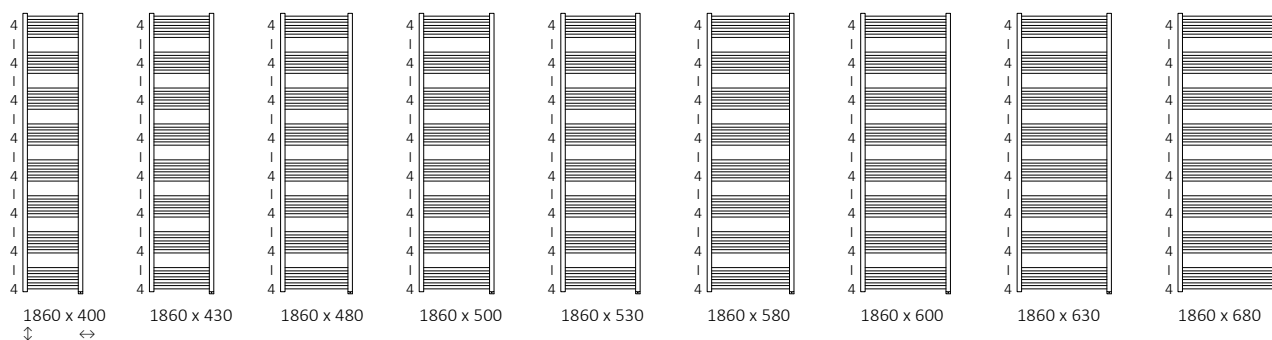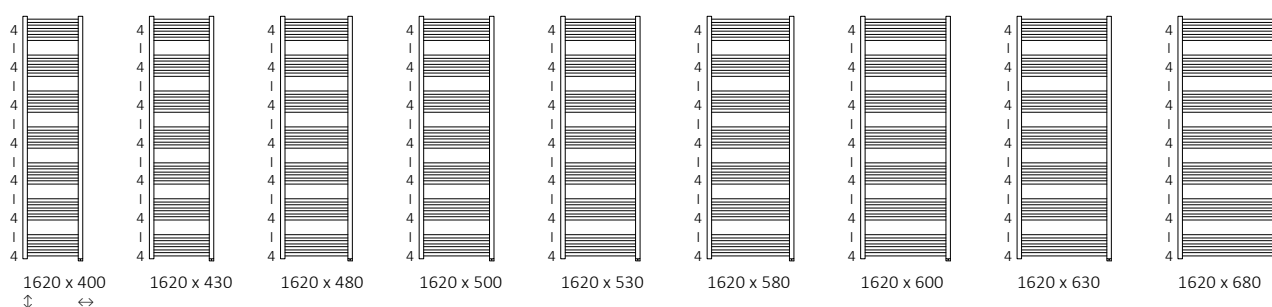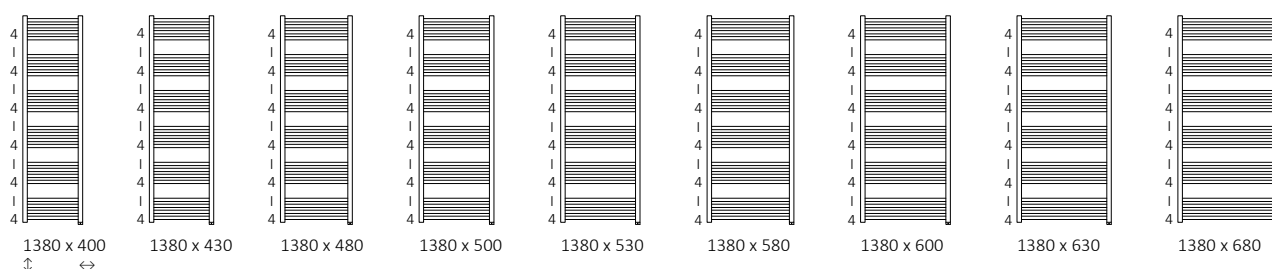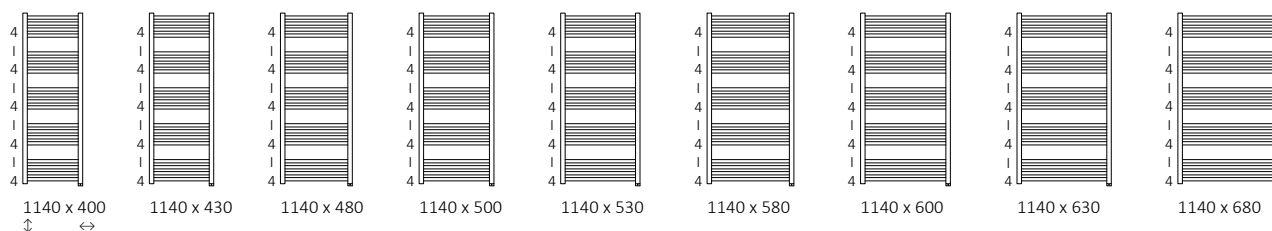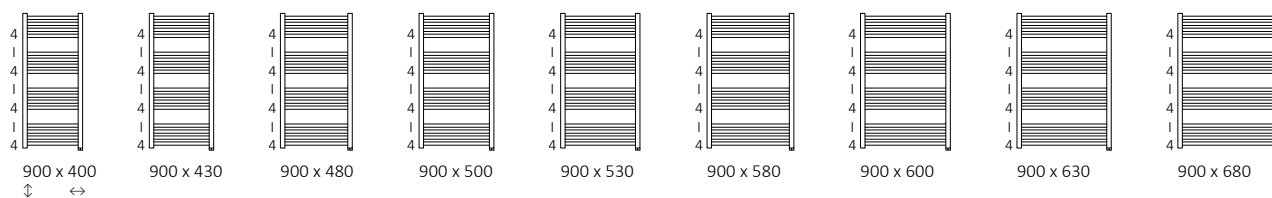



Fiona One s. 114

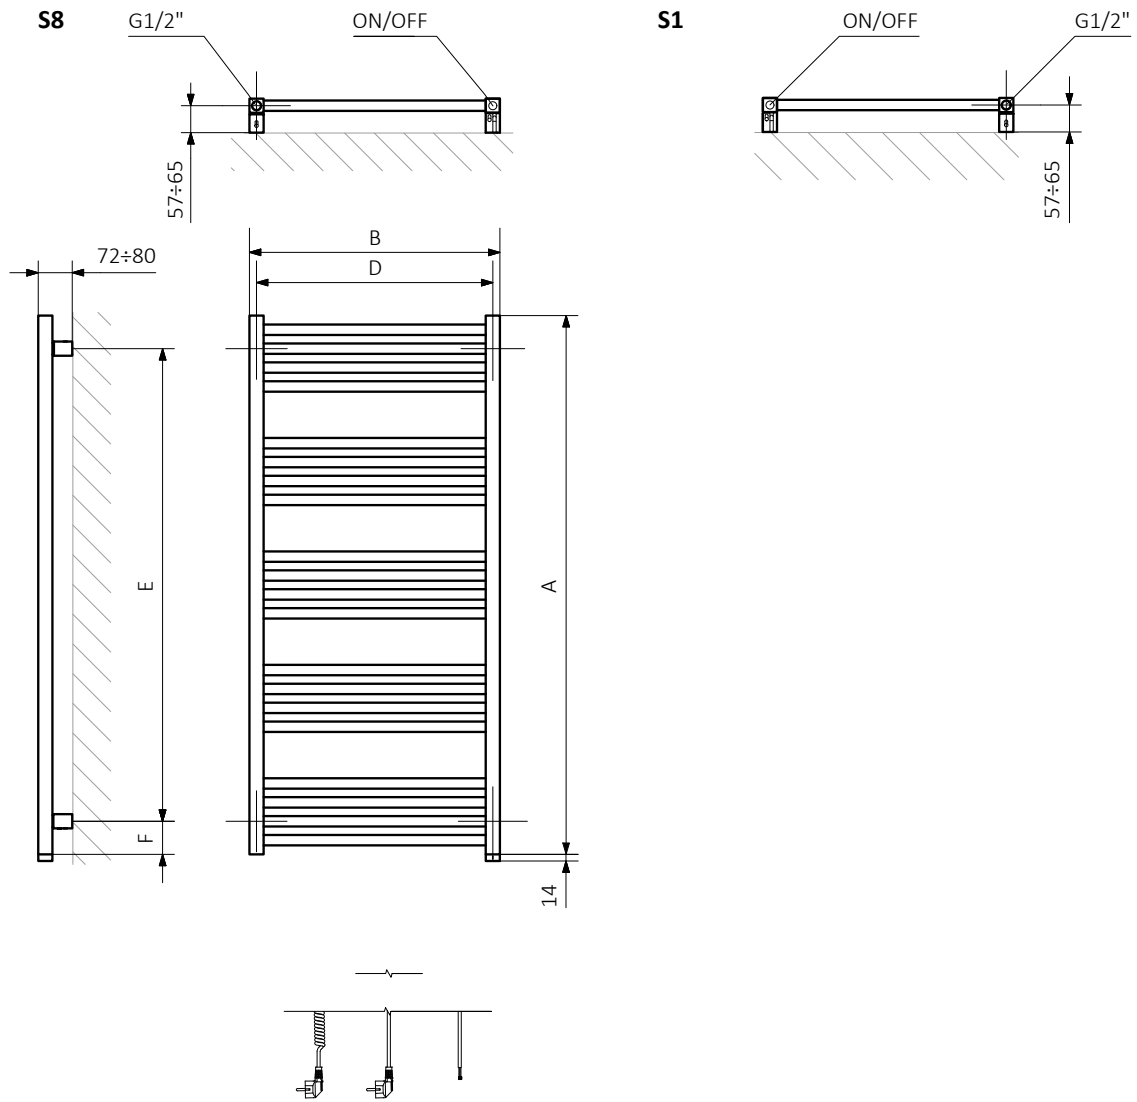


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator

Collector:


Pipe:





Standard connections:


A ↓ 422÷502:




A ↓ 821÷1700:




Available sizes:




422 x 711
↓ ↔




502 x 1126



821 x 486




1220 x 486

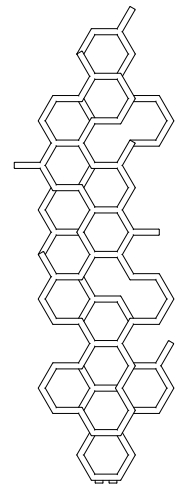

1700 x 573

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | H [dm³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|------------|-------------------|-------------------|------------|---|--|
| 422 | 711 | 50 | 190 | 102 | 1,25 | 3,66 | WGH2X042071 |
| 502 | 1126 | 50 | 317 | 169 | 2,22 | 6,31 | WGH2X050112 |
| 821 | 486 | 50 | 248 | 131 | 1,67 | 4,80 | WGH2X082048 |
| 1220 | 486 | 50 | 346 | 180 | 2,43 | 6,86 | WGH2X122048 |
| 1700 | 573 | 50 | 500 | 258 | 3,61 | 10,04 | WGH2X170057 |

We recommend: A set of integrated thermostatic valves for YL, YP and ZX connections – see page 652




Integrated pipe masking set – see page 675






422 x 711
 ↕ ↔

YL

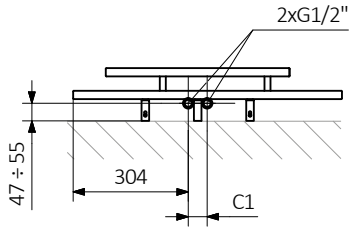


YP

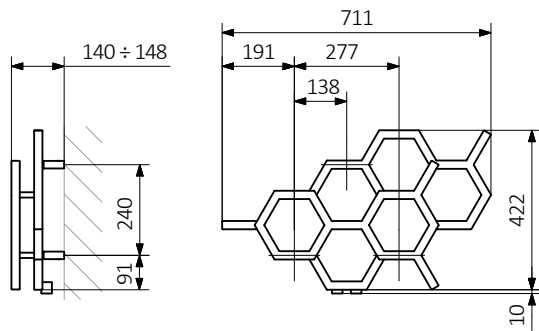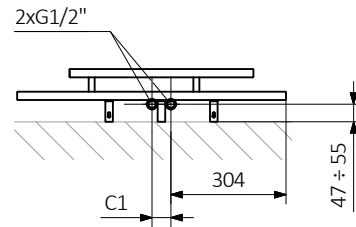


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:






502 x 1126
 \updownarrow \leftrightarrow

YL

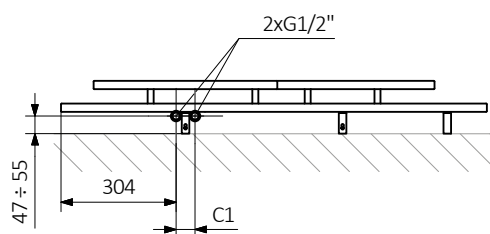


YP

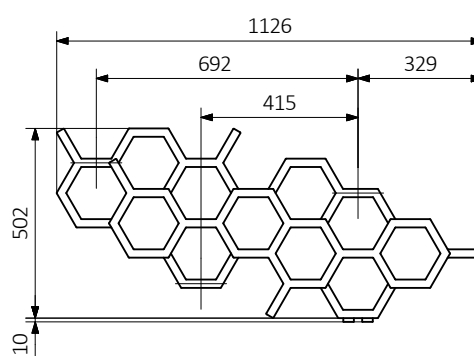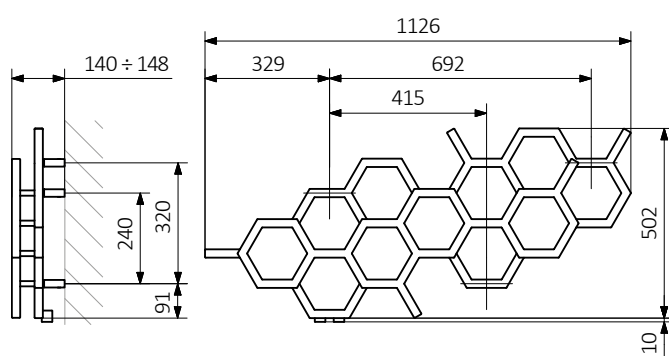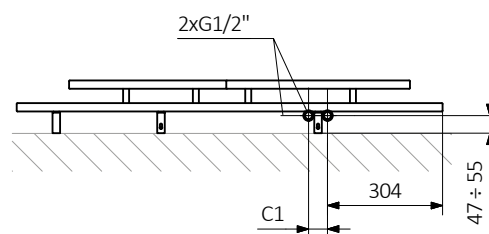

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Pipe:





821 x 486


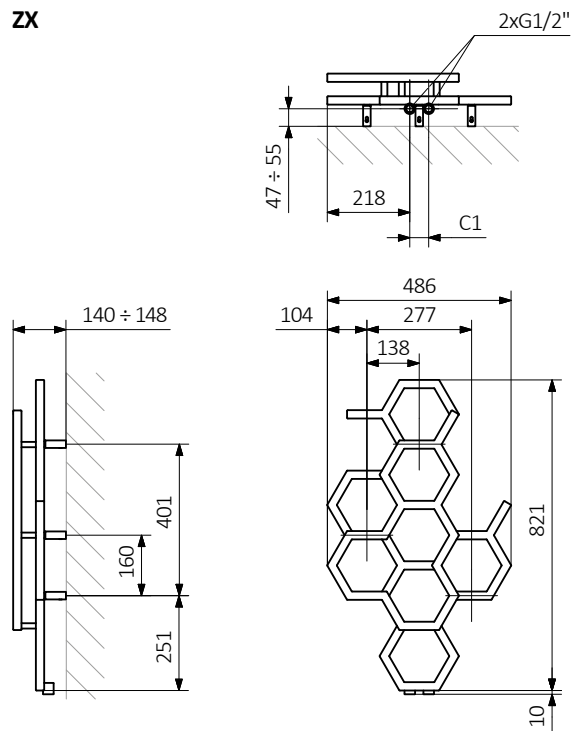


ZX




1220 x 486
 

ZX

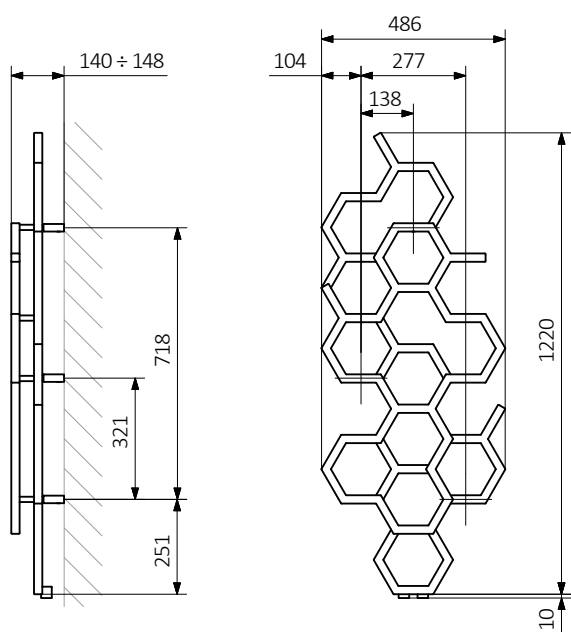


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:



1700 x 573
↕ ↔

ZX

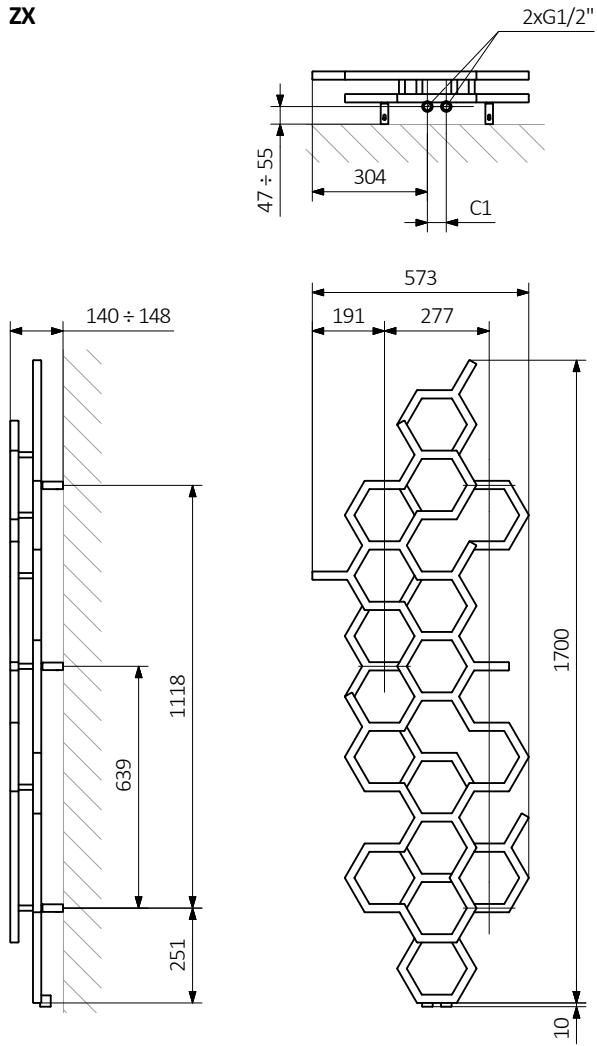



design: Krzysztof Kotłowski

Standard connections:


A ↓ 465÷1545:



A ↓ 735÷1545




Electric radiators: see page 599.



Optional connections:


A ↓ 465÷1545:



A ↓ 735÷1545



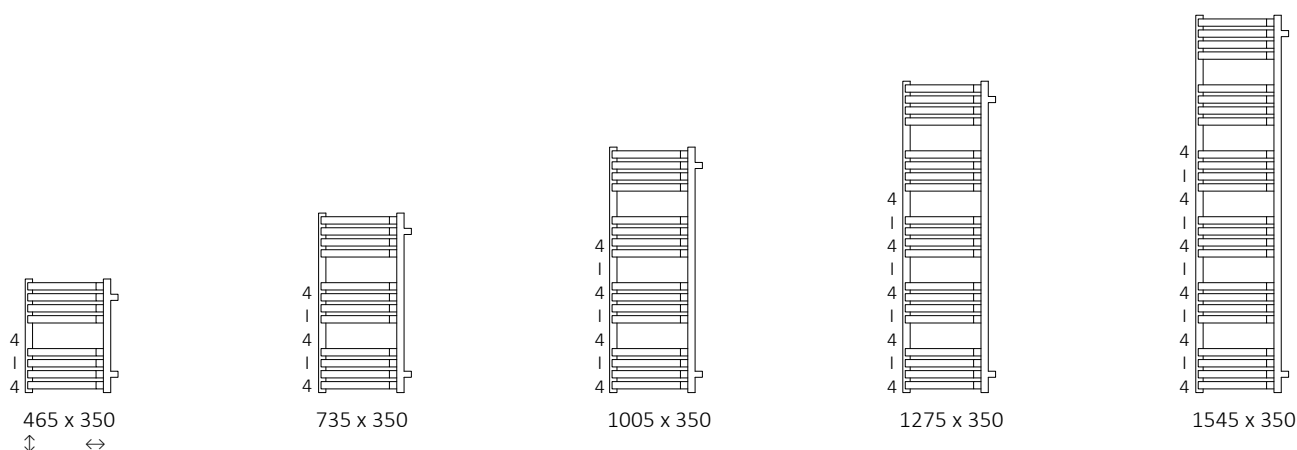


Available sizes:



Specifications:




Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75 65 20°C [W] | 55 45 20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|--|---|--|
| 465 | 350 | 365 | 284 | 153 | 300 | 365 | 315 | 76 | 1,53 | 5,37 | WGQIN046035 |
| 735 | 350 | 365 | 415 | 223 | 400 | 365 | 585 | 76 | 2,34 | 8,16 | WGQIN073035 |
| 1005 | 350 | 365 | 546 | 293 | 600 | 365 | 855 | 76 | 3,16 | 10,94 | WGQIN100035 |
| 1275 | 350 | 365 | 677 | 363 | 800 | 365 | 1125 | 76 | 3,98 | 13,73 | WGQIN127035 |
| 1545 | 350 | 365 | 808 | 433 | 800 | 365 | 1395 | 76 | 4,80 | 16,52 | WGQIN154035 |

We recommend: 3-axis thermostatic valve for SX connection – see page 648

Pipe masking set – 70 mm – see page 673



ZIP V 30 hanger – see page 637

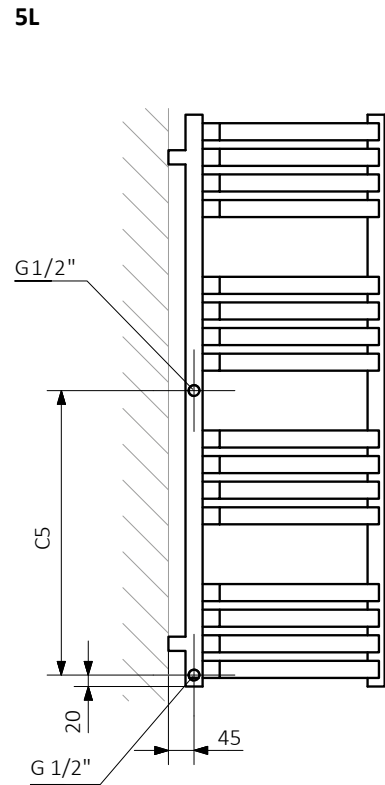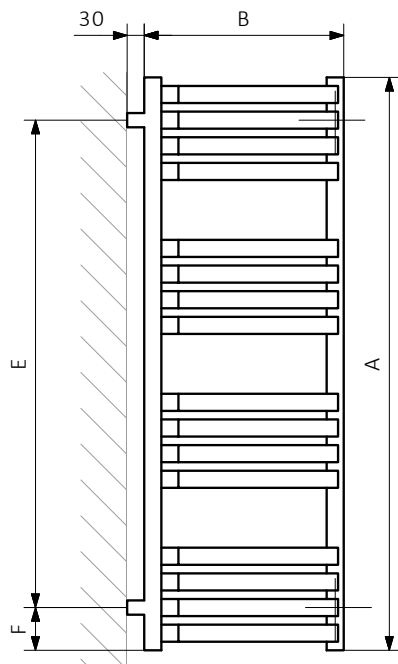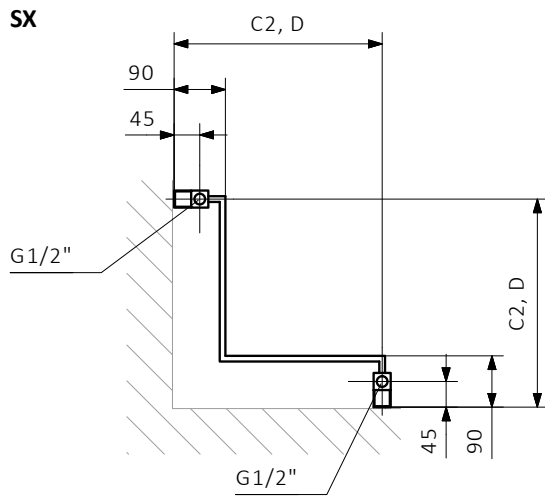

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:







Colour included in the price

design: Terma


Standard connections:



Optional connections:



Available sizes:

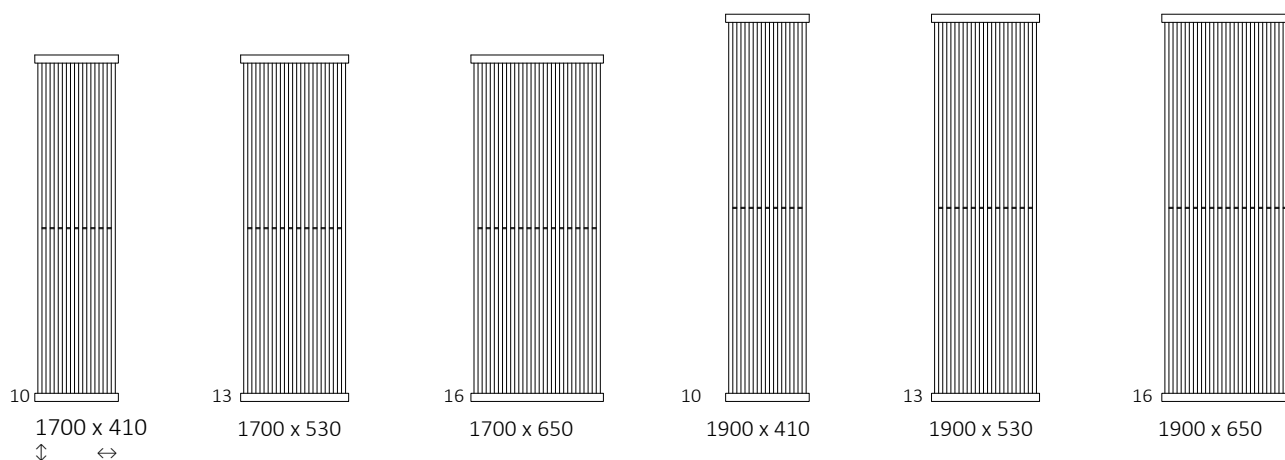

Specifications:

Working pressure: 800 kPa

Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | C4 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] | H [dm ³] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|------------|-------------------|-------------------|-----------|-----------|-----------|-------------------------|------------|--|
| Powder coating | | | | | | | | | | | | |
| 1700 | 410 | 50 | 370 | 410 | 660 | 346 | 270 | 1660 | 20 | 5,48 | 16,25 | WGINB170041 |
| 1700 | 530 | 50 | 490 | 530 | 858 | 450 | 390 | 1660 | 20 | 7,11 | 21,02 | WGINB170053 |
| 1700 | 650 | 50 | 610 | 650 | 1056 | 554 | 510 | 1660 | 20 | 8,75 | 25,79 | WGINB170065 |
| 1900 | 410 | 50 | 370 | 410 | 756 | 388 | 270 | 1860 | 20 | 6,05 | 17,98 | WGINB190041 |
| 1900 | 530 | 50 | 490 | 530 | 982 | 506 | 390 | 1860 | 20 | 7,86 | 23,27 | WGINB190053 |
| 1900 | 650 | 50 | 610 | 650 | 1209 | 612 | 510 | 1860 | 20 | 9,67 | 28,56 | WGINB190065 |
| Plated finishes | | | | | | | | | | | | |
| 1700 | 410 | 50 | 370 | 410 | 462 | 242 | 270 | 1660 | 20 | 5,48 | 15,72 | WGINB170041 |
| 1700 | 530 | 50 | 490 | 530 | 601 | 315 | 390 | 1660 | 20 | 7,11 | 20,33 | WGINB170053 |
| 1700 | 650 | 50 | 610 | 650 | 739 | 387 | 510 | 1660 | 20 | 8,75 | 24,94 | WGINB170065 |

We recommend: A set of integrated thermostatic valves for ZX, YL and YP connections – see page 652




Integrated pipe masking set – see page 675




ZIP V hanger 20 – see page 637




AX

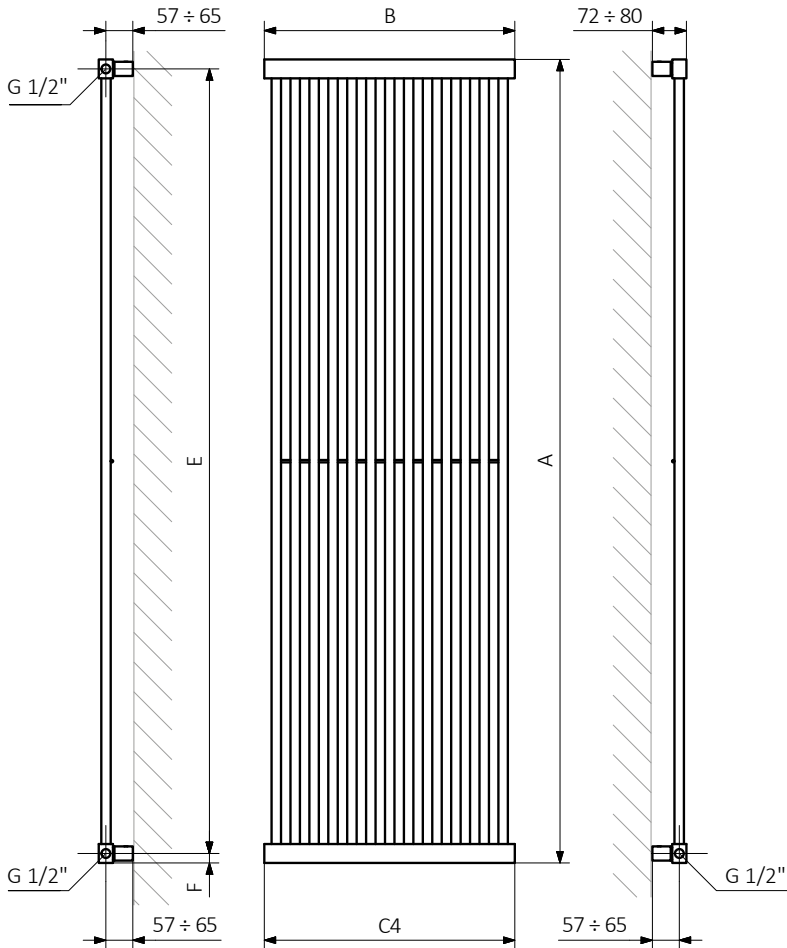


SX

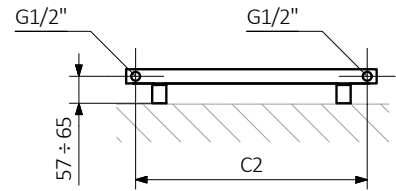


ZX

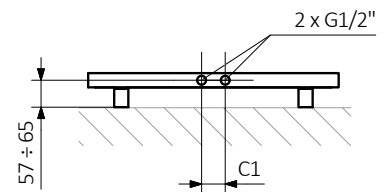

YL

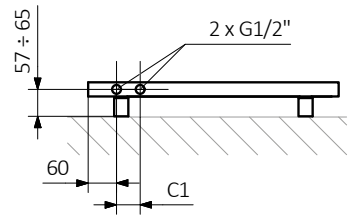


YP




A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Intra M s. 128




Colour included
in the price

projekt: Terma


Standard connections:



Optional connections:




Available sizes:

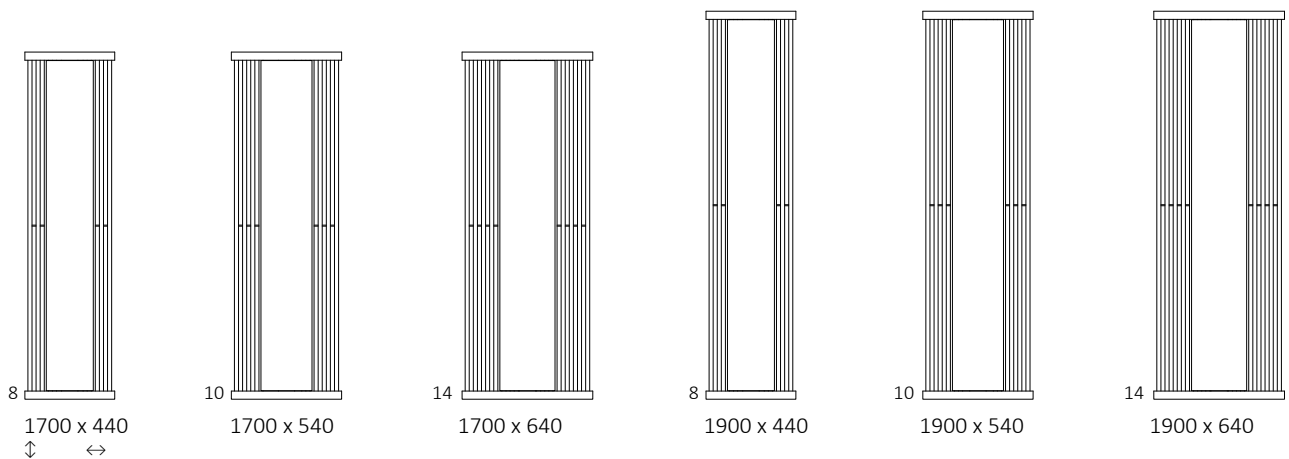

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | C4 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | | | | |
| 1700 | 440 | 50 | 400 | 440 | 528 | 269 | 300 | 1660 | 20 | 4,60 | 19,28 | WGINT170044 |
| 1700 | 540 | 50 | 500 | 540 | 660 | 337 | 400 | 1660 | 20 | 5,73 | 22,54 | WGINT170054 |
| 1700 | 640 | 50 | 600 | 640 | 925 | 472 | 500 | 1660 | 20 | 7,80 | 28,65 | WGINT170064 |
| 1900 | 440 | 50 | 400 | 440 | 600 | 306 | 300 | 1860 | 20 | 5,06 | 21,37 | WGINT190044 |
| 1900 | 540 | 50 | 500 | 540 | 762 | 388 | 400 | 1860 | 20 | 6,31 | 24,98 | WGINT190054 |
| 1900 | 640 | 50 | 600 | 640 | 995 | 507 | 500 | 1860 | 20 | 8,60 | 31,79 | WGINT190064 |
| Plated finishes | | | | | | | | | | | | |
| 1700 | 440 | 50 | 400 | 440 | 370 | 192 | 300 | 1660 | 20 | 4,60 | 18,84 | WGINT170044 |
| 1700 | 540 | 50 | 500 | 540 | 462 | 240 | 400 | 1660 | 20 | 5,73 | 21,99 | WGINT170054 |
| 1700 | 640 | 50 | 600 | 640 | 647 | 337 | 500 | 1660 | 20 | 7,80 | 27,90 | WGINT170064 |

We recommend: A set of integrated thermostatic valves for ZX, YL and YP connections – see page 652




Integrated pipe masking set – see page 675




ZIP V hanger 20 – see page 637




AX

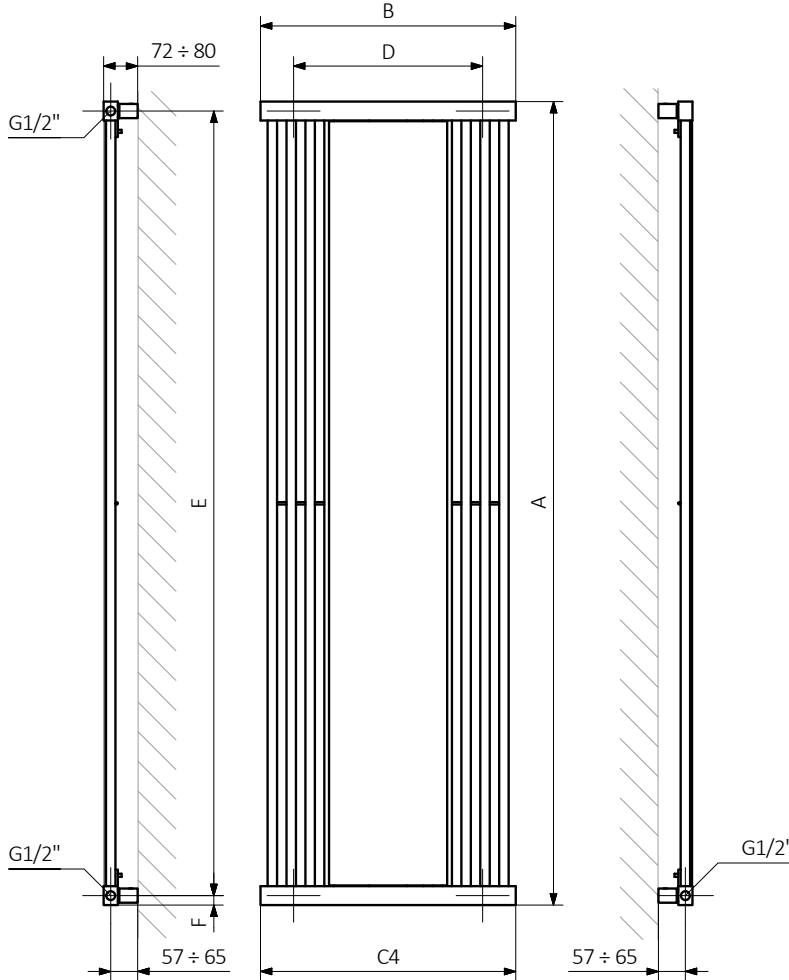


SX

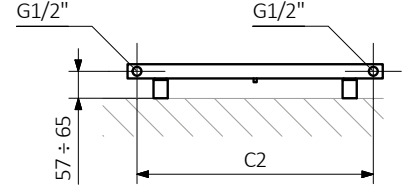


ZX

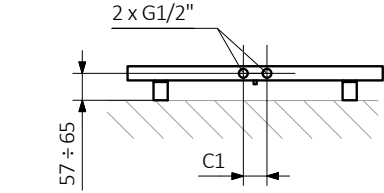

YL

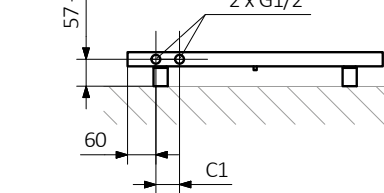


YP

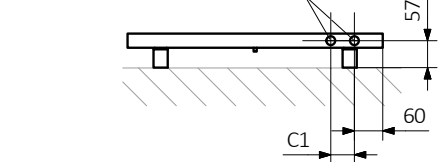


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Standard connections:

Electric radiators: see page 599.



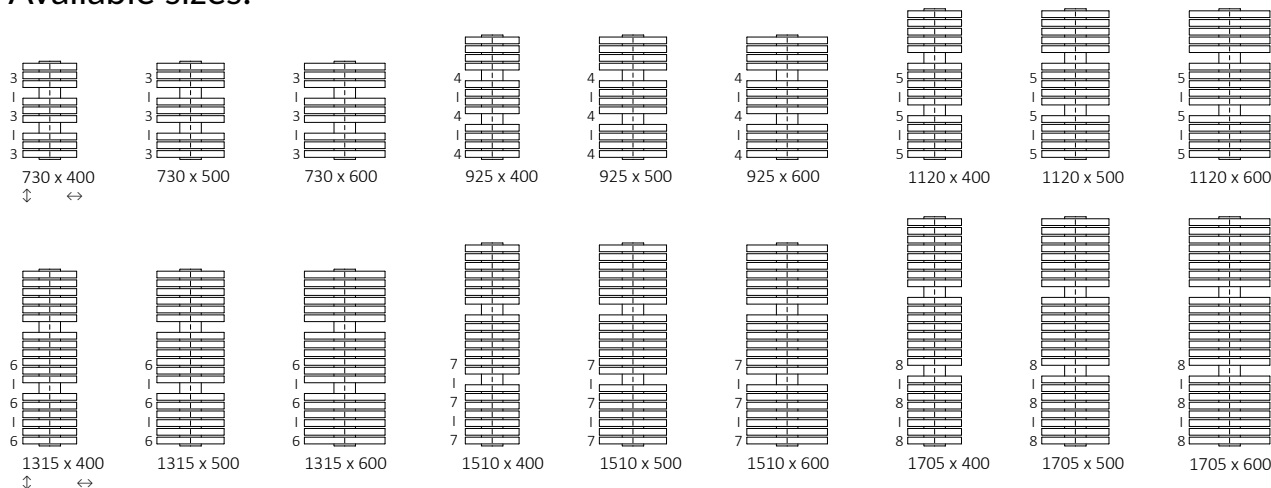


Available sizes:



Specifications:

Working pressure: 600 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| 730 | 400 | 50 | 453 | 240 | 400 | 50 | 530 | 100 | 3,29 | 13,24 | WGIRD073040 |
| 730 | 500 | 50 | 552 | 292 | 600 | 50 | 530 | 100 | 3,89 | 15,69 | WGIRD073050 |
| 730 | 600 | 50 | 649 | 344 | 600 | 50 | 530 | 100 | 4,48 | 18,13 | WGIRD073060 |
| 925 | 400 | 50 | 565 | 299 | 600 | 50 | 725 | 100 | 4,32 | 17,30 | WGIRD092040 |
| 925 | 500 | 50 | 689 | 364 | 800 | 50 | 725 | 100 | 5,11 | 20,56 | WGIRD092050 |
| 925 | 600 | 50 | 809 | 428 | 800 | 50 | 725 | 100 | 5,90 | 23,82 | WGIRD092060 |
| 1120 | 400 | 50 | 676 | 358 | 800 | 50 | 920 | 100 | 5,36 | 21,35 | WGIRD112040 |
| 1120 | 500 | 50 | 824 | 435 | 800 | 50 | 920 | 100 | 6,34 | 25,42 | WGIRD112050 |
| 1120 | 600 | 50 | 969 | 511 | 1000 | 50 | 920 | 100 | 7,33 | 29,49 | WGIRD112060 |
| 1315 | 400 | 50 | 788 | 417 | 800 | 50 | 1115 | 100 | 6,39 | 25,40 | WGIRD131040 |
| 1315 | 500 | 50 | 960 | 506 | 1000 | 50 | 1115 | 100 | 7,57 | 30,28 | WGIRD131050 |
| 1315 | 600 | 50 | 1128 | 593 | 1200 | 50 | 1115 | 100 | 8,76 | 35,18 | WGIRD131060 |
| 1510 | 400 | 50 | 899 | 474 | 1000 | 50 | 1310 | 100 | 7,42 | 29,45 | WGIRD151040 |
| 1510 | 500 | 50 | 1095 | 577 | 1000 | 50 | 1310 | 100 | 8,80 | 35,15 | WGIRD151050 |
| 1510 | 600 | 50 | 1287 | 677 | 1200 | 50 | 1310 | 100 | 10,18 | 40,86 | WGIRD151060 |
| 1705 | 400 | 50 | 1011 | 531 | 1000 | 50 | 1505 | 100 | 8,45 | 33,51 | WGIRD170040 |
| 1705 | 500 | 50 | 1231 | 648 | 1200 | 50 | 1505 | 100 | 10,03 | 40,03 | WGIRD170050 |
| 1705 | 600 | 50 | 1447 | 762 | 1500 | 50 | 1505 | 100 | 11,61 | 46,55 | WGIRD170060 |

We recommend: Integrated thermostatic t-piece valve set for ZX connection – see page 653






Integrated pipe masking set – see page 675



MOA heating element – see page 702




ZX
 130 ÷ 138 (B=400)
 135 ÷ 143 (B=500)
 140 ÷ 148 (B=600)

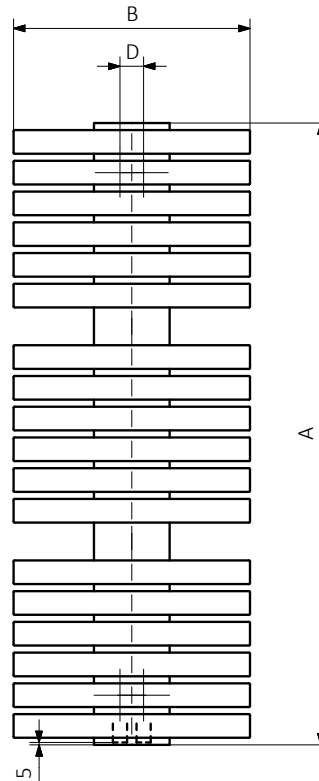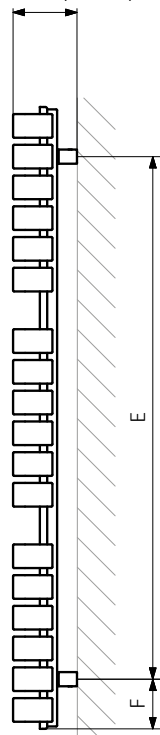


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Iron S

s. 134



Colour included in the price

design: Piotunowska Renata, Berus Dariusz


Standard connections:



Electric radiators: see page 599.



Available sizes:

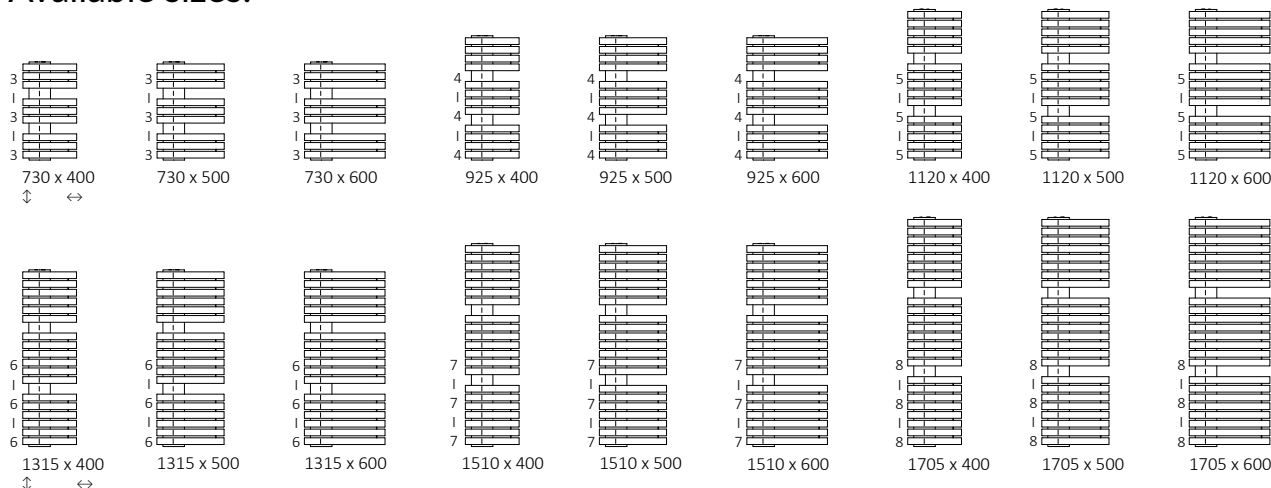

Specifications:

Working pressure: 600 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm²] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|------|-----------|-----------|-----------|-------|-------|--|
| 730 | 400 | 50 | 461 | 246 | 400 | 50 | 530 | 100 | 3,3 | 13,28 | WGIRS073040 |
| 730 | 500 | 50 | 567 | 302 | 600 | 50 | 530 | 100 | 3,9 | 15,76 | WGIRS073050 |
| 730 | 600 | 50 | 672 | 357 | 800 | 50 | 530 | 100 | 4,51 | 18,27 | WGIRS073060 |
| 925 | 400 | 50 | 578 | 307 | 600 | 50 | 725 | 100 | 4,34 | 17,35 | WGIRS092040 |
| 925 | 500 | 50 | 712 | 378 | 800 | 50 | 725 | 100 | 5,14 | 20,66 | WGIRS092050 |
| 925 | 600 | 50 | 843 | 446 | 800 | 50 | 725 | 100 | 5,95 | 23,98 | WGIRS092060 |
| 1120 | 400 | 50 | 695 | 368 | 800 | 50 | 920 | 100 | 5,37 | 21,41 | WGIRS112040 |
| 1120 | 500 | 50 | 855 | 452 | 800 | 50 | 920 | 100 | 6,37 | 25,55 | WGIRS112050 |
| 1120 | 600 | 50 | 1012 | 535 | 1000 | 50 | 920 | 100 | 7,38 | 29,71 | WGIRS112060 |
| 1315 | 400 | 50 | 810 | 427 | 800 | 50 | 1115 | 100 | 6,4 | 25,47 | WGIRS131040 |
| 1315 | 500 | 50 | 996 | 525 | 1000 | 50 | 1115 | 100 | 7,61 | 30,44 | WGIRS131050 |
| 1315 | 600 | 50 | 1180 | 622 | 1200 | 50 | 1115 | 100 | 8,82 | 35,43 | WGIRS131060 |
| 1510 | 400 | 50 | 924 | 486 | 1000 | 50 | 1310 | 100 | 7,44 | 29,53 | WGIRS151040 |
| 1510 | 500 | 50 | 1137 | 598 | 1200 | 50 | 1310 | 100 | 8,84 | 35,33 | WGIRS151050 |
| 1510 | 600 | 50 | 1347 | 709 | 1500 | 50 | 1310 | 100 | 10,25 | 41,16 | WGIRS151060 |
| 1705 | 400 | 50 | 1037 | 545 | 1000 | 50 | 1505 | 100 | 8,47 | 33,6 | WGIRS170040 |
| 1705 | 500 | 50 | 1276 | 670 | 1200 | 50 | 1505 | 100 | 10,08 | 40,22 | WGIRS170050 |
| 1705 | 600 | 50 | 1511 | 794 | 1500 | 50 | 1505 | 100 | 11,69 | 46,88 | WGIRS170060 |

We recommend: Integrated thermostatic t-piece valve set for GD connection – see page 653





Integrated pipe masking set – see page 675






MOA heating element – see page 702



GD

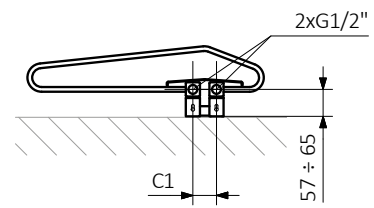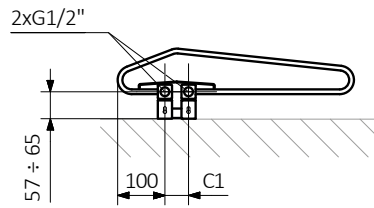


138 ÷ 146 (B = 400)
158 ÷ 166 (B = 500)
159 ÷ 169 (B = 600)

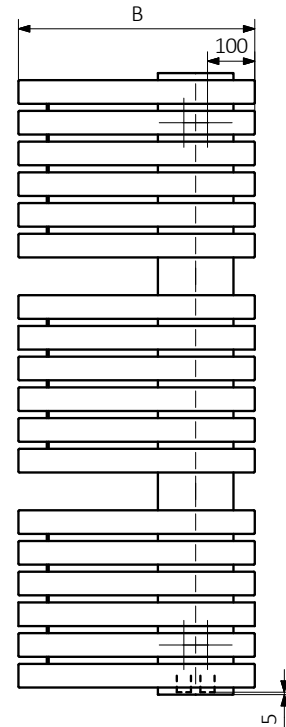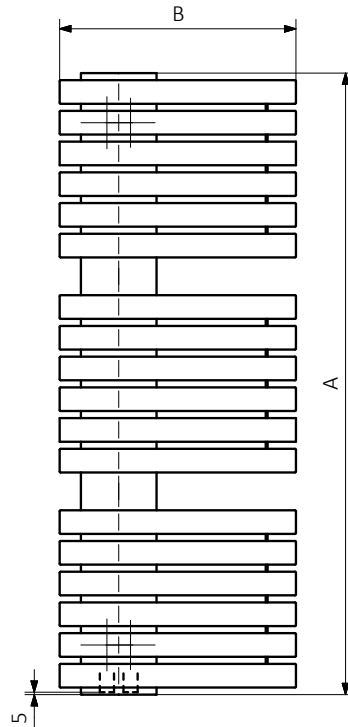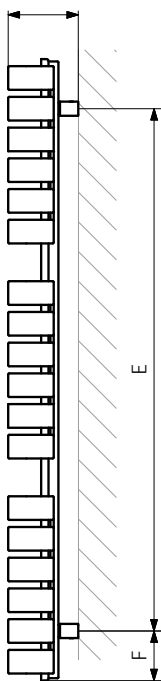


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Colour included in the price

Standard connections:




Electric radiators: see page 599.



Optional connections:



Available sizes:

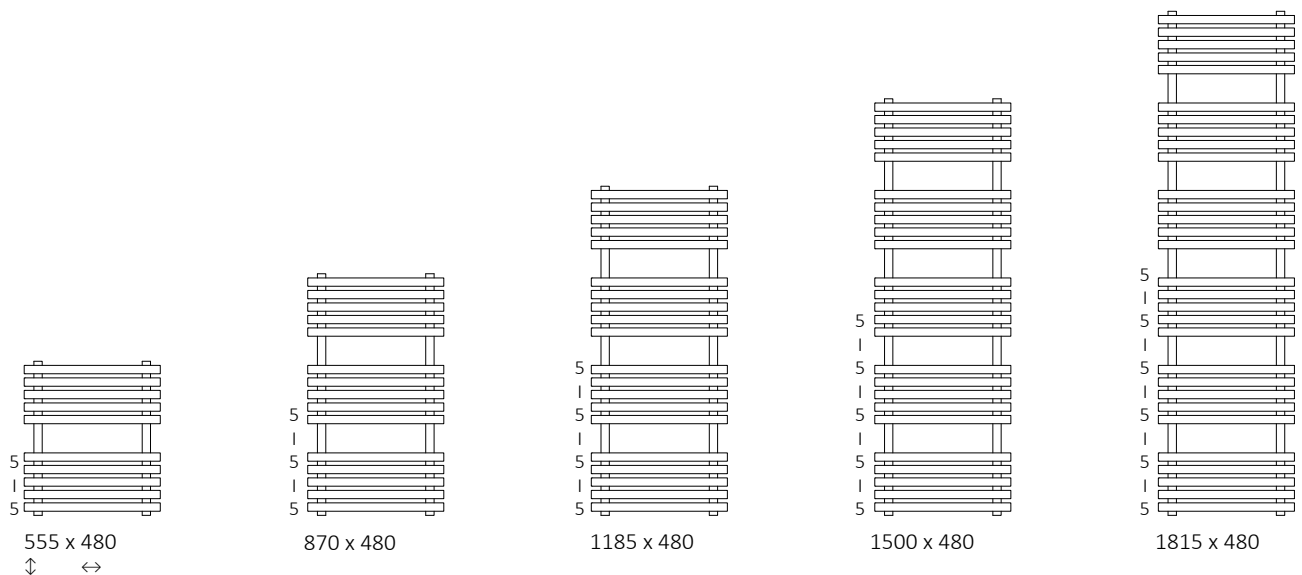

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C



| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75 65 20°C [W] | 55 45 20°C [W] | ☉ [W] | D [mm] | E [mm] | F [mm] | U [dm³] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|------------|--|
| 555 | 480 | 390 | 324 | 176 | 300 | 390 | 375 | 90 | 1,97 | 7,09 | WGKIO055048 |
| 870 | 480 | 390 | 476 | 255 | 400 | 390 | 690 | 90 | 3,01 | 10,70 | WGKIO087048 |
| 1185 | 480 | 390 | 628 | 336 | 600 | 390 | 1005 | 90 | 4,05 | 14,31 | WGKIO118048 |
| 1500 | 480 | 390 | 780 | 415 | 800 | 390 | 1320 | 90 | 5,09 | 17,92 | WGKIO150048 |
| 1815 | 480 | 390 | 932 | 496 | 1000 | 390 | 1635 | 90 | 6,13 | 21,53 | WGKIO181048 |

We recommend: 3-axis thermostatic valve for SX connection – see page 648

Pipe masking set – 70 mm – see page 673





SX

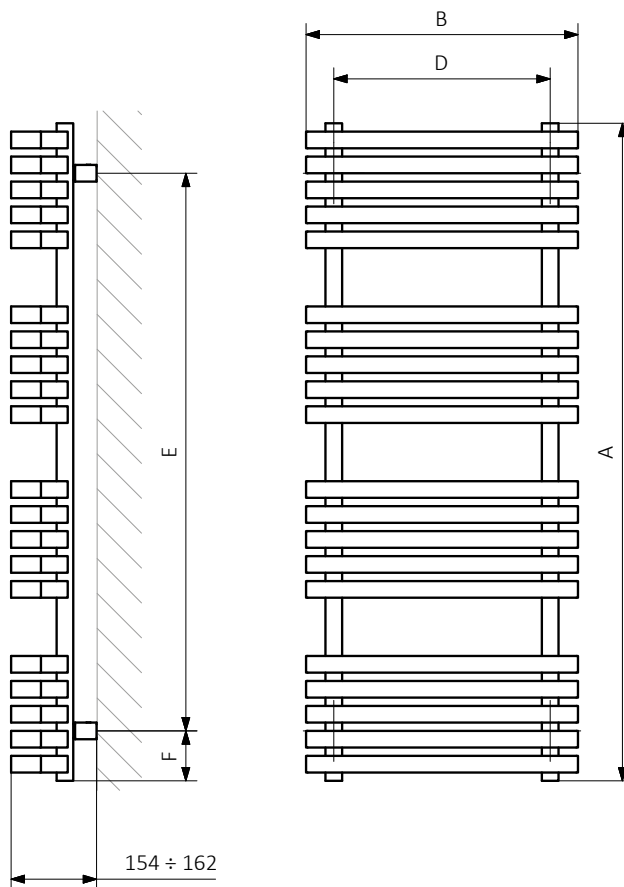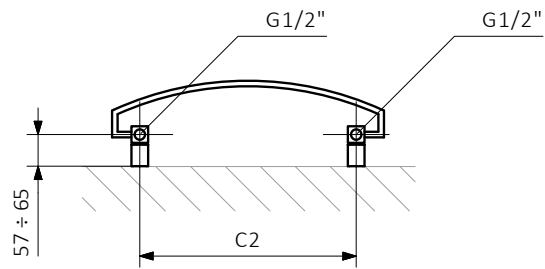

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:



Kioto One


📷 s. 138

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: Krzysztof Kotłowski


Standard connections:



Electric radiators: see page 599.



Available sizes:

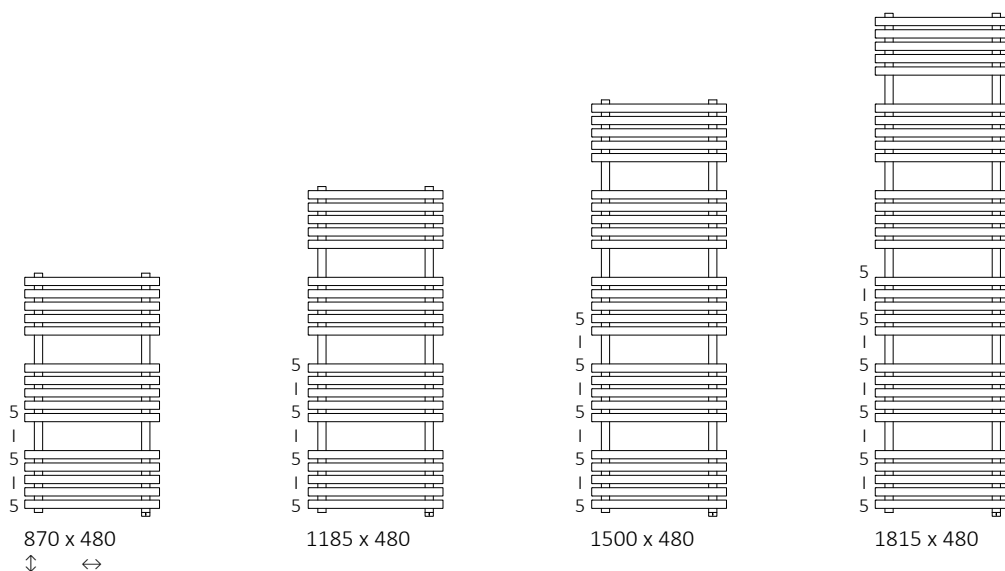

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☺ [W] | D [mm] | E [mm] | F [mm] | 📦 [dm³] | 📖 [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|-----------|--|
| 870 | 480 | 476 | 255 | 400 | 390 | 720 | 75 | 2,96 | 10,70 | WZKIN087048 |
| 1185 | 480 | 628 | 336 | 600 | 390 | 1035 | 75 | 4,00 | 14,31 | WZKIN118048 |
| 1500 | 480 | 780 | 415 | 800 | 390 | 1350 | 75 | 5,04 | 17,92 | WZKIN150048 |
| 1815 | 480 | 932 | 496 | 1000 | 390 | 1665 | 75 | 6,08 | 21,53 | WZKIN181048 |


We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654





Integrated pipe masking set – see page 675



S8

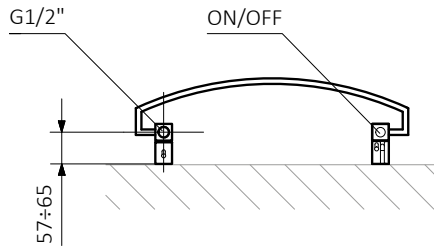


S1

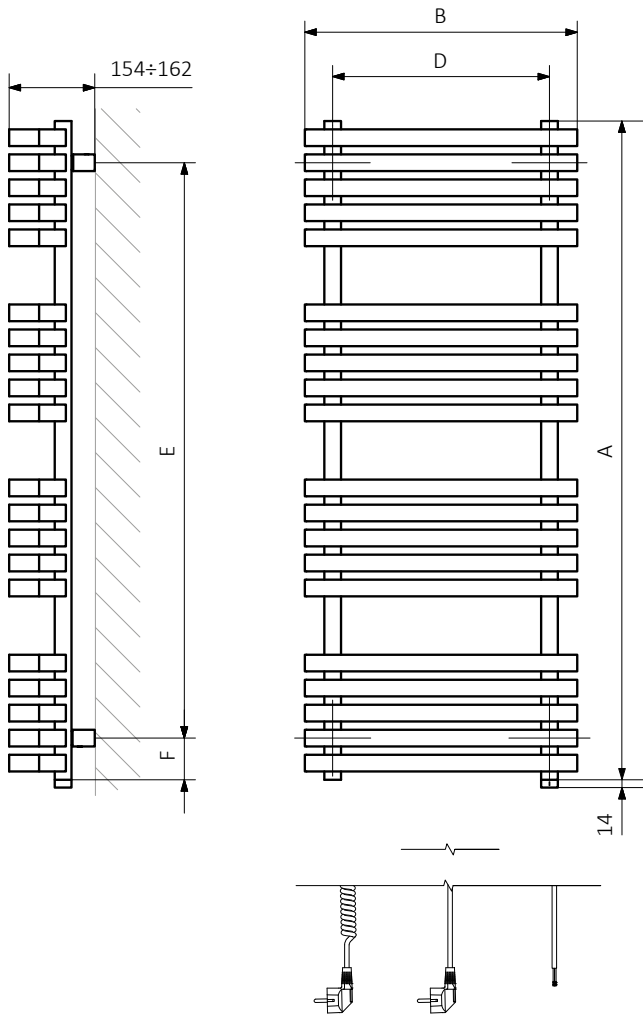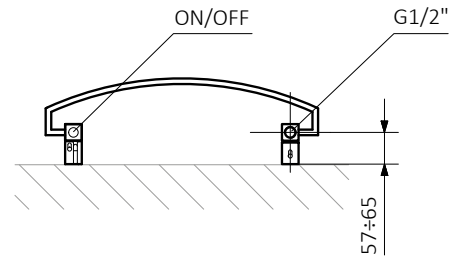


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Standard connections:



Electric radiators: see page 599.






Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-----------------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| Powder coating | | | | | | | | | | | |
| 660 | 400 | 364 | 243 | 131 | 300 | 356 | 480 | 90 | 2,23 | 4,60 | WGLEN066040 |
| 660 | 436 | 400 | 262 | 141 | 300 | 392 | 480 | 90 | 2,36 | 4,89 | WGLEN066043 |
| 660 | 486 | 450 | 287 | 154 | 300 | 442 | 480 | 90 | 2,54 | 5,28 | WGLEN066048 |
| 660 | 500 | 464 | 294 | 158 | 300 | 456 | 480 | 90 | 2,59 | 5,40 | WGLEN066050 |
| 660 | 536 | 500 | 312 | 168 | 300 | 492 | 480 | 90 | 2,72 | 5,69 | WGLEN066053 |
| 660 | 586 | 550 | 337 | 181 | 400 | 542 | 480 | 90 | 2,90 | 6,09 | WGLEN066058 |
| 660 | 600 | 564 | 343 | 185 | 400 | 556 | 480 | 90 | 2,95 | 6,20 | WGLEN066060 |
| 660 | 636 | 600 | 361 | 194 | 400 | 592 | 480 | 90 | 3,08 | 6,48 | WGLEN066063 |
| 660 | 686 | 650 | 385 | 207 | 400 | 642 | 480 | 90 | 3,26 | 6,89 | WGLEN066068 |
| 900 | 400 | 364 | 326 | 175 | 300 | 356 | 720 | 90 | 3,01 | 6,16 | WGLEN090040 |
| 900 | 436 | 400 | 351 | 189 | 400 | 392 | 720 | 90 | 3,18 | 6,54 | WGLEN090043 |
| 900 | 486 | 450 | 385 | 207 | 400 | 442 | 720 | 90 | 3,42 | 7,07 | WGLEN090048 |
| 900 | 500 | 464 | 394 | 212 | 400 | 456 | 720 | 90 | 3,48 | 7,23 | WGLEN090050 |
| 900 | 536 | 500 | 418 | 225 | 400 | 492 | 720 | 90 | 3,65 | 7,62 | WGLEN090053 |
| 900 | 586 | 550 | 451 | 242 | 400 | 542 | 720 | 90 | 3,89 | 8,15 | WGLEN090058 |
| 900 | 600 | 564 | 460 | 247 | 400 | 556 | 720 | 90 | 3,96 | 8,29 | WGLEN090060 |
| 900 | 636 | 600 | 484 | 260 | 600 | 592 | 720 | 90 | 4,13 | 8,68 | WGLEN090063 |
| 900 | 686 | 650 | 516 | 277 | 600 | 642 | 720 | 90 | 4,37 | 9,21 | WGLEN090068 |
| 1140 | 400 | 364 | 409 | 219 | 400 | 356 | 960 | 90 | 3,78 | 7,73 | WGLEN114040 |
| 1140 | 436 | 400 | 440 | 236 | 400 | 392 | 960 | 90 | 3,99 | 8,21 | WGLEN114043 |
| 1140 | 486 | 450 | 483 | 259 | 600 | 442 | 960 | 90 | 4,29 | 8,87 | WGLEN114048 |
| 1140 | 500 | 464 | 495 | 265 | 600 | 456 | 960 | 90 | 4,38 | 9,06 | WGLEN114050 |
| 1140 | 536 | 500 | 525 | 281 | 600 | 492 | 960 | 90 | 4,59 | 9,54 | WGLEN114053 |
| 1140 | 586 | 550 | 566 | 303 | 600 | 542 | 960 | 90 | 4,89 | 10,21 | WGLEN114058 |
| 1140 | 600 | 564 | 578 | 310 | 600 | 556 | 960 | 90 | 4,97 | 10,39 | WGLEN114060 |
| 1140 | 636 | 600 | 607 | 325 | 600 | 592 | 960 | 90 | 5,19 | 10,87 | WGLEN114063 |
| 1140 | 686 | 650 | 648 | 347 | 600 | 642 | 960 | 90 | 5,49 | 11,54 | WGLEN114068 |

We recommend: 3-axis manual valve for SX connection – see page 649






Pipe masking set – 70 mm – see page 673




Yo! hanger – see page 636




| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ⊗ [W] | D [mm] | E [mm] | F [mm] | ⊔ [dm ²] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|------------|--|
| 1380 | 400 | 364 | 493 | 264 | 600 | 356 | 1200 | 90 | 4,55 | 9,29 | WGLEN138040 |
| 1380 | 436 | 400 | 530 | 284 | 600 | 392 | 1200 | 90 | 4,81 | 9,86 | WGLEN138043 |
| 1380 | 486 | 450 | 582 | 311 | 600 | 442 | 1200 | 90 | 5,17 | 10,66 | WGLEN138048 |
| 1380 | 500 | 464 | 596 | 319 | 600 | 456 | 1200 | 90 | 5,27 | 10,89 | WGLEN138050 |
| 1380 | 536 | 500 | 632 | 338 | 600 | 492 | 1200 | 90 | 5,53 | 11,46 | WGLEN138053 |
| 1380 | 586 | 550 | 682 | 365 | 600 | 542 | 1200 | 90 | 5,88 | 12,27 | WGLEN138058 |
| 1380 | 600 | 564 | 696 | 372 | 800 | 556 | 1200 | 90 | 5,98 | 12,49 | WGLEN138060 |
| 1380 | 636 | 600 | 731 | 391 | 800 | 592 | 1200 | 90 | 6,24 | 13,07 | WGLEN138063 |
| 1380 | 686 | 650 | 780 | 417 | 800 | 642 | 1200 | 90 | 6,60 | 13,87 | WGLEN138068 |
| 1620 | 400 | 364 | 577 | 308 | 600 | 356 | 1440 | 90 | 5,32 | 10,85 | WGLEN162040 |
| 1620 | 436 | 400 | 621 | 332 | 600 | 392 | 1440 | 90 | 5,63 | 11,52 | WGLEN162043 |
| 1620 | 486 | 450 | 682 | 364 | 800 | 442 | 1440 | 90 | 6,04 | 12,45 | WGLEN162048 |
| 1620 | 500 | 464 | 698 | 373 | 800 | 456 | 1440 | 90 | 6,16 | 12,72 | WGLEN162050 |
| 1620 | 536 | 500 | 741 | 396 | 800 | 492 | 1440 | 90 | 6,46 | 13,39 | WGLEN162053 |
| 1620 | 586 | 550 | 799 | 427 | 800 | 542 | 1440 | 90 | 6,88 | 14,33 | WGLEN162058 |
| 1620 | 600 | 564 | 815 | 435 | 800 | 556 | 1440 | 90 | 7,00 | 14,59 | WGLEN162060 |
| 1620 | 636 | 600 | 857 | 457 | 800 | 592 | 1440 | 90 | 7,30 | 15,26 | WGLEN162063 |
| 1620 | 686 | 650 | 914 | 488 | 1000 | 642 | 1440 | 90 | 7,72 | 16,20 | WGLEN162068 |
| 1860 | 400 | 364 | 663 | 354 | 600 | 356 | 1680 | 90 | 6,10 | 12,42 | WGLEN186040 |
| 1860 | 436 | 400 | 714 | 381 | 800 | 392 | 1680 | 90 | 6,44 | 13,18 | WGLEN186043 |
| 1860 | 486 | 450 | 783 | 417 | 800 | 442 | 1680 | 90 | 6,92 | 14,25 | WGLEN186048 |
| 1860 | 500 | 464 | 802 | 427 | 800 | 456 | 1680 | 90 | 7,05 | 14,54 | WGLEN186050 |
| 1860 | 536 | 500 | 851 | 453 | 800 | 492 | 1680 | 90 | 7,40 | 15,32 | WGLEN186053 |
| 1860 | 586 | 550 | 918 | 489 | 1000 | 542 | 1680 | 90 | 7,87 | 16,39 | WGLEN186058 |
| 1860 | 600 | 564 | 937 | 499 | 1000 | 556 | 1680 | 90 | 8,01 | 16,68 | WGLEN186060 |
| 1860 | 636 | 600 | 984 | 524 | 1000 | 592 | 1680 | 90 | 8,35 | 17,45 | WGLEN186063 |
| 1860 | 686 | 650 | 1050 | 559 | 1000 | 642 | 1680 | 90 | 8,83 | 18,53 | WGLEN186068 |
| Plated finishes | | | | | | | | | | | |
| 660 | 400 | 364 | 170 | 92 | 200 | 356 | 480 | 90 | 2,23 | 4,42 | WGLEN066040 |
| 660 | 436 | 400 | 183 | 99 | 200 | 392 | 480 | 90 | 2,36 | 4,70 | WGLEN066043 |
| 660 | 486 | 450 | 201 | 108 | 200 | 442 | 480 | 90 | 2,54 | 5,08 | WGLEN066048 |
| 660 | 500 | 464 | 206 | 111 | 200 | 456 | 480 | 90 | 2,59 | 5,19 | WGLEN066050 |
| 660 | 536 | 500 | 218 | 118 | 200 | 492 | 480 | 90 | 2,72 | 5,47 | WGLEN066053 |
| 660 | 586 | 550 | 236 | 127 | 300 | 542 | 480 | 90 | 2,90 | 5,85 | WGLEN066058 |
| 660 | 600 | 564 | 240 | 130 | 200 | 556 | 480 | 90 | 2,95 | 5,96 | WGLEN066060 |
| 660 | 636 | 600 | 253 | 136 | 300 | 592 | 480 | 90 | 3,08 | 6,23 | WGLEN066063 |
| 660 | 686 | 650 | 270 | 145 | 300 | 642 | 480 | 90 | 3,26 | 6,62 | WGLEN066068 |
| 900 | 400 | 364 | 228 | 123 | 300 | 356 | 720 | 90 | 3,01 | 5,92 | WGLEN090040 |
| 900 | 436 | 400 | 246 | 132 | 300 | 392 | 720 | 90 | 3,18 | 6,29 | WGLEN090043 |
| 900 | 486 | 450 | 270 | 145 | 300 | 442 | 720 | 90 | 3,42 | 6,80 | WGLEN090048 |
| 900 | 500 | 464 | 276 | 148 | 300 | 456 | 720 | 90 | 3,48 | 6,95 | WGLEN090050 |

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| Plated finishes | | | | | | | | | | | |
| 900 | 536 | 500 | 293 | 158 | 300 | 492 | 720 | 90 | 3,65 | 7,32 | WGLEN090053 |
| 900 | 586 | 550 | 316 | 169 | 300 | 542 | 720 | 90 | 3,89 | 7,83 | WGLEN090058 |
| 900 | 600 | 564 | 322 | 173 | 300 | 556 | 720 | 90 | 3,96 | 7,97 | WGLEN090060 |
| 900 | 636 | 600 | 339 | 182 | 300 | 592 | 720 | 90 | 4,13 | 8,34 | WGLEN090063 |
| 900 | 686 | 650 | 361 | 194 | 400 | 642 | 720 | 90 | 4,37 | 8,85 | WGLEN090068 |
| 1140 | 400 | 364 | 286 | 153 | 300 | 356 | 960 | 90 | 3,78 | 7,43 | WGLEN114040 |
| 1140 | 436 | 400 | 308 | 165 | 300 | 392 | 960 | 90 | 3,99 | 7,89 | WGLEN114043 |
| 1140 | 486 | 450 | 338 | 181 | 400 | 442 | 960 | 90 | 4,29 | 8,53 | WGLEN114048 |
| 1140 | 500 | 464 | 347 | 186 | 400 | 456 | 960 | 90 | 4,38 | 8,71 | WGLEN114050 |
| 1140 | 536 | 500 | 368 | 197 | 400 | 492 | 960 | 90 | 4,59 | 9,17 | WGLEN114053 |
| 1140 | 586 | 550 | 396 | 212 | 400 | 542 | 960 | 90 | 4,89 | 9,81 | WGLEN114058 |
| 1140 | 600 | 564 | 405 | 217 | 400 | 556 | 960 | 90 | 4,97 | 9,99 | WGLEN114060 |
| 1140 | 636 | 600 | 425 | 228 | 400 | 592 | 960 | 90 | 5,19 | 10,45 | WGLEN114063 |
| 1140 | 686 | 650 | 454 | 243 | 400 | 642 | 960 | 90 | 5,49 | 11,09 | WGLEN114068 |
| 1380 | 400 | 364 | 345 | 185 | 400 | 356 | 1200 | 90 | 4,55 | 8,93 | WGLEN138040 |
| 1380 | 436 | 400 | 371 | 199 | 400 | 392 | 1200 | 90 | 4,81 | 9,48 | WGLEN138043 |
| 1380 | 486 | 450 | 407 | 218 | 400 | 442 | 1200 | 90 | 5,17 | 10,25 | WGLEN138048 |
| 1380 | 500 | 464 | 417 | 223 | 400 | 456 | 1200 | 90 | 5,27 | 10,47 | WGLEN138050 |
| 1380 | 536 | 500 | 442 | 237 | 400 | 492 | 1200 | 90 | 5,53 | 11,02 | WGLEN138053 |
| 1380 | 586 | 550 | 477 | 256 | 600 | 542 | 1200 | 90 | 5,88 | 11,79 | WGLEN138058 |
| 1380 | 600 | 564 | 487 | 260 | 400 | 556 | 1200 | 90 | 5,98 | 12,00 | WGLEN138060 |
| 1380 | 636 | 600 | 512 | 274 | 400 | 592 | 1200 | 90 | 6,24 | 12,56 | WGLEN138063 |
| 1380 | 686 | 650 | 546 | 292 | 400 | 642 | 1200 | 90 | 6,60 | 13,33 | WGLEN138068 |
| 1620 | 400 | 364 | 404 | 216 | 400 | 356 | 1440 | 90 | 5,32 | 10,43 | WGLEN162040 |
| 1620 | 436 | 400 | 435 | 232 | 400 | 392 | 1440 | 90 | 5,63 | 11,08 | WGLEN162043 |
| 1620 | 486 | 450 | 477 | 255 | 600 | 442 | 1440 | 90 | 6,04 | 11,97 | WGLEN162048 |
| 1620 | 500 | 464 | 489 | 261 | 600 | 456 | 1440 | 90 | 6,16 | 12,23 | WGLEN162050 |
| 1620 | 536 | 500 | 519 | 277 | 600 | 492 | 1440 | 90 | 6,46 | 12,87 | WGLEN162053 |
| 1620 | 586 | 550 | 559 | 299 | 600 | 542 | 1440 | 90 | 6,88 | 13,77 | WGLEN162058 |
| 1620 | 600 | 564 | 571 | 305 | 400 | 556 | 1440 | 90 | 7,00 | 14,02 | WGLEN162060 |
| 1620 | 636 | 600 | 600 | 320 | 600 | 592 | 1440 | 90 | 7,30 | 14,66 | WGLEN162063 |
| 1620 | 686 | 650 | 640 | 342 | 600 | 642 | 1440 | 90 | 7,72 | 15,56 | WGLEN162068 |

Available sizes:


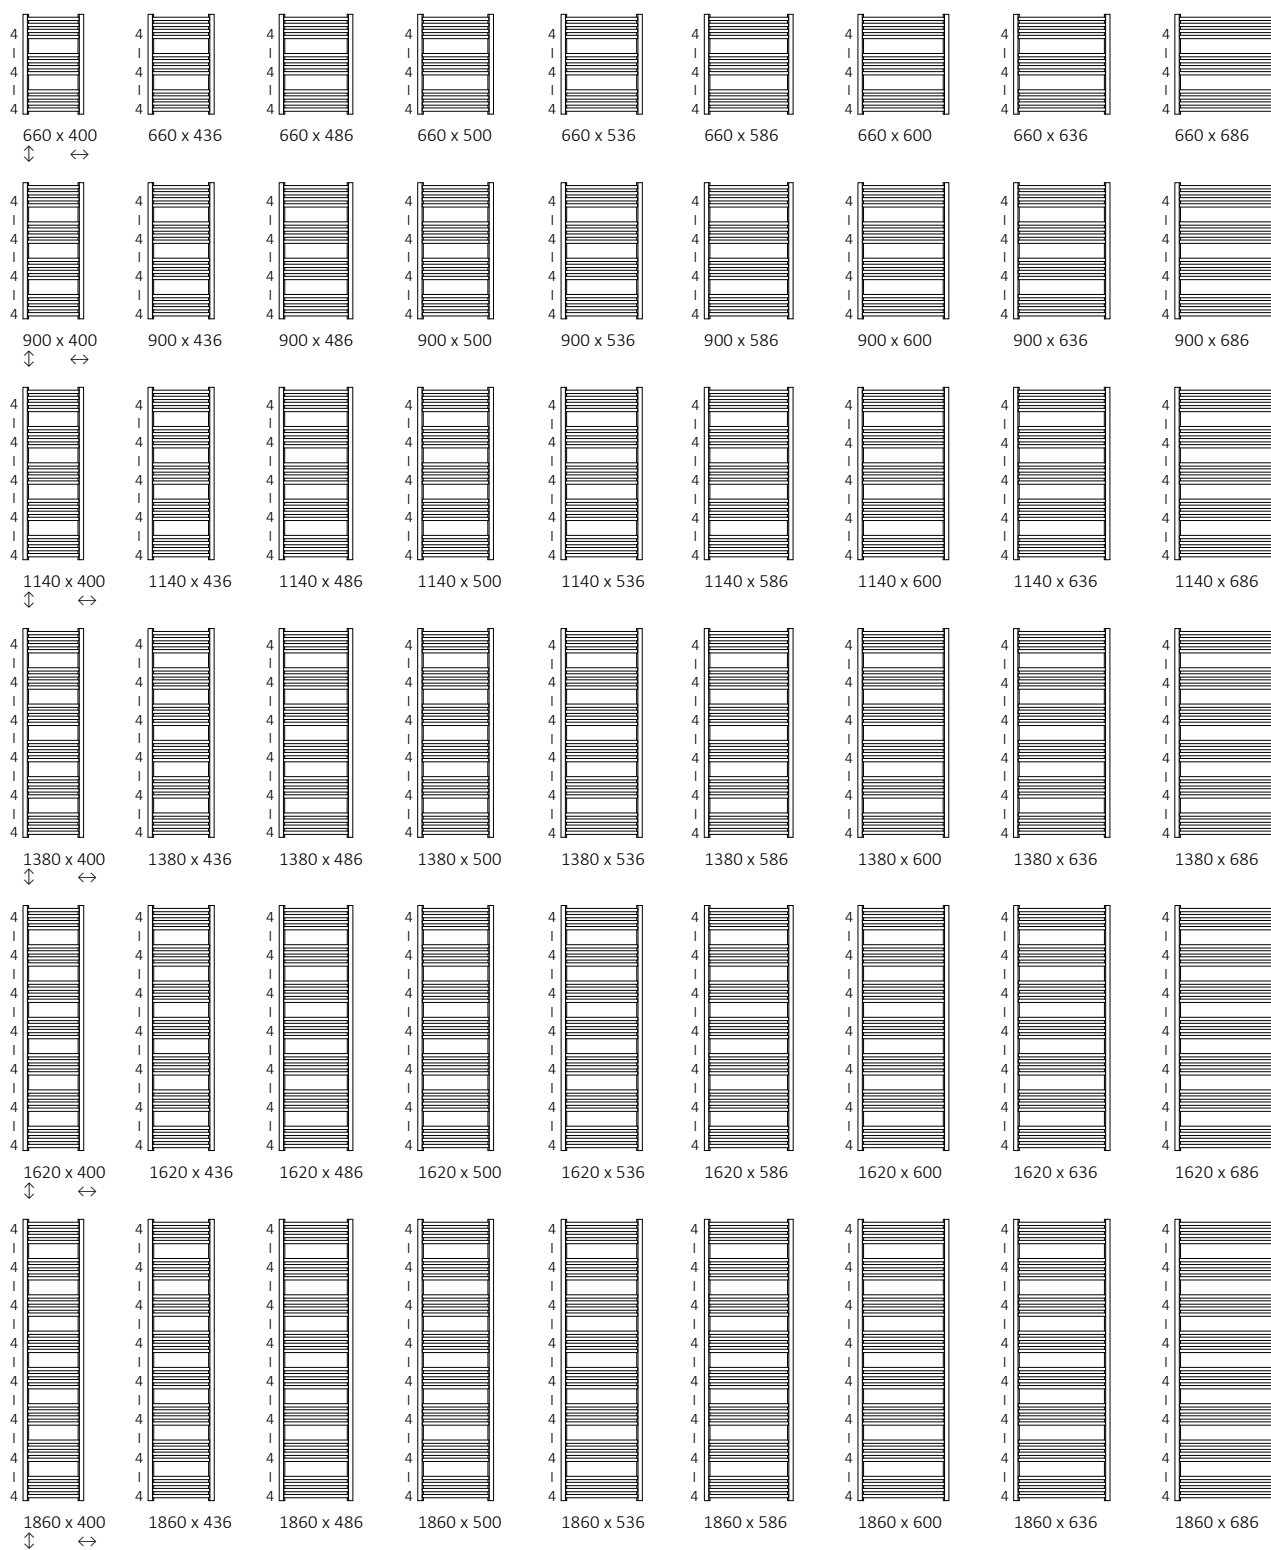


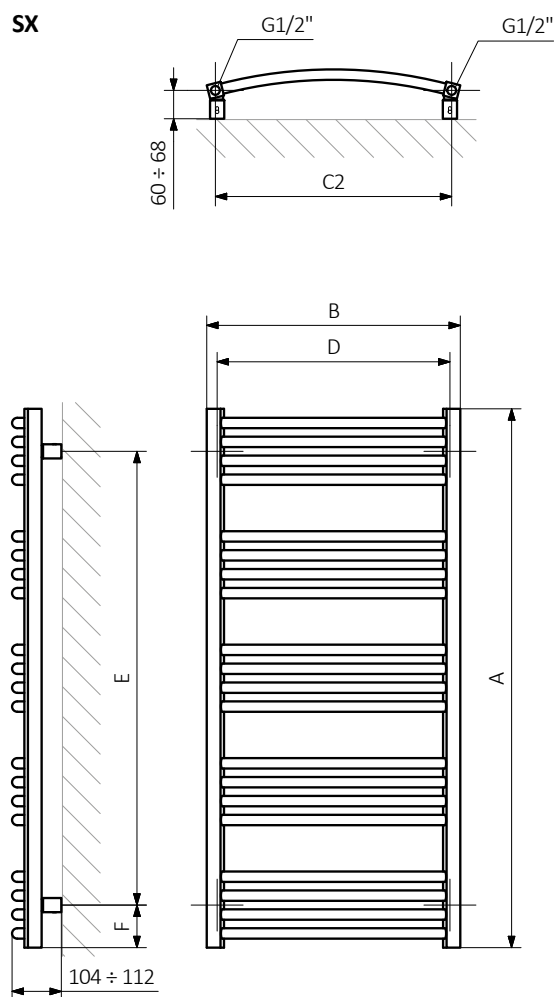

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:







Colour included in the price

design: Terma

Standard connections:

A ↓ 300÷1700:



A ↓ 500÷1700:



Electric radiators: see page 599.



Optional connections:

A ↓ 300÷1700:



A ↓ 500÷1700:



A ↓ 820÷1700:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☉ [W] | D [mm] | E [mm] | F [mm] | H [dm³] | 📦 [kg] | Product code <small>(Configuration code p. 787)</small> |
|-----------------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|-----------|--|
| Powder coating | | | | | | | | | | | | |
| 300 | 1000 | 50 | 970 | 290 | 159 | — | 970 | 120 | 90 | 2,43 | 5,28 | WGLIM030100 |
| 300 | 1200 | 50 | 1170 | 347 | 191 | — | 1170 | 120 | 90 | 2,85 | 6,21 | WGLIM030120 |
| 300 | 1400 | 50 | 1370 | 405 | 223 | — | 1370 | 120 | 90 | 3,26 | 7,15 | WGLIM030140 |
| 500 | 300 | 50 | 270 | 144 | 79 | 120 | 270 | 320 | 90 | 1,50 | 3,06 | WGLIM050030 |
| 500 | 400 | 50 | 370 | 192 | 105 | 200 | 370 | 320 | 90 | 1,79 | 3,72 | WGLIM050040 |
| 500 | 500 | 50 | 470 | 241 | 131 | 200 | 470 | 320 | 90 | 2,09 | 4,39 | WGLIM050050 |
| 500 | 600 | 50 | 570 | 282 | 153 | 300 | 570 | 320 | 90 | 2,39 | 5,06 | WGLIM050060 |
| 500 | 700 | 50 | 670 | 324 | 176 | 300 | 670 | 320 | 90 | 2,69 | 5,73 | WGLIM050070 |
| 500 | 1000 | 50 | 970 | 482 | 262 | — | 970 | 320 | 90 | 3,59 | 7,73 | WGLIM050100 |
| 500 | 1200 | 50 | 1170 | 578 | 314 | — | 1170 | 320 | 90 | 4,18 | 9,07 | WGLIM050120 |
| 500 | 1400 | 50 | 1370 | 675 | 367 | — | 1370 | 320 | 90 | 4,78 | 10,41 | WGLIM050140 |
| 820 | 300 | 50 | 270 | 244 | 132 | 300 | 270 | 640 | 90 | 2,53 | 5,14 | WGLIM082030 |
| 820 | 400 | 50 | 370 | 325 | 175 | 300 | 370 | 640 | 90 | 3,07 | 6,34 | WGLIM082040 |
| 820 | 500 | 50 | 470 | 406 | 218 | 400 | 470 | 640 | 90 | 3,61 | 7,54 | WGLIM082050 |
| 820 | 600 | 50 | 570 | 477 | 256 | 400 | 570 | 640 | 90 | 4,15 | 8,75 | WGLIM082060 |
| 820 | 700 | 50 | 670 | 547 | 293 | 600 | 670 | 640 | 90 | 4,68 | 9,95 | WGLIM082070 |
| 1140 | 300 | 50 | 270 | 345 | 185 | 400 | 270 | 960 | 90 | 3,57 | 7,22 | WGLIM114030 |

We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652



Integrated pipe masking set – see page 675



ONE heating element – see page 690



Yo! hanger – see page 636














| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☉ [W] | D [mm] | E [mm] | F [mm] | H [dm ³] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|------------|--|
| 1140 | 400 | 50 | 370 | 460 | 247 | 400 | 370 | 960 | 90 | 4,35 | 8,96 | WGLIM114040 |
| 1140 | 500 | 50 | 470 | 574 | 308 | 600 | 470 | 960 | 90 | 5,13 | 10,69 | WGLIM114050 |
| 1140 | 600 | 50 | 570 | 675 | 361 | 800 | 570 | 960 | 90 | 5,90 | 12,43 | WGLIM114060 |
| 1140 | 700 | 50 | 670 | 776 | 415 | 800 | 670 | 960 | 90 | 6,68 | 14,17 | WGLIM114070 |
| 1460 | 300 | 50 | 270 | 449 | 240 | 400 | 270 | 1280 | 90 | 4,66 | 9,42 | WGLIM146030 |
| 1460 | 400 | 50 | 370 | 599 | 319 | 600 | 370 | 1280 | 90 | 5,68 | 11,69 | WGLIM146040 |
| 1460 | 500 | 50 | 470 | 748 | 399 | 800 | 470 | 1280 | 90 | 6,69 | 13,96 | WGLIM146050 |
| 1460 | 600 | 50 | 570 | 879 | 468 | 800 | 570 | 1280 | 90 | 7,71 | 16,23 | WGLIM146060 |
| 1460 | 700 | 50 | 670 | 1009 | 537 | 1000 | 670 | 1280 | 90 | 8,73 | 18,50 | WGLIM146070 |
| 1700 | 300 | 50 | 270 | 527 | 280 | 600 | 270 | 1520 | 90 | 5,47 | 11,04 | WGLIM170030 |
| 1700 | 400 | 50 | 370 | 703 | 374 | 800 | 370 | 1520 | 90 | 6,66 | 13,71 | WGLIM170040 |
| 1700 | 500 | 50 | 470 | 878 | 466 | 800 | 470 | 1520 | 90 | 7,86 | 16,38 | WGLIM170050 |
| 1700 | 600 | 50 | 570 | 1031 | 547 | 1000 | 570 | 1520 | 90 | 9,05 | 19,05 | WGLIM170060 |
| 1700 | 700 | 50 | 670 | 1183 | 628 | 1200 | 670 | 1520 | 90 | 10,25 | 21,73 | WGLIM170070 |




Plated finishes

| | | | | | | | | | | | | |
|------|------|----|------|-----|-----|-----|------|------|----|-------|-------|-------------|
| 300 | 1000 | 50 | 970 | 203 | 104 | – | 970 | 120 | 90 | 2,43 | 5,07 | WGLIM030100 |
| 300 | 1200 | 50 | 1170 | 243 | 124 | – | 1170 | 120 | 90 | 2,85 | 5,96 | WGLIM030120 |
| 300 | 1400 | 50 | 1370 | 284 | 145 | – | 1370 | 120 | 90 | 3,26 | 6,86 | WGLIM030140 |
| 500 | 300 | 50 | 270 | 101 | 51 | 120 | 270 | 320 | 90 | 1,50 | 2,94 | WGLIM050030 |
| 500 | 400 | 50 | 370 | 134 | 69 | 120 | 370 | 320 | 90 | 1,79 | 3,58 | WGLIM050040 |
| 500 | 500 | 50 | 470 | 169 | 86 | 200 | 470 | 320 | 90 | 2,09 | 4,22 | WGLIM050050 |
| 500 | 600 | 50 | 570 | 197 | 101 | 200 | 570 | 320 | 90 | 2,39 | 4,86 | WGLIM050060 |
| 500 | 700 | 50 | 670 | 227 | 116 | 200 | 670 | 320 | 90 | 2,69 | 5,50 | WGLIM050070 |
| 500 | 1000 | 50 | 970 | 337 | 172 | – | 970 | 320 | 90 | 3,59 | 7,43 | WGLIM050100 |
| 500 | 1200 | 50 | 1170 | 405 | 206 | – | 1170 | 320 | 90 | 4,18 | 8,71 | WGLIM050120 |
| 500 | 1400 | 50 | 1370 | 473 | 241 | – | 1370 | 320 | 90 | 4,78 | 9,99 | WGLIM050140 |
| 820 | 300 | 50 | 270 | 171 | 87 | 200 | 270 | 640 | 90 | 2,53 | 4,94 | WGLIM082030 |
| 820 | 400 | 50 | 370 | 228 | 116 | 200 | 370 | 640 | 90 | 3,07 | 6,10 | WGLIM082040 |
| 820 | 500 | 50 | 470 | 284 | 145 | 300 | 470 | 640 | 90 | 3,61 | 7,25 | WGLIM082050 |
| 820 | 600 | 50 | 570 | 334 | 170 | 400 | 570 | 640 | 90 | 4,15 | 8,40 | WGLIM082060 |
| 820 | 700 | 50 | 670 | 383 | 195 | 400 | 670 | 640 | 90 | 4,68 | 9,55 | WGLIM082070 |
| 1140 | 300 | 50 | 270 | 242 | 123 | 300 | 270 | 960 | 90 | 3,57 | 6,94 | WGLIM114030 |
| 1140 | 400 | 50 | 370 | 322 | 164 | 300 | 370 | 960 | 90 | 4,35 | 8,61 | WGLIM114040 |
| 1140 | 500 | 50 | 470 | 402 | 205 | 400 | 470 | 960 | 90 | 5,13 | 10,27 | WGLIM114050 |
| 1140 | 600 | 50 | 570 | 473 | 241 | 400 | 570 | 960 | 90 | 5,90 | 11,94 | WGLIM114060 |
| 1140 | 700 | 50 | 670 | 543 | 277 | 600 | 670 | 960 | 90 | 6,68 | 13,61 | WGLIM114070 |
| 1460 | 300 | 50 | 270 | 314 | 160 | 300 | 270 | 1280 | 90 | 4,66 | 9,06 | WGLIM146030 |
| 1460 | 400 | 50 | 370 | 419 | 214 | 400 | 370 | 1280 | 90 | 5,68 | 11,24 | WGLIM146040 |
| 1460 | 500 | 50 | 470 | 524 | 267 | 600 | 470 | 1280 | 90 | 6,69 | 13,41 | WGLIM146050 |
| 1460 | 600 | 50 | 570 | 615 | 314 | 600 | 570 | 1280 | 90 | 7,71 | 15,59 | WGLIM146060 |
| 1460 | 700 | 50 | 670 | 706 | 360 | 800 | 670 | 1280 | 90 | 8,73 | 17,77 | WGLIM146070 |
| 1700 | 300 | 50 | 270 | 369 | 188 | 400 | 270 | 1520 | 90 | 5,47 | 10,62 | WGLIM170030 |
| 1700 | 400 | 50 | 370 | 492 | 251 | 600 | 370 | 1520 | 90 | 6,66 | 13,18 | WGLIM170040 |
| 1700 | 500 | 50 | 470 | 615 | 313 | 600 | 470 | 1520 | 90 | 7,86 | 15,74 | WGLIM170050 |
| 1700 | 600 | 50 | 570 | 722 | 368 | 800 | 570 | 1520 | 90 | 9,05 | 18,30 | WGLIM170060 |
| 1700 | 700 | 50 | 670 | 828 | 422 | 800 | 670 | 1520 | 90 | 10,25 | 20,86 | WGLIM170070 |

Available sizes:

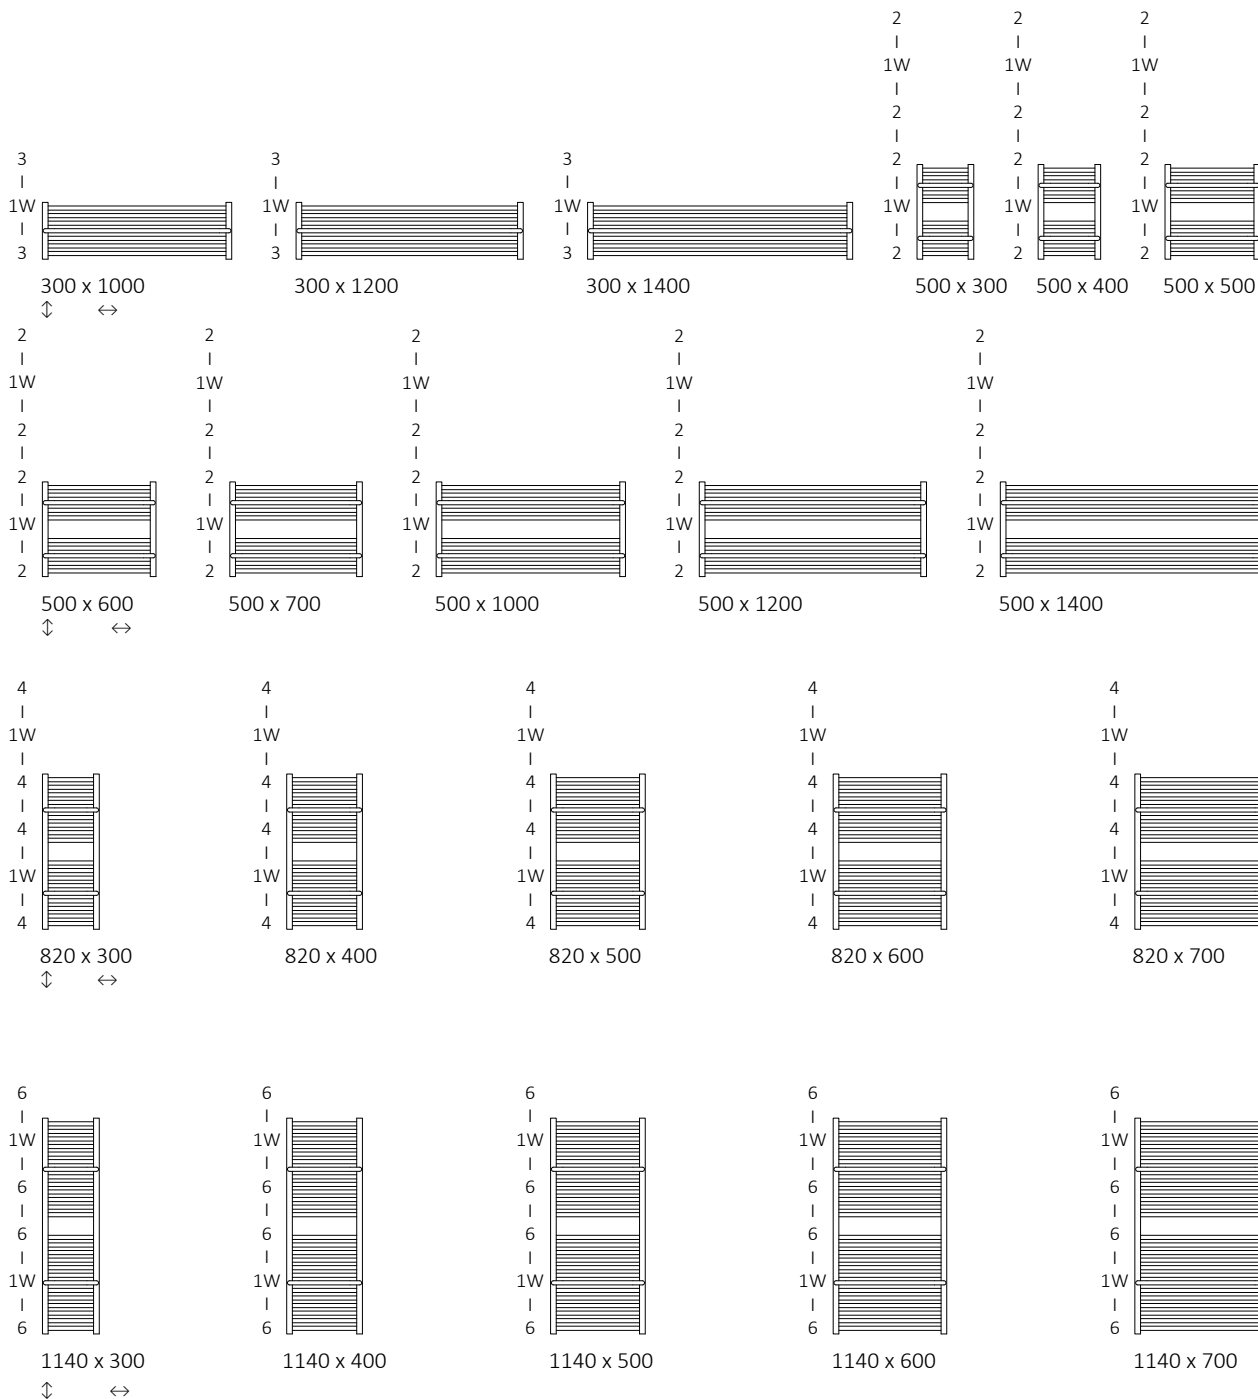

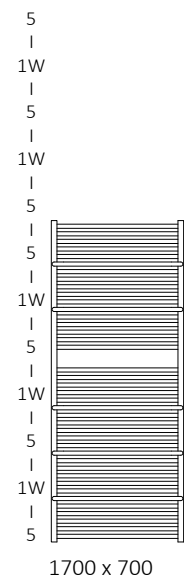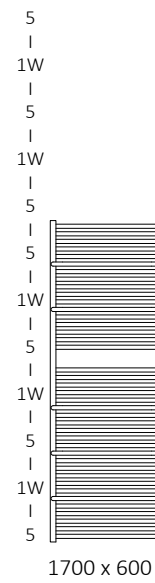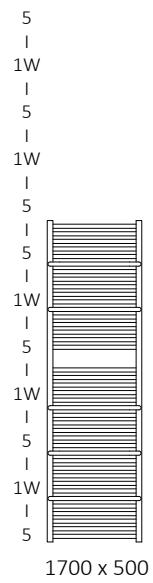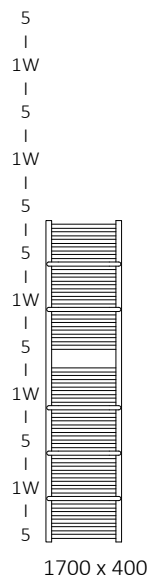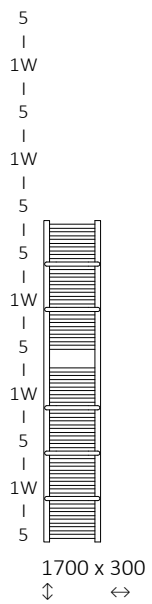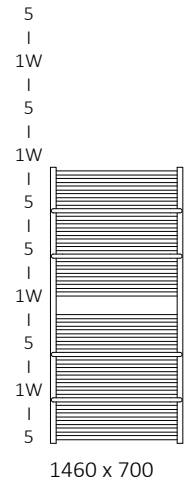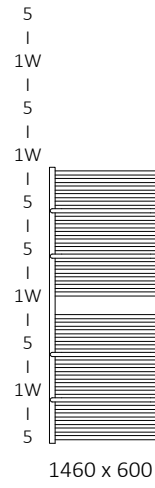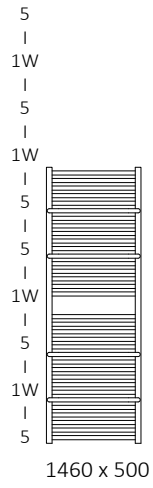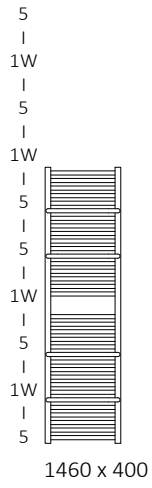
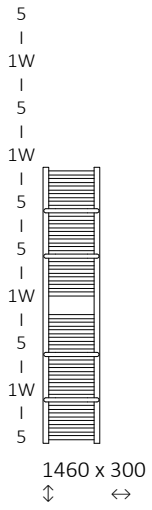


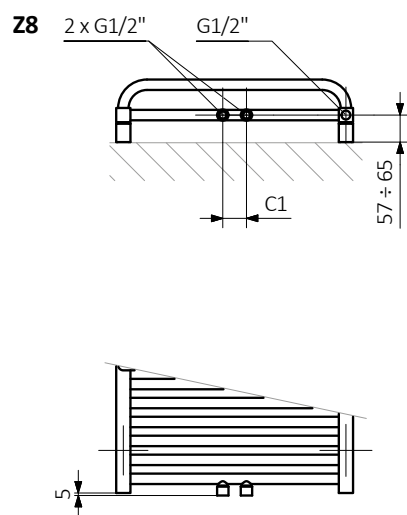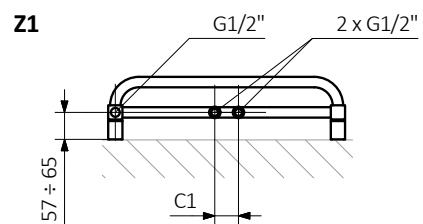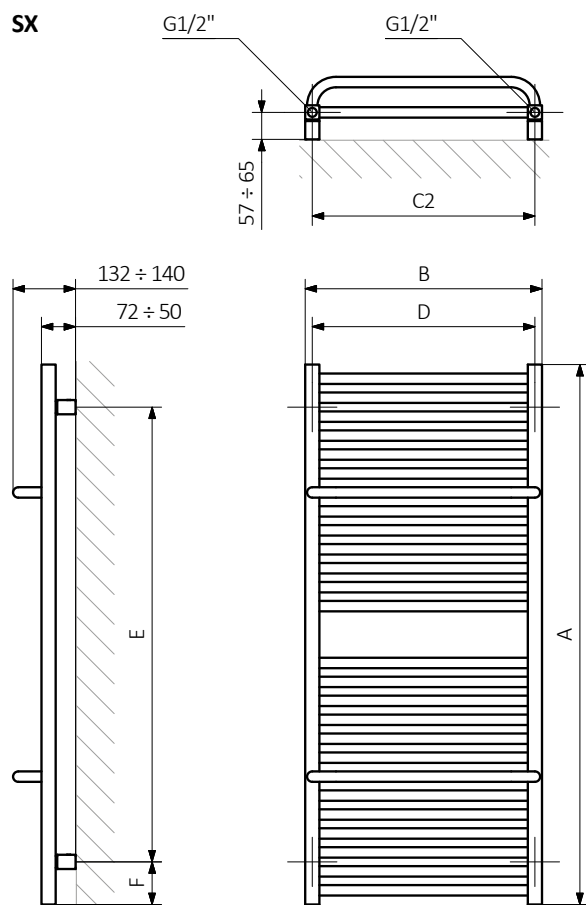


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:






Lima One s. 142

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:



Optional connections:






Electric radiators: see page 599.



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | C5 [mm] | 75 65 20°C [W] | 55 45 20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|-----------------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|--|---|--|
| Powder coating | | | | | | | | | | | |
| 820 | 300 | 500 | 244 | 132 | 300 | 270 | 680 | 70 | 2,47 | 5,14 | WZLIE082030 |
| 820 | 400 | 500 | 325 | 175 | 300 | 370 | 680 | 70 | 3,01 | 6,34 | WZLIE082040 |
| 820 | 500 | 500 | 406 | 218 | 400 | 470 | 680 | 70 | 3,54 | 7,54 | WZLIE082050 |
| 820 | 600 | 500 | 477 | 256 | 400 | 570 | 680 | 70 | 4,08 | 8,75 | WZLIE082060 |
| 820 | 700 | 500 | 547 | 293 | 600 | 670 | 680 | 70 | 4,62 | 9,95 | WZLIE082070 |
| 1140 | 300 | 500 | 345 | 185 | 400 | 270 | 1000 | 70 | 3,51 | 7,22 | WZLIE114030 |
| 1140 | 400 | 500 | 460 | 247 | 400 | 370 | 1000 | 70 | 4,28 | 8,96 | WZLIE114040 |
| 1140 | 500 | 500 | 574 | 308 | 600 | 470 | 1000 | 70 | 5,06 | 10,69 | WZLIE114050 |
| 1140 | 600 | 500 | 675 | 361 | 800 | 570 | 1000 | 70 | 5,84 | 12,43 | WZLIE114060 |
| 1140 | 700 | 500 | 776 | 415 | 800 | 670 | 1000 | 70 | 6,61 | 14,17 | WZLIE114070 |
| 1460 | 300 | 500 | 449 | 240 | 400 | 270 | 1320 | 70 | 4,60 | 9,42 | WZLIE146030 |
| 1460 | 400 | 500 | 599 | 319 | 600 | 370 | 1320 | 70 | 5,61 | 11,69 | WZLIE146040 |
| 1460 | 500 | 500 | 748 | 399 | 800 | 470 | 1320 | 70 | 6,63 | 13,96 | WZLIE146050 |
| 1460 | 600 | 500 | 879 | 468 | 800 | 570 | 1320 | 70 | 7,64 | 16,23 | WZLIE146060 |
| 1460 | 700 | 500 | 1009 | 537 | 1000 | 670 | 1320 | 70 | 8,66 | 18,50 | WZLIE146070 |
| 1700 | 300 | 500 | 527 | 280 | 600 | 270 | 1560 | 70 | 5,40 | 11,04 | WZLIE170030 |
| 1700 | 400 | 500 | 703 | 374 | 800 | 370 | 1560 | 70 | 6,60 | 13,71 | WZLIE170040 |
| 1700 | 500 | 500 | 878 | 466 | 800 | 470 | 1560 | 70 | 7,79 | 16,38 | WZLIE170050 |
| 1700 | 600 | 500 | 1031 | 547 | 1000 | 570 | 1560 | 70 | 8,99 | 19,05 | WZLIE170060 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654






Integrated pipe masking set – see page 675


























Yo! hanger – see page 636



| A ↓ [mm] | B ↔ [mm] | C5 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Plated finishes | | | | | | | | | | | |
| 820 | 300 | 500 | 171 | 87 | 200 | 270 | 680 | 70 | 2,47 | 4,94 | WZLIE082030 |
| 820 | 400 | 500 | 228 | 116 | 200 | 370 | 680 | 70 | 3,01 | 6,10 | WZLIE082040 |
| 820 | 500 | 500 | 284 | 145 | 300 | 470 | 680 | 70 | 3,54 | 7,25 | WZLIE082050 |
| 820 | 600 | 500 | 334 | 170 | 400 | 570 | 680 | 70 | 4,08 | 8,40 | WZLIE082060 |
| 820 | 700 | 500 | 383 | 195 | 400 | 670 | 680 | 70 | 4,62 | 9,55 | WZLIE082070 |
| 1140 | 300 | 500 | 242 | 123 | 300 | 270 | 1000 | 70 | 3,51 | 6,94 | WZLIE114030 |
| 1140 | 400 | 500 | 322 | 164 | 300 | 370 | 1000 | 70 | 4,28 | 8,61 | WZLIE114040 |
| 1140 | 500 | 500 | 402 | 205 | 400 | 470 | 1000 | 70 | 5,06 | 10,27 | WZLIE114050 |
| 1140 | 600 | 500 | 473 | 241 | 400 | 570 | 1000 | 70 | 5,84 | 11,94 | WZLIE114060 |
| 1140 | 700 | 500 | 543 | 277 | 600 | 670 | 1000 | 70 | 6,61 | 13,61 | WZLIE114070 |
| 1460 | 300 | 500 | 314 | 160 | 300 | 270 | 1320 | 70 | 4,60 | 9,06 | WZLIE146030 |
| 1460 | 400 | 500 | 419 | 214 | 400 | 370 | 1320 | 70 | 5,61 | 11,24 | WZLIE146040 |
| 1460 | 500 | 500 | 524 | 267 | 600 | 470 | 1320 | 70 | 6,63 | 13,41 | WZLIE146050 |
| 1460 | 600 | 500 | 615 | 314 | 600 | 570 | 1320 | 70 | 7,64 | 15,59 | WZLIE146060 |
| 1460 | 700 | 500 | 706 | 360 | 800 | 670 | 1320 | 70 | 8,66 | 17,77 | WZLIE146070 |
| 1700 | 300 | 500 | 369 | 188 | 400 | 270 | 1560 | 70 | 5,40 | 10,62 | WZLIE170030 |
| 1700 | 400 | 500 | 492 | 251 | 600 | 370 | 1560 | 70 | 6,60 | 13,18 | WZLIE170040 |
| 1700 | 500 | 500 | 615 | 313 | 600 | 470 | 1560 | 70 | 7,79 | 15,74 | WZLIE170050 |
| 1700 | 600 | 500 | 722 | 368 | 800 | 570 | 1560 | 70 | 8,99 | 18,30 | WZLIE170060 |
| 1700 | 700 | 500 | 828 | 422 | 800 | 670 | 1560 | 70 | 10,18 | 20,86 | WZLIE170070 |

Available sizes:





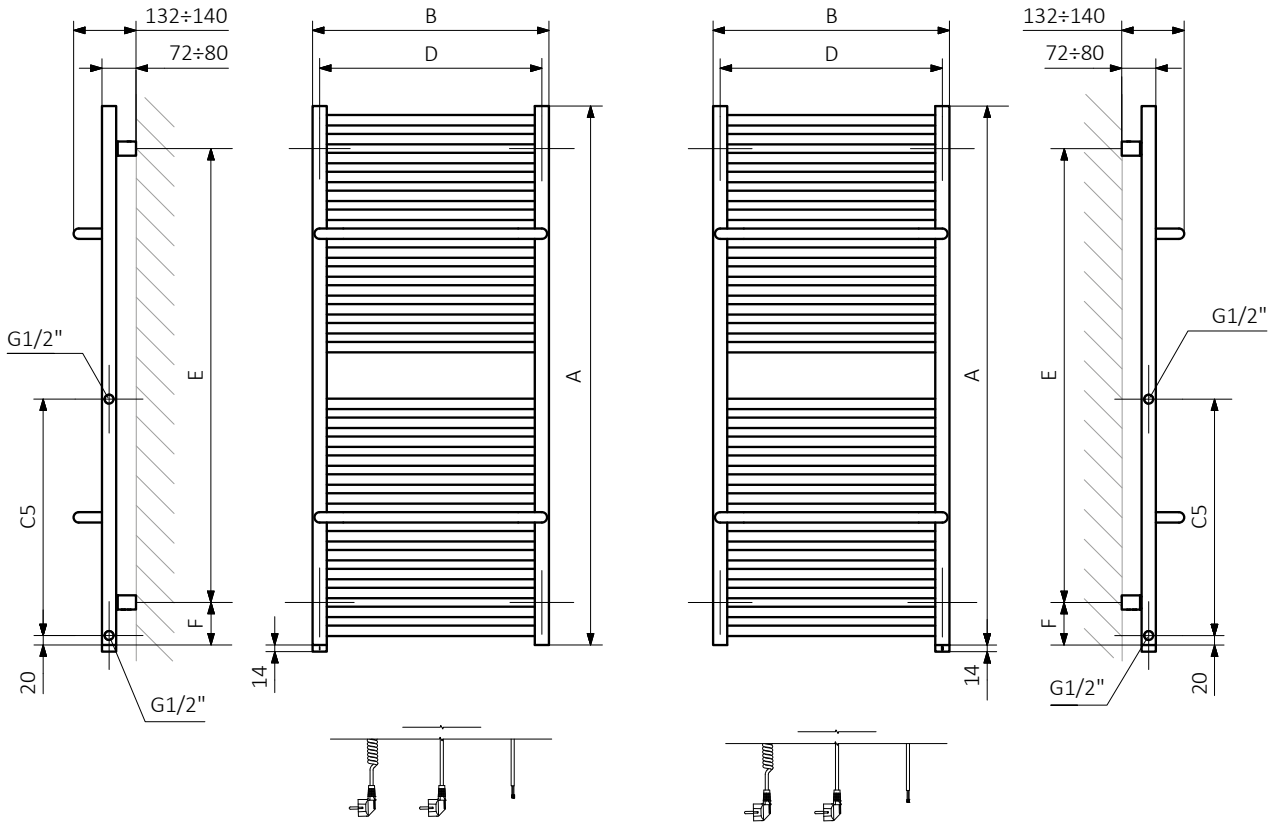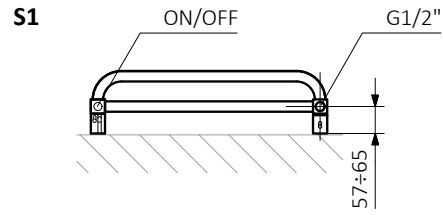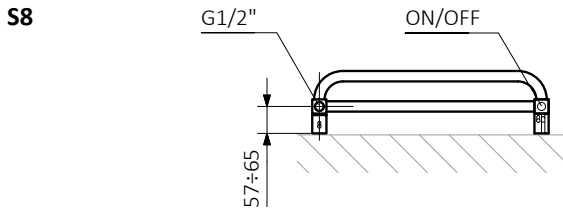


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:


Pipe:




Standard connections:




Electric radiators: see page 599.



Optional connections:

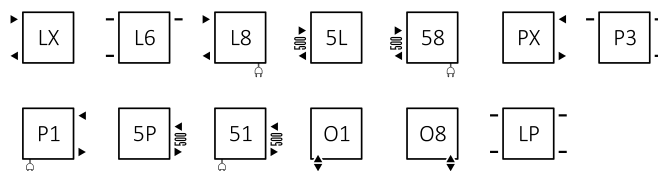

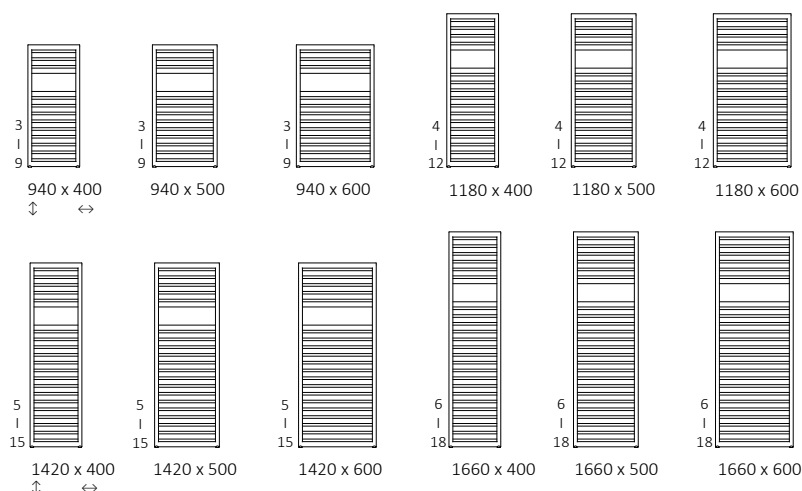


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 940 | 400 | 50 | 370 | 344 | 186 | 400 | 370 | 780 | 80 | 2,83 | 7,60 | WGW51094040 |
| 940 | 500 | 50 | 470 | 428 | 231 | 400 | 470 | 780 | 80 | 3,32 | 9,23 | WGW51094050 |
| 940 | 600 | 50 | 570 | 502 | 271 | 600 | 570 | 780 | 80 | 3,82 | 10,86 | WGW51094060 |
| 1180 | 400 | 50 | 370 | 435 | 234 | 400 | 370 | 1020 | 80 | 3,51 | 9,66 | WGW51118040 |
| 1180 | 500 | 50 | 470 | 538 | 288 | 600 | 470 | 1020 | 80 | 4,11 | 11,74 | WGW51118050 |
| 1180 | 600 | 50 | 570 | 629 | 337 | 600 | 570 | 1020 | 80 | 4,70 | 13,82 | WGW51118060 |
| 1420 | 400 | 50 | 370 | 526 | 283 | 600 | 370 | 1260 | 80 | 4,19 | 11,73 | WGW51142040 |
| 1420 | 500 | 50 | 470 | 633 | 340 | 600 | 470 | 1260 | 80 | 4,89 | 14,25 | WGW51142050 |
| 1420 | 600 | 50 | 570 | 756 | 406 | 800 | 570 | 1260 | 80 | 5,59 | 16,77 | WGW51142060 |
| 1660 | 400 | 50 | 370 | 617 | 331 | 600 | 370 | 1500 | 80 | 4,87 | 13,78 | WGW51166040 |
| 1660 | 500 | 50 | 470 | 758 | 405 | 800 | 470 | 1500 | 80 | 5,67 | 16,76 | WGW51166050 |
| 1660 | 600 | 50 | 570 | 883 | 470 | 800 | 570 | 1500 | 80 | 6,47 | 19,73 | WGW51166060 |

We recommend: 3-axis thermostatic valve for SX connection – see page 648



Pipe masking set – 70 mm – see page 673




SX

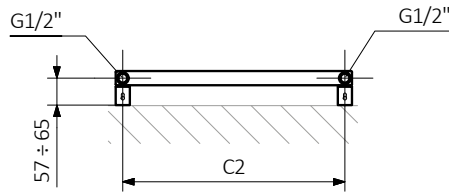


ZX

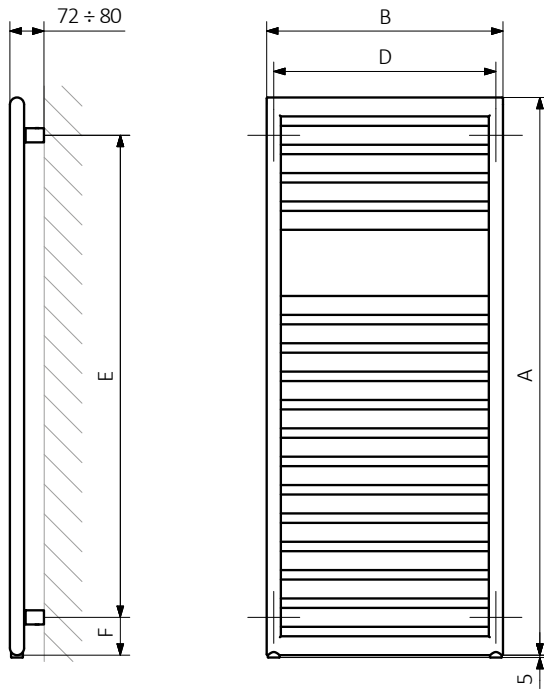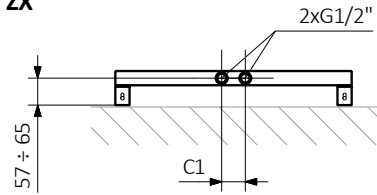

Z1

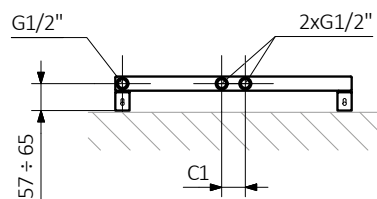


Z8

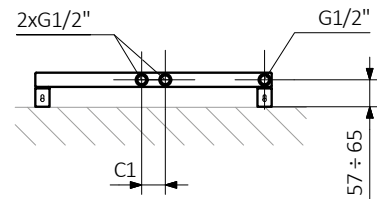


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:







Standard connections:




Electric radiators: see page 599.



Optional connections:

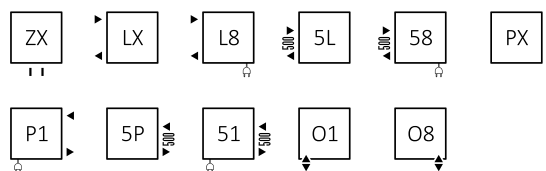

Available sizes:

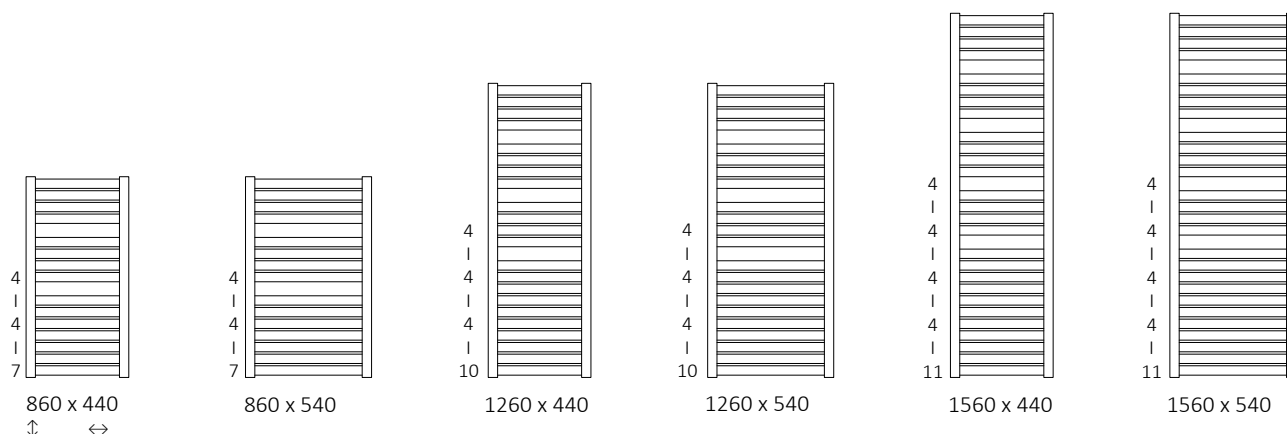

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---------|-----------|-----------|-----------|-----------|----------|--|
| 860 | 440 | 50 | 400 | 351 | 185 | 400 | 400 | 680 | 90 | 3,03 | 9,34 | WG MAT086044 |
| 860 | 540 | 50 | 500 | 423 | 223 | 400 | 500 | 680 | 90 | 3,41 | 11,06 | WG MAT086054 |
| 1260 | 440 | 50 | 400 | 502 | 266 | 600 | 400 | 1080 | 90 | 4,44 | 13,86 | WG MAT126044 |
| 1260 | 540 | 50 | 500 | 605 | 319 | 600 | 500 | 1080 | 90 | 5,00 | 16,31 | WG MAT126054 |
| 1560 | 440 | 50 | 400 | 615 | 326 | 600 | 400 | 1380 | 90 | 5,47 | 17,04 | WG MAT156044 |
| 1560 | 540 | 50 | 500 | 742 | 391 | 800 | 500 | 1380 | 90 | 6,17 | 20,06 | WG MAT156054 |

We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652



Integrated pipe masking set – see page 675




KTX 1 heating element – see page 700




ZIP H 10 hanger – see page 636






SX

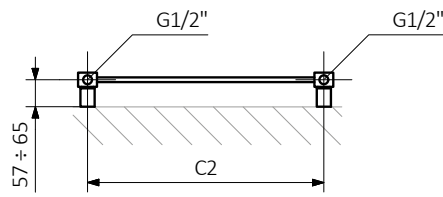

Z1

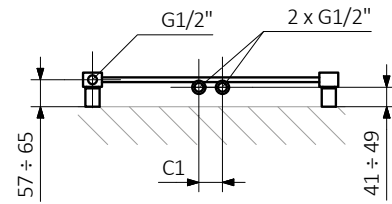


Z8

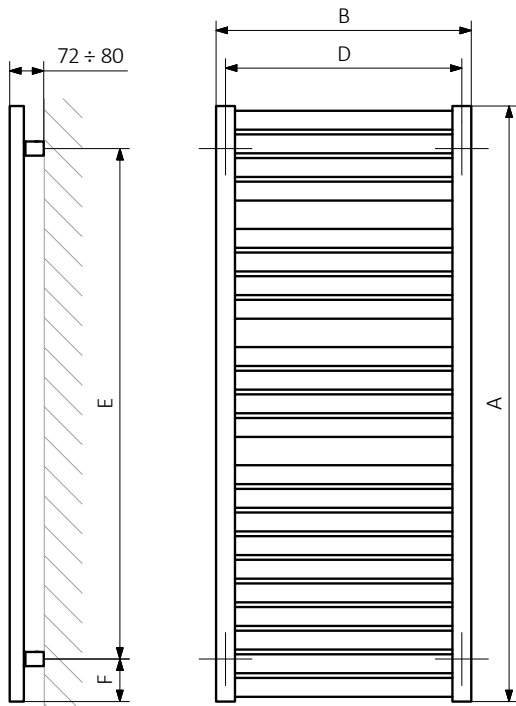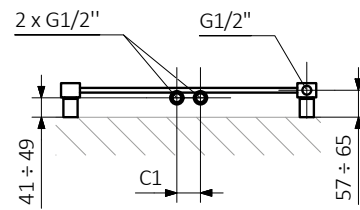


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Mantis One


📷 s. 148

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:




Electric radiators: see page 599.



Optional connections:



Available sizes:

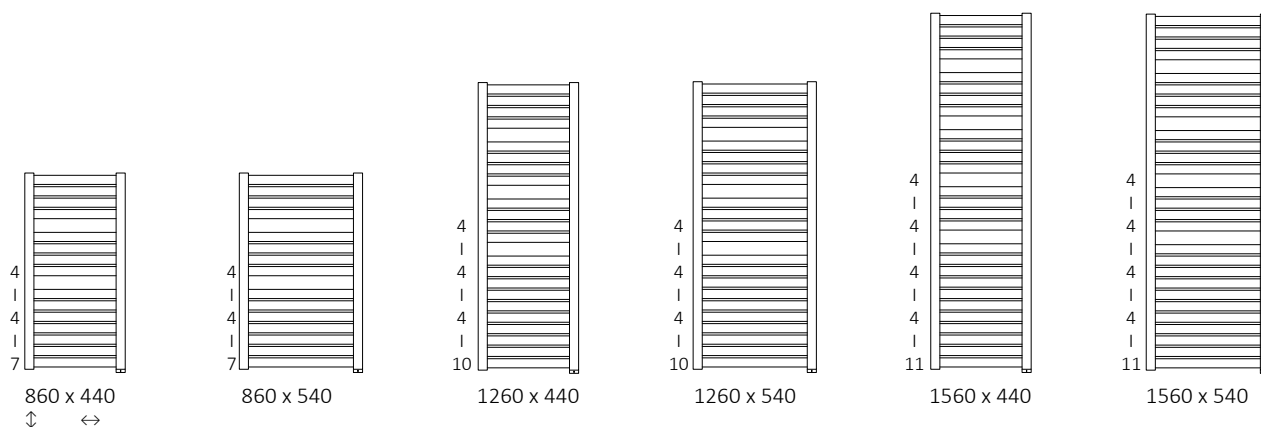

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | C5 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | 📷 [W] | D [mm] | E [mm] | F [mm] | 📏 [dm ³] | 📖 [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|-----------|--|
| 860 | 440 | 500 | 351 | 185 | 400 | 400 | 710 | 75 | 2,94 | 9,34 | WZMAE086044 |
| 860 | 540 | 500 | 423 | 223 | 400 | 500 | 710 | 75 | 3,32 | 11,06 | WZMAE086054 |
| 1260 | 440 | 500 | 502 | 266 | 600 | 400 | 1110 | 75 | 4,35 | 13,86 | WZMAE126044 |
| 1260 | 540 | 500 | 605 | 319 | 600 | 500 | 1110 | 75 | 4,91 | 16,31 | WZMAE126054 |
| 1560 | 440 | 500 | 615 | 326 | 600 | 400 | 1410 | 75 | 5,38 | 17,04 | WZMAE156044 |
| 1560 | 540 | 500 | 742 | 391 | 800 | 500 | 1410 | 75 | 6,08 | 20,06 | WZMAE156054 |







We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654



Integrated pipe masking set – see page 675




ZIP H 10 hanger – see page 636

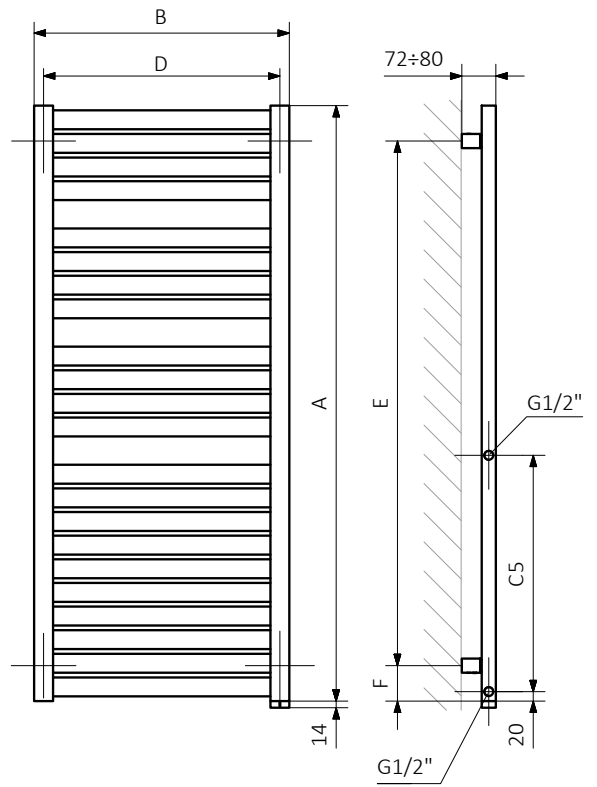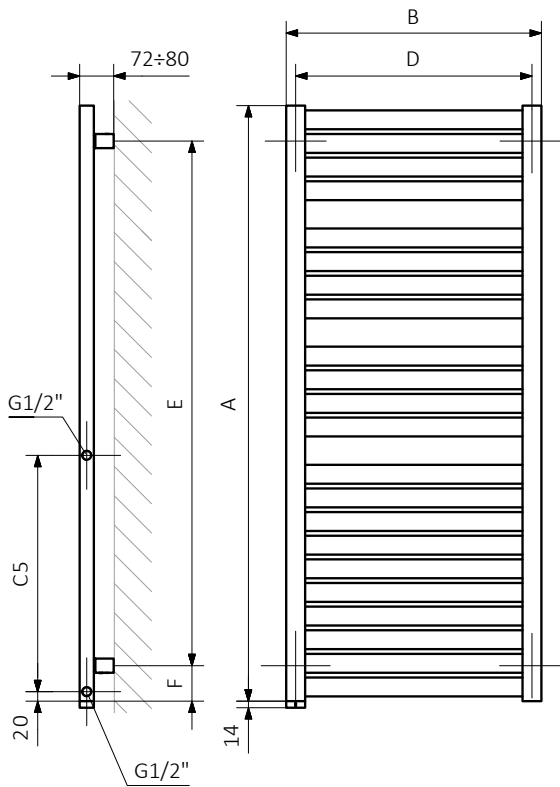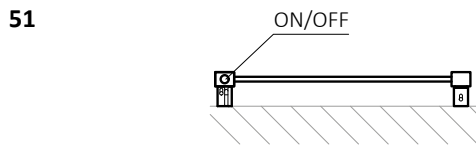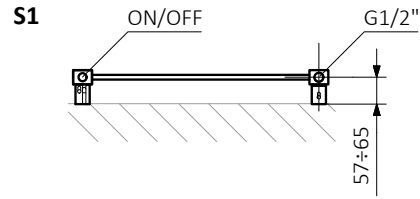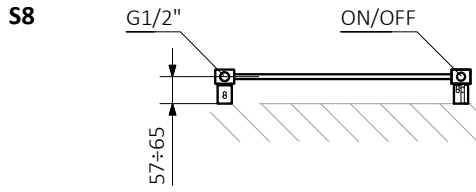


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Standard connections:



Electric radiators: see page 599.






Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | | | |
| 600 | 430 | 400 | 244 | 134 | 300 | 400 | 420 | 90 | 1,57 | 5,03 | WGMAR060043 |
| 600 | 530 | 500 | 301 | 165 | 300 | 500 | 420 | 90 | 1,76 | 5,92 | WGMAR060053 |
| 600 | 630 | 600 | 358 | 196 | 400 | 600 | 420 | 90 | 1,94 | 6,81 | WGMAR060063 |
| 780 | 430 | 400 | 319 | 172 | 300 | 400 | 600 | 90 | 2,11 | 6,84 | WGMAR078043 |
| 780 | 530 | 500 | 393 | 212 | 400 | 500 | 600 | 90 | 2,38 | 8,08 | WGMAR078053 |
| 780 | 630 | 600 | 467 | 252 | 400 | 600 | 600 | 90 | 2,64 | 9,32 | WGMAR078063 |
| 1185 | 430 | 400 | 467 | 251 | 400 | 400 | 1005 | 90 | 3,25 | 10,52 | WGMAR118043 |
| 1185 | 530 | 500 | 576 | 309 | 600 | 500 | 1005 | 90 | 3,66 | 12,48 | WGMAR118053 |
| 1185 | 630 | 600 | 685 | 367 | 800 | 600 | 1005 | 90 | 4,08 | 14,43 | WGMAR118063 |
| 1680 | 430 | 400 | 653 | 351 | 600 | 400 | 1500 | 90 | 4,66 | 15,12 | WGMAR168043 |
| 1680 | 530 | 500 | 805 | 433 | 800 | 500 | 1500 | 90 | 5,27 | 17,97 | WGMAR168053 |
| 1680 | 630 | 600 | 957 | 514 | 1000 | 600 | 1500 | 90 | 5,87 | 20,81 | WGMAR168063 |
| Plated finishes | | | | | | | | | | | |
| 600 | 430 | 400 | 156 | 84 | 120 | 400 | 420 | 90 | 1,57 | 4,86 | WGMAR060043 |
| 600 | 530 | 500 | 192 | 104 | 200 | 500 | 420 | 90 | 1,76 | 5,71 | WGMAR060053 |
| 600 | 630 | 600 | 228 | 124 | 200 | 600 | 420 | 90 | 1,94 | 6,57 | WGMAR060063 |
| 780 | 430 | 400 | 211 | 112 | 200 | 400 | 600 | 90 | 2,11 | 6,60 | WGMAR078043 |
| 780 | 530 | 500 | 260 | 137 | 300 | 500 | 600 | 90 | 2,38 | 7,80 | WGMAR078053 |
| 780 | 630 | 600 | 310 | 163 | 300 | 600 | 600 | 90 | 2,64 | 9,00 | WGMAR078063 |
| 1185 | 430 | 400 | 323 | 162 | 300 | 400 | 1005 | 90 | 3,25 | 10,16 | WGMAR118043 |
| 1185 | 530 | 500 | 398 | 199 | 400 | 500 | 1005 | 90 | 3,66 | 12,05 | WGMAR118053 |
| 1185 | 630 | 600 | 473 | 237 | 600 | 600 | 1005 | 90 | 4,08 | 13,93 | WGMAR118063 |
| 1680 | 430 | 400 | 462 | 217 | 600 | 400 | 1500 | 90 | 4,66 | 14,60 | WGMAR168043 |
| 1680 | 530 | 500 | 570 | 267 | 600 | 500 | 1500 | 90 | 5,27 | 17,35 | WGMAR168053 |
| 1680 | 630 | 600 | 677 | 317 | 800 | 600 | 1500 | 90 | 5,87 | 20,09 | WGMAR168063 |

We recommend: 3-axis thermostatic valve for SX connection – see page 648



Pipe masking set – 70 mm – see page 673















REG 3 heating element – see page 714




ZIP H 10 hanger – see page 636



Available sizes:

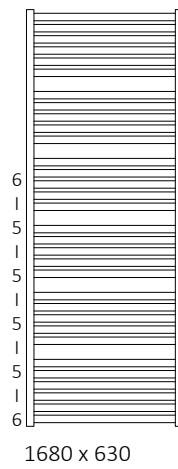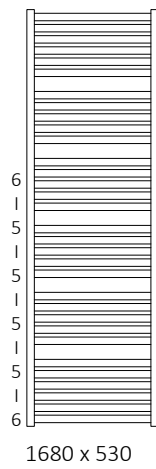



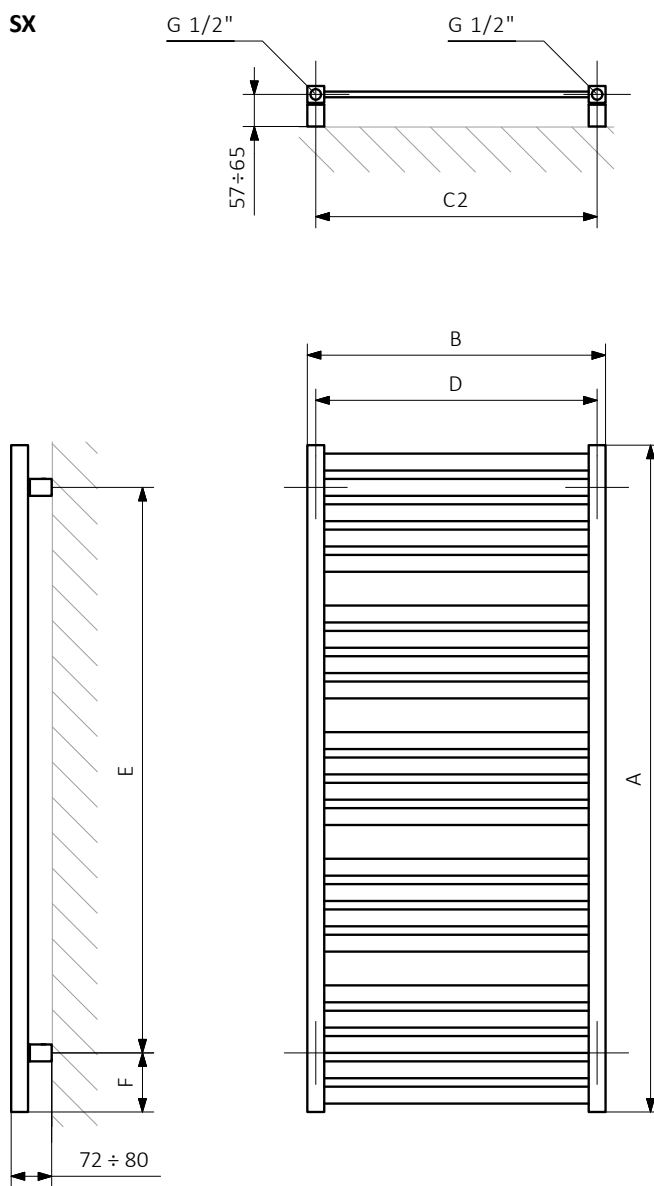


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:









design: Terma


Standard connections:



Electric radiators: see page 599.






Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| Powder coating | | | | | | | | | | |
| 600 | 430 | 244 | 134 | 300 | 400 | 450 | 75 | 1,50 | 5,01 | WZMRN060043 |
| 600 | 530 | 301 | 165 | 300 | 500 | 450 | 75 | 1,69 | 5,91 | WZMRN060053 |
| 600 | 630 | 358 | 196 | 400 | 600 | 450 | 75 | 1,88 | 6,82 | WZMRN060063 |
| 780 | 430 | 319 | 172 | 300 | 400 | 630 | 75 | 2,05 | 6,85 | WZMRN078043 |
| 780 | 530 | 393 | 212 | 400 | 500 | 630 | 75 | 2,32 | 8,11 | WZMRN078053 |
| 780 | 630 | 467 | 252 | 400 | 600 | 630 | 75 | 2,58 | 9,37 | WZMRN078063 |
| 1185 | 430 | 467 | 251 | 400 | 400 | 1035 | 75 | 3,19 | 10,57 | WZMRN118043 |
| 1185 | 530 | 576 | 309 | 600 | 500 | 1035 | 75 | 3,61 | 12,54 | WZMRN118053 |
| 1185 | 630 | 685 | 367 | 800 | 600 | 1035 | 75 | 4,02 | 14,51 | WZMRN118063 |
| 1680 | 430 | 653 | 351 | 600 | 400 | 1530 | 75 | 4,61 | 15,19 | WZMRN168043 |
| 1680 | 530 | 805 | 433 | 800 | 500 | 1530 | 75 | 5,22 | 18,05 | WZMRN168053 |
| 1680 | 630 | 957 | 514 | 1000 | 600 | 1530 | 75 | 5,82 | 20,91 | WZMRN168063 |
| Plated finishes | | | | | | | | | | |
| 600 | 430 | 156 | 84 | 120 | 400 | 450 | 75 | 1,50 | 4,83 | WZMRN060043 |
| 600 | 530 | 192 | 104 | 200 | 500 | 450 | 75 | 1,69 | 5,71 | WZMRN060053 |
| 600 | 630 | 228 | 124 | 200 | 600 | 450 | 75 | 1,88 | 6,58 | WZMRN060063 |
| 780 | 430 | 211 | 112 | 200 | 400 | 630 | 75 | 2,05 | 6,61 | WZMRN078043 |
| 780 | 530 | 260 | 137 | 300 | 500 | 630 | 75 | 2,32 | 7,83 | WZMRN078053 |
| 780 | 630 | 310 | 163 | 300 | 600 | 630 | 75 | 2,58 | 9,05 | WZMRN078063 |
| 1185 | 430 | 323 | 162 | 300 | 400 | 1035 | 75 | 3,19 | 10,21 | WZMRN118043 |
| 1185 | 530 | 398 | 199 | 400 | 500 | 1035 | 75 | 3,61 | 12,11 | WZMRN118053 |
| 1185 | 630 | 473 | 237 | 600 | 600 | 1035 | 75 | 4,02 | 14,01 | WZMRN118063 |
| 1680 | 430 | 462 | 217 | 600 | 400 | 1530 | 75 | 4,61 | 14,67 | WZMRN168043 |
| 1680 | 530 | 570 | 267 | 600 | 500 | 1530 | 75 | 5,22 | 17,43 | WZMRN168053 |
| 1680 | 630 | 677 | 317 | 800 | 600 | 1530 | 75 | 5,82 | 20,19 | WZMRN168063 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675




ZIP H 10 hanger – see page 636




Available sizes:




600 x 430
⇕ ⇔




600 x 530




600 x 630




780 x 430
⇕ ⇔




780 x 530




780 x 630




1185 x 430
⇕ ⇔




1185 x 530




1185 x 630



1680 x 430
⇕ ⇔

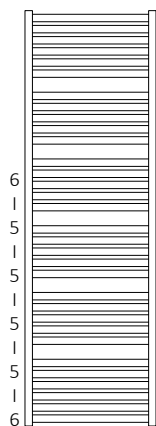


1680 x 530

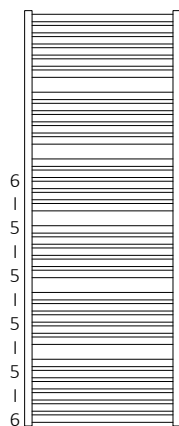




1680 x 630

Marlin One s. 150

S8

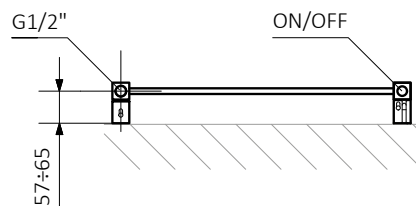


S1

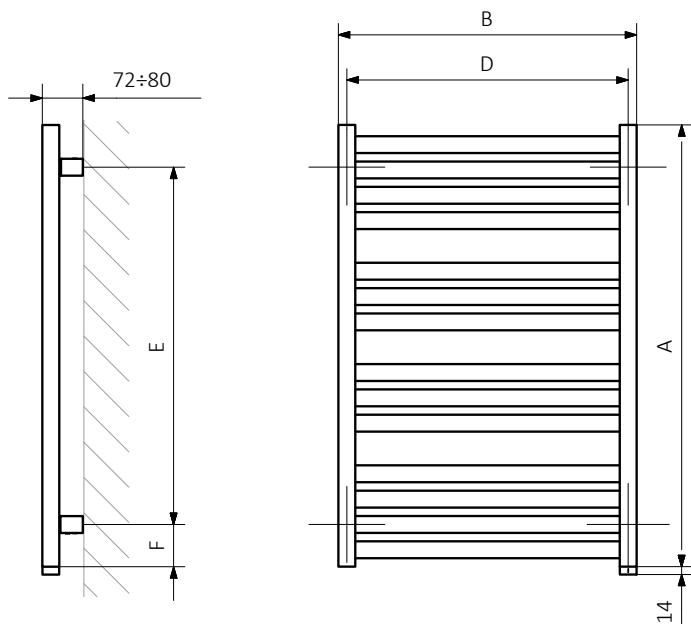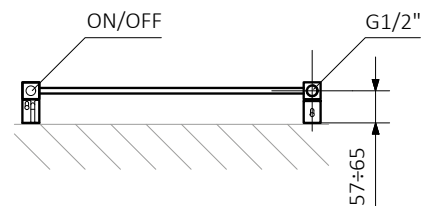



A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:









Standard connections:

Electric radiators: see page 599.



Available sizes:

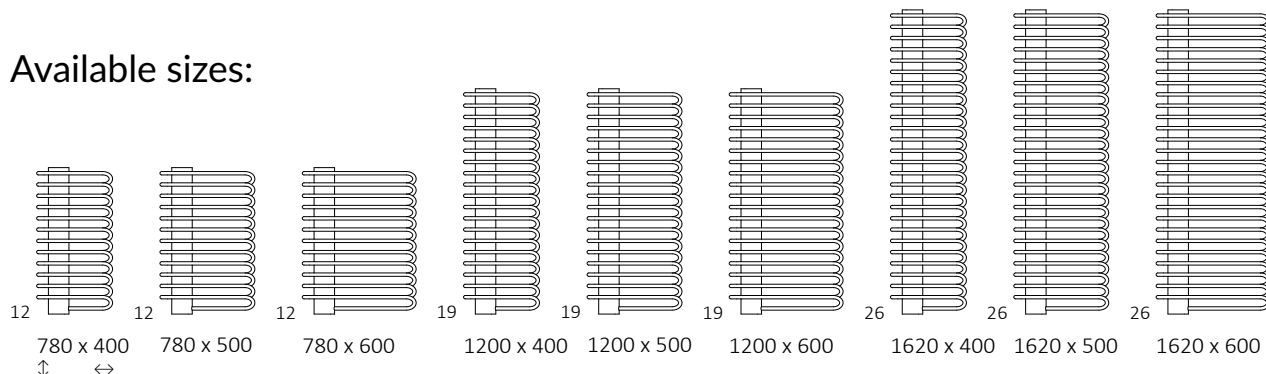

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☉ [W] | D [mm] | E [mm] | F [mm] | ⊞ [dm ²] | ⚖️ [kg] | Product code (Configuration code p. 787) |
|------------------------|-------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|------------|---|
| Powder coating | | | | | | | | | | | |
| 780 | 400 | 50 | 365 | 196 | 400 | 50 | 600 | 90 | 2,84 | 11,51 | WGMIC078040 |
| 780 | 500 | 50 | 455 | 244 | 400 | 50 | 600 | 90 | 3,29 | 12,80 | WGMIC078050 |
| 780 | 600 | 50 | 533 | 286 | 600 | 50 | 600 | 90 | 3,75 | 14,10 | WGMIC078060 |
| 1200 | 400 | 50 | 580 | 310 | 600 | 50 | 1020 | 90 | 4,46 | 18,03 | WGMIC120040 |
| 1200 | 500 | 50 | 721 | 386 | 800 | 50 | 1020 | 90 | 5,18 | 20,07 | WGMIC120050 |
| 1200 | 600 | 50 | 845 | 452 | 800 | 50 | 1020 | 90 | 5,90 | 22,13 | WGMIC120060 |
| 1620 | 400 | 50 | 805 | 429 | 800 | 50 | 1440 | 90 | 6,10 | 24,59 | WGMIC162040 |
| 1620 | 500 | 50 | 1000 | 533 | 1000 | 50 | 1440 | 90 | 7,08 | 27,40 | WGMIC162050 |
| 1620 | 600 | 50 | 1172 | 624 | 1200 | 50 | 1440 | 90 | 8,06 | 30,20 | WGMIC162060 |
| Plated finishes | | | | | | | | | | | |
| 780 | 400 | 50 | 256 | 130 | 300 | 50 | 600 | 90 | 2,84 | 11,23 | WGMIC078040 |
| 780 | 500 | 50 | 319 | 162 | 300 | 50 | 600 | 90 | 3,29 | 12,47 | WGMIC078050 |
| 780 | 600 | 50 | 373 | 190 | 400 | 50 | 600 | 90 | 3,75 | 13,71 | WGMIC078060 |
| 1200 | 400 | 50 | 406 | 207 | 400 | 50 | 1020 | 90 | 4,46 | 17,59 | WGMIC120040 |
| 1200 | 500 | 50 | 505 | 257 | 600 | 50 | 1020 | 90 | 5,18 | 19,55 | WGMIC120050 |
| 1200 | 600 | 50 | 592 | 302 | 600 | 50 | 1020 | 90 | 5,90 | 21,52 | WGMIC120060 |
| 1620 | 400 | 50 | 564 | 287 | 600 | 50 | 1440 | 90 | 6,10 | 23,99 | WGMIC162040 |
| 1620 | 500 | 50 | 700 | 357 | 800 | 50 | 1440 | 90 | 7,08 | 26,68 | WGMIC162050 |
| 1620 | 600 | 50 | 820 | 418 | 800 | 50 | 1440 | 90 | 8,06 | 29,37 | WGMIC162060 |

It is possible to mix and match colours of the radiator and the fascia.

We recommend: Integrated thermostatic t-piece valve set for YL and YP connections – see page 653




Integrated pipe-masking set – see page 675





MOA heating element – see page 702



YL




YP

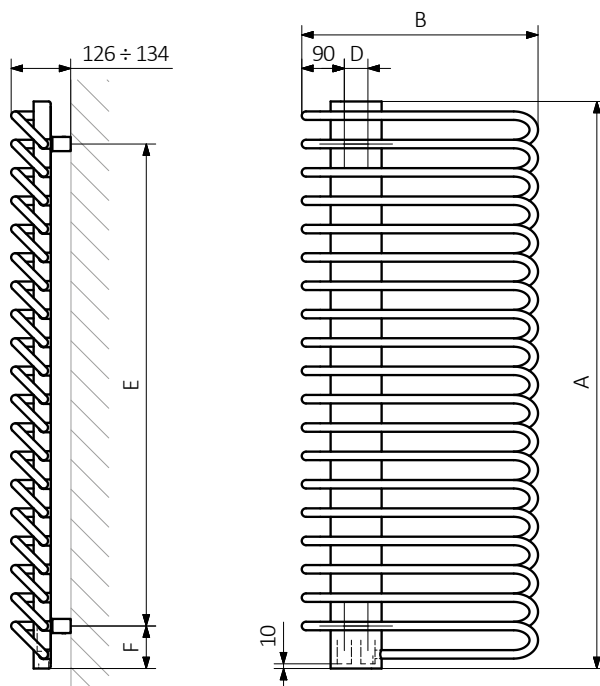


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Colour included in the price

design: Terma

Standard connections:

A ↓ 435÷1635, B ↔ 230÷530:




Electric radiators: see page 599.




Optional connections:


A ↓ 435÷1635, B ↔ 230÷530:



A ↓ 435÷1635, B ↔ 430÷530:






A ↓ 735÷1635, B ↔ 230÷530:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-----------------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|--|---|--|
| Powder coating | | | | | | | | | | | |
| 435 | 430 | 400 | 203 | 106 | 200 | 400 | 255 | 90 | 1,25 | 3,62 | WGMIK043043 |
| 435 | 530 | 500 | 245 | 128 | 300 | 500 | 255 | 90 | 1,41 | 4,28 | WGMIK043053 |
| 460 | 230 | 200 | 122 | 64 | 120 | 200 | 280 | 90 | 0,92 | 2,24 | WGMIK046023 |
| 710 | 230 | 200 | 185 | 97 | 200 | 200 | 530 | 90 | 1,40 | 3,38 | WGMIK071023 |
| 735 | 430 | 400 | 337 | 176 | 400 | 400 | 555 | 90 | 2,07 | 5,92 | WGMIK073043 |
| 735 | 530 | 500 | 406 | 213 | 400 | 500 | 555 | 90 | 2,34 | 6,99 | WGMIK073053 |
| 960 | 230 | 200 | 247 | 130 | 300 | 200 | 780 | 90 | 1,89 | 4,52 | WGMIK096023 |
| 1035 | 430 | 400 | 466 | 245 | 400 | 400 | 855 | 90 | 2,89 | 8,21 | WGMIK103043 |
| 1035 | 530 | 500 | 563 | 295 | 600 | 500 | 855 | 90 | 3,26 | 9,69 | WGMIK103053 |
| 1210 | 230 | 200 | 308 | 162 | 300 | 200 | 1030 | 90 | 2,38 | 5,66 | WGMIK121023 |
| 1335 | 430 | 400 | 593 | 312 | 600 | 400 | 1155 | 90 | 3,71 | 10,51 | WGMIK133043 |
| 1335 | 530 | 500 | 715 | 376 | 800 | 500 | 1155 | 90 | 4,19 | 12,40 | WGMIK133053 |
| 1460 | 230 | 200 | 367 | 193 | 400 | 200 | 1280 | 90 | 2,86 | 6,80 | WGMIK146023 |
| 1635 | 430 | 400 | 716 | 377 | 800 | 400 | 1455 | 90 | 4,53 | 12,81 | WGMIK163043 |
| 1635 | 530 | 500 | 864 | 454 | 800 | 500 | 1455 | 90 | 5,11 | 15,11 | WGMIK163053 |
| 1710 | 230 | 200 | 425 | 224 | 400 | 200 | 1530 | 90 | 3,35 | 7,94 | WGMIK171023 |

We recommend: 3-axis manual valve set for SX connection – see page 649



Pipe masking set – 70 mm – see page 673




ONE heating element – see page 690





| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm ²] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|---------|-----------|-----------|-----------|------------------------|----------|--|
| Plated finishes | | | | | | | | | | | |
| 435 | 430 | 400 | 142 | 72 | 120 | 400 | 255 | 90 | 1,25 | 3,48 | WGMIK043043 |
| 435 | 530 | 500 | 171 | 87 | 200 | 500 | 255 | 90 | 1,41 | 4,11 | WGMIK043053 |
| 460 | 230 | 200 | 85 | 44 | 120 | 200 | 280 | 90 | 0,92 | 2,16 | WGMIK046023 |
| 710 | 230 | 200 | 130 | 66 | 120 | 200 | 530 | 90 | 1,40 | 3,25 | WGMIK071023 |
| 735 | 430 | 400 | 236 | 120 | 200 | 400 | 555 | 90 | 2,07 | 5,68 | WGMIK073043 |
| 735 | 530 | 500 | 284 | 145 | 300 | 500 | 555 | 90 | 2,34 | 6,71 | WGMIK073053 |
| 960 | 230 | 200 | 173 | 88 | 200 | 200 | 780 | 90 | 1,89 | 4,35 | WGMIK096023 |
| 1035 | 430 | 400 | 326 | 167 | 300 | 400 | 855 | 90 | 2,89 | 7,89 | WGMIK103043 |
| 1035 | 530 | 500 | 394 | 201 | 400 | 500 | 855 | 90 | 3,26 | 9,31 | WGMIK103053 |
| 1210 | 230 | 200 | 216 | 110 | 200 | 200 | 1030 | 90 | 2,38 | 5,45 | WGMIK121023 |
| 1335 | 430 | 400 | 415 | 212 | 400 | 400 | 1155 | 90 | 3,71 | 10,09 | WGMIK133043 |
| 1335 | 530 | 500 | 501 | 255 | 600 | 500 | 1155 | 90 | 4,19 | 11,90 | WGMIK133053 |
| 1460 | 230 | 200 | 257 | 131 | 300 | 200 | 1280 | 90 | 2,86 | 6,54 | WGMIK146023 |
| 1635 | 430 | 400 | 501 | 256 | 600 | 400 | 1455 | 90 | 4,53 | 12,30 | WGMIK163043 |
| 1635 | 530 | 500 | 605 | 308 | 600 | 500 | 1455 | 90 | 5,11 | 14,50 | WGMIK163053 |
| 1710 | 230 | 200 | 298 | 152 | 300 | 200 | 1530 | 90 | 3,35 | 7,64 | WGMIK171023 |

Available sizes:

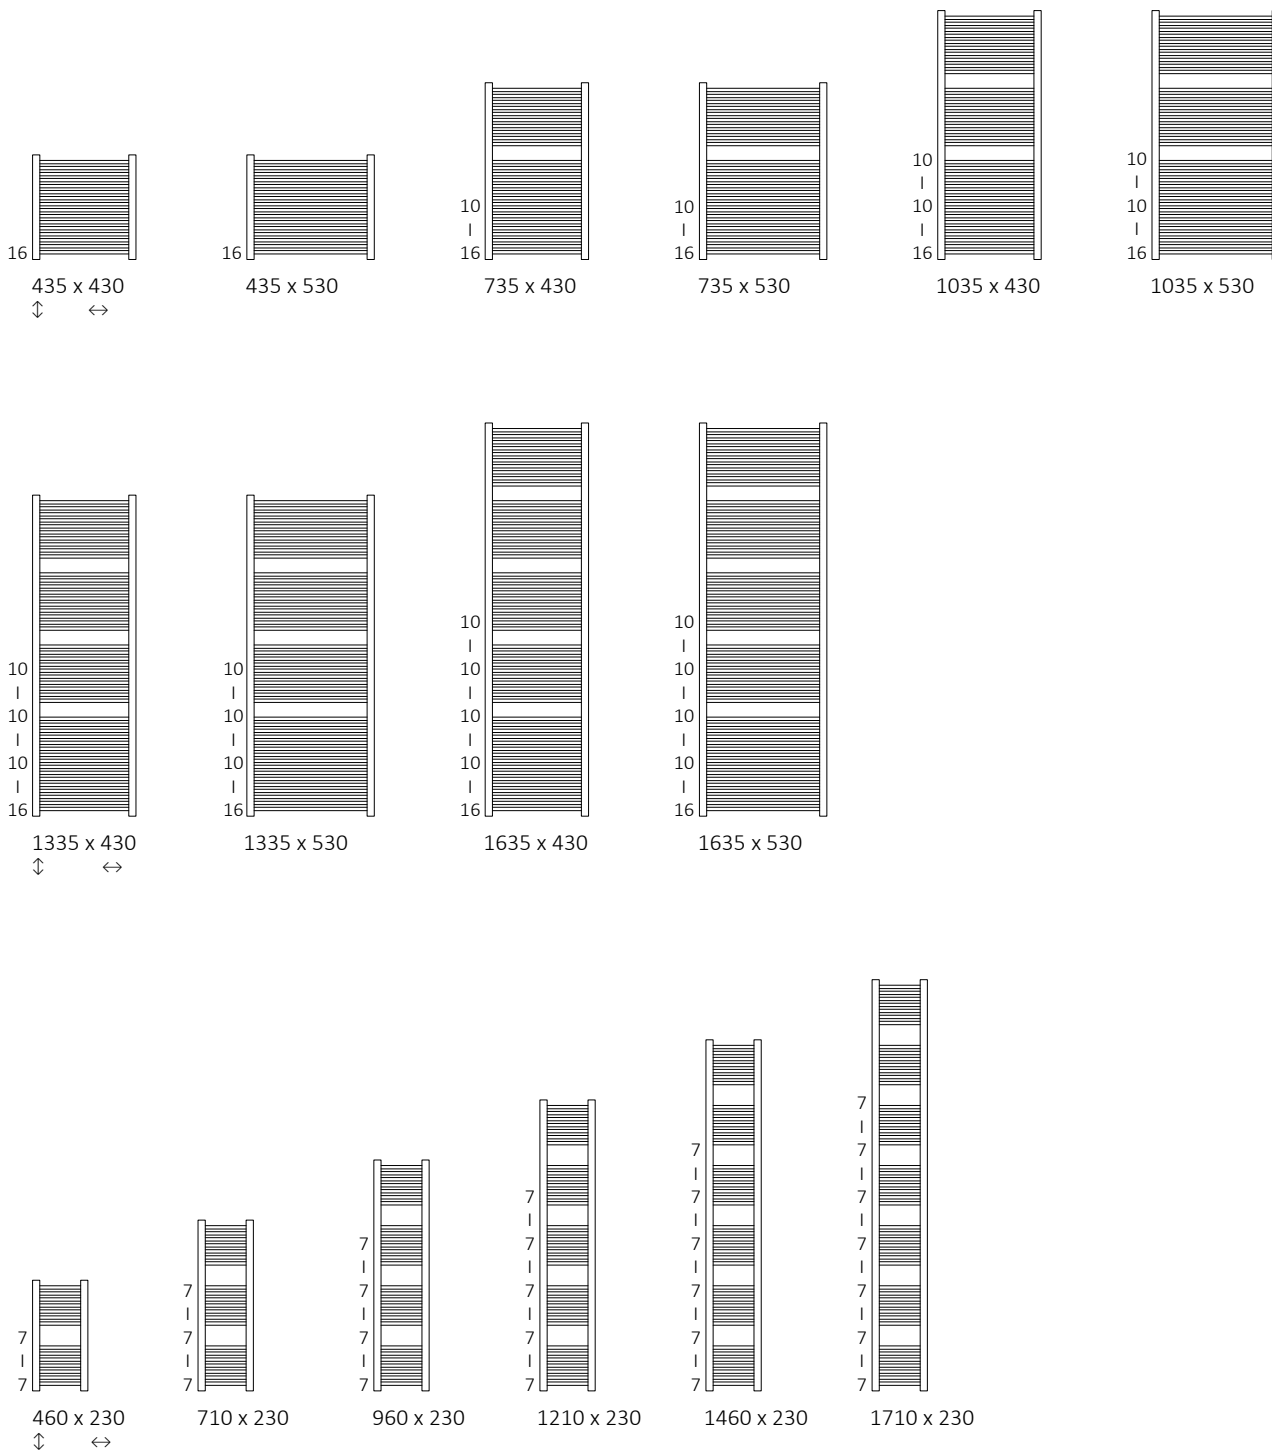


SX

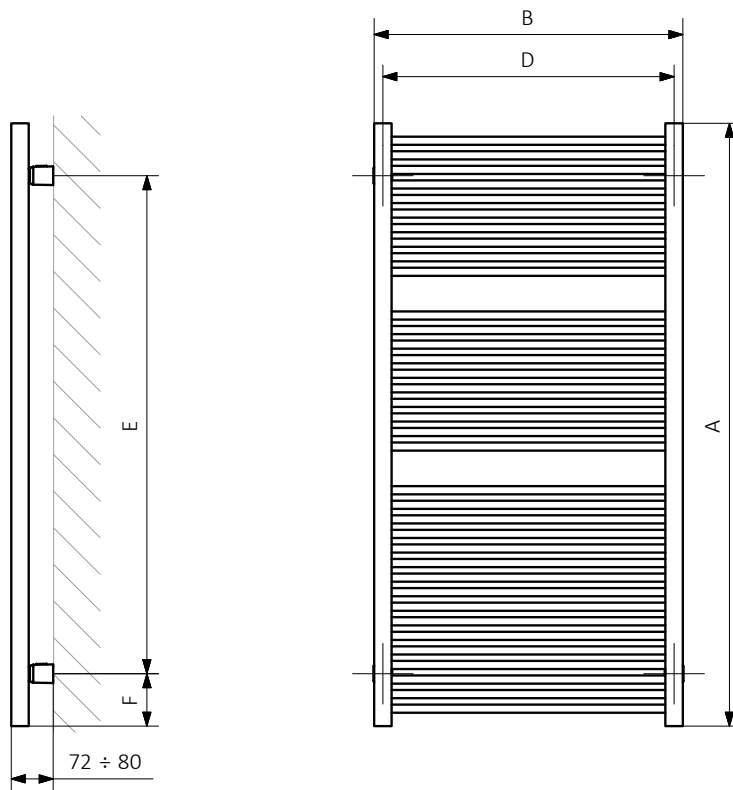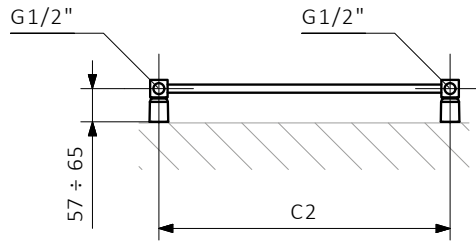


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:






design: *Terma*


Standard connections:



Electric radiators: see page 599.



Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | C5 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☉ [W] | D [mm] | E [mm] | F [mm] | 📐 [dm ³] | 📦 [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|-----------|--|
| Powder coating | | | | | | | | | | | |
| 710 | 230 | 500 | 185 | 97 | 200 | 200 | 570 | 70 | 1,34 | 3,38 | WZMIN071023 |
| 735 | 430 | 500 | 337 | 176 | 400 | 400 | 595 | 70 | 2,00 | 5,92 | WZMIN073043 |
| 735 | 530 | 500 | 406 | 213 | 400 | 500 | 595 | 70 | 2,27 | 6,99 | WZMIN073053 |
| 960 | 230 | 500 | 247 | 130 | 300 | 200 | 820 | 70 | 1,82 | 4,52 | WZMIN096023 |
| 1035 | 430 | 500 | 466 | 245 | 400 | 400 | 895 | 70 | 2,82 | 8,21 | WZMIN103043 |
| 1035 | 530 | 500 | 563 | 295 | 600 | 500 | 895 | 70 | 3,20 | 9,69 | WZMIN103053 |
| 1210 | 230 | 500 | 308 | 162 | 300 | 200 | 1170 | 70 | 2,31 | 5,66 | WZMIN121023 |
| 1335 | 430 | 500 | 593 | 312 | 600 | 400 | 1195 | 70 | 3,64 | 10,51 | WZMIN133043 |
| 1335 | 530 | 500 | 715 | 376 | 800 | 500 | 1195 | 70 | 4,12 | 12,40 | WZMIN133053 |
| 1460 | 230 | 500 | 367 | 193 | 400 | 200 | 1320 | 70 | 2,80 | 6,80 | WZMIN146023 |
| 1635 | 430 | 500 | 716 | 377 | 800 | 400 | 1495 | 70 | 4,46 | 12,81 | WZMIN163043 |
| 1635 | 530 | 500 | 864 | 454 | 800 | 500 | 1495 | 70 | 5,05 | 15,11 | WZMIN163053 |
| 1710 | 230 | 500 | 425 | 224 | 400 | 200 | 1570 | 70 | 3,29 | 7,94 | WZMIN171023 |
| Plated finishes | | | | | | | | | | | |
| 710 | 230 | 500 | 130 | 66 | 120 | 200 | 570 | 70 | 1,34 | 3,25 | WZMIN071023 |
| 735 | 430 | 500 | 236 | 120 | 200 | 400 | 595 | 70 | 2,00 | 5,68 | WZMIN073043 |
| 735 | 530 | 500 | 284 | 145 | 300 | 500 | 595 | 70 | 2,27 | 6,71 | WZMIN073053 |
| 960 | 230 | 500 | 173 | 88 | 200 | 200 | 820 | 70 | 1,82 | 4,35 | WZMIN096023 |
| 1035 | 430 | 500 | 326 | 167 | 300 | 400 | 895 | 70 | 2,82 | 7,89 | WZMIN103043 |
| 1035 | 530 | 500 | 394 | 201 | 400 | 500 | 895 | 70 | 3,20 | 9,31 | WZMIN103053 |
| 1210 | 230 | 500 | 216 | 110 | 200 | 200 | 1070 | 70 | 2,31 | 5,45 | WZMIN121023 |
| 1335 | 430 | 500 | 415 | 212 | 400 | 400 | 1195 | 70 | 3,64 | 10,09 | WZMIN133043 |
| 1335 | 530 | 500 | 501 | 255 | 600 | 500 | 1195 | 70 | 4,12 | 11,9 | WZMIN133053 |
| 1460 | 230 | 500 | 257 | 131 | 300 | 200 | 1320 | 70 | 2,80 | 6,54 | WZMIN146023 |
| 1635 | 430 | 500 | 501 | 256 | 600 | 400 | 1495 | 70 | 4,46 | 12,3 | WZMIN163043 |
| 1635 | 530 | 500 | 605 | 308 | 600 | 500 | 1495 | 70 | 5,05 | 14,5 | WZMIN163053 |
| 1710 | 230 | 500 | 298 | 152 | 300 | 200 | 1570 | 70 | 3,29 | 7,64 | WZMIN171023 |


We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675




Available sizes:

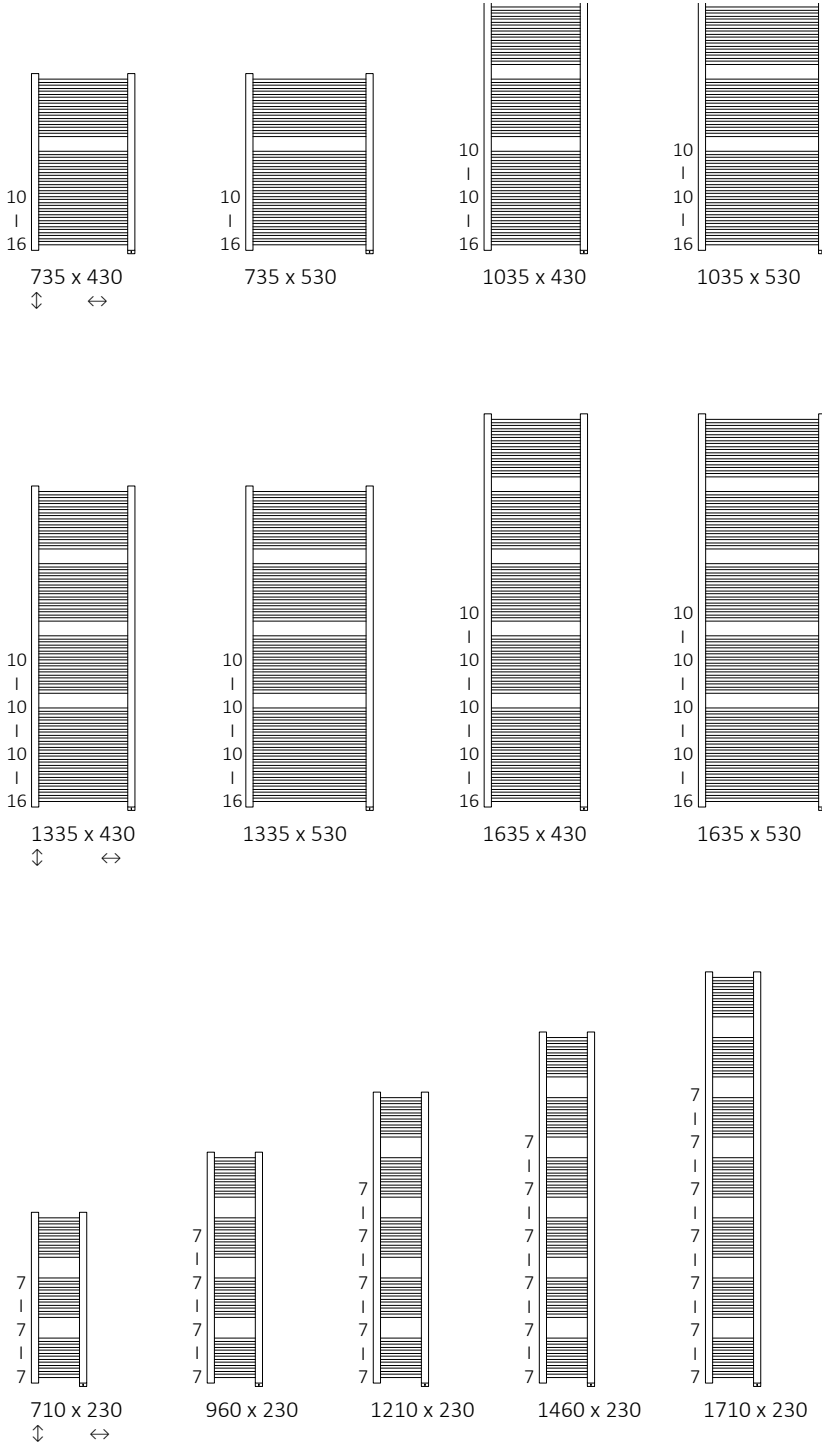


S8





S1



51





58

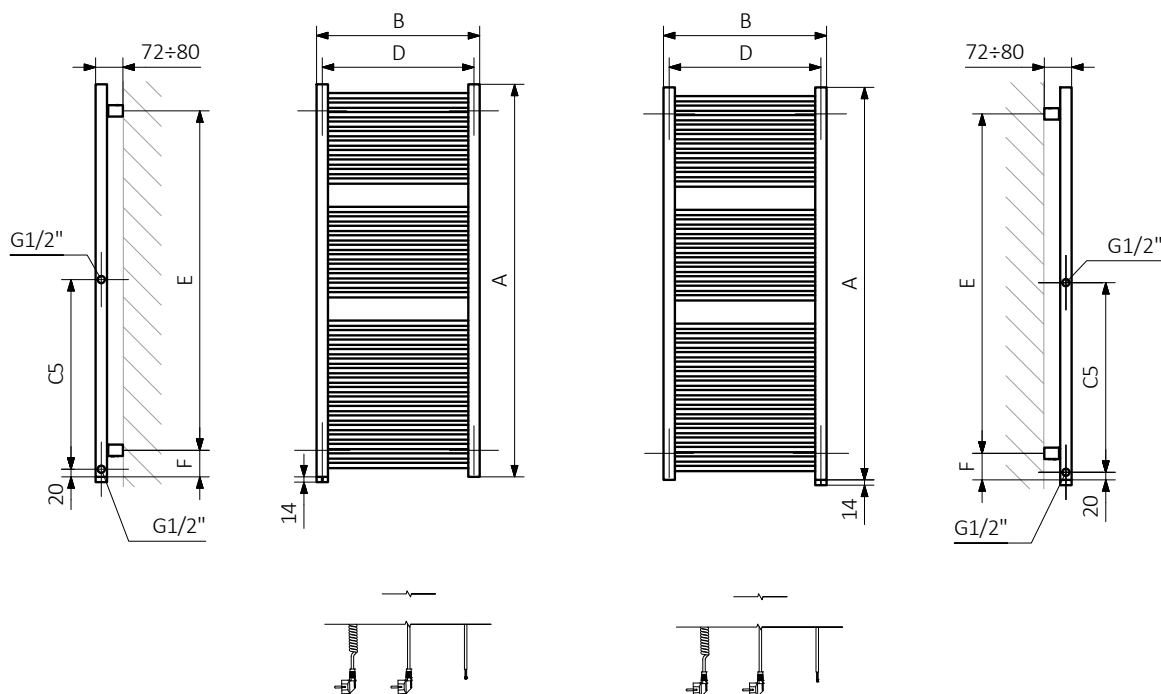


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:









Colour included
in the price

Standard connections:

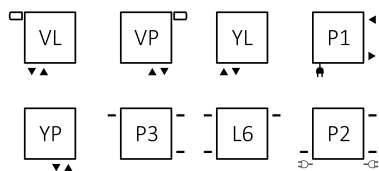

Optional connections:



Electric radiators: see page 599.



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C3 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ⊙ [W] | D [mm] | E [mm] | F [mm] | ⊞ [dm³] | ⚖ [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|-----------|--|
| 300 | 645 | 50 | 270 | 375 | 199 | 400 | 495 | 270 | 15 | 2,42 | 8,72 | WGNEM030064 |
| 300 | 915 | 50 | 270 | 533 | 282 | 600 | 765 | 270 | 15 | 3,45 | 12,42 | WGNEM030091 |
| 300 | 1185 | 50 | 270 | 690 | 365 | 800 | 1035 | 270 | 15 | 4,48 | 16,13 | WGNEM030118 |
| 300 | 1455 | 50 | 270 | 847 | 448 | 800 | 1305 | 270 | 15 | 5,51 | 19,83 | WGNEM030145 |
| 300 | 1725 | 50 | 270 | 1004 | 532 | 1000 | 1575 | 270 | 15 | 6,54 | 23,55 | WGNEM030172 |
| 530 | 375 | 50 | 500 | 364 | 190 | 400 | 225 | 500 | 15 | 2,09 | 8,34 | WGNEM053037 |
| 530 | 645 | 50 | 500 | 626 | 327 | 600 | 495 | 500 | 15 | 3,64 | 14,50 | WGNEM053064 |
| 530 | 915 | 50 | 500 | 888 | 464 | 800 | 765 | 500 | 15 | 5,19 | 20,67 | WGNEM053091 |
| 530 | 1185 | 50 | 500 | 1150 | 600 | 1200 | 1035 | 500 | 15 | 6,74 | 26,85 | WGNEM053118 |
| 530 | 1455 | 50 | 500 | 1412 | 737 | 1500 | 1305 | 500 | 15 | 8,29 | 33,03 | WGNEM053145 |
| 530 | 1725 | 50 | 500 | 1675 | 875 | 1500 | 1575 | 500 | 15 | 9,84 | 39,22 | WGNEM053172 |












We recommend: Integrated lockshield valve set for VL and VP and VP connections – see page 655




Integrated pipe masking set – see page 675




Available sizes:

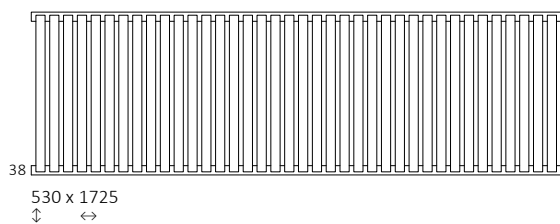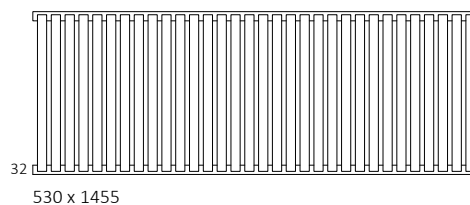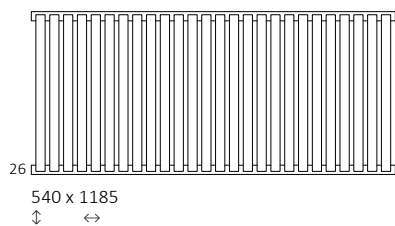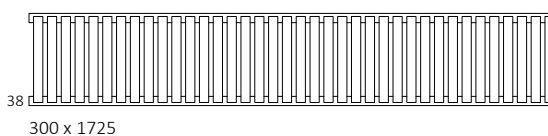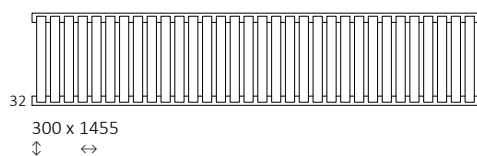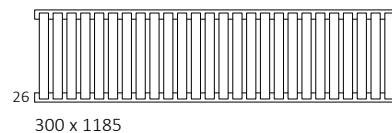



YL

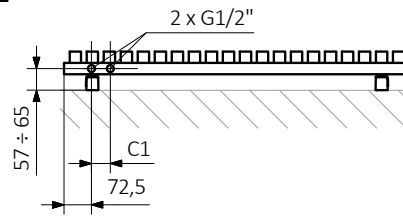


YP

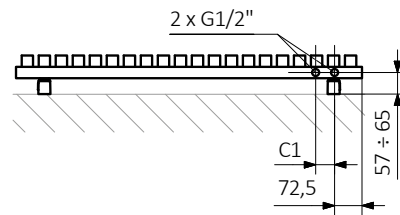




P3

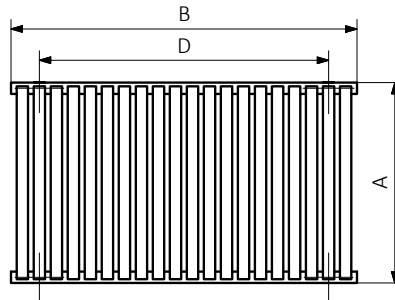

L6




P2

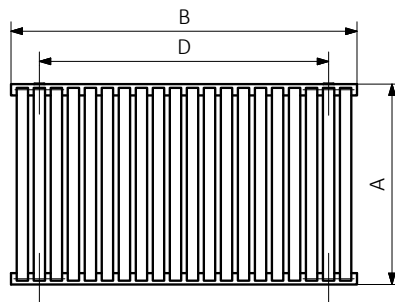


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:




Pipe:



VP

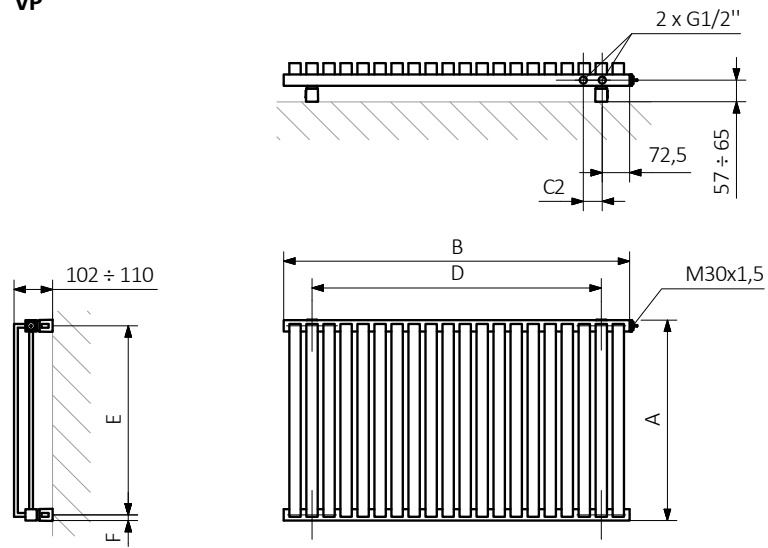

VL

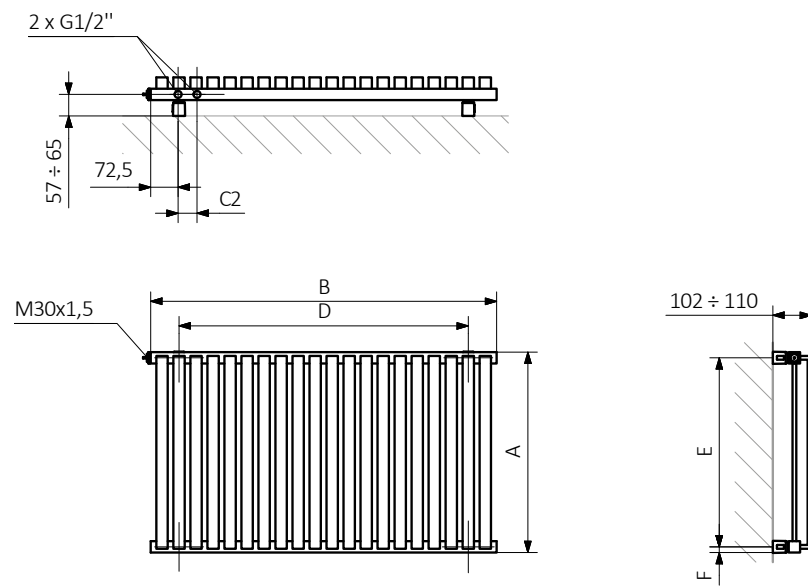



Colour included
in the price

design: Krzysztof Kotłowski

Standard connections:

A ↓ 465÷1545:



Electric radiators: see page 599.



Optional connections:


A ↓ 465÷1545:



A ↓ 735÷1545:



Available sizes:

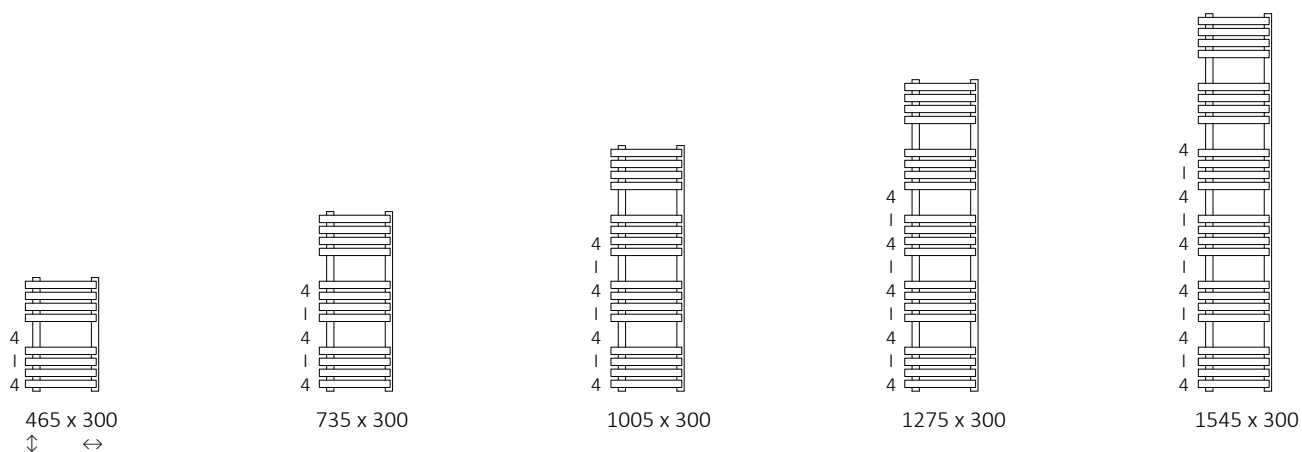

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75 65 20°C [W] | 55 45 20°C [W] | ⊙ [W] | D [mm] | E [mm] | F [mm] | U [dm³] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|------------|--|
| 465 | 300 | 195 | 294 | 160 | 300 | 195 | 315 | 76 | 1,56 | 5,51 | WGQON046030 |
| 735 | 300 | 195 | 421 | 228 | 400 | 195 | 585 | 76 | 2,39 | 8,37 | WGQON073030 |
| 1005 | 300 | 195 | 547 | 294 | 600 | 195 | 855 | 76 | 3,22 | 11,23 | WGQON100030 |
| 1275 | 300 | 195 | 673 | 361 | 800 | 195 | 1125 | 76 | 4,05 | 14,09 | WGQON127030 |
| 1545 | 300 | 195 | 799 | 428 | 800 | 195 | 1395 | 76 | 4,89 | 16,95 | WGQON154030 |

We recommend: A set of integrated thermostatic valves with immersion tube for O1 and O8 connections – see page 654



Integrated pipe masking set – see page 675






MOA heating element – see page 702



ZIP H 10 hanger – see page 636




SX

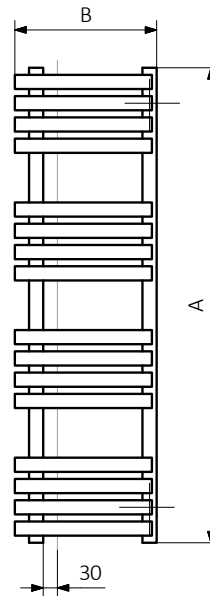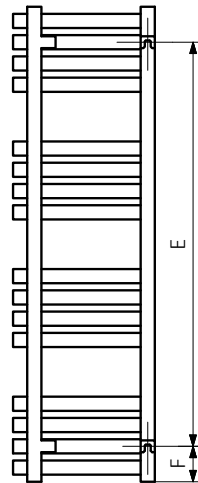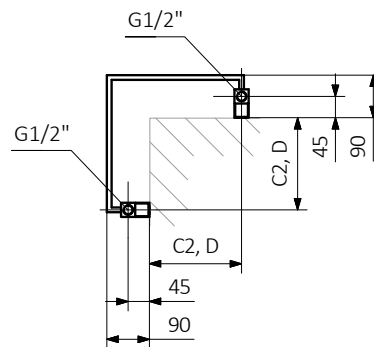


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:






Standard connections:






Electric radiators: see page 466.

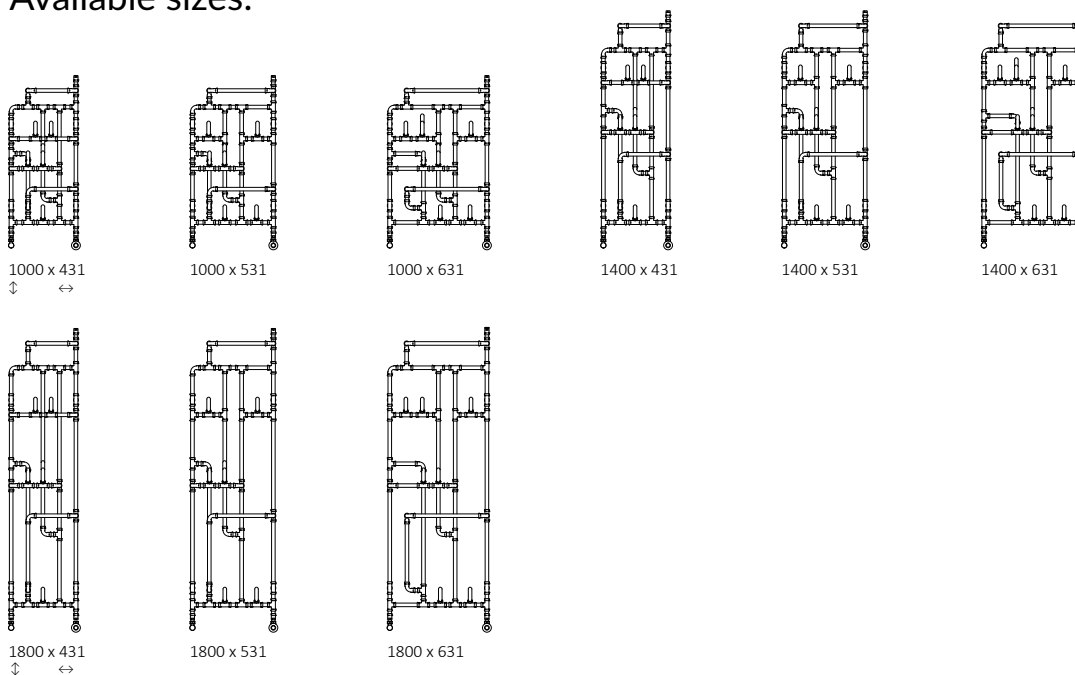Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|--|---|--|
| 1000 | 431 | 400 | 300 | 165 | 300 | 400 | 505 | 196,5 | 2,13 | 9,19 | WGPAJ100043 |
| 1000 | 531 | 500 | 339 | 184 | 400 | 500 | 505 | 196,5 | 2,20 | 9,57 | WGPAJ100053 |
| 1000 | 631 | 600 | 380 | 205 | 400 | 600 | 505 | 196,5 | 2,46 | 10,31 | WGPAJ100063 |
| 1400 | 431 | 400 | 368 | 199 | 400 | 400 | 852 | 196,5 | 2,70 | 10,28 | WGPAJ140043 |
| 1400 | 531 | 500 | 424 | 227 | 400 | 500 | 852 | 196,5 | 2,77 | 10,68 | WGPAJ140053 |
| 1400 | 631 | 600 | 480 | 256 | 600 | 600 | 852 | 196,5 | 3,02 | 11,40 | WGPAJ140063 |
| 1800 | 431 | 400 | 437 | 234 | 400 | 400 | 1162 | 196,5 | 3,26 | 11,39 | WGPAJ180043 |
| 1800 | 531 | 500 | 510 | 272 | 600 | 500 | 1162 | 196,5 | 3,32 | 11,79 | WGPAJ180053 |
| 1800 | 631 | 600 | 582 | 310 | 600 | 600 | 1162 | 196,5 | 3,58 | 12,53 | WGPAJ180063 |

Included components: The radiator is sold with Brass Wood angled regulatnig valve set. Adapters for installation included (Alupex Ø 16x2 and copper Ø 15). All elements of the fitting are copper colour.




We recommend: MOA BLUE heating
element – see page 706



SX

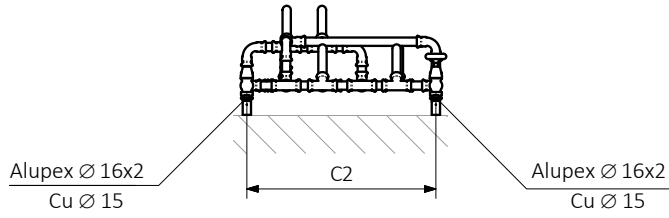


YX

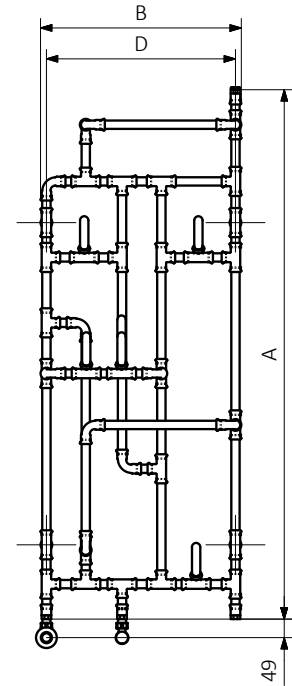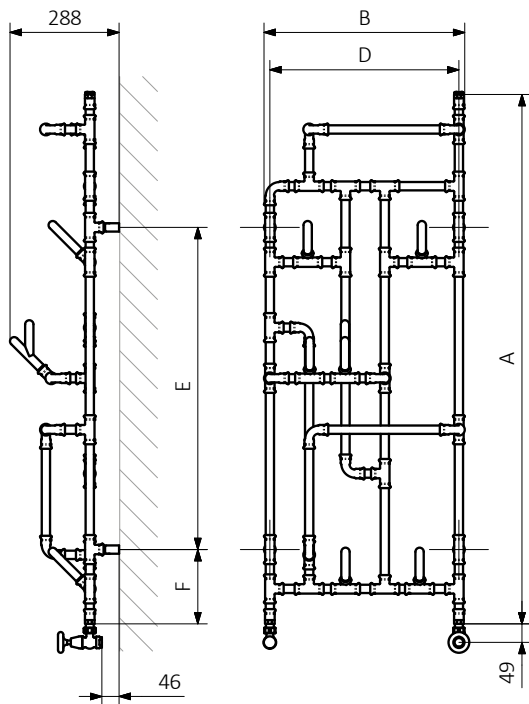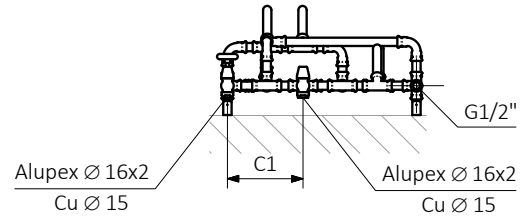


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:






Standard connections:




Water version, see page 464.


Available sizes:




923 x 431
↕ ↔




923 x 531




923 x 631




1323 x 431




1323 x 531




1323 x 631



1723 x 431
↕ ↔



1723 x 531



1723 x 631


Specifications:

| A ↕ [mm] | B ↔ [mm] | 📷 [W] | D [mm] | E [mm] | F [mm] | 📏 [dm ³] | 📖 [kg] | Product code <small>(Configuration code p. 789)</small> |
|-------------|-------------|----------|-----------|-----------|-----------|-------------------------|-----------|--|
| 923 | 431 | 300 | 400 | 505 | 196,5 | 2,07 | 10,56 | WLPAJ092043 |
| 923 | 531 | 400 | 500 | 505 | 196,5 | 2,14 | 10,98 | WLPAJ092053 |
| 923 | 631 | 400 | 600 | 505 | 196,5 | 2,40 | 11,93 | WLPAJ092063 |
| 1323 | 431 | 400 | 400 | 852 | 196,5 | 2,64 | 12,10 | WLPAJ132043 |
| 1323 | 531 | 400 | 500 | 852 | 196,5 | 2,71 | 12,57 | WLPAJ132053 |
| 1323 | 631 | 600 | 600 | 852 | 196,5 | 2,96 | 13,48 | WLPAJ132063 |
| 1723 | 431 | 400 | 400 | 1162 | 196,5 | 3,20 | 13,66 | WLPAJ172043 |
| 1723 | 531 | 600 | 500 | 1162 | 196,5 | 3,26 | 14,12 | WLPAJ172053 |
| 1723 | 631 | 600 | 600 | 1162 | 196,5 | 3,52 | 15,07 | WLPAJ172063 |




We recommend: MOA BLUE heating
element – see page 706



E8

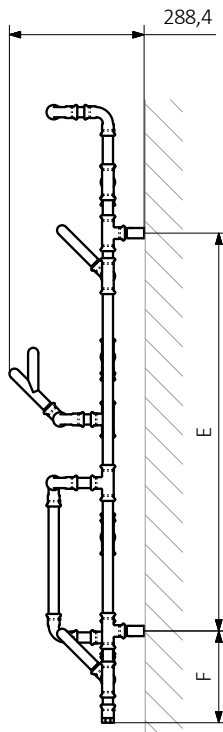


E1

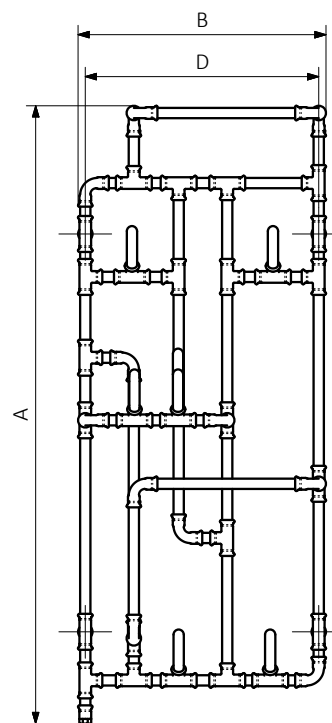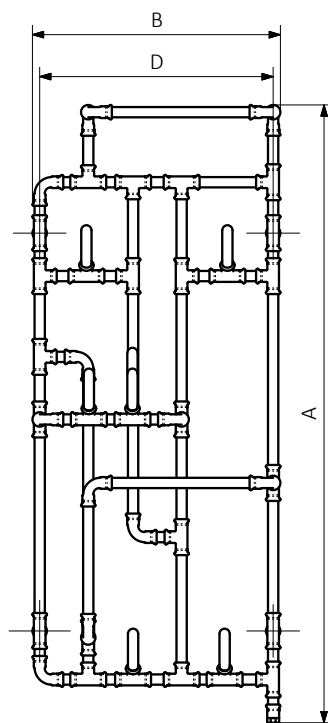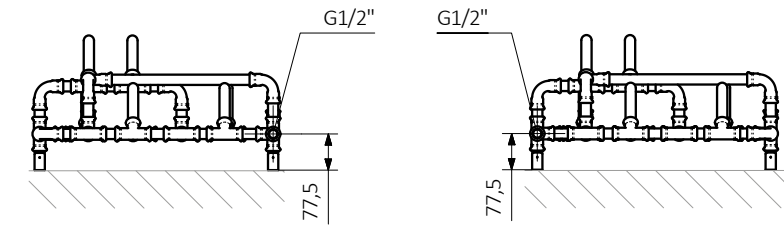

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Pipe:





Standard connections:




Electric radiators: see page 470.


Available sizes:




960 x 500
↕ ↔



960 x 600




1360 x 500



1360 x 600



1760 x 500



1760 x 600

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

The colour of the valve block on the Perta hydronic radiator will always match the colour of the radiator. In the case of a chrome radiator, the valve block will also match in chrome.




| A ↕ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] | ⊞ [dm ²] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|-------------------------|------------|--|
| Powder coating | | | | | | | | | | |
| 960 | 500 | 50 | 337 | 178 | 200 | 360 | 180 | 3,16 | 12,01 | WGPER096050 |
| 960 | 600 | 50 | 371 | 198 | 230 | 360 | 180 | 3,47 | 12,73 | WGPER096060 |
| 1360 | 500 | 50 | 478 | 253 | 160 | 600 | 340 | 4,41 | 13,46 | WGPER136050 |
| 1360 | 600 | 50 | 528 | 282 | 220 | 600 | 340 | 4,88 | 14,62 | WGPER136060 |
| 1760 | 500 | 50 | 630 | 334 | 200 | 600 | 540 | 5,75 | 16,78 | WGPER176050 |
| 1760 | 600 | 50 | 704 | 377 | 290 | 600 | 540 | 6,45 | 18,52 | WGPER176060 |
| Plated finishes | | | | | | | | | | |
| 960 | 500 | 50 | 229 | 119 | 200 | 360 | 180 | 3,16 | 11,80 | WGPER096050 |
| 960 | 600 | 50 | 252 | 134 | 230 | 360 | 180 | 3,47 | 12,50 | WGPER096060 |
| 1360 | 500 | 50 | 325 | 168 | 160 | 600 | 340 | 4,41 | 13,17 | WGPER136050 |
| 1360 | 600 | 50 | 359 | 190 | 220 | 600 | 340 | 4,88 | 14,29 | WGPER136060 |
| 1760 | 500 | 50 | 419 | 218 | 200 | 600 | 540 | 5,75 | 16,40 | WGPER176050 |
| 1760 | 600 | 50 | 488 | 260 | 290 | 600 | 540 | 6,45 | 18,09 | WGPER176060 |

Included components: Radiator sold with two angled lockshield valves with external thread (white and silver for corresponding colours and chrome for all others). Included is the NOBLE thermostatic head (white and silver for corresponding colours and chrome for all others), Alupex and Copper pipe adapters are included.

We recommend: Integrated pipe masking set – see page 675




ZX

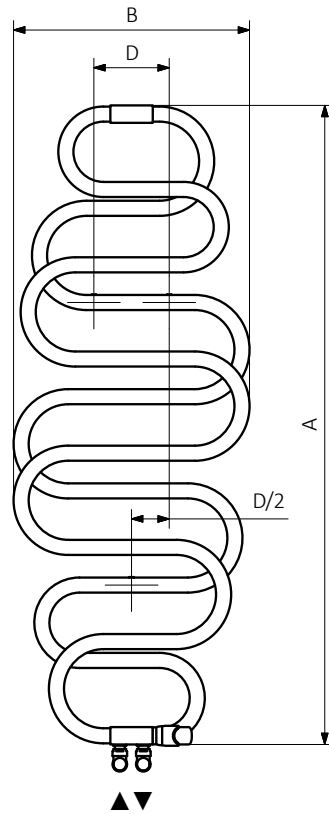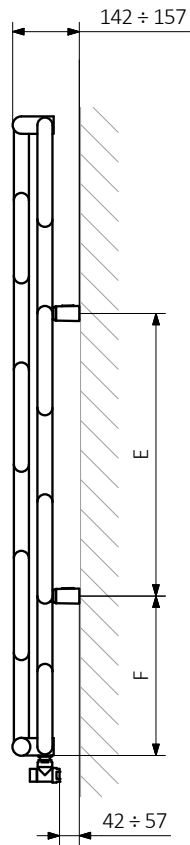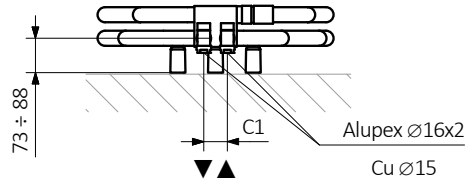

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:



Perta E Class I s. 170




design: Terma

Standard connections:



Water version, see page 468.

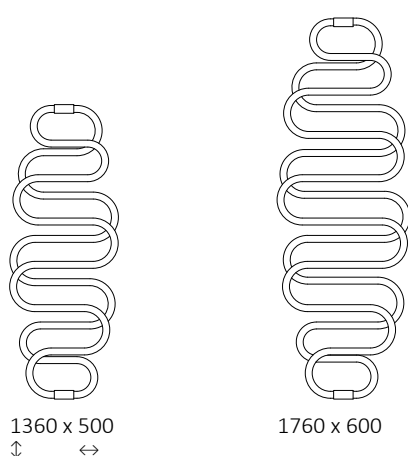


Available sizes:




Specifications:

Elektrische Version mit Heizspirale.

The element housing unit on the Perta Electric radiator, regardless of the selected colour, always comes in chrome finish.


| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 790)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | |
| 1360 | 500 | 284 | 160 | 600 | 340 | – | 13,46 | WSPER136050 |
| 1760 | 600 | 455 | 290 | 600 | 540 | – | 18,52 | WSPER176060 |
| Plated finishes | | | | | | | | |
| 1360 | 500 | 213 | 160 | 600 | 340 | – | 13,17 | WSPER136050 |
| 1760 | 600 | 284 | 290 | 600 | 540 | – | 18,09 | WSPER176060 |

EX

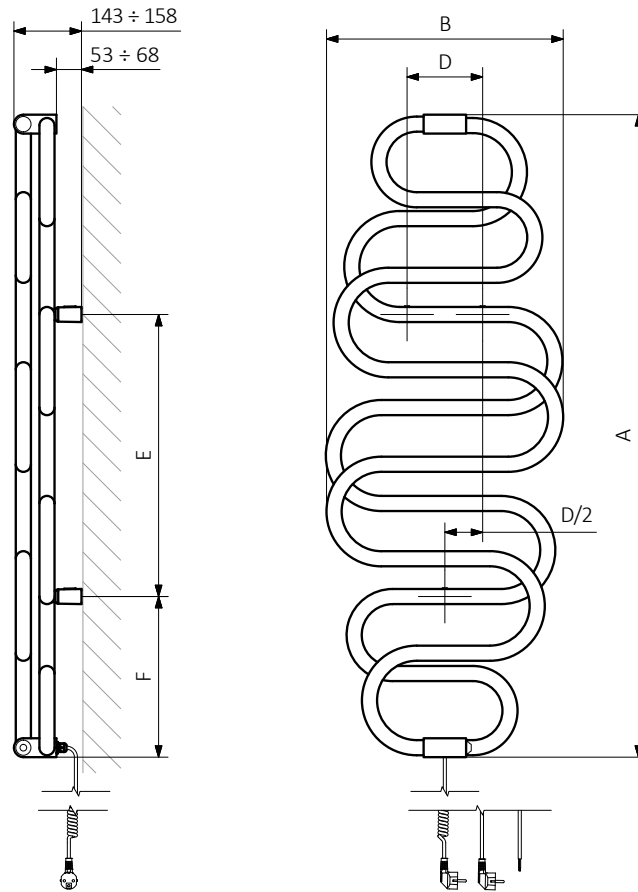


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator


Pipe:




Standard connections:



Optional connections:



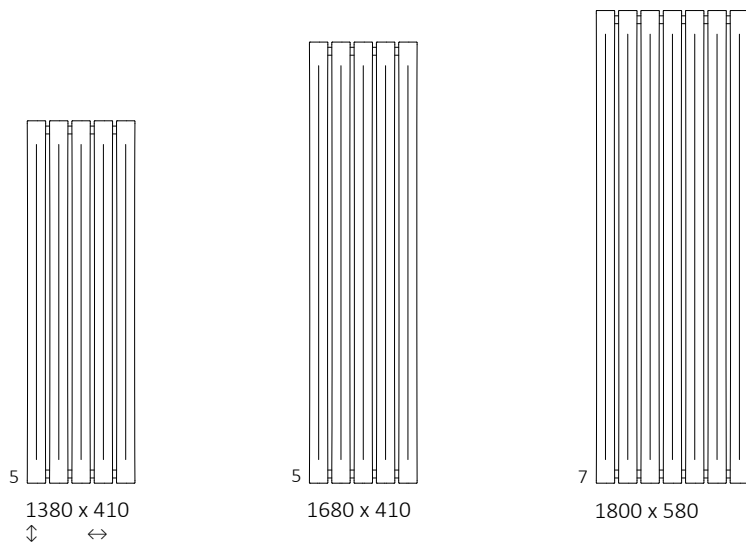

Available sizes:



Specifications:

Working pressure: 800 kPa

Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 1380 | 410 | 50 | 340 | 564 | 303 | 255 | 1310 | 35 | 6,81 | 18,16 | WGB19138041 |
| 1680 | 410 | 50 | 340 | 687 | 360 | 255 | 1610 | 35 | 8,26 | 21,54 | WGB19168041 |
| 1800 | 580 | 50 | 510 | 1030 | 535 | 425 | 1730 | 35 | 12,50 | 32,20 | WGB19180058 |

We recommend: 3-axis thermostatic valve for SX connection – see page 648



Pipe masking set – 70 mm – see page 673



SX




ZX

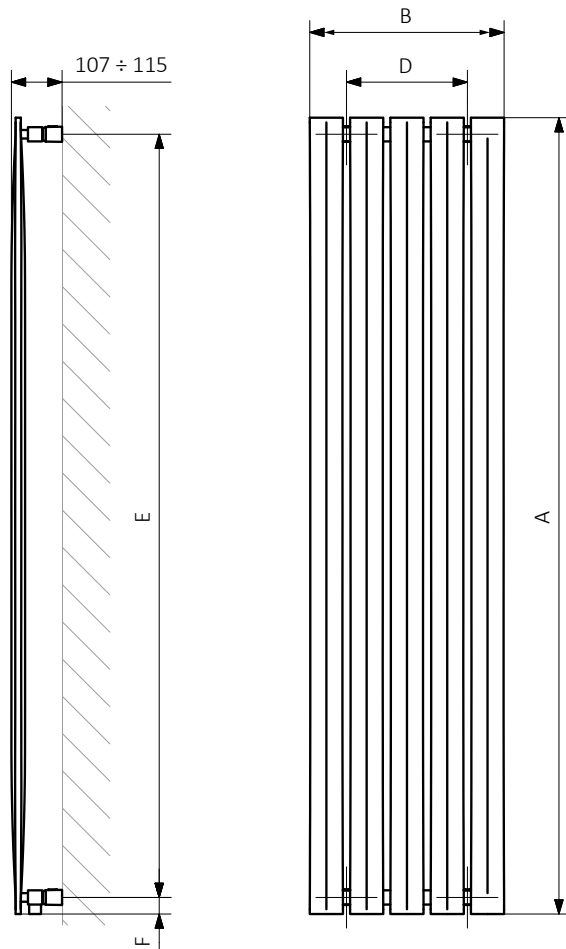


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Standard connections:


B ↔ 263:



B ↔ 463÷663:



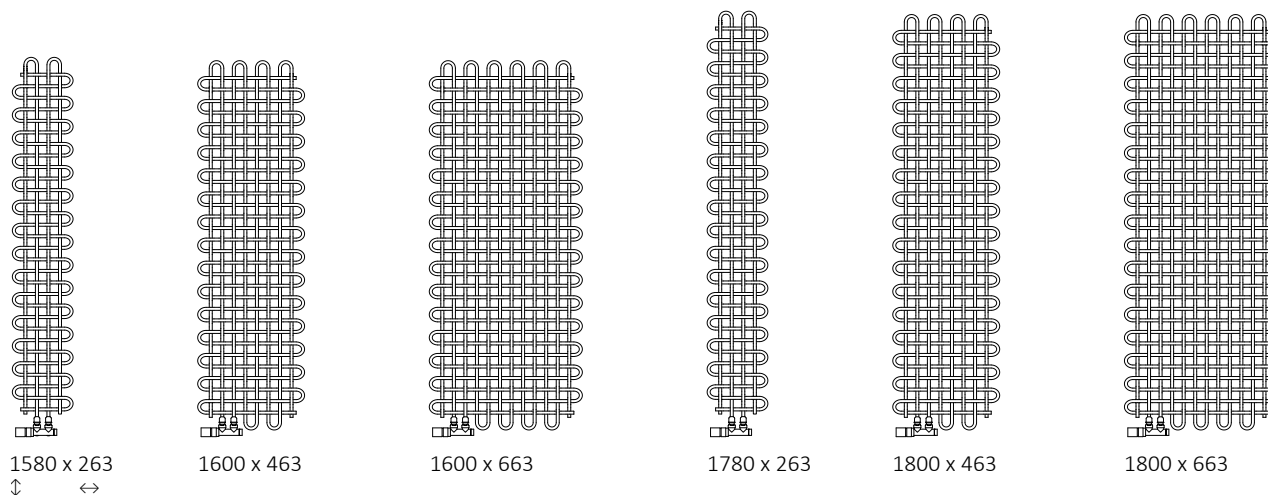

Available sizes:




Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↑ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 1580 | 263 | 50 | 331 | 169 | 150 | 1350 | 105 | 1,26 | 7,30 | WGPLV158026 |
| 1600 | 463 | 50 | 613 | 312 | 350 | 1350 | 125 | 2,39 | 13,60 | WGPLV160046 |
| 1600 | 663 | 50 | 894 | 456 | 550 | 1350 | 125 | 3,51 | 19,91 | WGPLV160066 |
| 1780 | 263 | 50 | 373 | 190 | 150 | 1550 | 105 | 1,43 | 8,24 | WGPLV178026 |
| 1800 | 463 | 50 | 690 | 352 | 350 | 1550 | 125 | 2,70 | 15,36 | WGPLV180046 |
| 1800 | 663 | 50 | 1007 | 514 | 550 | 1550 | 125 | 3,96 | 22,47 | WGPLV180066 |


Included components: The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

We recommend: Integrated pipe masking set – see page 675

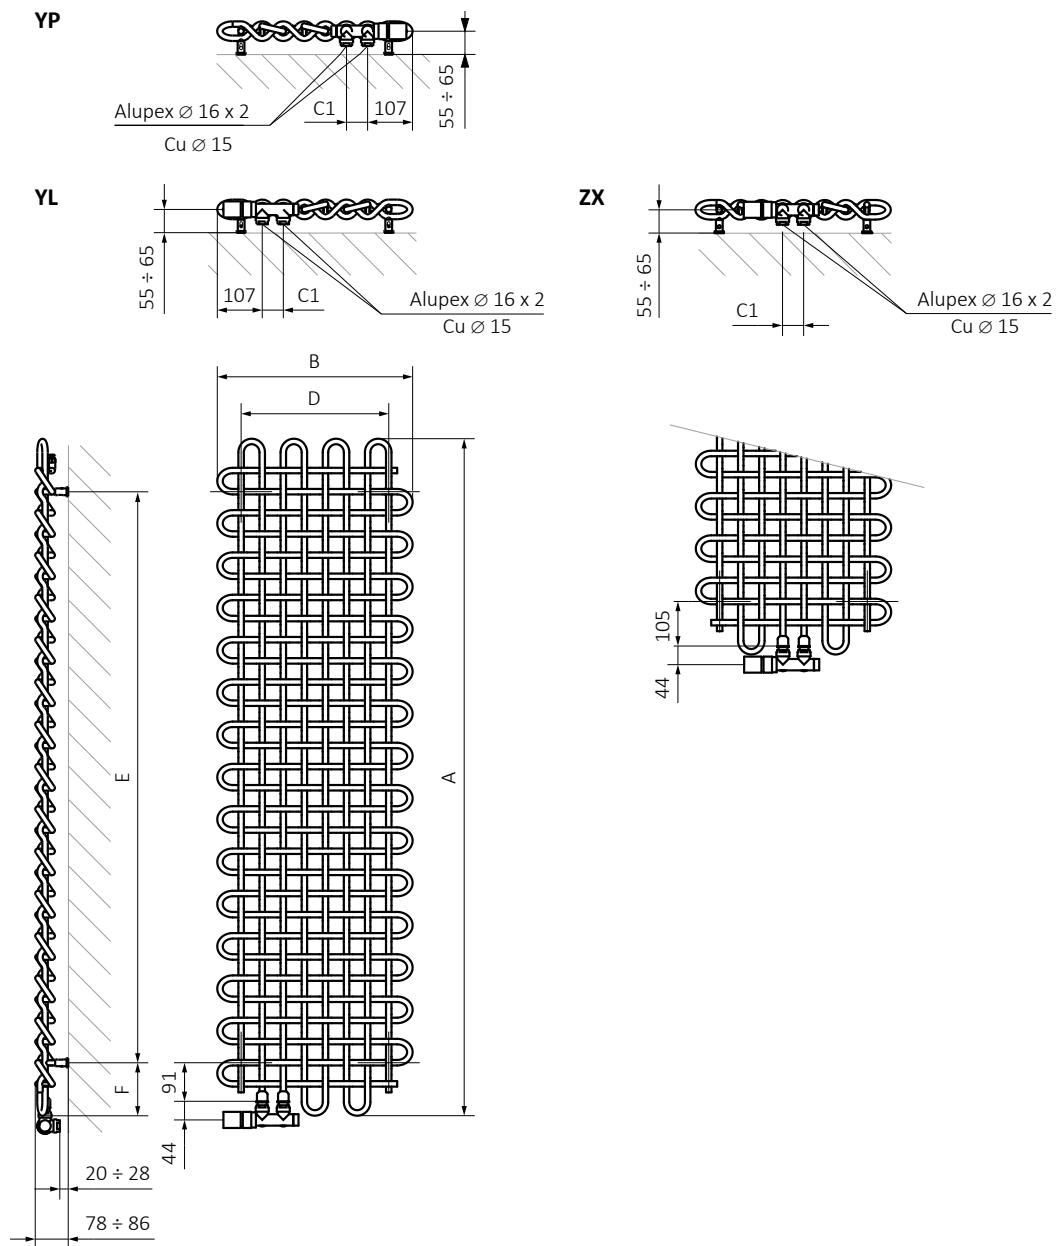

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:



PLC H s. 178


  Colour included
in the price

design: Jacek Ryń


Standard connections:



Available sizes:



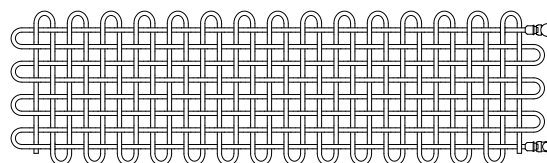

263 x 1600
↓ ↔



463 x 1600



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C3 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 263 | 1600 | 150 | 341 | 174 | 1350 | 150 | 56,5 | 1,27 | 7,36 | WGPLH026160 |
| 463 | 1600 | 350 | 622 | 317 | 1350 | 350 | 56,5 | 2,40 | 13,66 | WGPLH046160 |


Included components: Radiator (water version) sold together with angled thermostatic valve, angled lockshield valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

We recommend: Pipe masking set –
70 mm – see page 673

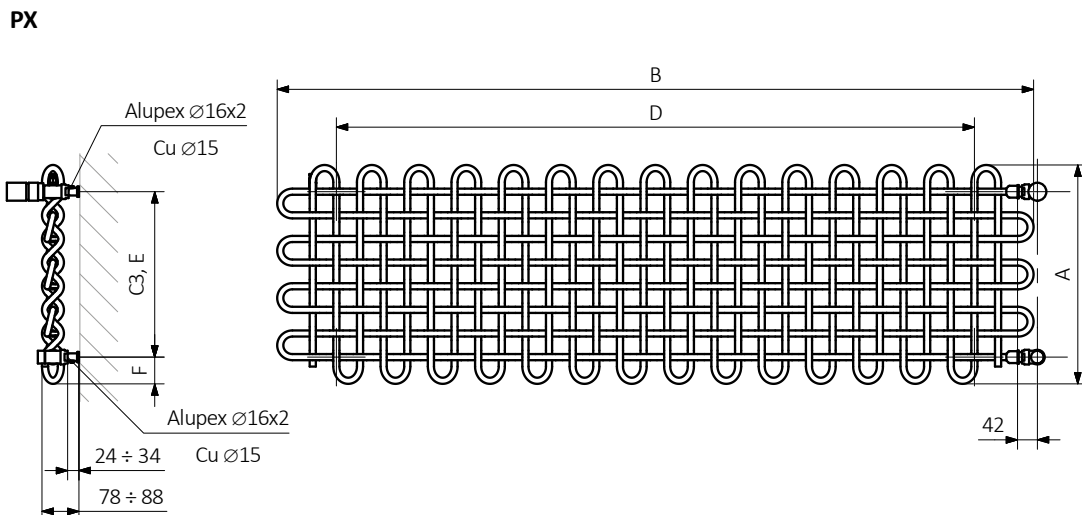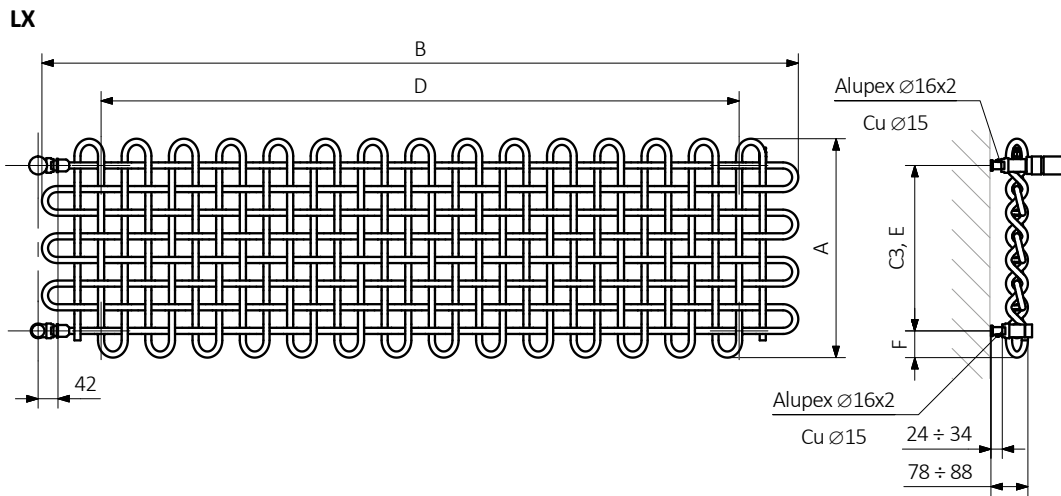

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:




POC 2 s. 180




design: Terma


Standard connections:



Electric radiators: see page 599.



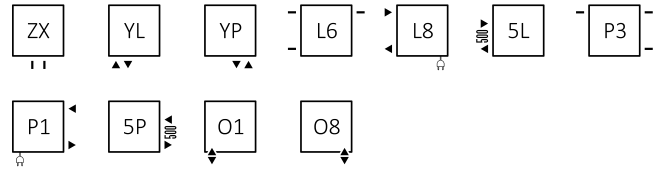


Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | C5 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 600 | 450 | 50 | 420 | 500 | 308 | 167 | 300 | 420 | 420 | 90 | 3,19 | 6,48 | WGZUL060045 |
| 600 | 500 | 50 | 470 | 500 | 342 | 185 | 400 | 470 | 420 | 90 | 3,45 | 7,05 | WGZUL060050 |
| 600 | 600 | 50 | 570 | 500 | 410 | 222 | 400 | 570 | 420 | 90 | 3,99 | 8,19 | WGZUL060060 |
| 840 | 450 | 50 | 420 | 500 | 443 | 239 | 400 | 420 | 660 | 90 | 4,29 | 8,76 | WGZUL084045 |
| 840 | 500 | 50 | 470 | 500 | 493 | 266 | 600 | 470 | 660 | 90 | 4,64 | 9,53 | WGZUL084050 |
| 840 | 600 | 50 | 570 | 500 | 590 | 318 | 600 | 570 | 660 | 90 | 5,36 | 11,07 | WGZUL084060 |
| 840 | 700 | 50 | 670 | 500 | 690 | 372 | 800 | 670 | 660 | 90 | 6,07 | 12,60 | WGZUL084070 |
| 1040 | 450 | 50 | 420 | 500 | 556 | 299 | 600 | 420 | 860 | 90 | 5,26 | 10,80 | WGZUL104045 |
| 1040 | 500 | 50 | 470 | 500 | 618 | 332 | 600 | 470 | 860 | 90 | 5,70 | 11,73 | WGZUL104050 |
| 1040 | 600 | 50 | 570 | 500 | 743 | 399 | 800 | 570 | 860 | 90 | 6,56 | 13,61 | WGZUL104060 |
| 1040 | 700 | 50 | 670 | 500 | 866 | 465 | 800 | 670 | 860 | 90 | 7,42 | 15,48 | WGZUL104070 |
| 1240 | 450 | 50 | 420 | 500 | 669 | 359 | 800 | 420 | 1060 | 90 | 6,19 | 12,72 | WGZUL124045 |
| 1240 | 500 | 50 | 470 | 500 | 744 | 399 | 800 | 470 | 1060 | 90 | 6,70 | 13,82 | WGZUL124050 |
| 1240 | 600 | 50 | 570 | 500 | 893 | 479 | 1000 | 570 | 1060 | 90 | 7,71 | 16,03 | WGZUL124060 |
| 1240 | 700 | 50 | 670 | 500 | 1041 | 559 | 1000 | 670 | 1060 | 90 | 8,72 | 18,23 | WGZUL124070 |
| 1400 | 500 | 50 | 470 | 500 | 844 | 452 | 800 | 470 | 1220 | 90 | 7,53 | 15,57 | WGZUL140050 |
| 1400 | 600 | 50 | 570 | 500 | 1013 | 543 | 1000 | 570 | 1220 | 90 | 8,66 | 18,05 | WGZUL140060 |
| 1400 | 700 | 50 | 670 | 500 | 1182 | 633 | 1200 | 670 | 1220 | 90 | 9,79 | 20,52 | WGZUL140070 |

We recommend: 3-axis thermostatic valve and lockshield integrated with T-piece set for SX connection – see page 651





















Pipe masking set – 70 mm – see page 673




MOA heating element – see page 702






Available sizes:



SX

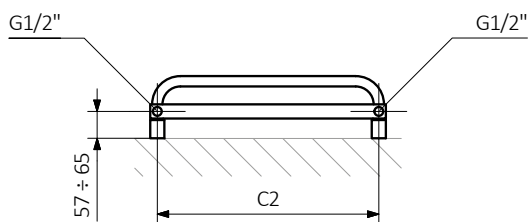



51


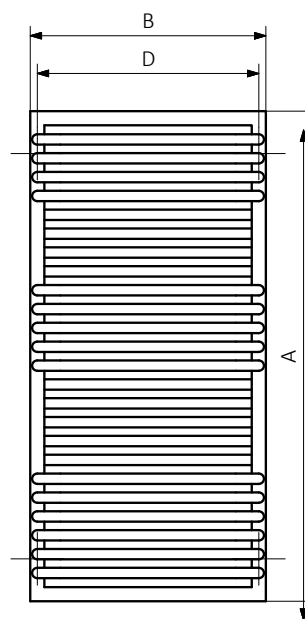
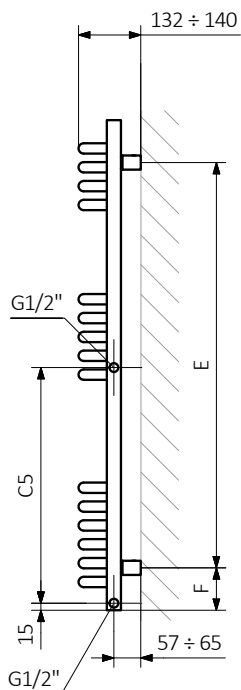
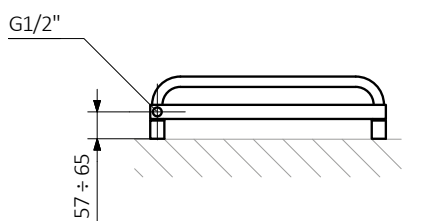


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:

Pipe:




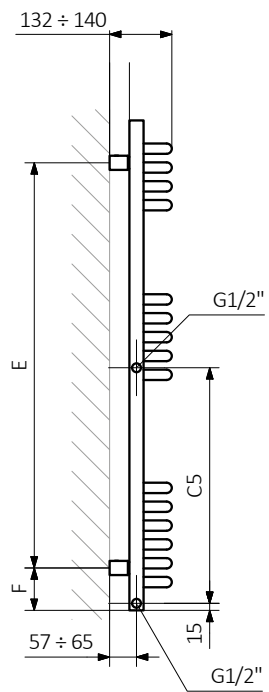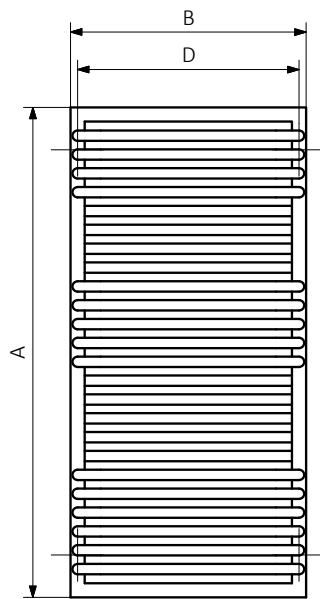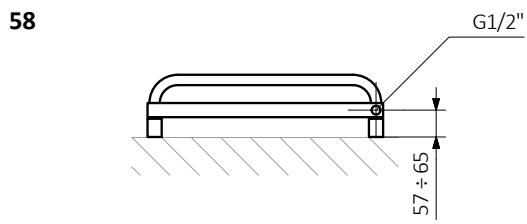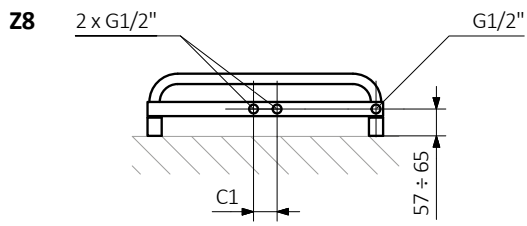



Standard connections:









Electric radiators: see page 599.



Optional connections:



Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|---------|-----------|-----------|-----------|-----------|----------|--|
| Powder coating | | | | | | | | | | | | |
| 780 | 500 | 50 | 470 | 392 | 211 | 400 | 470 | 600 | 90 | 3,34 | 6,99 | WGPAL078050 |
| 780 | 600 | 50 | 570 | 471 | 254 | 400 | 570 | 600 | 90 | 3,79 | 7,99 | WGPAL078060 |
| 1180 | 500 | 50 | 470 | 638 | 342 | 600 | 470 | 1000 | 90 | 5,39 | 11,28 | WGPAL118050 |
| 1180 | 600 | 50 | 570 | 766 | 411 | 800 | 570 | 1000 | 90 | 6,14 | 12,95 | WGPAL118060 |
| 1580 | 500 | 50 | 470 | 883 | 473 | 800 | 470 | 1400 | 90 | 7,44 | 15,57 | WGPAL158050 |
| 1580 | 600 | 50 | 570 | 1061 | 568 | 1000 | 570 | 1400 | 90 | 8,49 | 17,91 | WGPAL158060 |
| Plated finishes | | | | | | | | | | | | |
| 780 | 500 | 50 | 470 | 274 | 140 | 300 | 470 | 600 | 90 | 3,34 | 6,72 | WGPAL078050 |
| 780 | 600 | 50 | 570 | 330 | 168 | 300 | 570 | 600 | 90 | 3,79 | 7,68 | WGPAL078060 |
| 1180 | 500 | 50 | 470 | 447 | 228 | 400 | 470 | 1000 | 90 | 5,39 | 10,84 | WGPAL118050 |
| 1180 | 600 | 50 | 570 | 536 | 273 | 600 | 570 | 1000 | 90 | 6,14 | 12,44 | WGPAL118060 |
| 1580 | 500 | 50 | 470 | 618 | 315 | 600 | 470 | 1400 | 90 | 7,44 | 14,96 | WGPAL158050 |
| 1580 | 600 | 50 | 570 | 743 | 379 | 800 | 570 | 1400 | 90 | 8,49 | 17,20 | WGPAL158060 |





We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652



Integrated pipe masking set – see page 675




KTX 3 heating element – see page 696

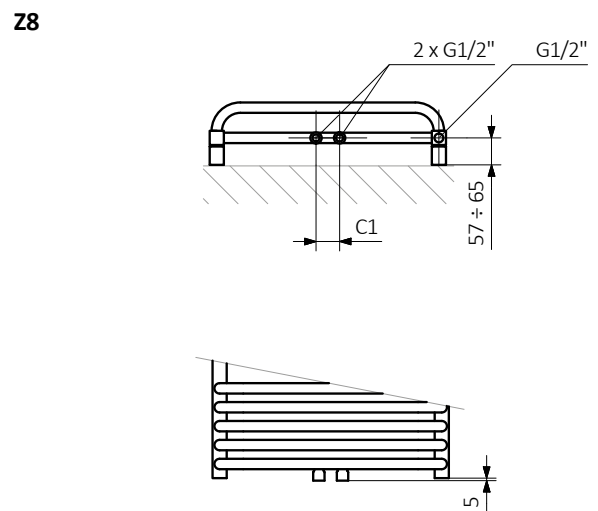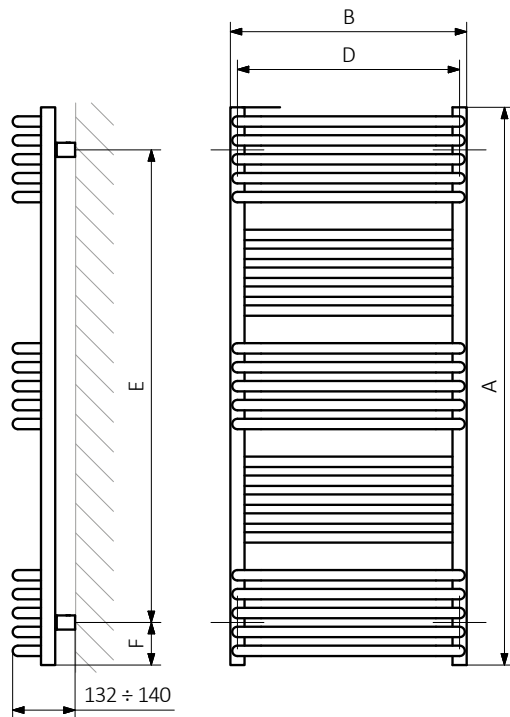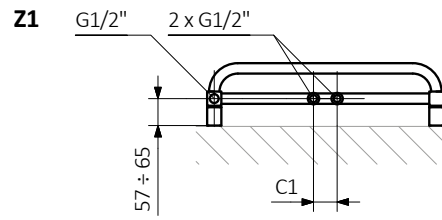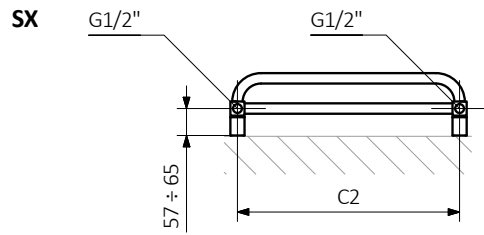


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Pola One s. 184

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:




Electric radiators: see page 599.



Optional connections:



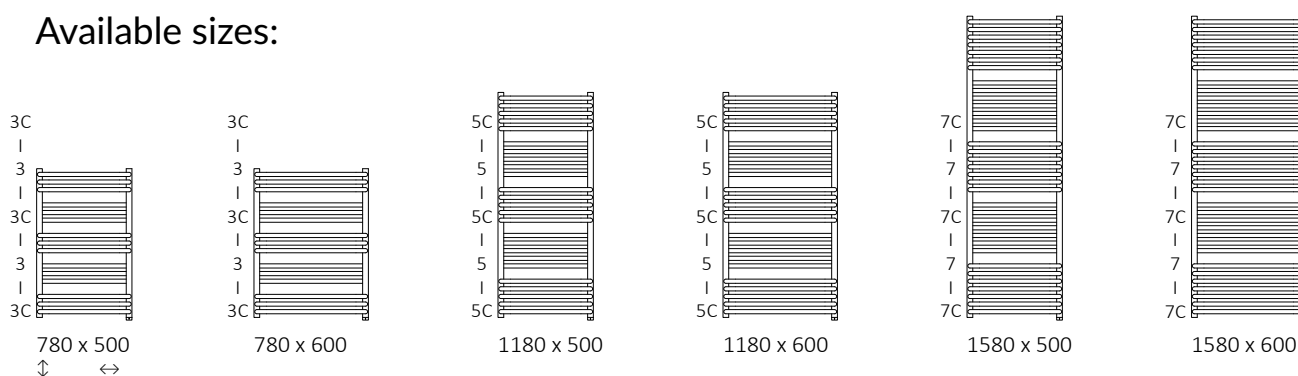


Available sizes:



Specifications:





Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | C5 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| Powder coating | | | | | | | | | | | |
| 780 | 500 | 500 | 392 | 211 | 400 | 470 | 640 | 70 | 3,27 | 6,99 | WZPAN078050 |
| 780 | 600 | 500 | 471 | 254 | 400 | 570 | 640 | 70 | 3,72 | 7,99 | WZPAN078060 |
| 1180 | 500 | 500 | 638 | 342 | 600 | 470 | 1040 | 70 | 5,33 | 11,28 | WZPAN118050 |
| 1180 | 600 | 500 | 766 | 411 | 800 | 570 | 1040 | 70 | 6,07 | 12,95 | WZPAN118060 |
| 1580 | 500 | 500 | 883 | 473 | 800 | 470 | 1440 | 70 | 7,38 | 15,57 | WZPAN158050 |
| 1580 | 600 | 500 | 1061 | 568 | 1000 | 570 | 1440 | 70 | 8,42 | 17,91 | WZPAN158060 |
| Plated finishes | | | | | | | | | | | |
| 780 | 500 | 500 | 274 | 140 | 300 | 470 | 640 | 70 | 3,27 | 6,72 | WZPAN078050 |
| 780 | 600 | 500 | 330 | 168 | 300 | 570 | 640 | 70 | 3,72 | 7,68 | WZPAN078060 |
| 1180 | 500 | 500 | 447 | 228 | 400 | 470 | 1040 | 70 | 5,33 | 10,84 | WZPAN118050 |
| 1180 | 600 | 500 | 536 | 273 | 600 | 570 | 1040 | 70 | 6,07 | 12,44 | WZPAN118060 |
| 1580 | 500 | 500 | 618 | 315 | 600 | 470 | 1440 | 70 | 7,38 | 14,96 | WZPAN158050 |
| 1580 | 600 | 500 | 743 | 379 | 800 | 570 | 1440 | 70 | 8,42 | 17,20 | WZPAN158060 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675

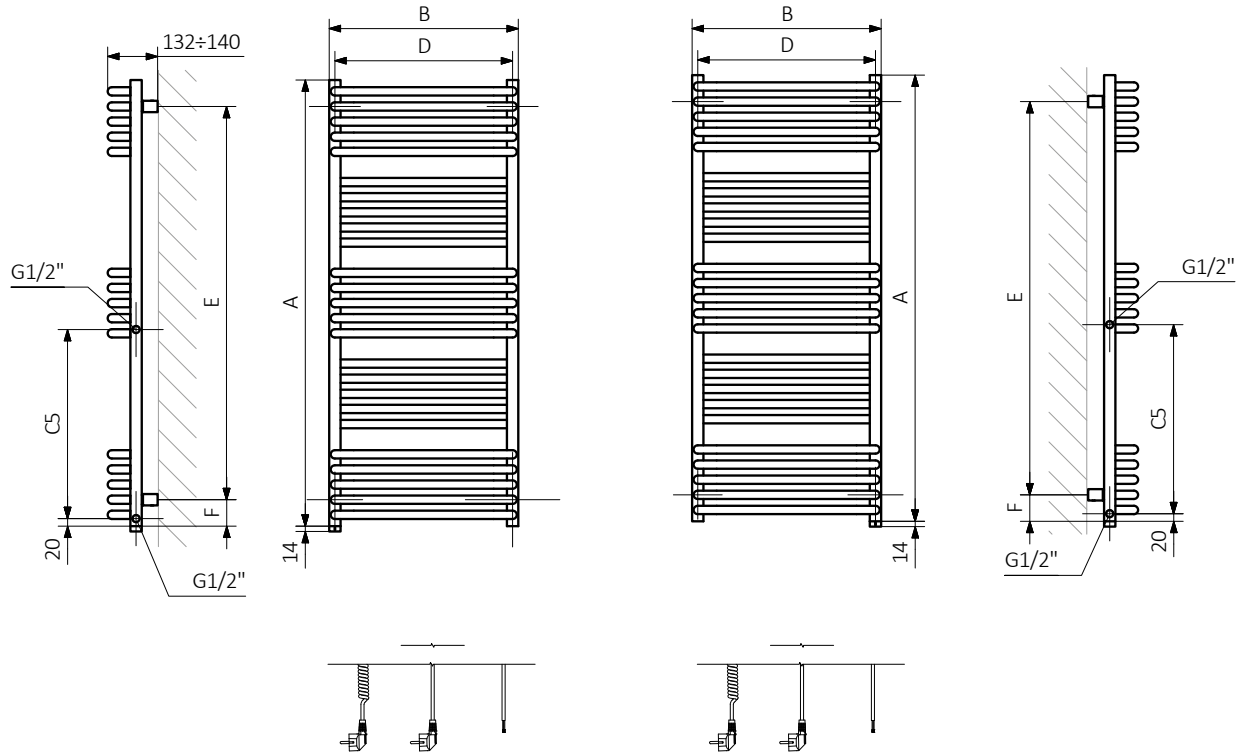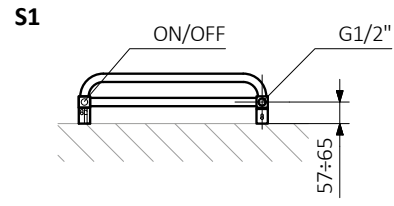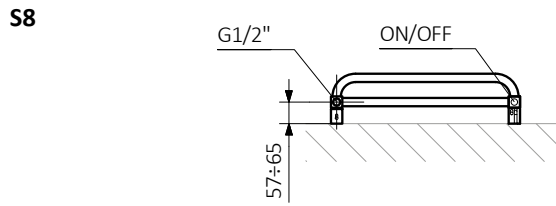


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Quadrus Bold s. 188


    Colour included in the price

design: *Terma*


Standard connections:




Electric radiators: see page 599.



Optional connections:

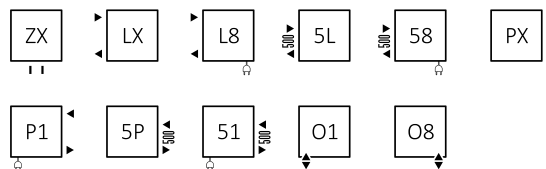

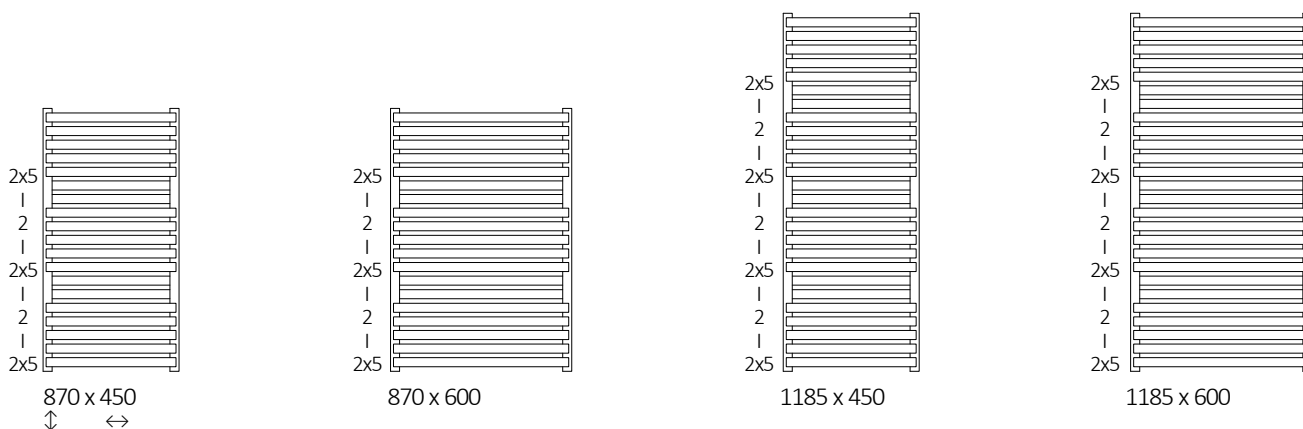


Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 870 | 450 | 50 | 420 | 531 | 285 | 600 | 420 | 690 | 90 | 4,11 | 15,70 | WGQBA087045 |
| 870 | 600 | 50 | 570 | 708 | 380 | 800 | 570 | 690 | 90 | 5,08 | 20,24 | WGQBA087060 |
| 1185 | 450 | 50 | 420 | 835 | 446 | 800 | 420 | 1005 | 90 | 5,57 | 21,23 | WGQBA118045 |
| 1185 | 600 | 50 | 570 | 1113 | 594 | 1200 | 570 | 1005 | 90 | 6,88 | 27,38 | WGQBA118060 |

We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652




Integrated pipe masking set – see page 675




KTX 2 heating element – see page 698






SX

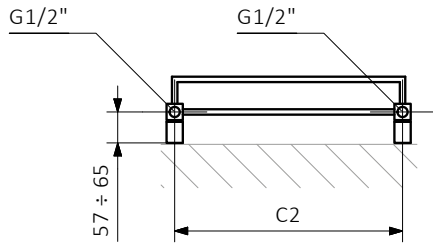

Z1

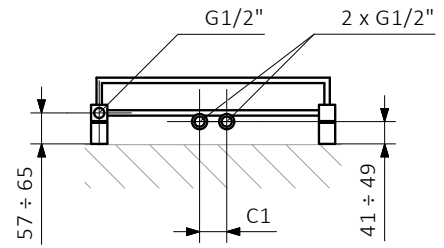


Z8

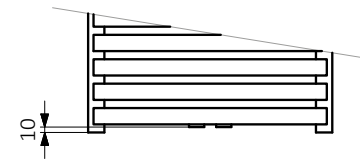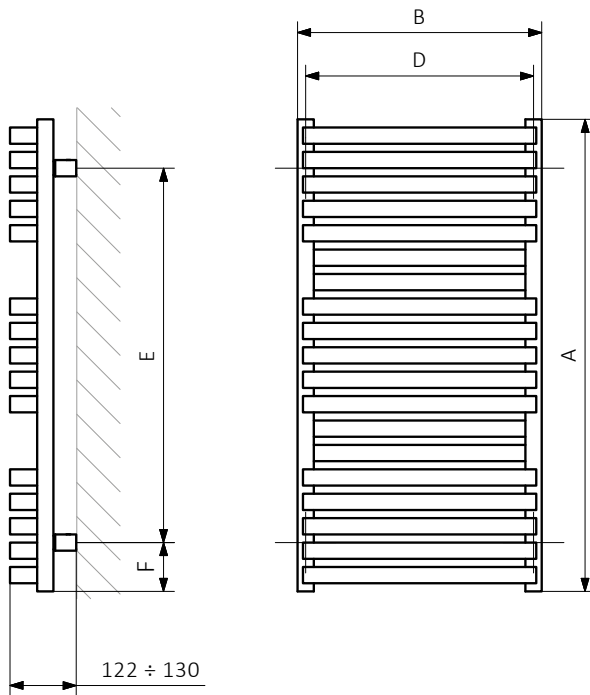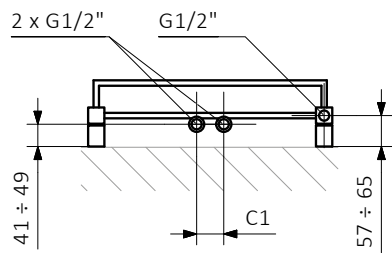


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Quadrus Bold One


s. 188

The radiator has a built-in ONE heating element. Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:




Electric radiators: see page 599.



Optional connections:



Available sizes:

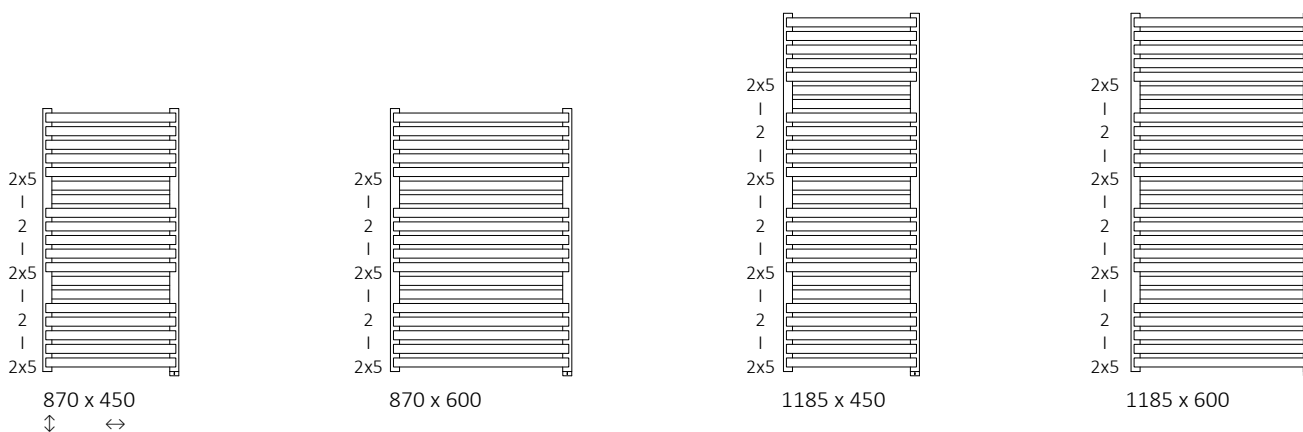

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|-------------------|-------------------|------|-----------|-----------|-----------|-------|-------|--|
| 870 | 450 | 531 | 285 | 600 | 420 | 720 | 75 | 4,05 | 15,70 | WZQBN087045 |
| 870 | 600 | 708 | 380 | 800 | 570 | 720 | 75 | 5,01 | 20,24 | WZQBN087060 |
| 1185 | 450 | 835 | 446 | 800 | 420 | 1035 | 75 | 5,50 | 21,23 | WZQBN118045 |
| 1185 | 600 | 1113 | 594 | 1200 | 570 | 1035 | 75 | 6,81 | 27,38 | WZQBN118060 |


We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654





Integrated pipe masking set – see page 675



S1

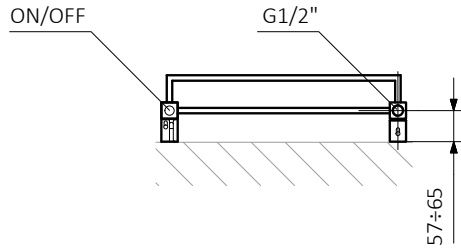


S8

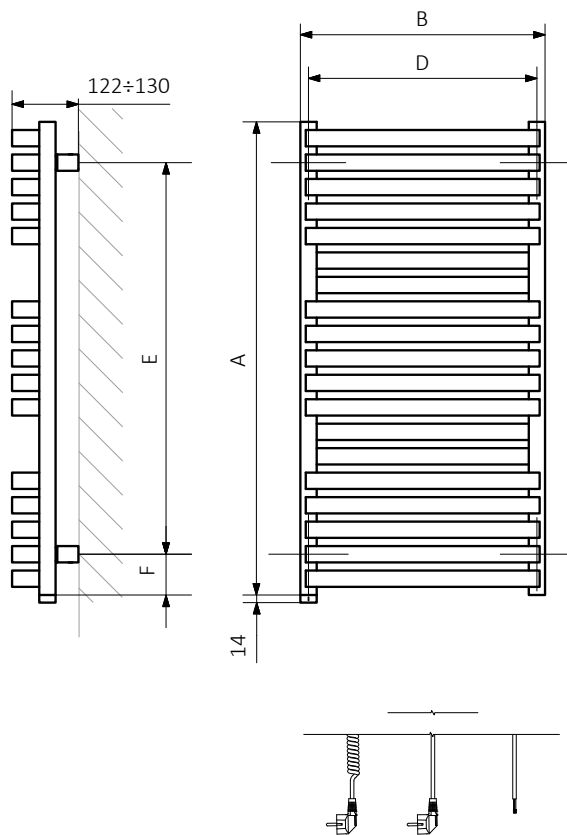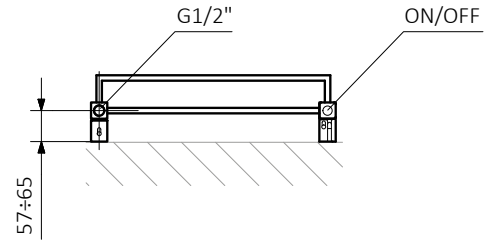


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Quadrus Slim s. 190




design: *Terma*


Standard connections:




Electric radiators: see page 599.



Optional connections:

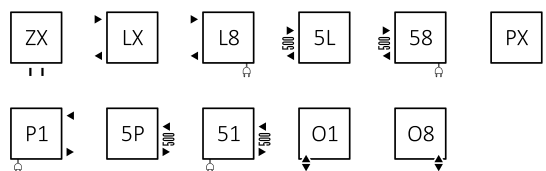

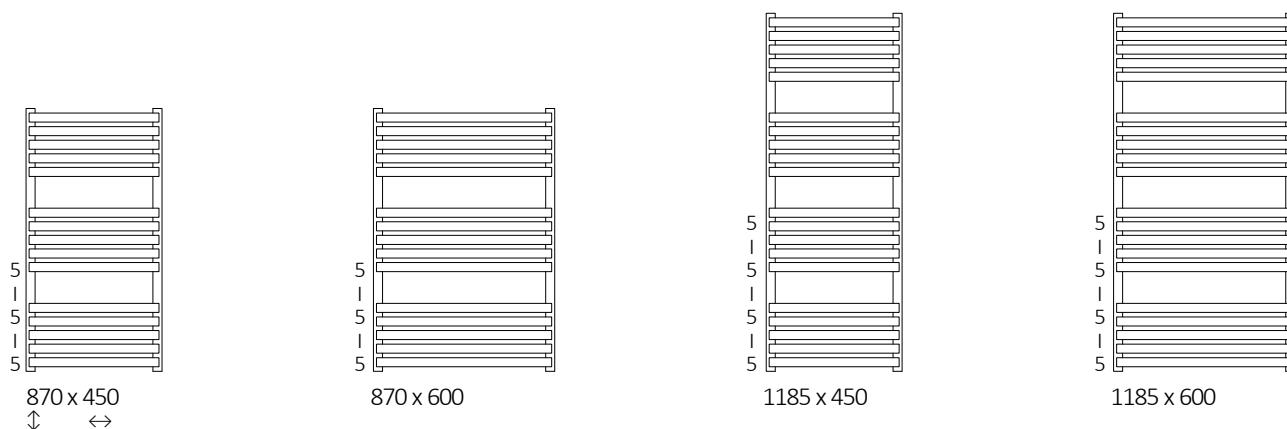


Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| 870 | 450 | 50 | 420 | 409 | 217 | 400 | 420 | 690 | 90 | 2,60 | 8,81 | WGQUS087045 |
| 870 | 600 | 50 | 570 | 559 | 296 | 600 | 570 | 690 | 90 | 3,03 | 10,81 | WGQUS087060 |
| 1185 | 450 | 50 | 420 | 537 | 278 | 600 | 420 | 1005 | 90 | 3,50 | 11,76 | WGQUS118045 |
| 1185 | 600 | 50 | 570 | 733 | 379 | 800 | 570 | 1005 | 90 | 4,07 | 14,43 | WGQUS118060 |

We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652



Integrated pipe masking set – see page 675




KTX 4 heating element – see page 692




ZIP H 10 hanger – see page 636






SX

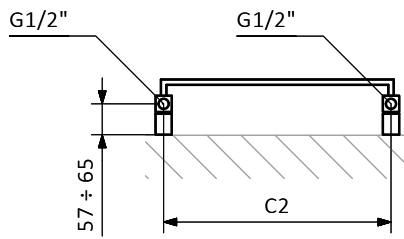

Z1

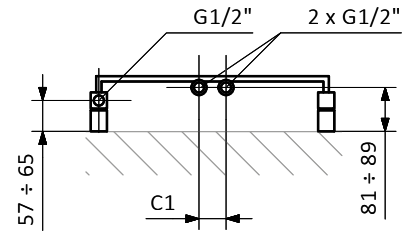


Z8

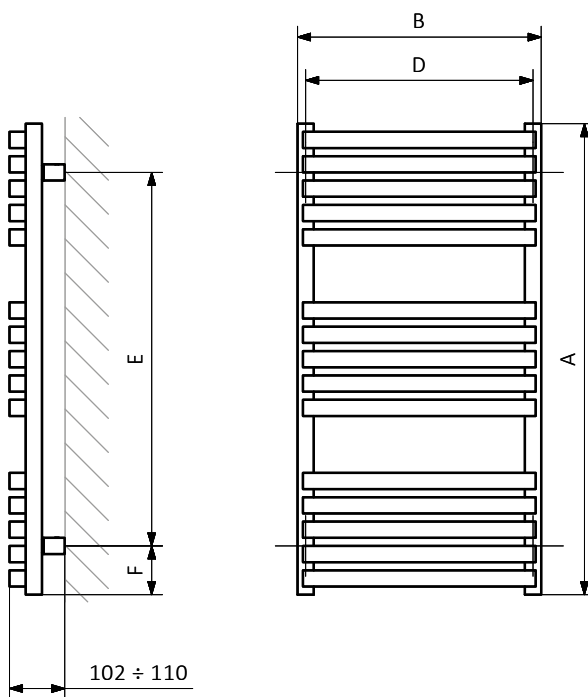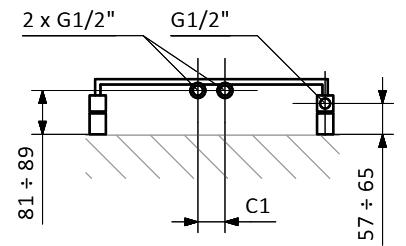


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Quadrus Slim One


s. 190

The radiator has a built-in ONE heating element. Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:







Electric radiators: see page 599.



Optional connections:



Available sizes:

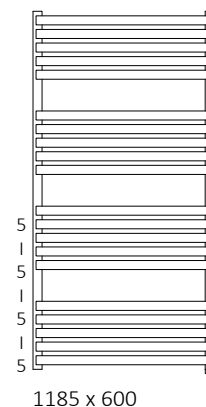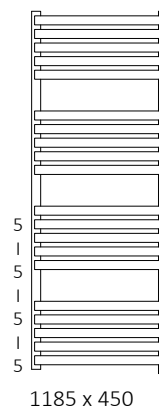

Specifications:





Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|-------------------|-------------------|-----|-----------|-----------|-----------|-------|-------|--|
| 870 | 450 | 409 | 217 | 400 | 420 | 720 | 75 | 2,53 | 8,81 | WZQSN087045 |
| 870 | 600 | 559 | 296 | 600 | 570 | 720 | 75 | 2,96 | 10,81 | WZQSN087060 |
| 1185 | 450 | 537 | 278 | 600 | 420 | 1035 | 75 | 3,43 | 11,76 | WZQSN118045 |
| 1185 | 600 | 733 | 379 | 800 | 570 | 1035 | 75 | 4,00 | 14,43 | WZQSN118060 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675

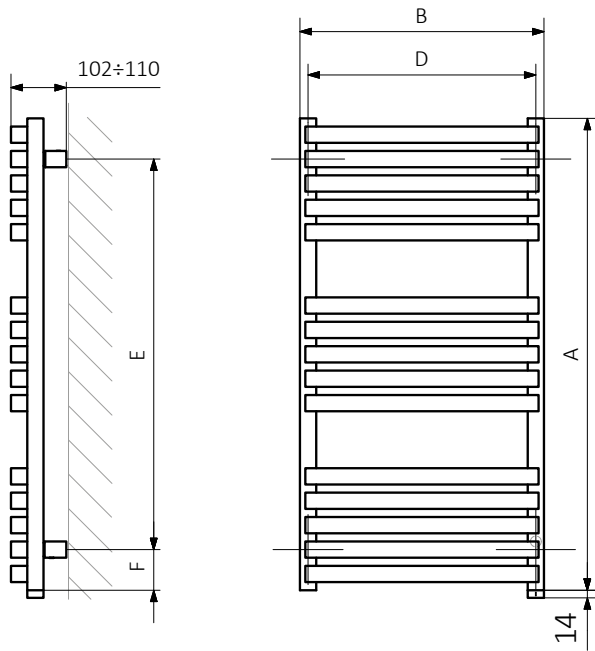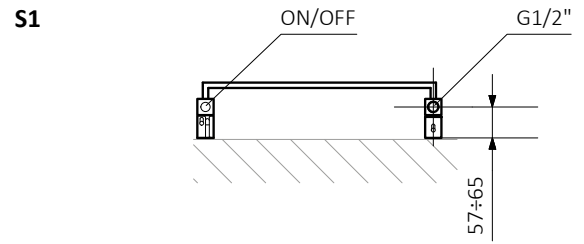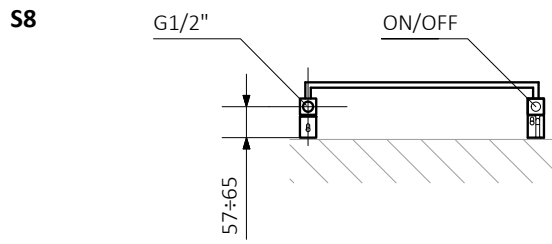


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Colour included in the price

design: Dariusz Berus





Standard connections:



Electric radiators: see page 599.



Available sizes:

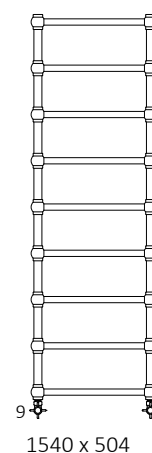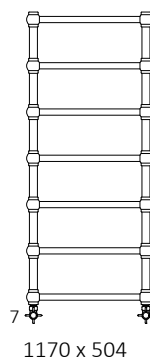

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C




| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | Cr [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|-----------|-----------|----------|--|
| Powder coating | | | | | | | | | | | |
| 430 | 504 | 450 | 115 | 63 | 120 | 450 | 370 | 30 | 1,05 | 5,57 | WGRE1043050 |
| 800 | 504 | 450 | 210 | 114 | 200 | 450 | 740 | 30 | 1,88 | 8,49 | WGRE1080050 |
| 1170 | 504 | 450 | 308 | 165 | 300 | 450 | 1110 | 30 | 2,71 | 11,40 | WGRE1117050 |
| 1540 | 504 | 450 | 405 | 216 | 400 | 450 | 1480 | 30 | 3,54 | 14,32 | WGRE1154050 |
| Plated finishes | | | | | | | | | | | |
| 430 | 504 | 450 | 81 | 44 | 120 | 450 | 370 | 30 | 1,05 | 5,48 | WGRE1043050 |
| 800 | 504 | 450 | 147 | 80 | 120 | 450 | 740 | 30 | 1,88 | 8,33 | WGRE1080050 |
| 1170 | 504 | 450 | 216 | 116 | 200 | 450 | 1110 | 30 | 2,71 | 11,19 | WGRE1117050 |
| 1540 | 504 | 450 | 284 | 151 | 300 | 450 | 1480 | 30 | 3,54 | 14,05 | WGRE1154050 |

Included components: Radiator (water version) sold with a set of chrome Star angled valves and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

We recommend: Pipe masking set –
70 mm – see page 673




SX

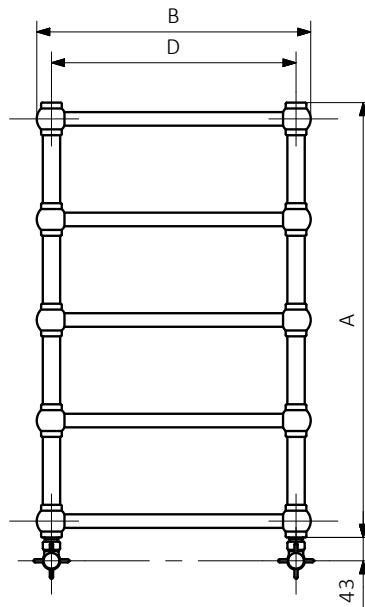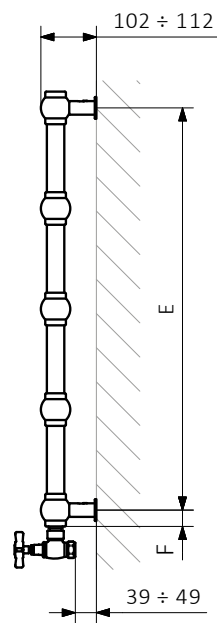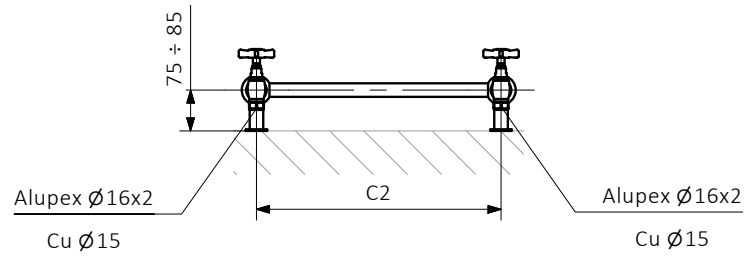


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Retro S s. 196




design: Dariusz Berus

Standard connections:



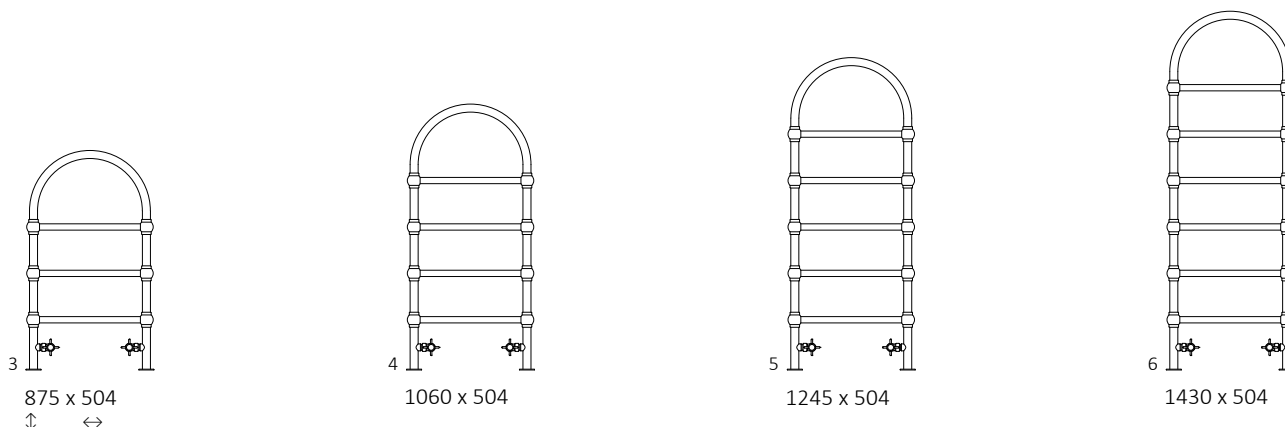

Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C4 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|-------------------|-------------------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | |
| 875 | 504 | 400 | 200 | 109 | 450 | 570 | 2,32 | 7,00 | WGR1S087050 |
| 1060 | 504 | 400 | 240 | 131 | 450 | 755 | 2,73 | 8,46 | WGR1S106050 |
| 1245 | 504 | 400 | 283 | 153 | 450 | 940 | 3,15 | 9,92 | WGR1S124050 |
| 1430 | 504 | 400 | 325 | 175 | 450 | 1125 | 3,57 | 11,38 | WGR1S143050 |
| Plated finishes | | | | | | | | | |
| 875 | 504 | 400 | 140 | 71 | 450 | 570 | 2,32 | 6,83 | WGR1S087050 |
| 1060 | 504 | 400 | 168 | 86 | 450 | 755 | 2,73 | 8,26 | WGR1S106050 |
| 1245 | 504 | 400 | 198 | 101 | 450 | 940 | 3,15 | 9,69 | WGR1S124050 |
| 1430 | 504 | 400 | 228 | 116 | 450 | 1125 | 3,57 | 11,12 | WGR1S143050 |

Included components: Radiator (water version) sold with a set of chrome Star angled valves and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

We recommend: Pipe masking set –
70 mm – see page 673




AX

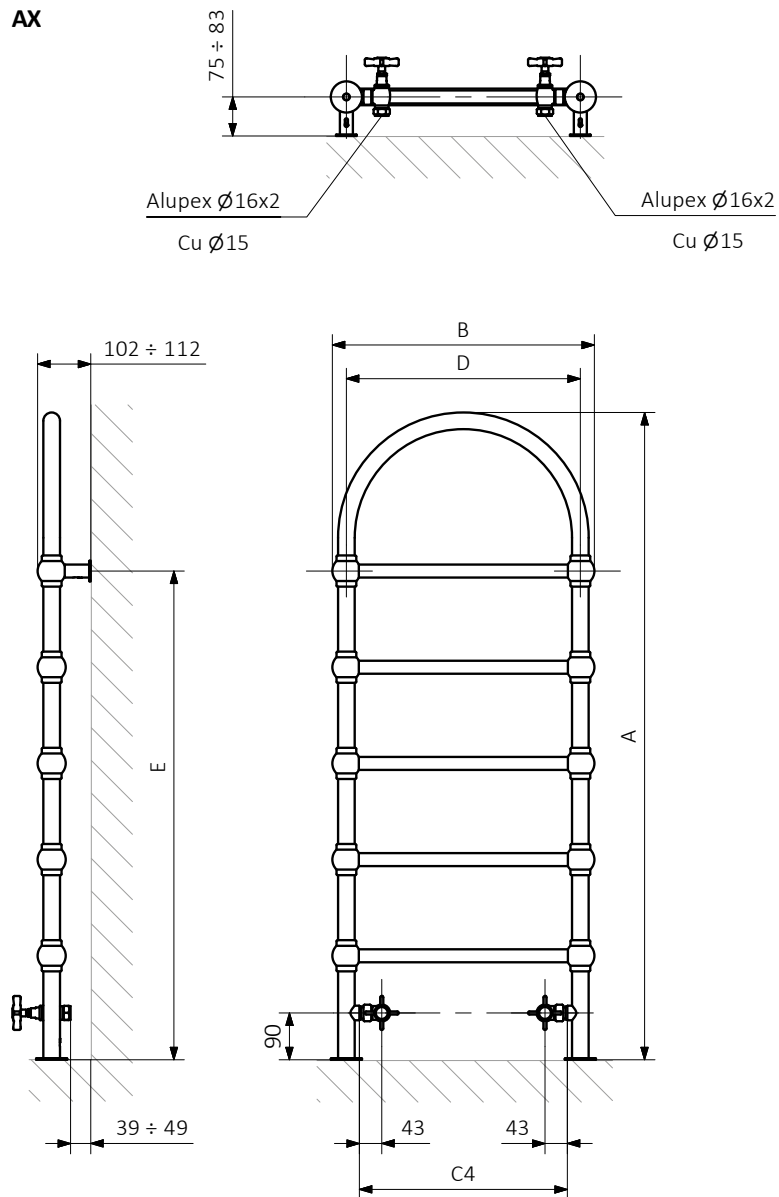


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Ribbon V s. 198

  Colour included in the price


design: Bartłomiej Drabik

Standard connections:





Electric radiators: see page 500.

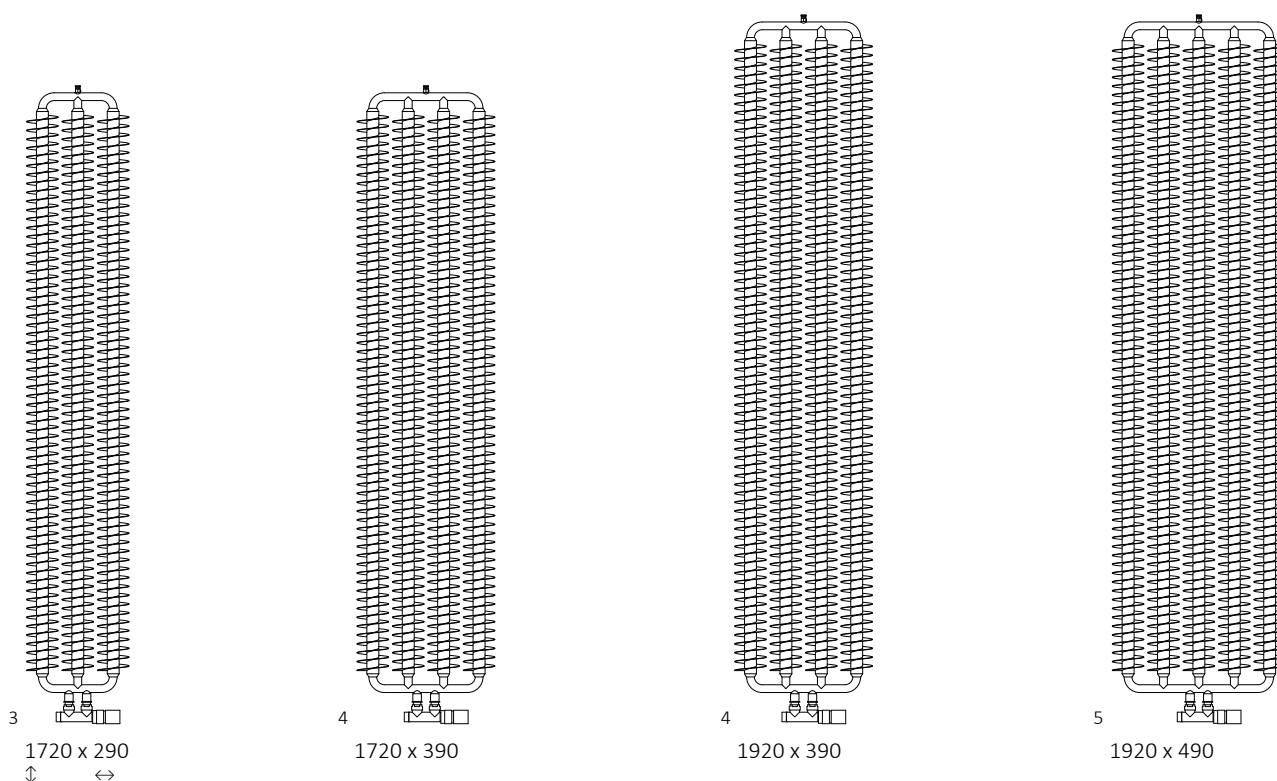Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C




| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|--|---|--|
| 1720 | 290 | 50 | 660 | 330 | 80 | 1672 | 36 | 3,14 | 26,65 | WGRIB172029 |
| 1720 | 390 | 50 | 872 | 436 | 180 | 1672 | 36 | 4,10 | 35,16 | WGRIB172039 |
| 1920 | 390 | 50 | 989 | 499 | 180 | 1872 | 36 | 4,59 | 39,37 | WGRIB192039 |
| 1920 | 490 | 50 | 1240 | 626 | 280 | 1872 | 36 | 5,66 | 48,92 | WGRIB192049 |

Included components: The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

We recommend: Integrated pipe masking set – see page 675




ZX

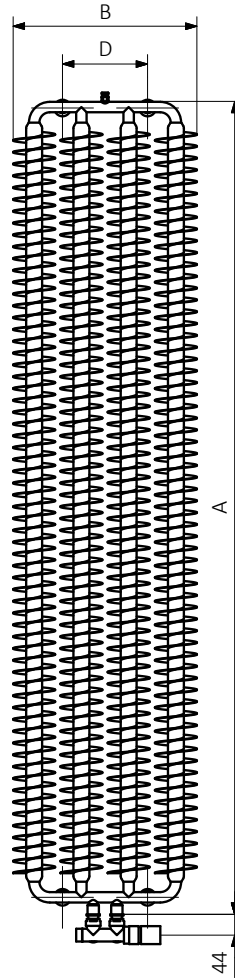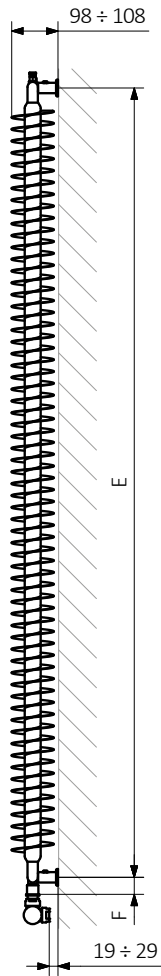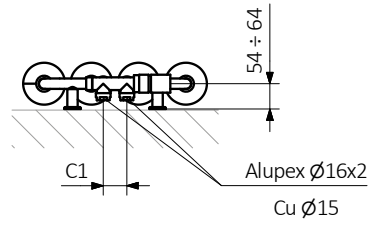


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Ribbon V E s. 202

  Colour included in the price




design: *Terma*

Standard connections:






Water version, see page 498.

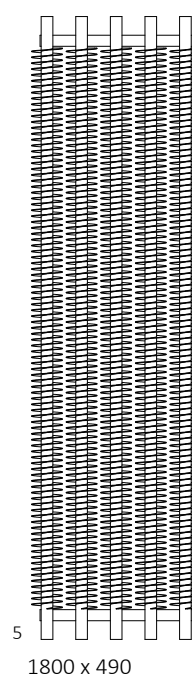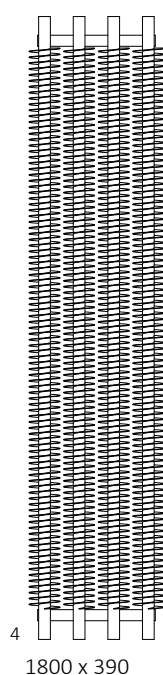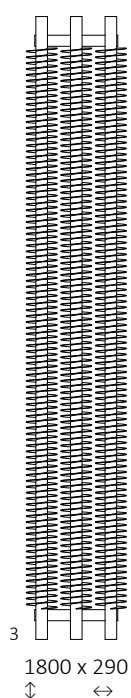Available sizes:




Specifications:

| A ↕ [mm] | B ↔ [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-------------|-------------|--|-----------|-----------|-----------|---|---|--|
| 1800 | 290 | 600 | 100 | 1660 | 70 | 3,33 | 28,52 | WLRVE180029 |
| 1800 | 390 | 800 | 200 | 1660 | 70 | 4,45 | 38,03 | WLRVE180039 |
| 1800 | 490 | 1000 | 300 | 1660 | 70 | 5,57 | 47,55 | WLRVE180049 |



We recommend: MOA BLUE heating element – see page 706



E8




E1

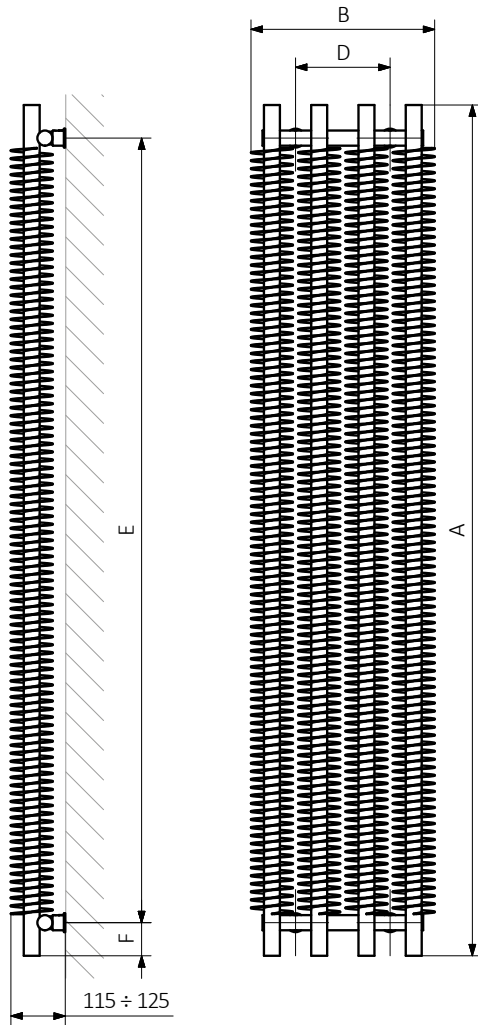


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Ribbon HSD s. 206







  Colour included in the price

design: *Terma*

Standard connections:



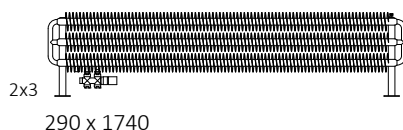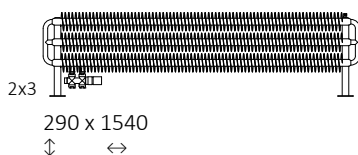

Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|---|---|--|
| 190 | 1540 | 50 | 1207 | 683 | 1400 | 3,78 | 32,67 | WGHSD019154 |
| 190 | 1740 | 50 | 1364 | 772 | 1600 | 4,26 | 36,88 | WGHSD019174 |
| 190 | 1940 | 50 | 1420 | 803 | 1800 | 4,75 | 41,09 | WGHSD019194 |
| 290 | 1540 | 50 | 1609 | 909 | 1400 | 5,52 | 47,69 | WGHSD029154 |
| 290 | 1740 | 50 | 1818 | 1028 | 1600 | 6,25 | 54,00 | WGHSD029174 |
| 290 | 1940 | 50 | 2027 | 1146 | 1800 | 6,99 | 60,32 | WGHSD029194 |

Included components: Included when purchased with YP and YL connections are an inline integrated thermostatic valve, SLIM thermostatic head and adapters for installation with Alupex Ø 16x2 and copper Ø 15 pipe. All valve components are finished in chrome. Included when purchased with VL and VP connection is an integrated, inline lockshield valve, SLIM thermostatic head and adapters for installation with Alupex Ø 16x2 and copper Ø 15 pipe. All valve components are finished in chrome.


We recommend: Integrated pipe masking set – see page 675




VP

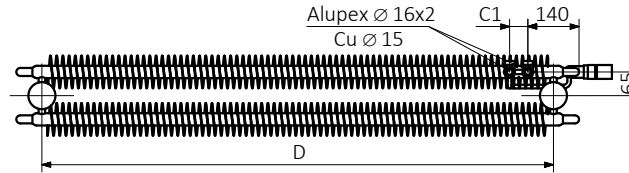


VL

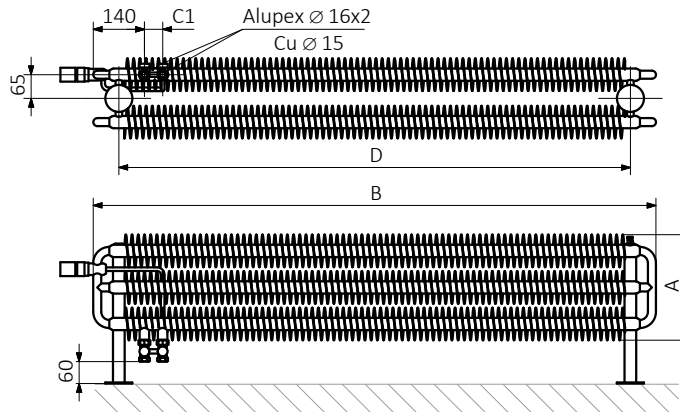

YP

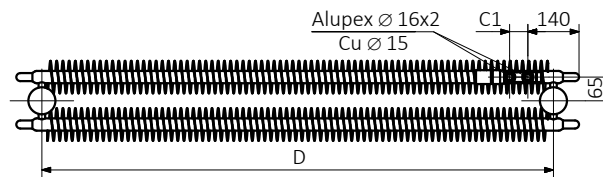


YL

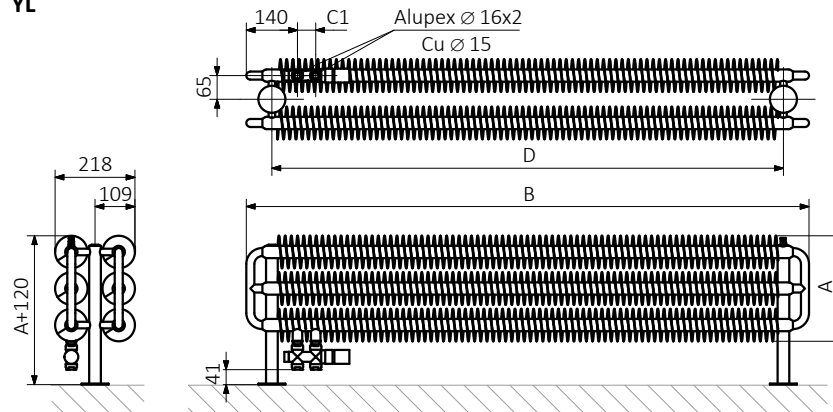


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Ribbon HWS s. 210










  Colour included in the price

design: *Terma*

Standard connections:



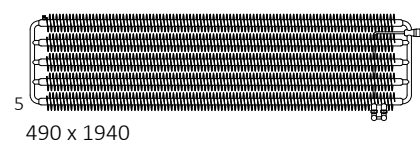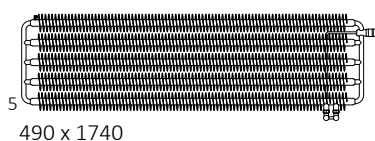

Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C


| A ↕ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|---|---|--|
| 290 | 1540 | 50 | 802 | 411 | 1400 | 200 | 43 | 2,90 | 25,14 | WGHWS029154 |
| 290 | 1740 | 50 | 906 | 464 | 1600 | 200 | 43 | 3,27 | 28,30 | WGHWS029174 |
| 290 | 1940 | 50 | 1010 | 517 | 1800 | 200 | 43 | 3,64 | 31,45 | WGHWS029194 |
| 390 | 1540 | 50 | 990 | 504 | 1400 | 300 | 43 | 3,78 | 32,67 | WGHWS039154 |
| 390 | 1740 | 50 | 1119 | 570 | 1600 | 300 | 43 | 4,26 | 36,88 | WGHWS039174 |
| 390 | 1940 | 50 | 1248 | 636 | 1800 | 300 | 43 | 4,75 | 41,09 | WGHWS039194 |
| 490 | 1540 | 50 | 1329 | 670 | 1400 | 400 | 43 | 4,65 | 40,18 | WGHWS049154 |
| 490 | 1740 | 50 | 1501 | 757 | 1600 | 400 | 43 | 5,26 | 45,45 | WGHWS049174 |
| 490 | 1940 | 50 | 1673 | 844 | 1800 | 400 | 43 | 5,87 | 50,71 | WGHWS049194 |

Included components: Included when purchased with YP and YL connections are an angled integrated thermostatic valve, SLIM thermostatic head and adapters for installation with Alupex Ø 16x2 and copper Ø 15 pipe. All valve components are finished in chrome. Included when purchased with VL and VP connection is an integrated, angled lockshield valve, SLIM thermostatic head and adapters for installation with Alupex Ø 16x2 and copper Ø 15 pipe. All valve components are finished in chrome.


We recommend: *Integrated pipe masking set – see page 675*




YP

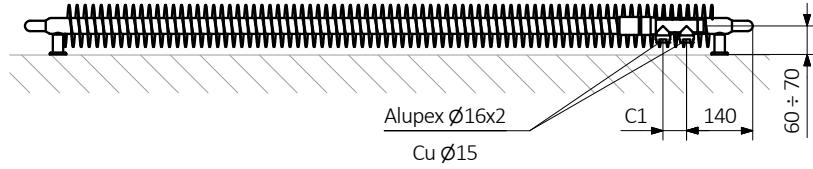




YL

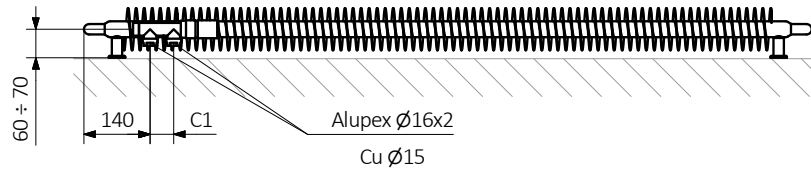

VP

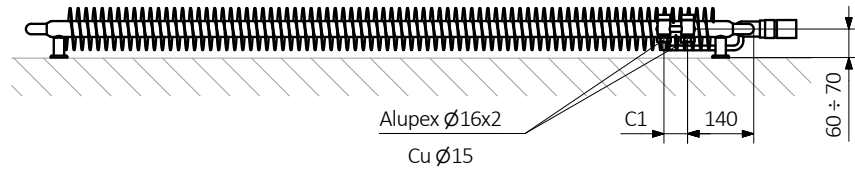


VL

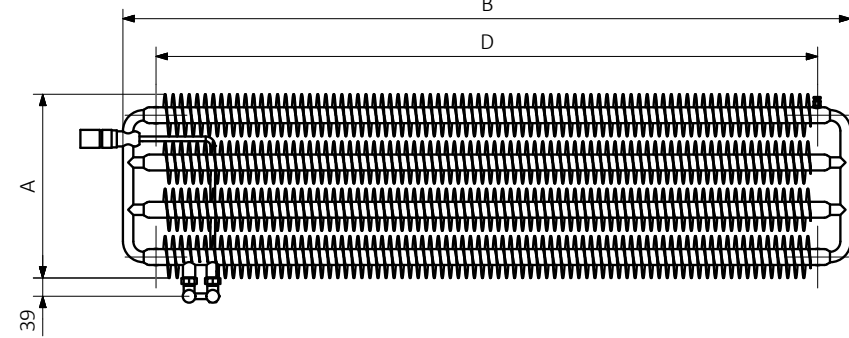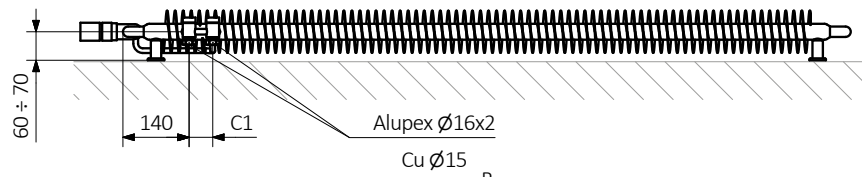


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Sherwood V s. 212




design: Jacek Ryń

Standard connections:






Electric radiators: see page 508.

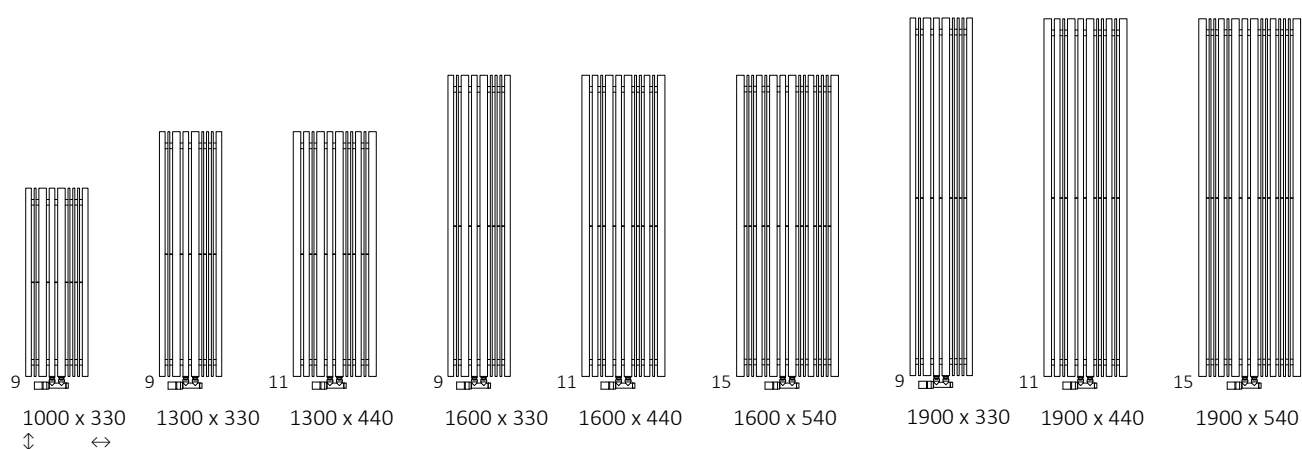Available sizes:



Specifications:

Working pressure: 700 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| 1000 | 330 | 50 | 478 | 242 | 600 | 220 | 850 | 75 | 5,53 | 14,62 | WGSTV100033 |
| 1300 | 330 | 50 | 602 | 303 | 600 | 220 | 1150 | 75 | 7,05 | 18,35 | WGSTV130033 |
| 1300 | 440 | 50 | 803 | 404 | 800 | 330 | 1150 | 75 | 9,80 | 22,87 | WGSTV130044 |
| 1600 | 330 | 50 | 727 | 365 | 800 | 220 | 1450 | 75 | 8,58 | 22,09 | WGSTV160033 |
| 1600 | 440 | 50 | 969 | 486 | 1000 | 330 | 1450 | 75 | 11,92 | 27,56 | WGSTV160044 |
| 1600 | 540 | 50 | 1190 | 597 | 1200 | 430 | 1450 | 75 | 13,45 | 34,10 | WGSTV160054 |
| 1900 | 330 | 50 | 851 | 427 | 800 | 220 | 1750 | 75 | 10,10 | 25,83 | WGSTV190033 |
| 1900 | 440 | 50 | 1135 | 569 | 1200 | 330 | 1750 | 75 | 14,05 | 32,24 | WGSTV190044 |
| 1900 | 540 | 50 | 1393 | 698 | 1500 | 430 | 1750 | 75 | 15,84 | 39,96 | WGSTV190054 |

Included components: The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

We recommend: Integrated pipe masking set – see page 675




KTX 4 BLUE heating element – see page 694





ZIP V 30 hanger – see page 637




ZX

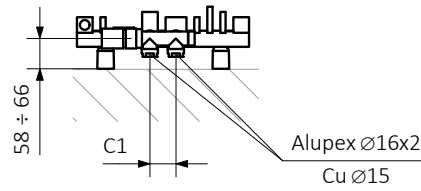

Z1

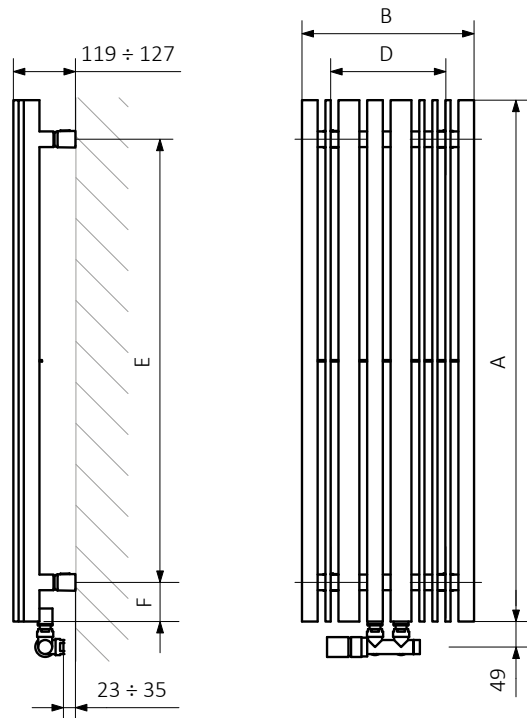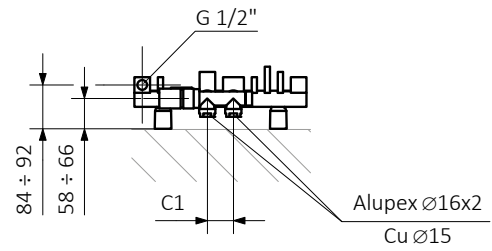


Z8

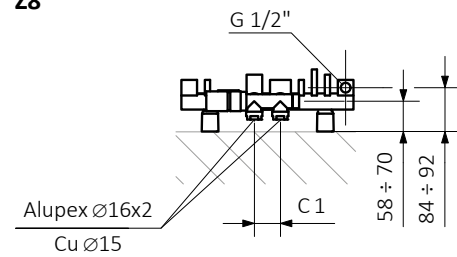

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:

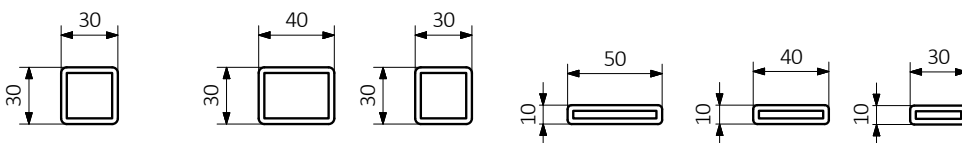


Sherwood V E s. 212



Colour included
in the price


design: Jacek Ryń

Standard connections:






Water version, see page 506.

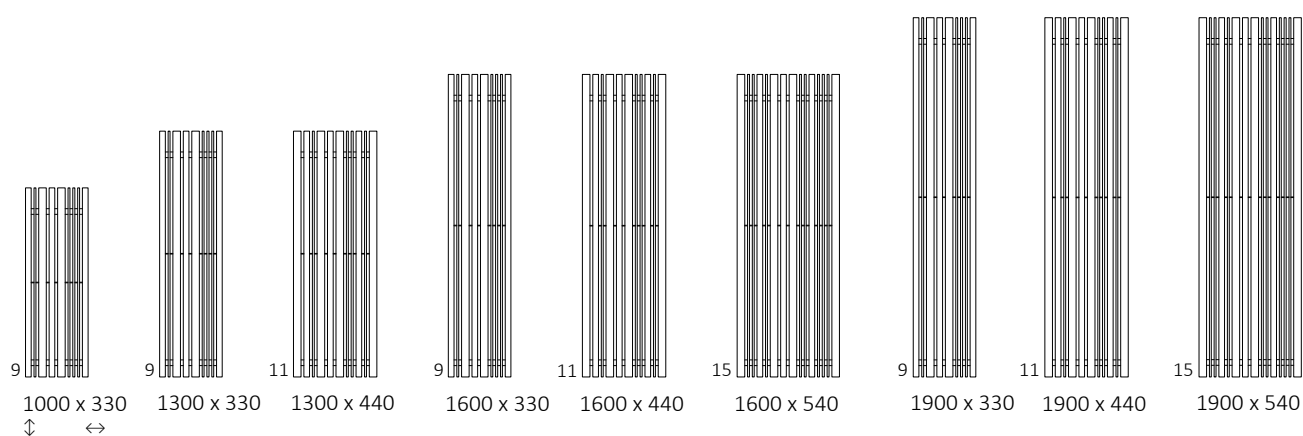Available sizes:




Specifications:

| A ↓ [mm] | B ↔ [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-------------|-------------|--|-----------|-----------|-----------|---|---|--|
| 1000 | 330 | 600 | 220 | 800 | 75 | 5,53 | 18,10 | WLSTV100033 |
| 1300 | 330 | 600 | 220 | 1100 | 75 | 7,05 | 23,06 | WLSTV130033 |
| 1300 | 440 | 800 | 330 | 1100 | 75 | 9,80 | 29,81 | WLSTV130044 |
| 1600 | 330 | 800 | 220 | 1400 | 75 | 8,58 | 28,04 | WLSTV160033 |
| 1600 | 440 | 1000 | 330 | 1400 | 75 | 11,92 | 36,22 | WLSTV160044 |
| 1600 | 540 | 1200 | 430 | 1400 | 75 | 13,45 | 43,99 | WLSTV160054 |
| 1900 | 330 | 800 | 220 | 1700 | 75 | 10,10 | 33,01 | WLSTV190033 |
| 1900 | 440 | 1200 | 330 | 1700 | 75 | 14,05 | 42,62 | WLSTV190044 |
| 1900 | 540 | 1500 | 430 | 1700 | 75 | 15,84 | 51,79 | WLSTV190054 |



We recommend: KTX 4 BLUE heating element – see page 694



E1




E8

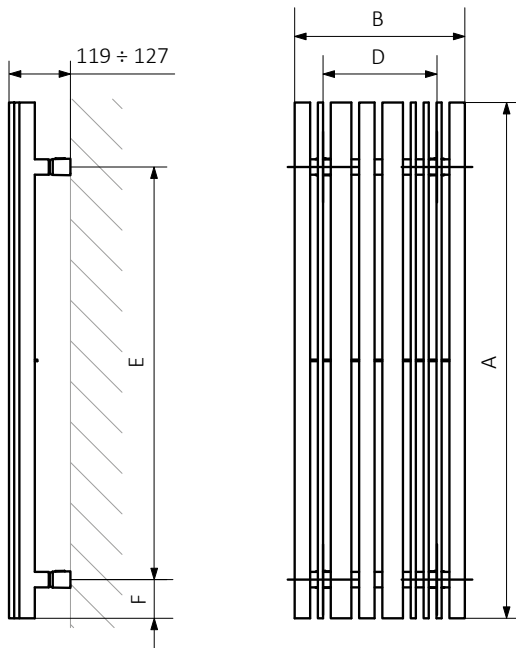

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:

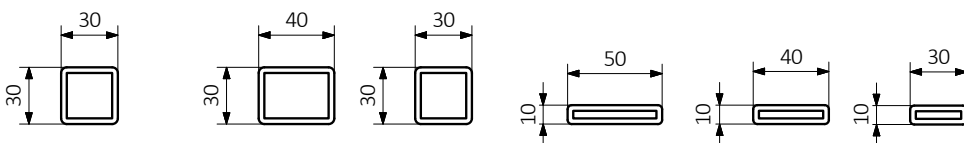


Sherwood H s. 214


  Colour included in the price

design: Jacek Ryń


Standard connections:



Optional connections:



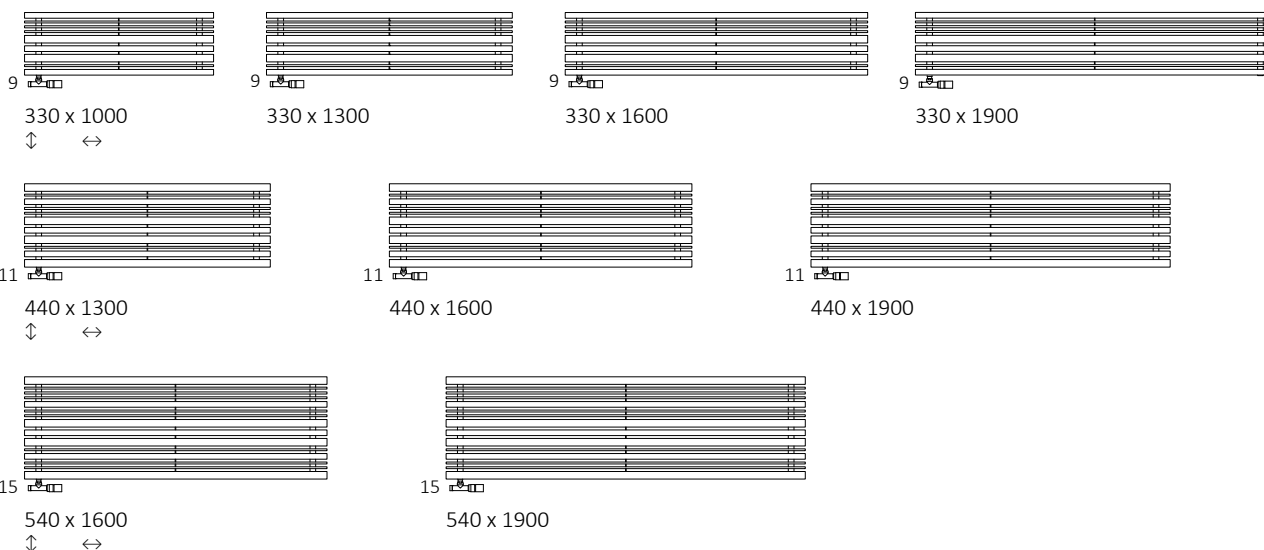

Available sizes:



Specifications:

Working pressure: 700 kPa Maximum operating temperature: 95°C


| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|--|---|--|
| 330 | 1000 | 50 | 429 | 222 | 850 | 220 | 55 | 5,53 | 14,62 | WGSTH033100 |
| 330 | 1300 | 50 | 558 | 289 | 1150 | 220 | 55 | 7,05 | 18,35 | WGSTH033130 |
| 330 | 1600 | 50 | 687 | 356 | 1450 | 220 | 55 | 8,58 | 22,09 | WGSTH033160 |
| 330 | 1900 | 50 | 816 | 422 | 1750 | 220 | 55 | 10,10 | 25,83 | WGSTH033190 |
| 440 | 1300 | 50 | 701 | 364 | 1150 | 330 | 55 | 9,80 | 22,87 | WGSTH044130 |
| 440 | 1600 | 50 | 863 | 448 | 1450 | 330 | 55 | 11,92 | 27,56 | WGSTH044160 |
| 440 | 1900 | 50 | 1025 | 532 | 1750 | 330 | 55 | 14,05 | 32,24 | WGSTH044190 |
| 540 | 1600 | 50 | 1057 | 557 | 1450 | 430 | 55 | 13,45 | 34,10 | WGSTH054160 |
| 540 | 1900 | 50 | 1255 | 661 | 1750 | 430 | 55 | 15,84 | 39,96 | WGSTH054190 |

Included components: The radiator is sold with an integrated, angled thermostatic valve with immersion tube, SLIM thermostatic head and adapters for installation (Alupez Ø 16x2 and copper Ø 15). All valve components are finished in chrome.




We recommend: Integrated pipe masking set – see page 675



O8

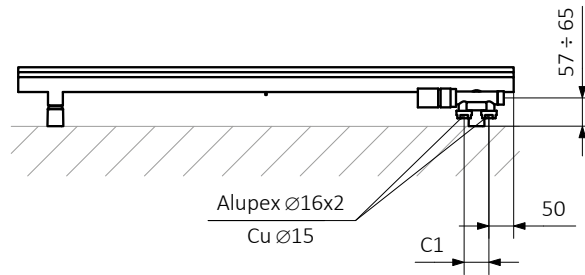


O1

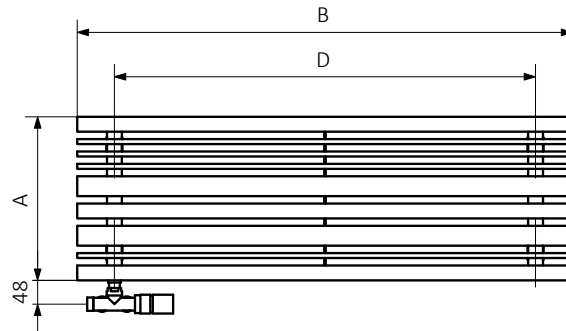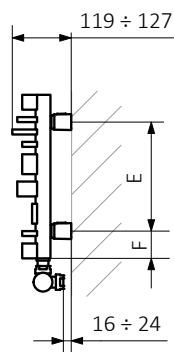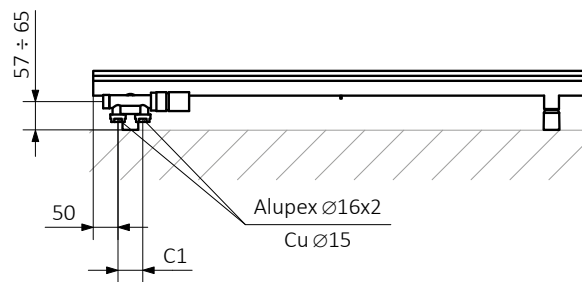

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:


Pipe:

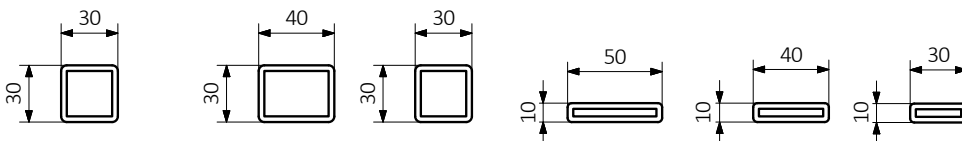




Standard connections:

A ↓ 480÷1920:




Electric radiators: see page 599.




Optional connections:

A ↓ 480÷1920:



A ↓ 720÷1920:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ☺ [W] | D [mm] | E [mm] | F [mm] | H [dm ²] | ⚖ [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|-----------|--|
| Powder coating | | | | | | | | | | | | |
| 480 | 500 | 50 | 470 | 173 | 100 | 200 | 470 | 240 | 120 | 1,96 | 3,84 | WGSIM048050 |
| 600 | 500 | 50 | 470 | 217 | 123 | 200 | 470 | 360 | 120 | 2,45 | 4,74 | WGSIM060050 |
| 720 | 500 | 50 | 470 | 262 | 145 | 300 | 470 | 480 | 120 | 2,94 | 5,64 | WGSIM072050 |
| 840 | 500 | 50 | 470 | 306 | 167 | 300 | 470 | 600 | 120 | 3,43 | 6,54 | WGSIM084050 |
| 960 | 500 | 50 | 470 | 351 | 189 | 400 | 470 | 720 | 120 | 3,92 | 7,43 | WGSIM096050 |
| 1080 | 500 | 50 | 470 | 396 | 211 | 400 | 470 | 840 | 120 | 4,41 | 8,33 | WGSIM108050 |
| 1200 | 500 | 50 | 470 | 440 | 234 | 400 | 470 | 960 | 120 | 4,90 | 9,23 | WGSIM120050 |
| 1440 | 500 | 50 | 470 | 529 | 271 | 600 | 470 | 1200 | 120 | 5,89 | 11,03 | WGSIM144050 |
| 1680 | 500 | 50 | 470 | 618 | 308 | 600 | 470 | 1440 | 120 | 6,87 | 12,83 | WGSIM168050 |
| 1920 | 500 | 50 | 470 | 707 | 343 | 800 | 470 | 1680 | 120 | 7,85 | 14,63 | WGSIM192050 |
| Plated finishes | | | | | | | | | | | | |
| 480 | 500 | 50 | 470 | 121 | 70 | 120 | 470 | 240 | 120 | 1,96 | 3,72 | WGSIM048050 |
| 600 | 500 | 50 | 470 | 152 | 86 | 120 | 470 | 360 | 120 | 2,45 | 4,58 | WGSIM060050 |
| 720 | 500 | 50 | 470 | 183 | 102 | 200 | 470 | 480 | 120 | 2,94 | 5,45 | WGSIM072050 |
| 840 | 500 | 50 | 470 | 214 | 117 | 200 | 470 | 600 | 120 | 3,43 | 6,32 | WGSIM084050 |
| 960 | 500 | 50 | 470 | 246 | 132 | 300 | 470 | 720 | 120 | 3,92 | 7,19 | WGSIM096050 |
| 1080 | 500 | 50 | 470 | 277 | 148 | 300 | 470 | 840 | 120 | 4,41 | 8,06 | WGSIM108050 |
| 1200 | 500 | 50 | 470 | 308 | 164 | 300 | 470 | 960 | 120 | 4,90 | 8,93 | WGSIM120050 |
| 1440 | 500 | 50 | 470 | 370 | 190 | 400 | 470 | 1200 | 120 | 5,89 | 10,67 | WGSIM144050 |
| 1680 | 500 | 50 | 470 | 433 | 216 | 400 | 470 | 1440 | 120 | 6,87 | 12,40 | WGSIM168050 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654



Integrated pipe masking set – see page 675




SIMPLE hanger – see page 640




SIMPLE shelf – see page 632



Available sizes:



4
480 x 500
⇕ ⇔




5
600 x 500



6
720 x 500



7
840 x 500



8
960 x 500
⇕ ⇔




9
1080 x 500



10
1200 x 500




12
1440 x 500

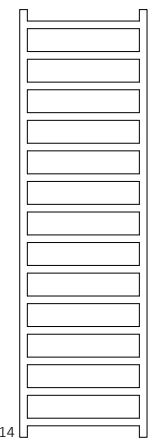

14
1680 x 500
⇕ ⇔





16
1920 x 500

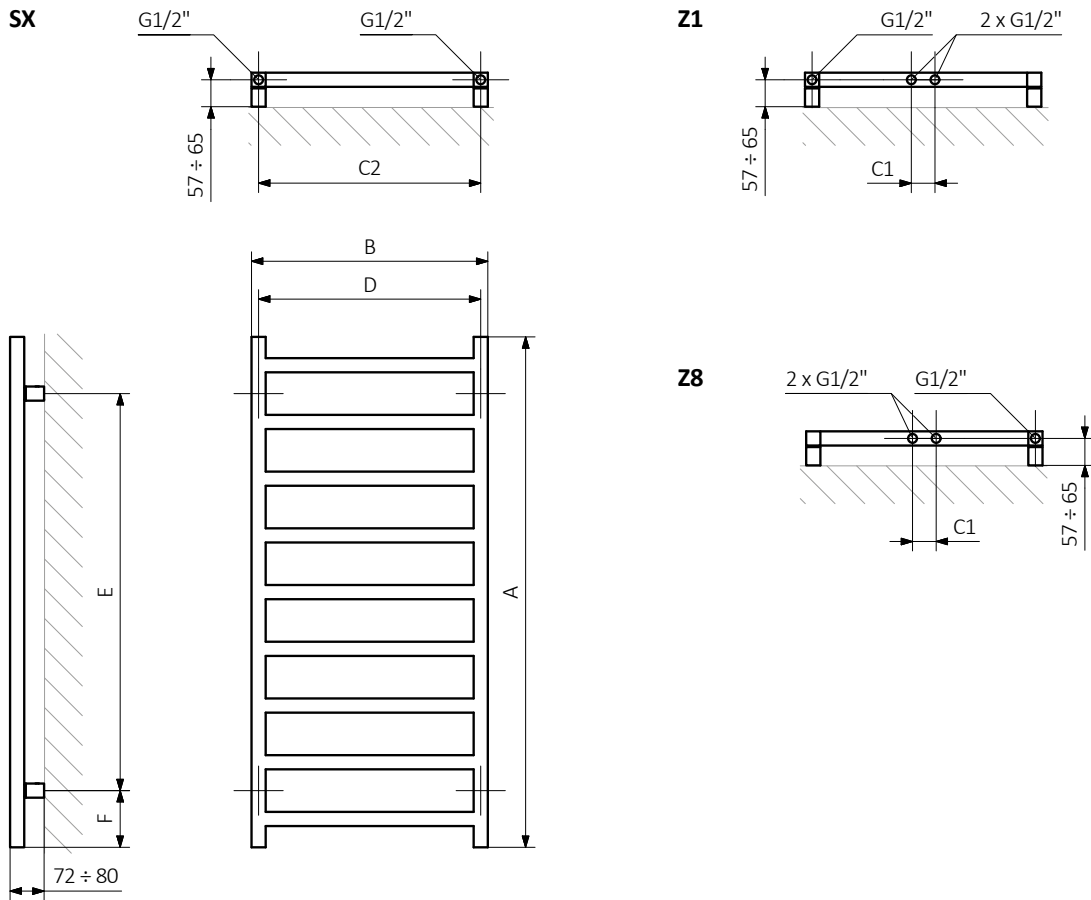

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:






Simple One s. 218

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: Przemysław Jan Majchrzak


Standard connections:



Electric radiators: see page 599.






Optional connections:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|------------------------|-------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | | |
| 720 | 500 | 262 | 145 | 300 | 470 | 480 | 120 | 2,87 | 5,64 | WZSIE072050 |
| 840 | 500 | 306 | 167 | 300 | 470 | 600 | 120 | 3,36 | 6,54 | WZSIE084050 |
| 960 | 500 | 351 | 189 | 400 | 470 | 720 | 120 | 3,85 | 7,43 | WZSIE096050 |
| 1080 | 500 | 396 | 211 | 400 | 470 | 840 | 120 | 4,34 | 8,33 | WZSIE108050 |
| 1200 | 500 | 440 | 234 | 400 | 470 | 960 | 120 | 4,83 | 9,23 | WZSIE120050 |
| 1440 | 500 | 529 | 271 | 600 | 470 | 1200 | 120 | 5,81 | 11,03 | WZSIE144050 |
| 1680 | 500 | 618 | 308 | 600 | 470 | 1440 | 120 | 6,79 | 12,83 | WZSIE168050 |
| 1920 | 500 | 707 | 343 | 800 | 470 | 1680 | 120 | 7,78 | 14,63 | WZSIE192050 |
| Plated finishes | | | | | | | | | | |
| 720 | 500 | 183 | 102 | 200 | 470 | 480 | 120 | 2,87 | 5,45 | WZSIE072050 |
| 840 | 500 | 214 | 117 | 200 | 470 | 600 | 120 | 3,36 | 6,32 | WZSIE084050 |
| 960 | 500 | 246 | 132 | 300 | 470 | 720 | 120 | 3,85 | 7,19 | WZSIE096050 |
| 1080 | 500 | 277 | 148 | 300 | 470 | 840 | 120 | 4,34 | 8,06 | WZSIE108050 |
| 1200 | 500 | 308 | 164 | 300 | 470 | 960 | 120 | 4,83 | 8,93 | WZSIE120050 |
| 1440 | 500 | 370 | 190 | 400 | 470 | 1200 | 120 | 5,81 | 10,67 | WZSIE144050 |
| 1680 | 500 | 433 | 216 | 400 | 470 | 1440 | 120 | 6,79 | 12,40 | WZSIE168050 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654



Integrated pipe masking set – see page 675




SIMPLE hanger – see page 640



SIMPLE shelf – see page 632



Available sizes:



720 x 500
↕ ↔




840 x 500




960 x 500



1080 x 500



1200 x 500
↕ ↔

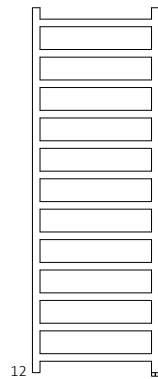

1440 x 500




1680 x 500




1920 x 500

Simple One s. 218

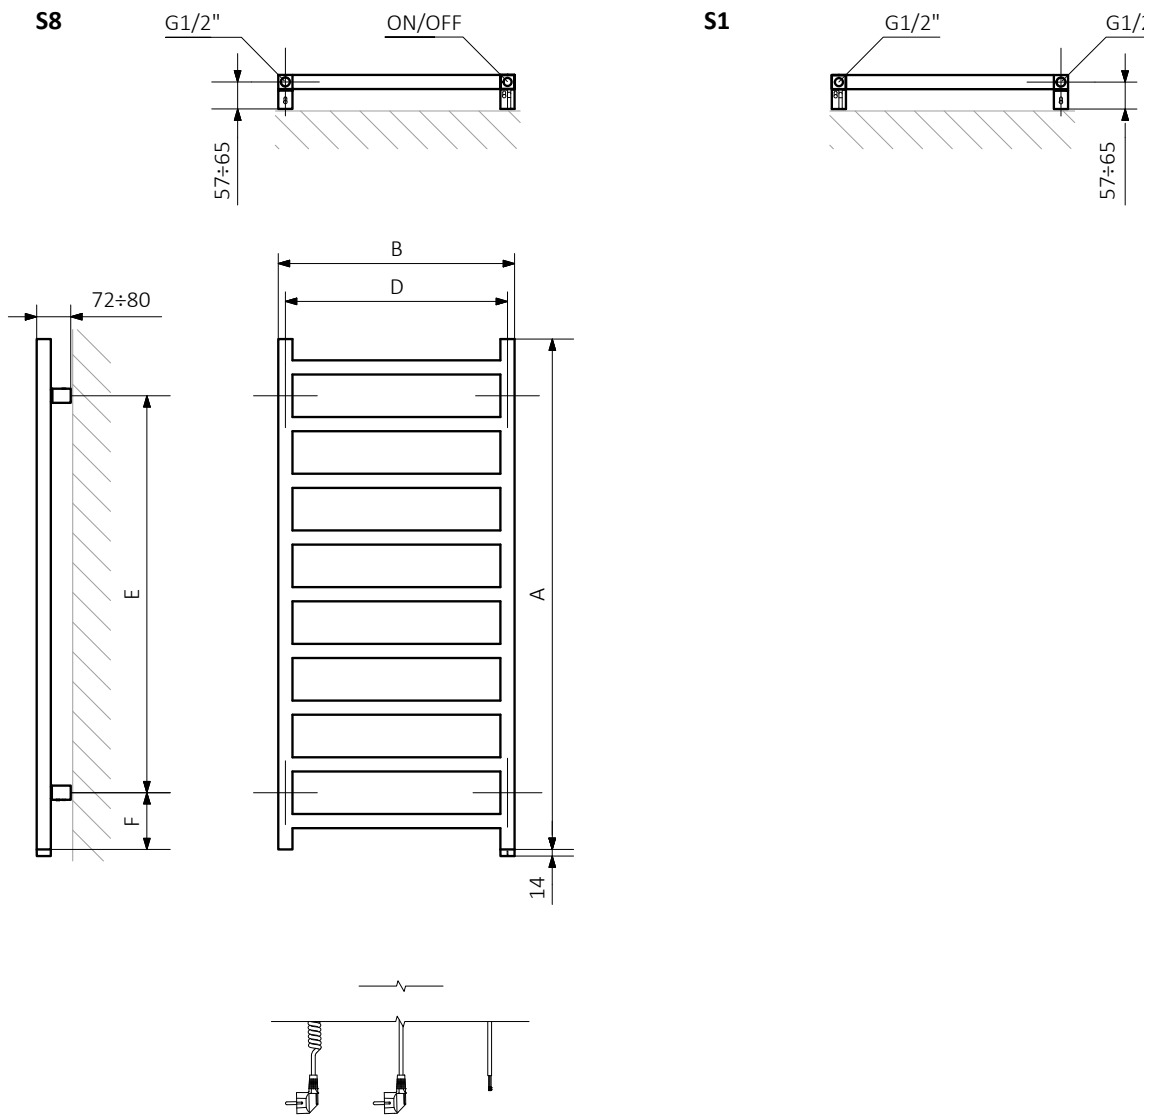

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator

Pipe:






Simple DW s. 222



design: Przemysław Jan Majchrzak

Standard connections:



Electric radiators: see page 599.



Optional connections:






Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|---|---|--|
| 1515 | 500 | 50 | 529 | 271 | 600 | 1320 | 15 | 5,89 | 11,03 | WGSDW151050 |
| 1755 | 500 | 50 | 618 | 308 | 600 | 1560 | 15 | 6,87 | 12,83 | WGSDW175050 |
| 1995 | 500 | 50 | 707 | 343 | 800 | 1800 | 15 | 7,85 | 14,63 | WGSDW199050 |

We recommend: A set of integrated thermostatic valves for ZX connection – see page 652



Integrated pipe masking set – see page 675



KTX 3 heating element – see page 696




SIMPLE hanger – see page 640





SIMPLE shelf – see page 632



O1




Z1

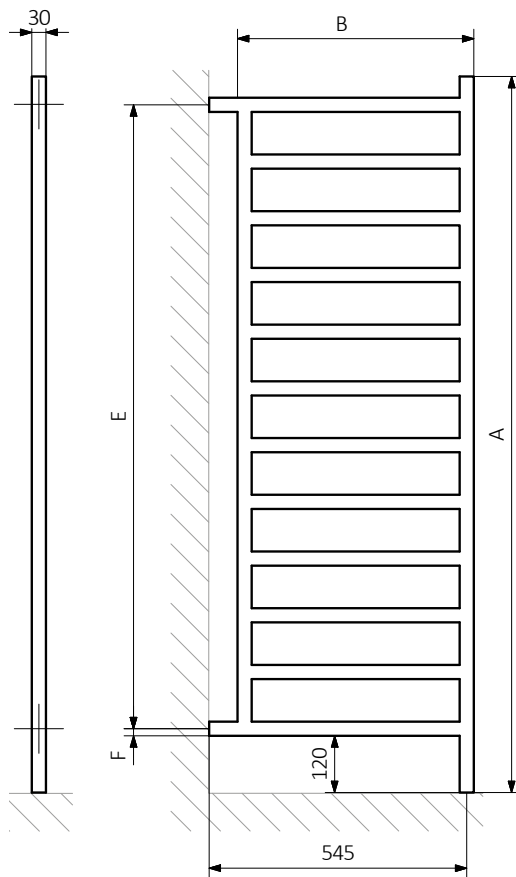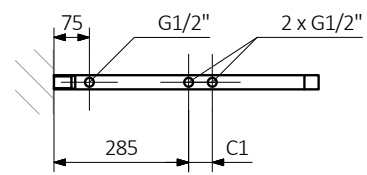

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Pipe:




Standard connections:



Optional connections:

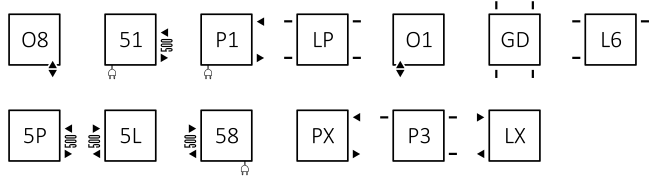

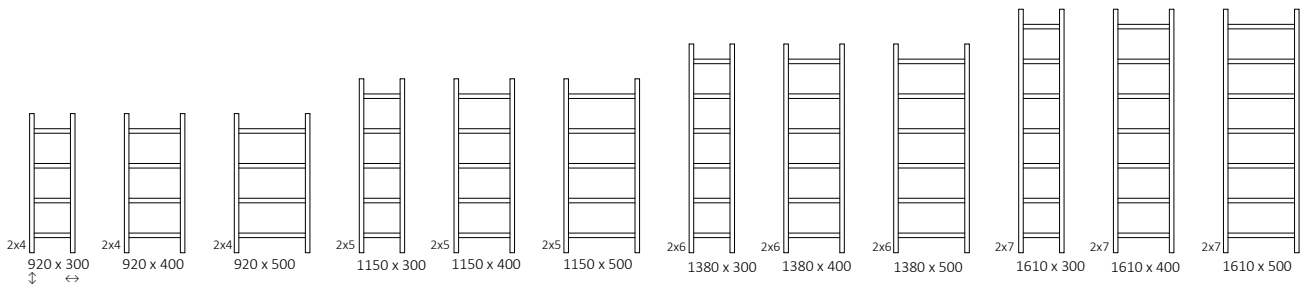


Available sizes:



Specifications:




Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 920 | 300 | 270 | 383 | 207 | 400 | 270 | 915 | 115 | 5,29 | 8,81 | WGSCA092030 |
| 920 | 400 | 370 | 434 | 234 | 400 | 370 | 915 | 115 | 5,87 | 9,88 | WGSCA092040 |
| 920 | 500 | 470 | 486 | 262 | 600 | 470 | 915 | 115 | 6,45 | 10,96 | WGSCA092050 |
| 1150 | 300 | 270 | 480 | 259 | 400 | 270 | 1145 | 115 | 6,56 | 10,86 | WGSCA115030 |
| 1150 | 400 | 370 | 547 | 295 | 600 | 370 | 1145 | 115 | 7,28 | 12,20 | WGSCA115040 |
| 1150 | 500 | 470 | 615 | 331 | 600 | 470 | 1145 | 115 | 8,00 | 13,55 | WGSCA115050 |
| 1380 | 300 | 270 | 577 | 310 | 600 | 270 | 1375 | 115 | 7,82 | 12,90 | WGSCA138030 |
| 1380 | 400 | 370 | 660 | 355 | 600 | 370 | 1375 | 115 | 8,69 | 14,52 | WGSCA138040 |
| 1380 | 500 | 470 | 743 | 399 | 800 | 470 | 1375 | 115 | 9,55 | 16,13 | WGSCA138050 |
| 1610 | 300 | 270 | 674 | 362 | 800 | 270 | 1605 | 115 | 9,08 | 14,96 | WGSCA161030 |
| 1610 | 400 | 370 | 773 | 415 | 800 | 370 | 1605 | 115 | 10,09 | 16,83 | WGSCA161040 |
| 1610 | 500 | 470 | 872 | 468 | 800 | 470 | 1605 | 115 | 11,10 | 18,71 | WGSCA161050 |

We recommend: 3-axis manual valve set for SX STAND shelf – connection – see page 649 see page 631




SX

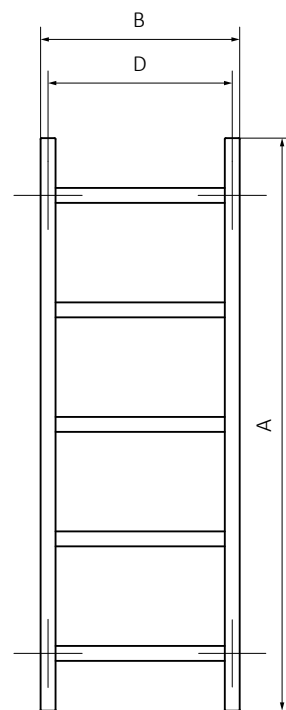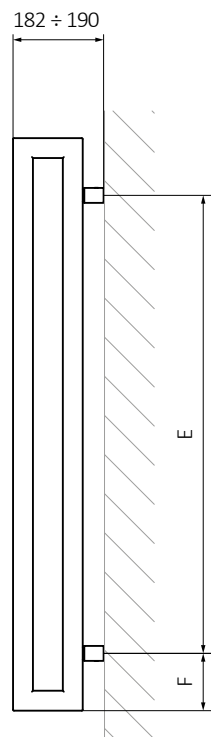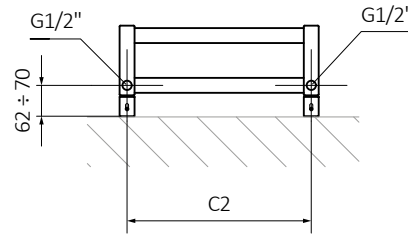


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:







Colour included
in the price


design: *Terma*

Standard connections:

A \updownarrow 560÷1900:



A \updownarrow 560÷610:




A \updownarrow 900÷1900:





Optional connections:


A \updownarrow 560÷1900:



A \updownarrow 560÷610:




A \updownarrow 900÷1900:



Electric radiators: see page 528.

Available sizes:

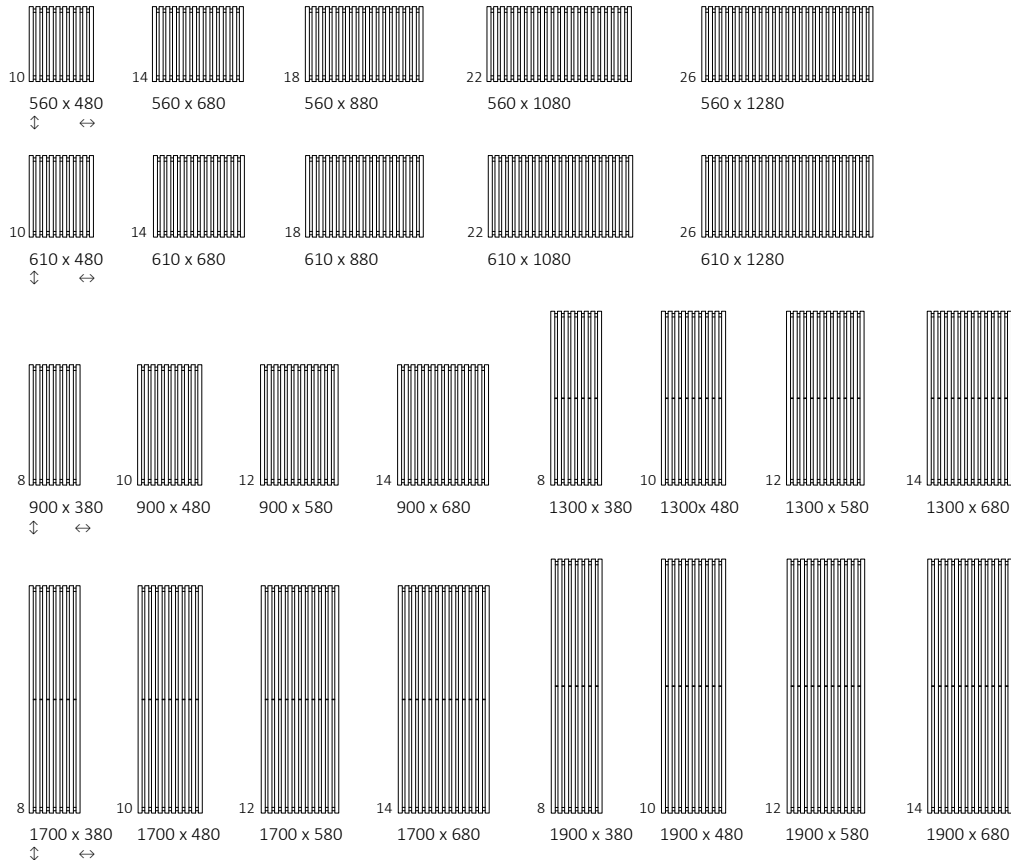

We recommend: A set of integrated thermostatic valves for YL and YP connections – see page 652




Integrated pipe masking set – see page 675



ZIP V 40 hanger – see page 637




TRIGA shelf – see page 632



Specifications:


Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↑ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | C3 [mm] | C4 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ⊕ [W] | D [mm] | E [mm] | F [mm] | ⊔ [dm³] | ⊔ [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|-----------|--|
| 560 | 480 | 50 | 450 | 500 | 480 | 356 | 192 | 400 | 450 | 380 | 90 | 5,72 | 10,14 | WGTRG056048 |
| 560 | 680 | 50 | 650 | 500 | 680 | 504 | 272 | 600 | 650 | 380 | 90 | 8,01 | 14,25 | WGTRG056068 |
| 560 | 880 | 50 | 850 | 500 | 880 | 652 | 352 | 600 | 850 | 380 | 90 | 10,31 | 18,36 | WGTRG056088 |
| 560 | 1080 | 50 | 1050 | 500 | 1080 | 800 | 431 | 800 | 1050 | 380 | 90 | 12,60 | 22,47 | WGTRG056108 |
| 560 | 1280 | 50 | 1250 | 500 | 1280 | 948 | 511 | 1000 | 1250 | 380 | 90 | 14,90 | 26,58 | WGTRG056128 |
| 610 | 480 | 50 | 450 | 550 | 480 | 391 | 210 | 400 | 450 | 430 | 90 | 6,22 | 10,93 | WGTRG061048 |
| 610 | 680 | 50 | 650 | 550 | 680 | 554 | 298 | 600 | 650 | 430 | 90 | 8,71 | 15,36 | WGTRG061068 |
| 610 | 880 | 50 | 850 | 550 | 880 | 717 | 385 | 800 | 850 | 430 | 90 | 11,21 | 19,79 | WGTRG061088 |
| 610 | 1080 | 50 | 1050 | 550 | 1080 | 880 | 473 | 800 | 1050 | 430 | 90 | 13,70 | 24,22 | WGTRG061108 |
| 610 | 1280 | 50 | 1250 | 550 | 1280 | 1043 | 560 | 1000 | 1250 | 430 | 90 | 16,19 | 28,65 | WGTRG061128 |
| 900 | 380 | 50 | 350 | 840 | 380 | 459 | 242 | 400 | 350 | 720 | 90 | 7,29 | 12,40 | WGTRG090038 |
| 900 | 480 | 50 | 450 | 840 | 480 | 580 | 306 | 600 | 450 | 720 | 90 | 9,11 | 15,54 | WGTRG090048 |
| 900 | 580 | 50 | 550 | 840 | 580 | 701 | 370 | 800 | 550 | 720 | 90 | 10,94 | 18,67 | WGTRG090058 |
| 900 | 680 | 50 | 650 | 840 | 680 | 821 | 433 | 800 | 650 | 720 | 90 | 12,76 | 21,81 | WGTRG090068 |
| 1300 | 380 | 50 | 350 | 1240 | 380 | 652 | 339 | 600 | 350 | 1120 | 90 | 10,48 | 17,48 | WGTRG130038 |
| 1300 | 480 | 50 | 450 | 1240 | 480 | 824 | 429 | 800 | 450 | 1120 | 90 | 13,10 | 21,89 | WGTRG130048 |
| 1300 | 580 | 50 | 550 | 1240 | 580 | 996 | 518 | 1000 | 550 | 1120 | 90 | 15,72 | 26,30 | WGTRG130058 |
| 1300 | 680 | 50 | 650 | 1240 | 680 | 1168 | 608 | 1200 | 650 | 1120 | 90 | 18,34 | 30,70 | WGTRG130068 |
| 1700 | 380 | 50 | 350 | 1640 | 380 | 850 | 437 | 800 | 350 | 1520 | 90 | 13,67 | 22,57 | WGTRG170038 |
| 1700 | 480 | 50 | 450 | 1640 | 480 | 1074 | 552 | 1000 | 450 | 1520 | 90 | 17,09 | 28,24 | WGTRG170048 |
| 1700 | 580 | 50 | 550 | 1640 | 580 | 1298 | 667 | 1200 | 550 | 1520 | 90 | 20,51 | 33,92 | WGTRG170058 |
| 1700 | 680 | 50 | 650 | 1640 | 680 | 1521 | 781 | 1500 | 650 | 1520 | 90 | 23,93 | 39,60 | WGTRG170068 |
| 1900 | 380 | 50 | 350 | 1840 | 380 | 961 | 492 | 1000 | 350 | 1720 | 90 | 15,26 | 25,11 | WGTRG190038 |
| 1900 | 480 | 50 | 450 | 1840 | 480 | 1202 | 615 | 1200 | 450 | 1720 | 90 | 19,08 | 31,42 | WGTRG190048 |
| 1900 | 580 | 50 | 550 | 1840 | 580 | 1442 | 737 | 1500 | 550 | 1720 | 90 | 22,90 | 37,73 | WGTRG190058 |
| 1900 | 680 | 50 | 650 | 1840 | 680 | 1682 | 860 | 1500 | 650 | 1720 | 90 | 26,72 | 44,04 | WGTRG190068 |

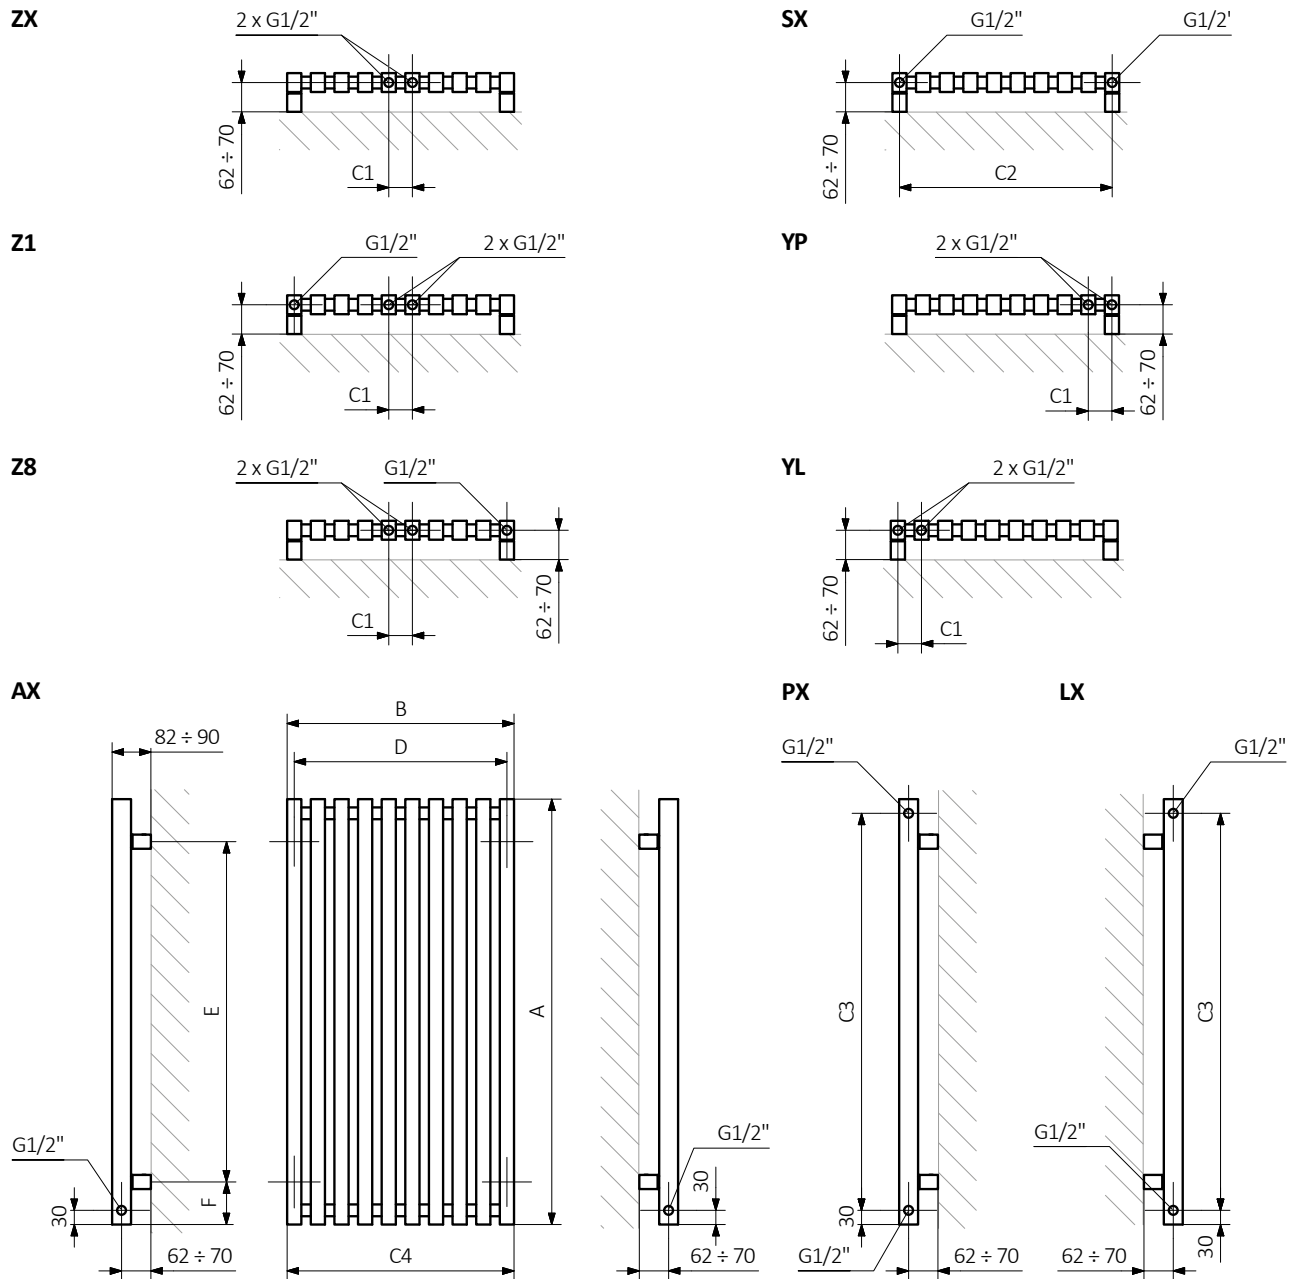


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:




Pipe:



VP

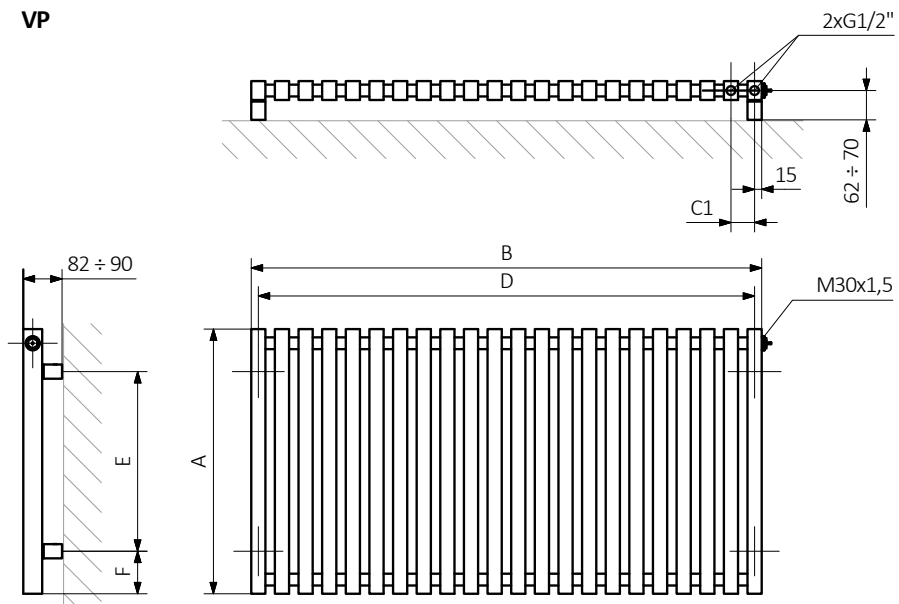

VL

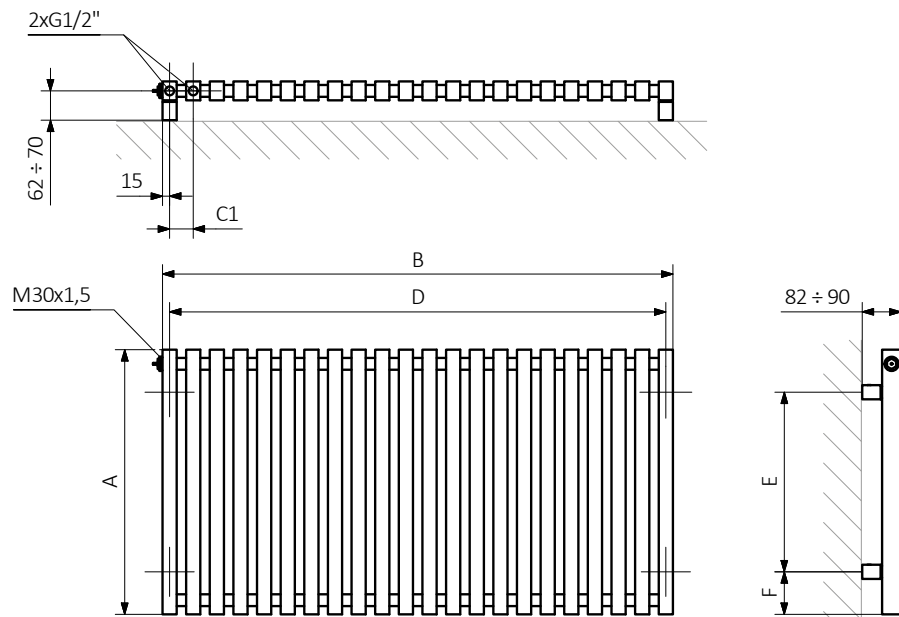

Triga E s. 228



Colour included
in the price


design: *Terma*

Standard connections:

A=560-610:






A=900-1900:



Water version, see page 524.

Specifications:

| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| 560 | 480 | 400 | 450 | 380 | 90 | 5,72 | 14,77 | WLTRG056048 |
| 560 | 680 | 600 | 650 | 380 | 90 | 8,01 | 20,74 | WLTRG056068 |
| 560 | 880 | 600 | 850 | 380 | 90 | 10,31 | 26,71 | WLTRG056088 |
| 560 | 1080 | 800 | 1050 | 380 | 90 | 12,60 | 32,68 | WLTRG056108 |
| 560 | 1280 | 1000 | 1250 | 380 | 90 | 14,90 | 38,65 | WLTRG056128 |
| 610 | 480 | 400 | 450 | 430 | 90 | 6,22 | 15,97 | WLTRG061048 |
| 610 | 680 | 600 | 650 | 430 | 90 | 8,71 | 22,42 | WLTRG061068 |
| 610 | 880 | 800 | 850 | 430 | 90 | 11,21 | 28,87 | WLTRG061088 |
| 610 | 1080 | 800 | 1050 | 430 | 90 | 13,70 | 35,32 | WLTRG061108 |
| 610 | 1280 | 1000 | 1250 | 430 | 90 | 16,19 | 41,76 | WLTRG061128 |
| 900 | 380 | 400 | 350 | 720 | 90 | 7,29 | 18,30 | WLTRG090038 |
| 900 | 480 | 600 | 450 | 720 | 90 | 9,11 | 22,92 | WLTRG090048 |
| 900 | 580 | 800 | 550 | 720 | 90 | 10,94 | 27,53 | WLTRG090058 |
| 900 | 680 | 800 | 650 | 720 | 90 | 12,76 | 32,15 | WLTRG090068 |
| 1300 | 380 | 600 | 350 | 1120 | 90 | 10,48 | 25,97 | WLTRG130038 |
| 1300 | 480 | 800 | 450 | 1120 | 90 | 13,10 | 32,50 | WLTRG130048 |
| 1300 | 580 | 1000 | 550 | 1120 | 90 | 15,72 | 39,03 | WLTRG130058 |
| 1300 | 680 | 1200 | 650 | 1120 | 90 | 18,34 | 45,56 | WLTRG130068 |
| 1700 | 380 | 800 | 350 | 1520 | 90 | 13,67 | 33,64 | WLTRG170038 |
| 1700 | 480 | 1000 | 450 | 1520 | 90 | 17,09 | 42,08 | WLTRG170048 |
| 1700 | 580 | 1200 | 550 | 1520 | 90 | 20,51 | 50,53 | WLTRG170058 |
| 1700 | 680 | 1500 | 650 | 1520 | 90 | 23,93 | 58,98 | WLTRG170068 |
| 1900 | 380 | 1000 | 350 | 1720 | 90 | 15,26 | 37,47 | WLTRG190038 |
| 1900 | 480 | 1200 | 450 | 1720 | 90 | 19,08 | 46,87 | WLTRG190048 |
| 1900 | 580 | 1500 | 550 | 1720 | 90 | 22,90 | 56,28 | WLTRG190058 |
| 1900 | 680 | 1500 | 650 | 1720 | 90 | 26,72 | 65,68 | WLTRG190068 |

We recommend: KTX 4 BLUE heating element – see page 694



ZIP V 40 hanger – see page 637



TRIGA shelf – see page 632







TRIGA shelf with towel rail – see page 633




TRIGA towel rail – see page 633




Available sizes:

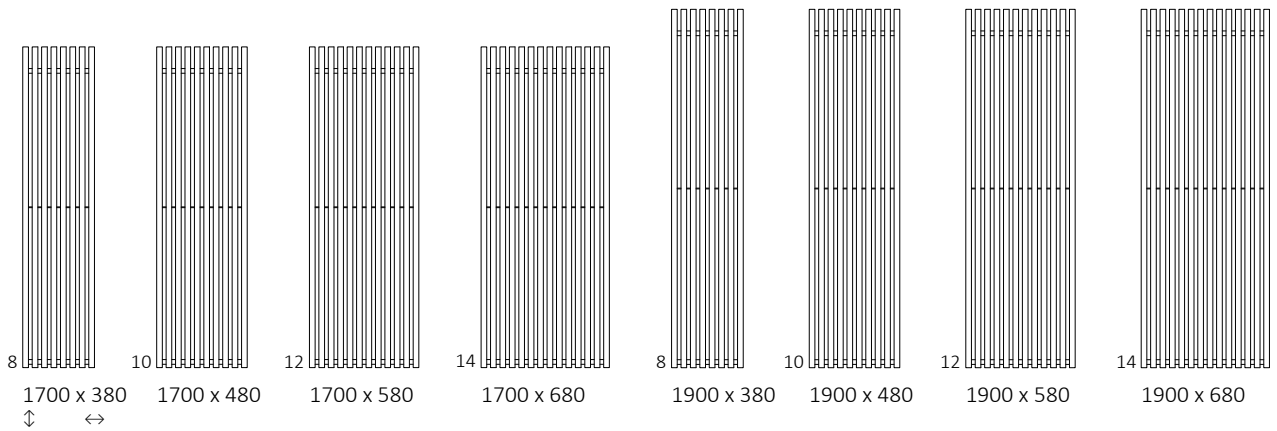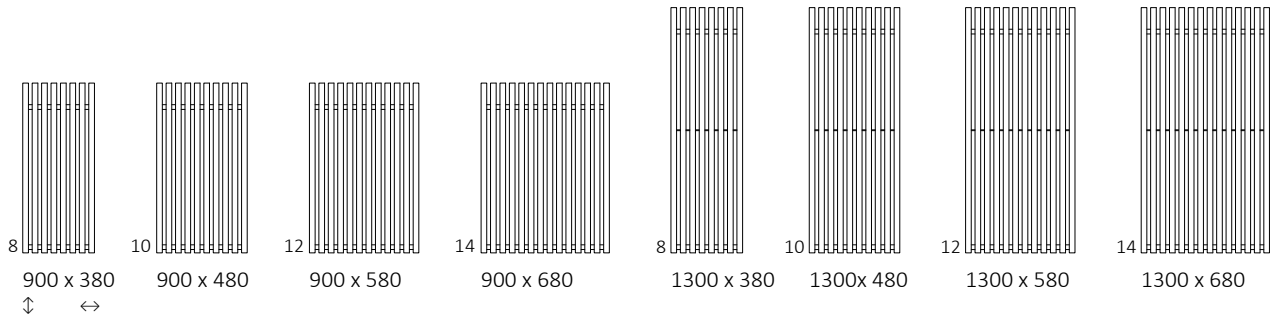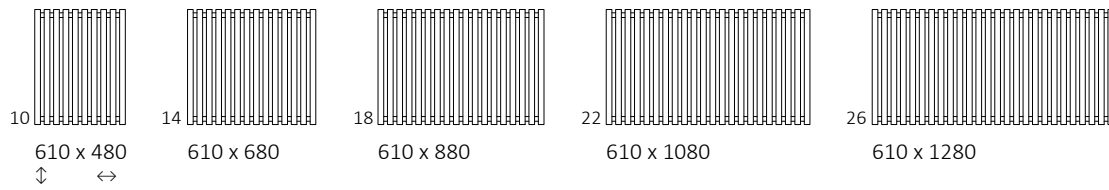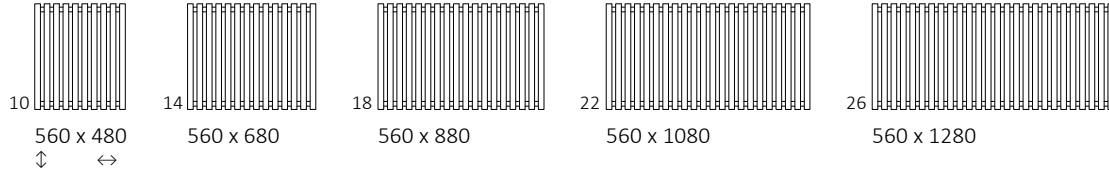

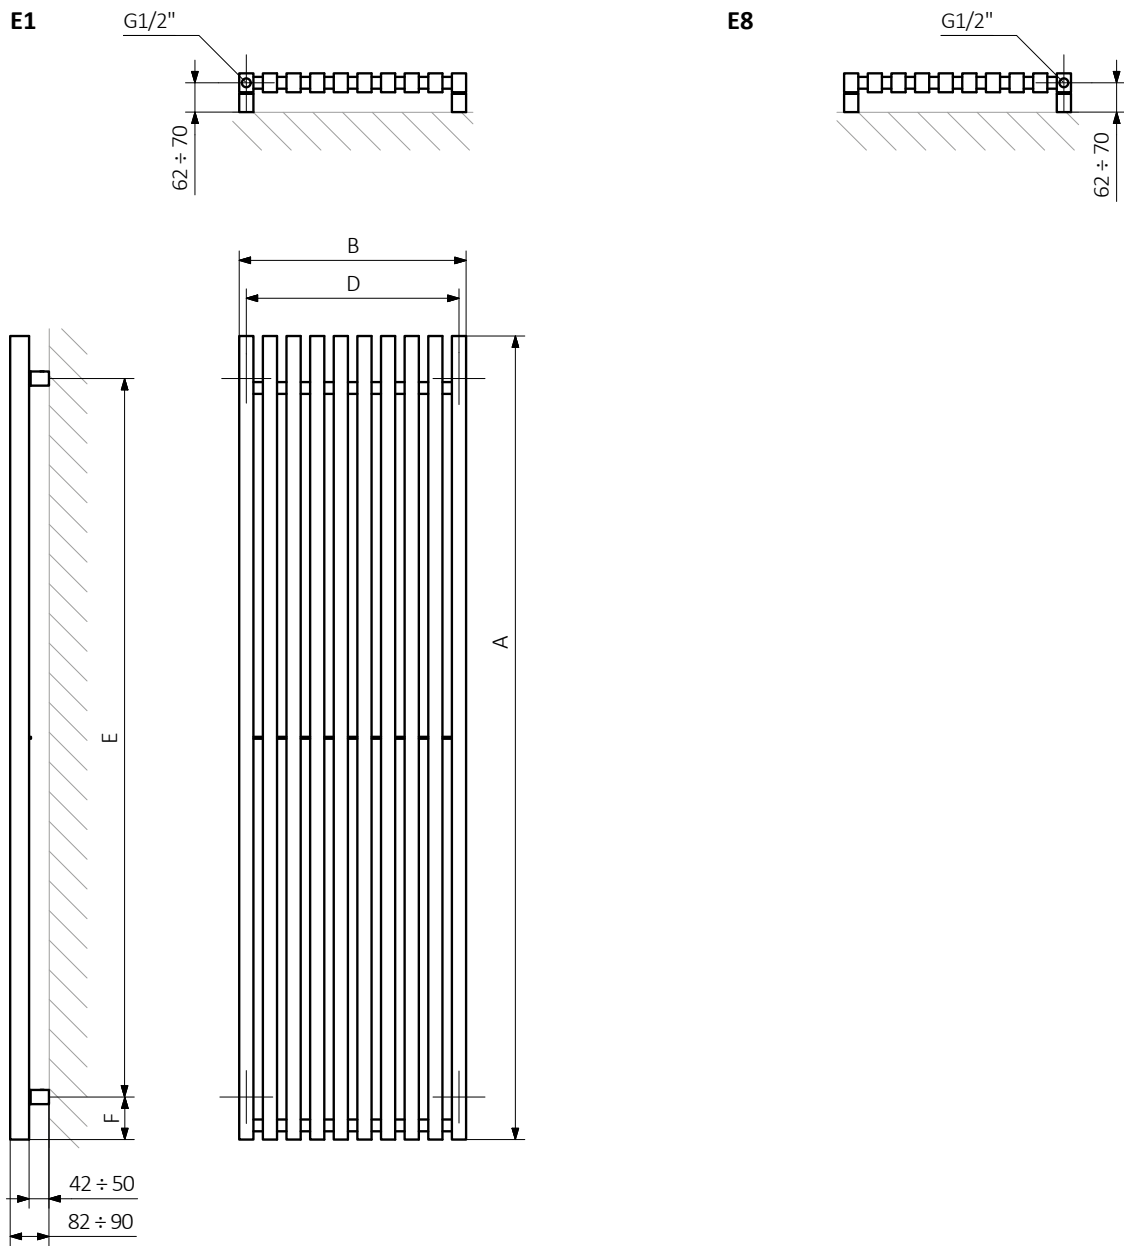


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator


Collector:




Pipe:



E2

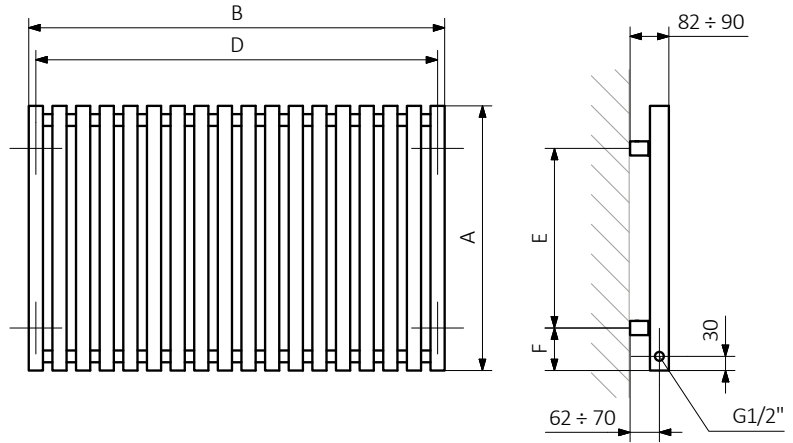

E7

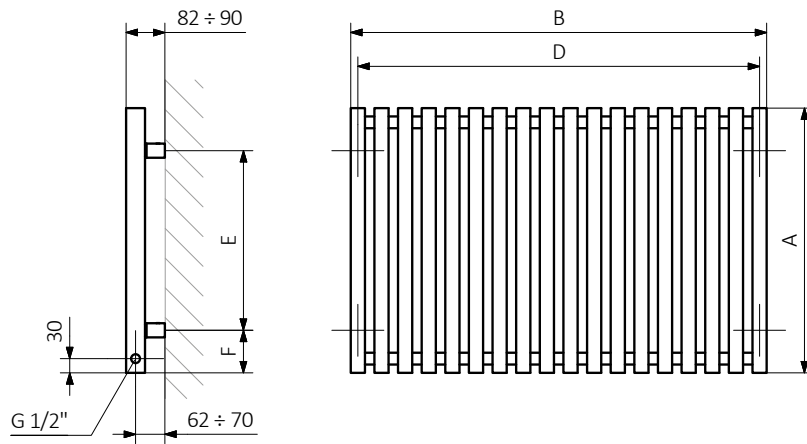


Triga M s. 232




Colour included
in the price

design: *Terma*

Standard connections:




Optional connections:

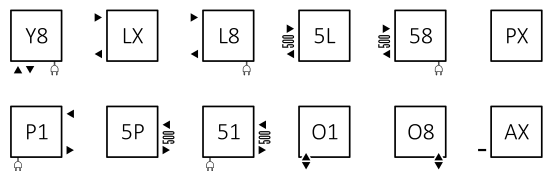




Electric radiators: see page 534.

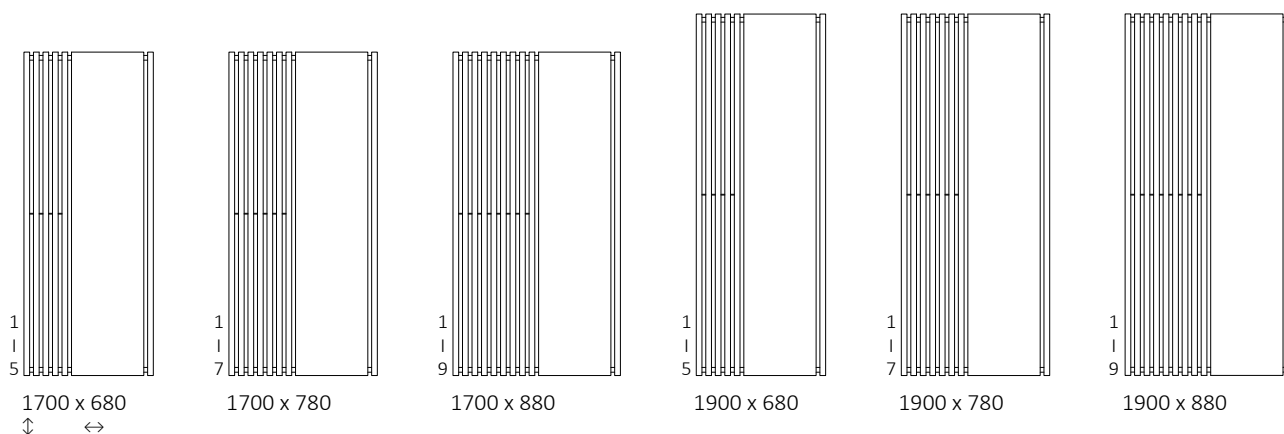Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 1700 | 680 | 50 | 650 | 646 | 332 | 600 | 650 | 1520 | 90 | 10,55 | 29,21 | WGTRL170068 |
| 1700 | 780 | 50 | 750 | 850 | 437 | 800 | 750 | 1520 | 90 | 13,97 | 34,89 | WGTRL170078 |
| 1700 | 880 | 50 | 850 | 1074 | 552 | 1000 | 850 | 1520 | 90 | 17,39 | 40,56 | WGTRL170088 |
| 1900 | 680 | 50 | 650 | 721 | 369 | 800 | 650 | 1720 | 90 | 11,75 | 32,49 | WGTRL190068 |
| 1900 | 780 | 50 | 750 | 961 | 492 | 1000 | 750 | 1720 | 90 | 15,57 | 38,81 | WGTRL190078 |
| 1900 | 880 | 50 | 850 | 1202 | 615 | 1200 | 850 | 1720 | 90 | 19,39 | 45,12 | WGTRL190088 |

We recommend: A set of integrated thermostatic valves for YL and YP connections – see page 652




Integrated pipe masking set – see page 675




ZIP V 40 hanger – see page 637





TRIGA shelf – see page 632



SX

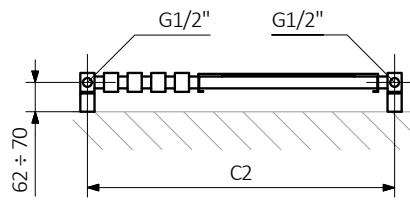


YL

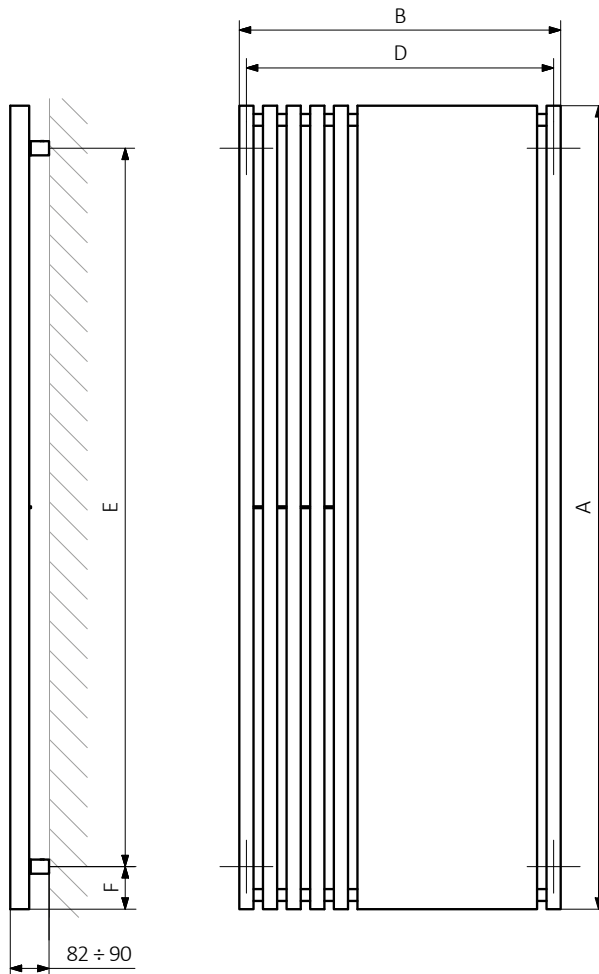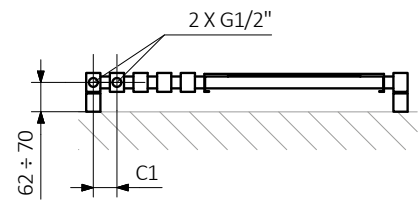


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Triga M E s. 232



Colour included
in the price


design: *Terma*

Standard connections:






Water version, see page 532.

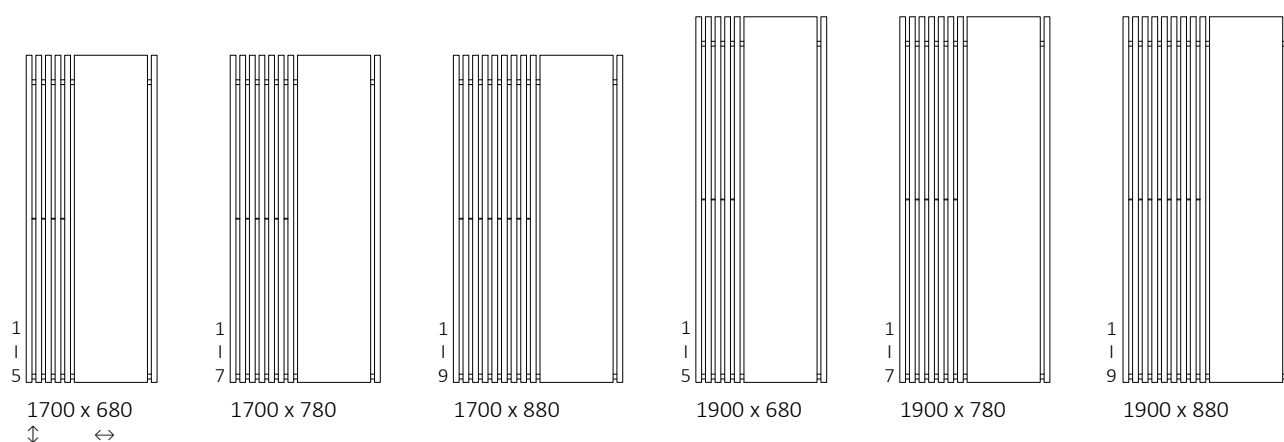Available sizes:



Specifications:

| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| 1700 | 680 | 600 | 650 | 1520 | 90 | 10,55 | 37,76 | WLTRL170068 |
| 1700 | 780 | 800 | 750 | 1520 | 90 | 13,97 | 46,21 | WLTRL170078 |
| 1700 | 880 | 1000 | 850 | 1520 | 90 | 17,39 | 54,65 | WLTRL170088 |
| 1900 | 680 | 800 | 650 | 1720 | 90 | 11,75 | 42,01 | WLTRL190068 |
| 1900 | 780 | 1000 | 750 | 1720 | 90 | 15,57 | 51,42 | WLTRL190078 |
| 1900 | 880 | 1200 | 850 | 1720 | 90 | 19,39 | 60,83 | WLTRL190088 |

We recommend: KTX 4 BLUE heating element – see page 694



ZIP V 40 hanger – see page 637



TRIGA shelf – see page 632




TRIGA shelf with towel rail – see page 633





TRIGA towel rail – see page 633



E1

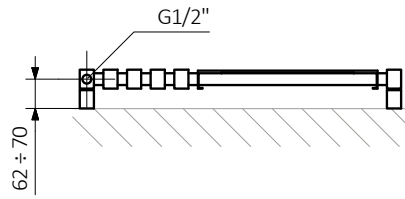


E8

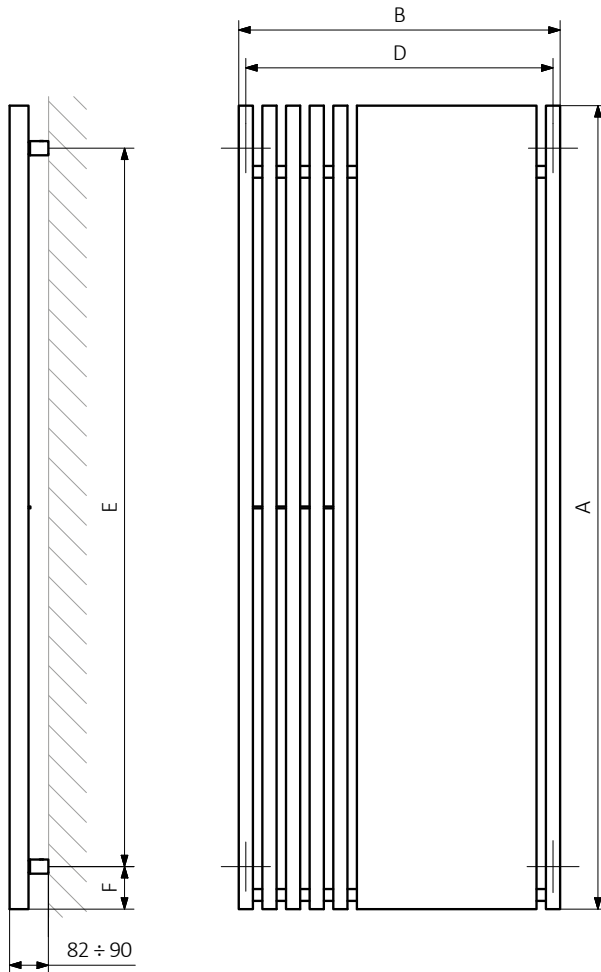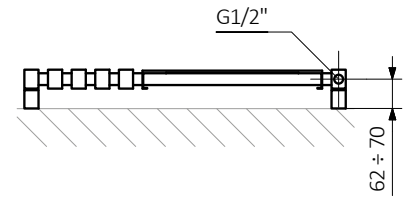


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Triga AN s. 234

  Colour included in the price


design: *Terma*

Standard connections:





Electric radiators: see page 538.

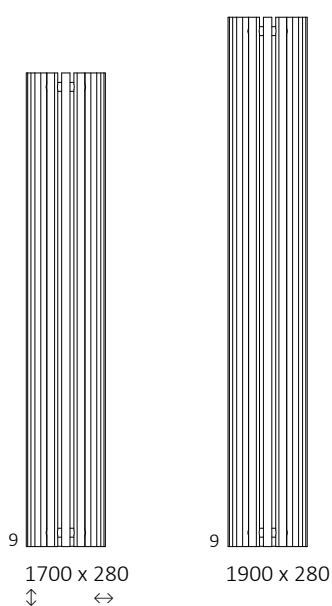Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|--|---|--|
| 1700 | 280 | 50 | 953 | 492 | 120 | 1600 | 50 | 11,64 | 22,61 | WGVER170028 |
| 1900 | 280 | 50 | 1053 | 548 | 120 | 1800 | 50 | 12,95 | 25,03 | WGVER190028 |

We recommend: A set of integrated thermostatic valves for ZX connection – see page 652




Integrated pipe masking set – see page 675



ZIP V 30 hanger – see page 637




ZX

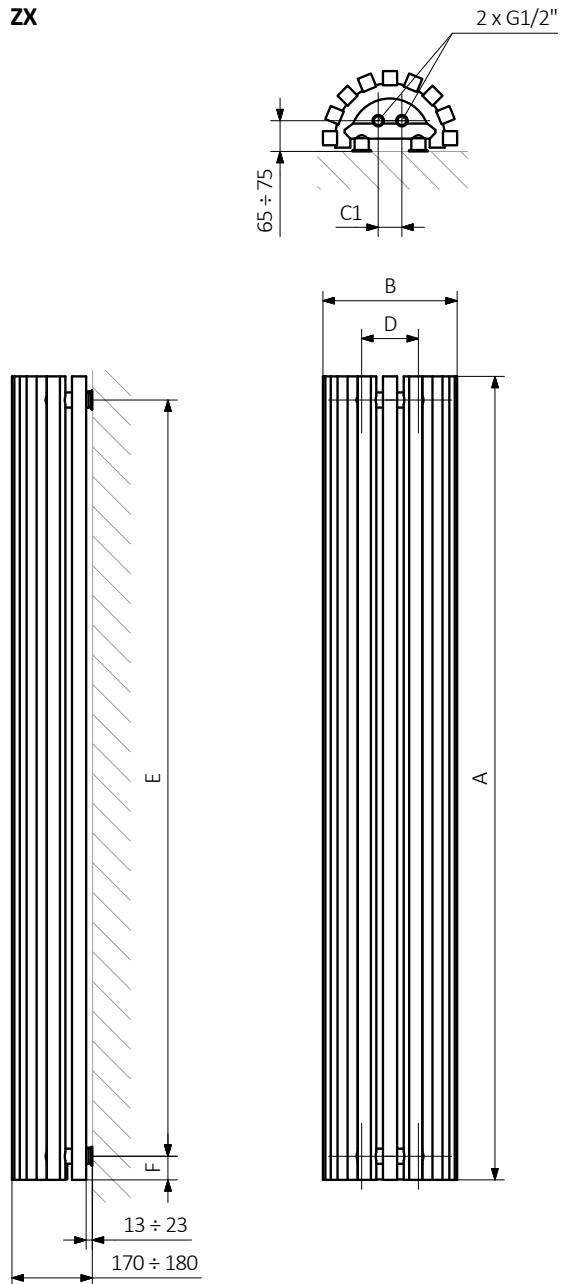


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Triga AN E s. 234



Colour included
in the price


design: *Terma*

Standard connections:






Water version, see page 536.

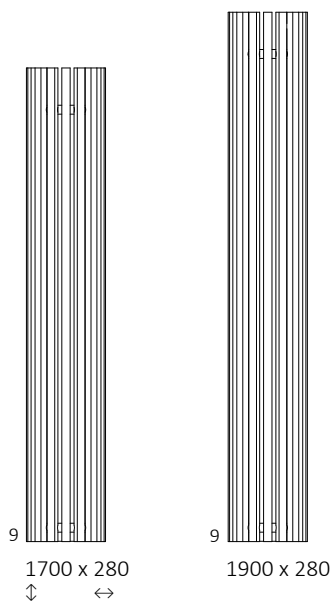Available sizes:



Specifications:

| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| 1700 | 280 | 1000 | 120 | 1500 | 50 | 11,64 | 32,04 | WLVER170028 |
| 1900 | 280 | 1000 | 120 | 1700 | 50 | 12,95 | 35,52 | WLVER190028 |


We recommend: KTX 4 BLUE heating element – see page 694



ZIP V 30 hanger – see page 637




EX

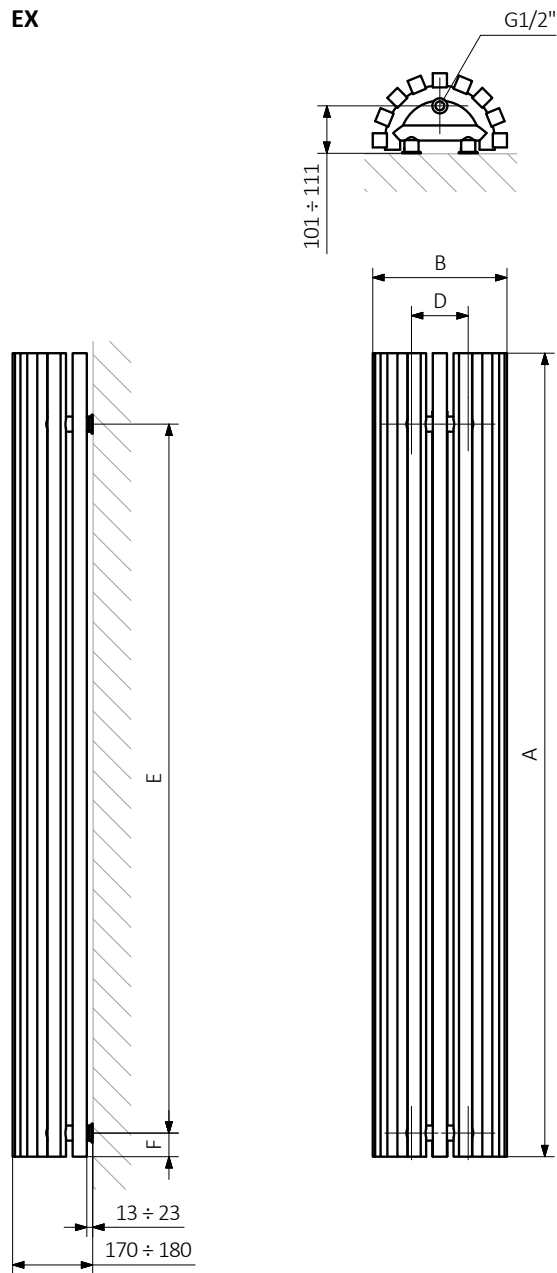


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Triga ANC s. 236




design: *Terma*

Standard connections:





Electric radiators: see page 542.

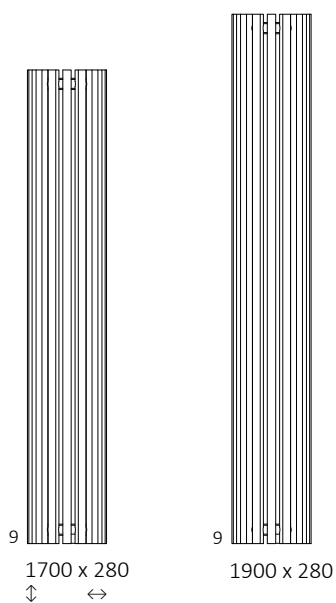Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|--|---|--|
| 1700 | 280 | 50 | 953 | 492 | 151 | 1600 | 50 | 11,64 | 22,61 | WGVEC170028 |
| 1900 | 280 | 50 | 1053 | 548 | 151 | 1800 | 50 | 12,95 | 25,03 | WGVEC190028 |

We recommend: A set of integrated thermostatic valves for YL and YP connections – see page 652




Integrated pipe masking set – see page 675





ZIP V 30 hanger – see page 637



YP

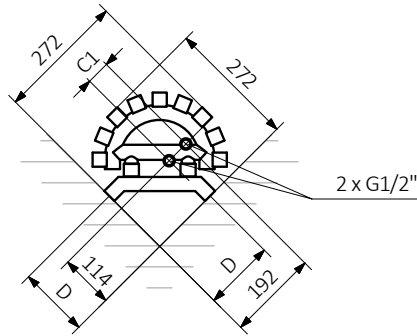


YL

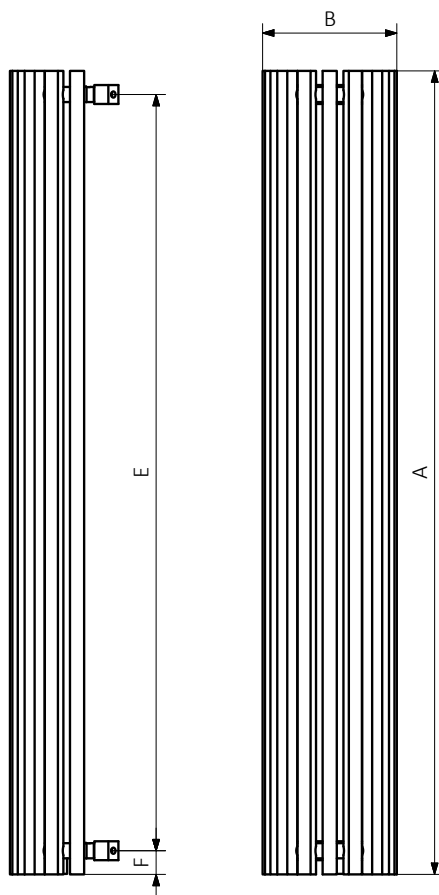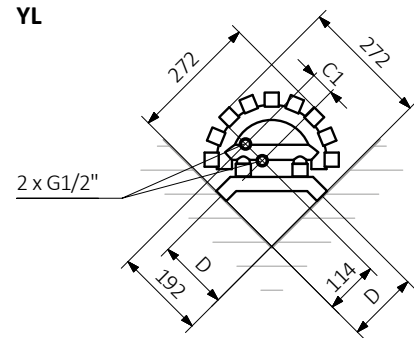


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Triga ANC E s. 236



Colour included
in the price


design: *Terma*

Standard connections:






Water version, see page 540.

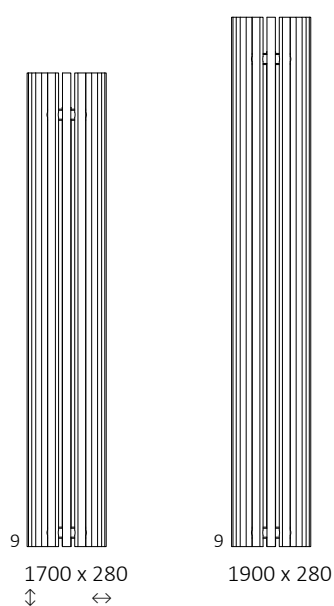Available sizes:



Specifications:

| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| 1700 | 280 | 1000 | 151 | 1500 | 50 | 11,64 | 32,04 | WLVEC170028 |
| 1900 | 280 | 1000 | 151 | 1700 | 50 | 12,95 | 35,52 | WLVEC190028 |


We recommend: KTX 4 BLUE heating element – see page 694



ZIP V 30 hanger – see page 637




EX

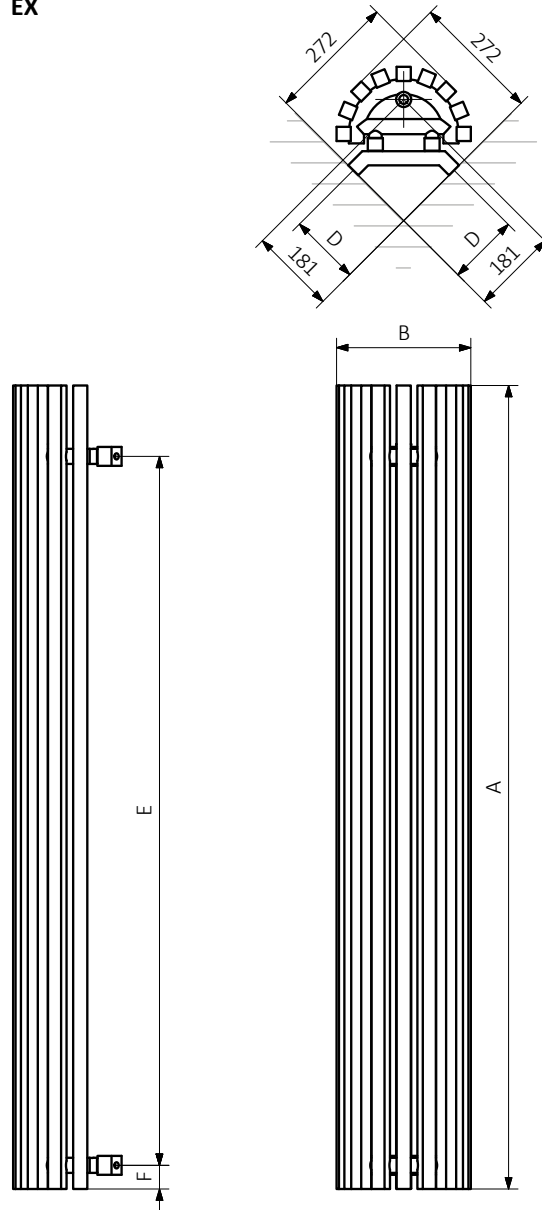


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Triga AW s. 238


  Colour included in the price

design: *Terma*

Standard connections:



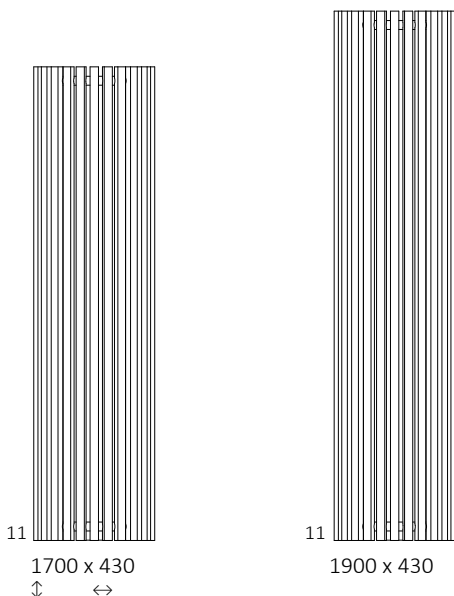

Available sizes:



Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|--|---|--|
| 1700 | 430 | 50 | 1122 | 583 | 240 | 1600 | 50 | 14,33 | 27,86 | WGVRA170043 |
| 1900 | 430 | 50 | 1255 | 652 | 240 | 1800 | 50 | 15,93 | 30,82 | WGVRA190043 |

We recommend: A set of integrated thermostatic valves for ZX connection – see page 652




Integrated pipe masking set – see page 675



ZIP V 30 hanger – see page 637




ZX

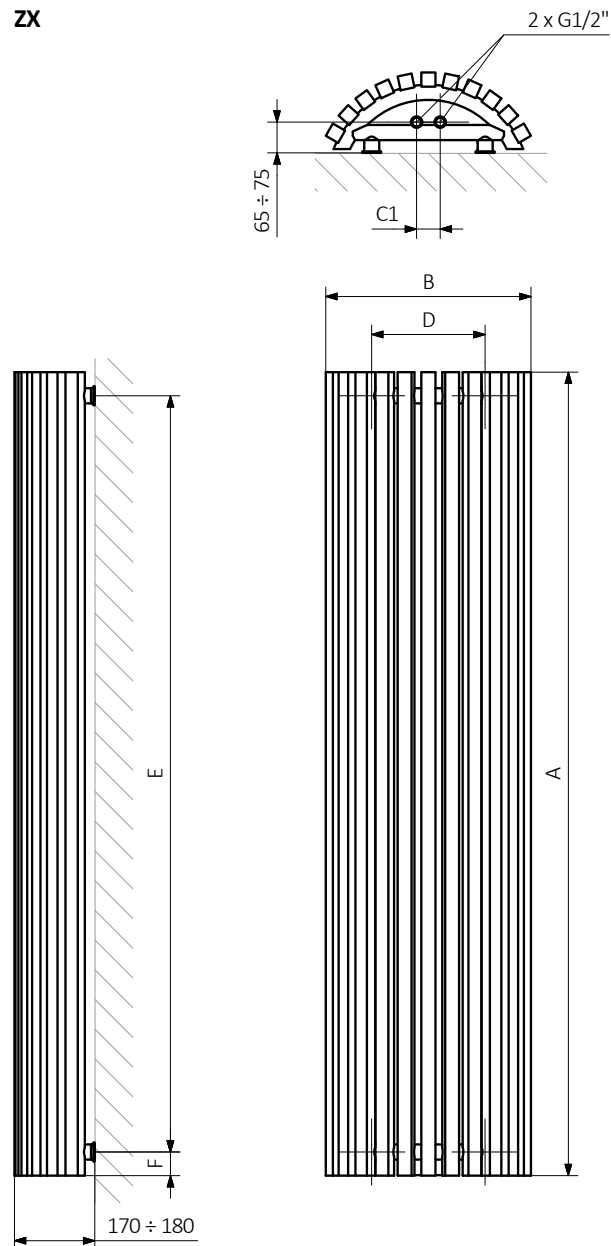


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Triga AW E




Colour included
in the price

Standard connections:



Water version, see page 540.

Available sizes:

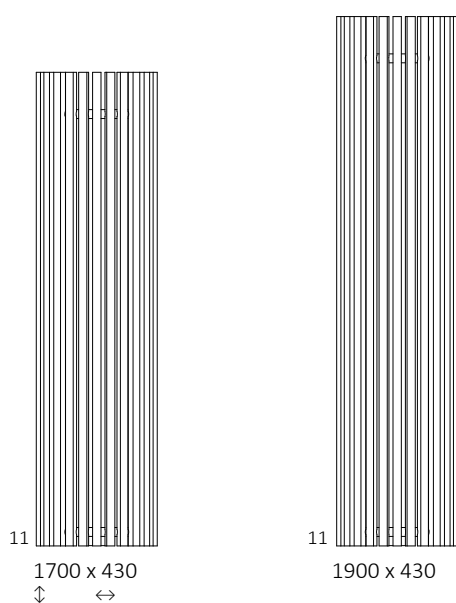

Specifications:

| A \updownarrow [mm] | B \leftrightarrow [mm] | [W] | D [mm] | E [mm] | F [mm] | [dm ³] | [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|---------|-----------|-----------|-----------|------------------------|----------|--|
| 1700 | 430 | 1200 | 240 | 1500 | 50 | 14,33 | 39,47 | WLVRA170043 |
| 1900 | 430 | 1200 | 240 | 1700 | 50 | 15,93 | 43,72 | WLVRA190043 |


We recommend: KTX 4 BLUE heating element – see page 694



ZIP V 30 hanger – see page 637




EX

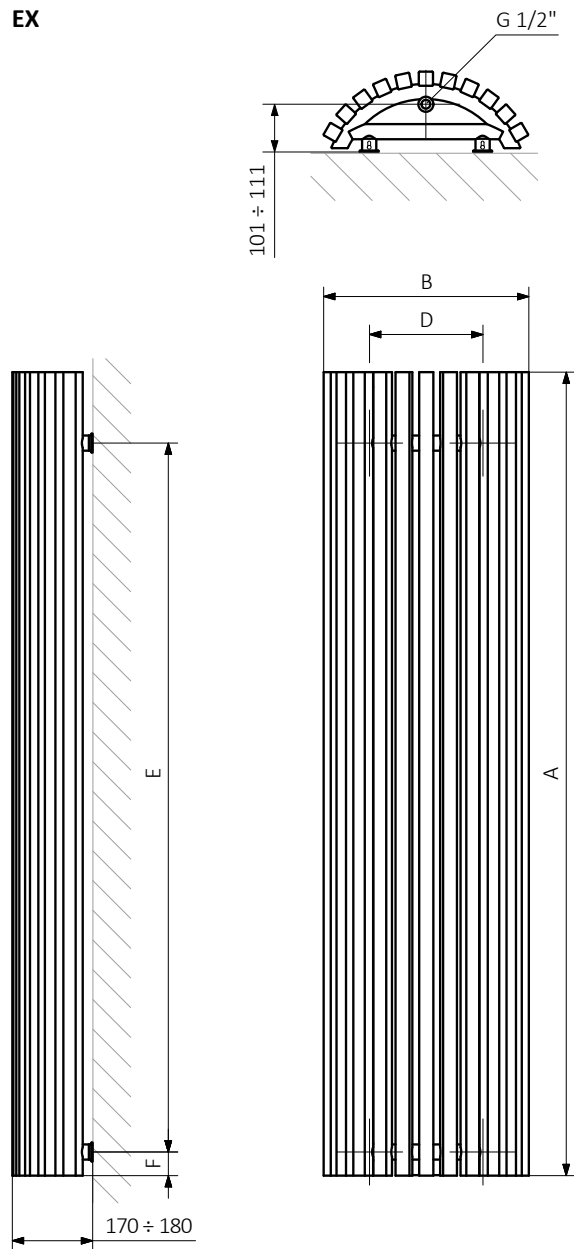


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:



Tune VWD

 s. 240




 Colour included in the price


design: *Terma*

Standard connections:

A ↓ 600÷1800:




A ↓ 1800:





Optional connections:



A ↓ 600÷1800:



A ↓ 600:






A ↓ 1800:



Electric radiators: see page 552.

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | C3 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 600 | 590 | 50 | 550 | 500 | 725 | 378 | 800 | 550 | 500 | 50 | 10,72 | 15,71 | WGTUV060059 |
| 600 | 790 | 50 | 750 | 500 | 967 | 504 | 1000 | 750 | 500 | 50 | 14,30 | 20,92 | WGTUV060079 |
| 600 | 990 | 50 | 950 | 500 | 1209 | 630 | 1200 | 950 | 500 | 50 | 17,87 | 26,13 | WGTUV060099 |
| 600 | 1190 | 50 | 1150 | 500 | 1450 | 756 | 1500 | 1150 | 500 | 50 | 21,45 | 31,34 | WGTUV060119 |
| 600 | 1390 | 50 | 1350 | 500 | 1693 | 883 | 1500 | 1350 | 500 | 50 | 25,03 | 36,55 | WGTUV060139 |
| 600 | 1590 | 50 | 1550 | 500 | 1934 | 1008 | — | 1550 | 500 | 50 | 28,61 | 41,76 | WGTUV060159 |
| 1800 | 290 | 50 | 250 | 1700 | 967 | 489 | 1000 | 250 | 1700 | 50 | 15,26 | 21,71 | WGTUV180029 |
| 1800 | 490 | 50 | 450 | 1700 | 1612 | 815 | 1500 | 450 | 1700 | 50 | 25,44 | 36,06 | WGTUV180049 |
| 1800 | 690 | 50 | 650 | 1700 | 2257 | 1141 | — | 650 | 1700 | 50 | 35,62 | 50,41 | WGTUV180069 |

We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652












Integrated pipe masking set – see page 675




MOA BLUE heating element – see page 706




Available sizes:

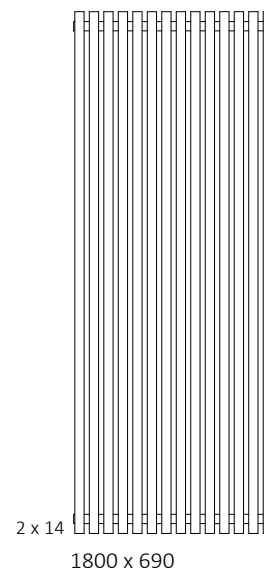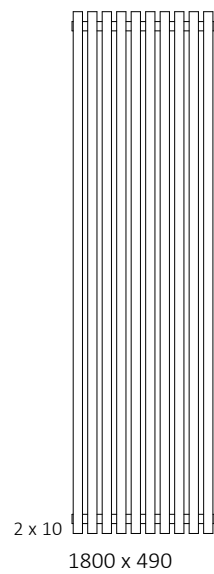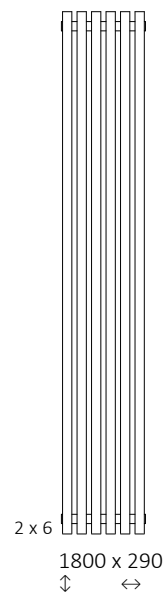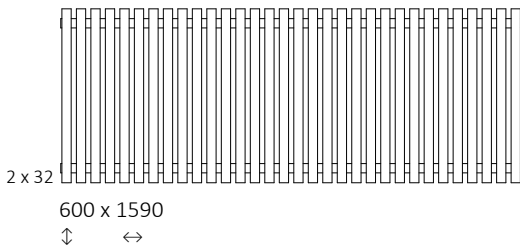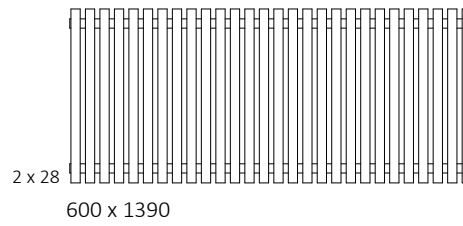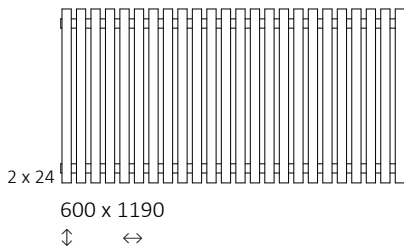

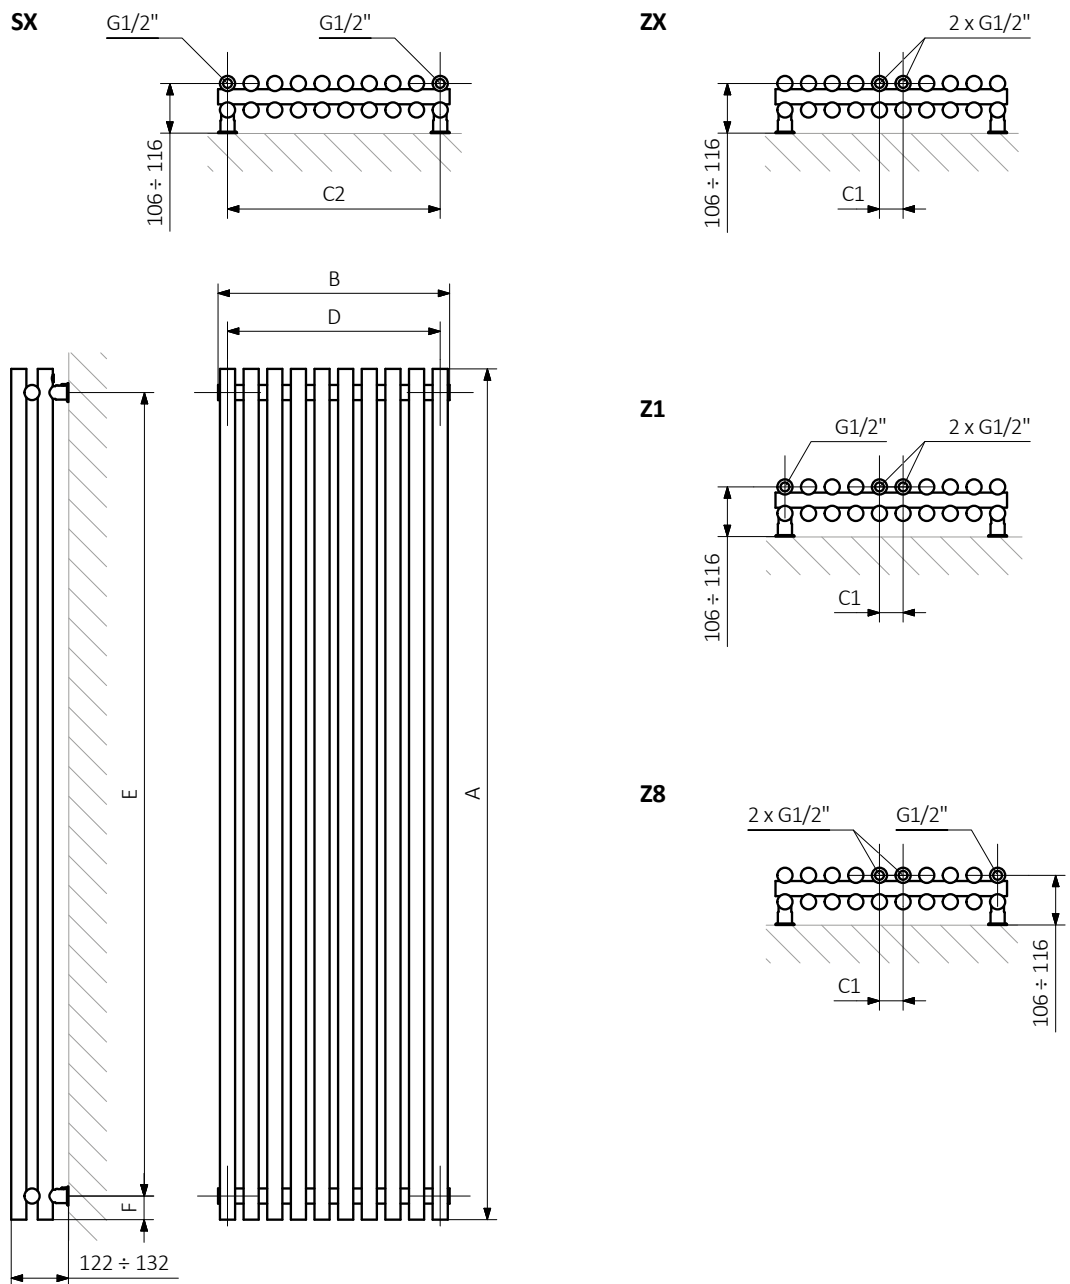


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Pipe:



PX

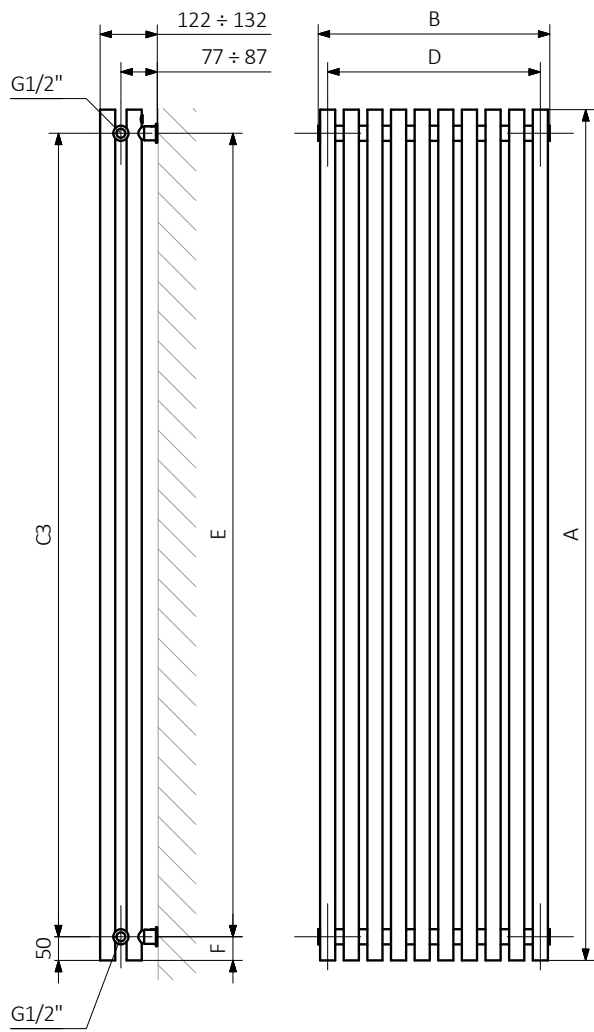

LX

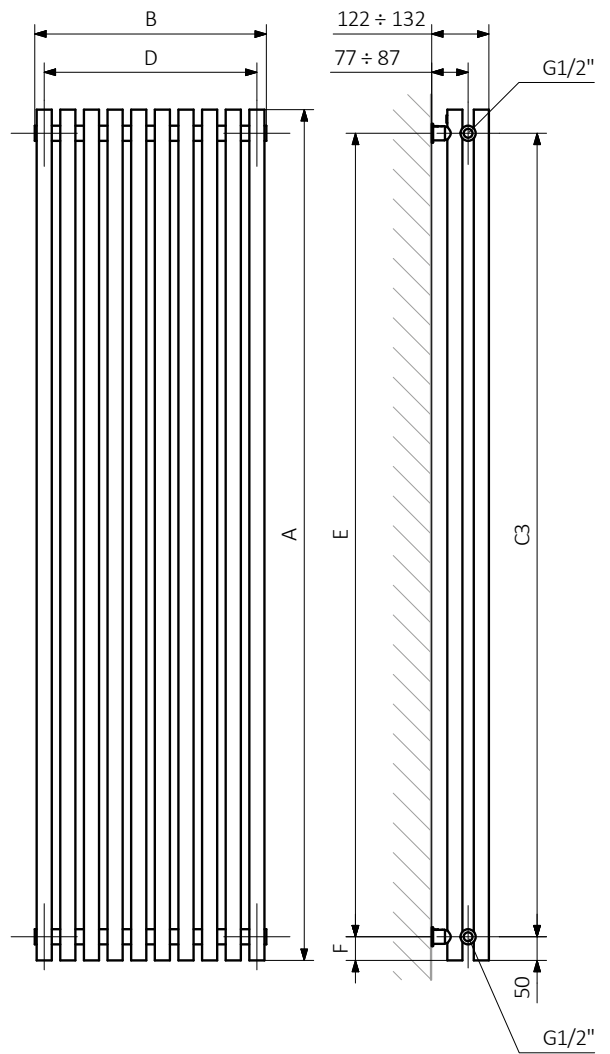

Tune VWD E s. 240



Colour included
in the price


design: *Terma*

Standard connections:

A \updownarrow 600:






A \updownarrow 1800:



Water version, see page 548.


Specifications:

| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| 600 | 590 | 800 | 550 | 500 | 50 | 10,72 | 24,39 | WLTUV060059 |
| 600 | 790 | 1000 | 750 | 500 | 50 | 14,30 | 32,50 | WLTUV060079 |
| 600 | 990 | 1200 | 950 | 500 | 50 | 17,87 | 40,60 | WLTUV060099 |
| 600 | 1190 | 1500 | 1150 | 500 | 50 | 21,45 | 48,71 | WLTUV060119 |
| 600 | 1390 | 1500 | 1350 | 500 | 50 | 25,03 | 56,82 | WLTUV060139 |
| 1800 | 290 | 1000 | 250 | 1600 | 50 | 15,26 | 34,07 | WLTUV180029 |
| 1800 | 490 | 1500 | 450 | 1600 | 50 | 25,44 | 56,67 | WLTUV180049 |


We recommend: MOA BLUE heating
element – see page 706




Available sizes:




600 x 590




600 x 790




600 x 990

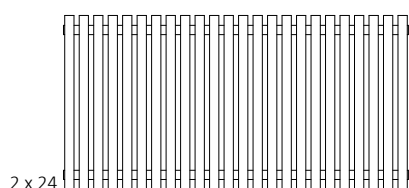


600 x 1190

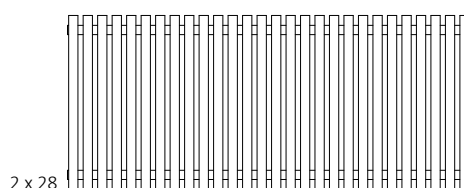

600 x 1390

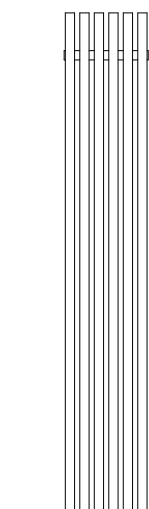


1800 x 290

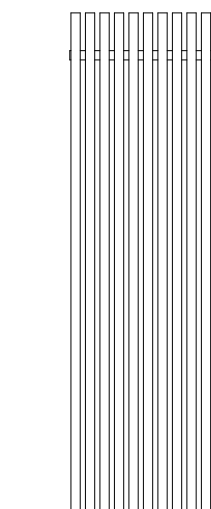


1800 x 490

E2

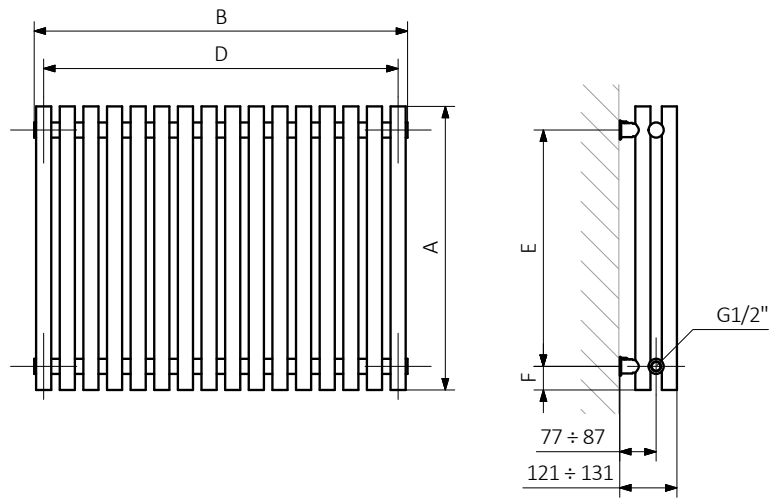


E7

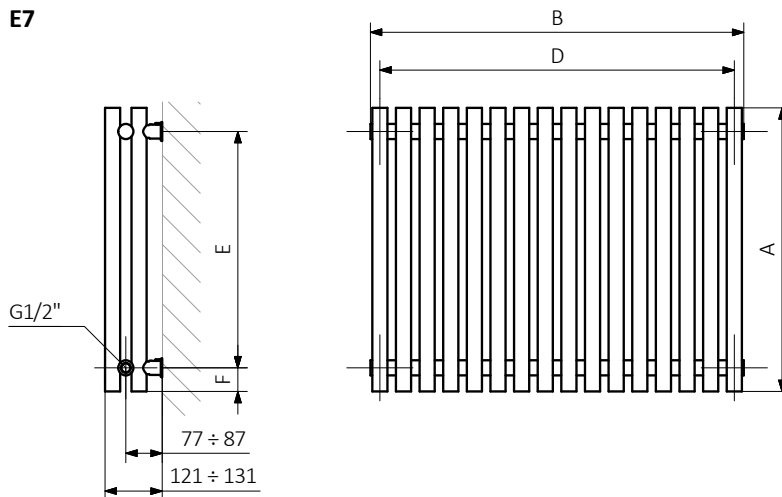


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator



Pipe:



E1




E8

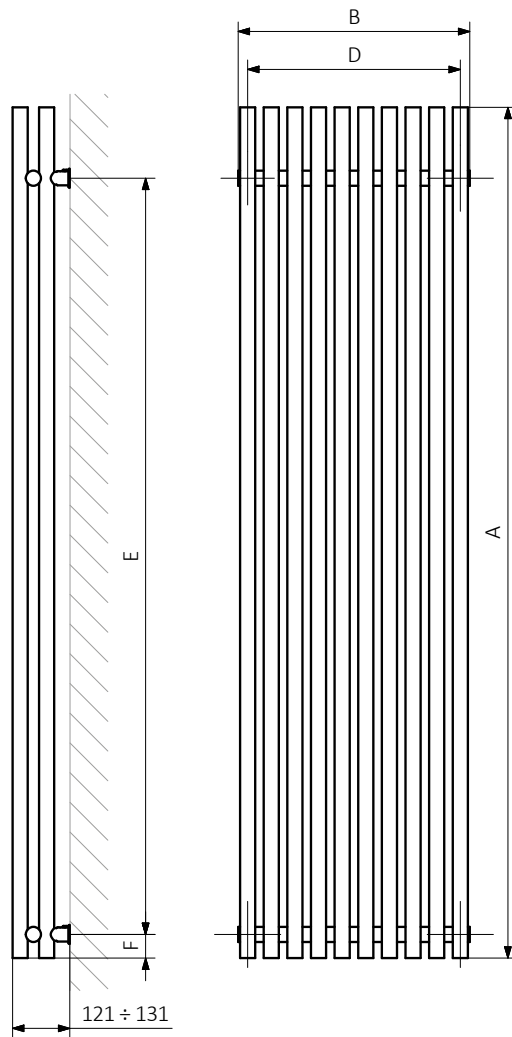

Tune VWS s. 242




 Colour included in the price


design: *Terma*

Standard connections:

A ↓ 600÷1800:




A ↓ 1800:





Optional connections:



A ↓ 600÷1800:



A ↓ 600:






A ↓ 1800:



Electric radiators: see page 560.

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | C3 [mm] | 75 65 20°C [W] | 55 45 20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 600 | 590 | 50 | 550 | 500 | 450 | 240 | 400 | 490 | 500 | 50 | 5,77 | 8,57 | WGTSV060059 |
| 600 | 790 | 50 | 750 | 500 | 602 | 321 | 600 | 690 | 500 | 50 | 7,69 | 11,37 | WGTSV060079 |
| 600 | 990 | 50 | 950 | 500 | 752 | 401 | 800 | 890 | 500 | 50 | 9,62 | 14,16 | WGTSV060099 |
| 600 | 1190 | 50 | 1150 | 500 | 902 | 481 | 1000 | 1090 | 500 | 50 | 11,54 | 16,96 | WGTSV060119 |
| 600 | 1390 | 50 | 1350 | 500 | 1053 | 561 | 1000 | 1290 | 500 | 50 | 13,47 | 19,75 | WGTSV060139 |
| 600 | 1590 | 50 | 1550 | 500 | 1203 | 641 | 1200 | 1490 | 500 | 50 | 15,26 | 22,26 | WGTSV060159 |
| 1800 | 290 | 50 | 250 | 1700 | 608 | 305 | 600 | 190 | 1700 | 50 | 7,83 | 11,23 | WGTSV180029 |
| 1800 | 490 | 50 | 450 | 1700 | 1014 | 509 | 1000 | 390 | 1700 | 50 | 13,06 | 18,60 | WGTSV180049 |
| 1800 | 690 | 50 | 650 | 1700 | 1420 | 713 | 1500 | 590 | 1700 | 50 | 18,29 | 25,96 | WGTSV180069 |

We recommend: A set of integrated thermostatic valves for Z1 and Z8 connections – see page 652




Integrated pipe masking set – see page 675



MOA BLUE heating element – see page 706




Available sizes:




12

600 x 590




16

600 x 790




20

600 x 990

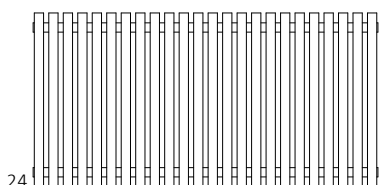


24

600 x 1190

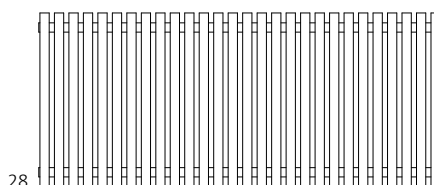


28

600 x 1390

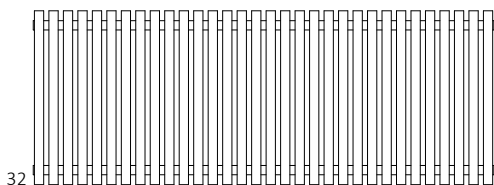


32

600 x 1590




6

1800 x 290

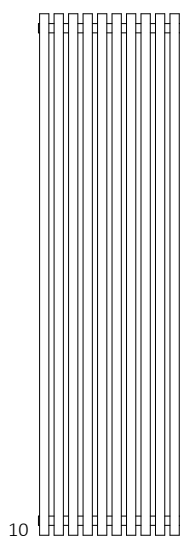

10


1800 x 490

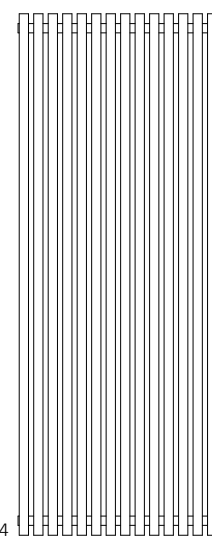


14

1800 x 690


SX

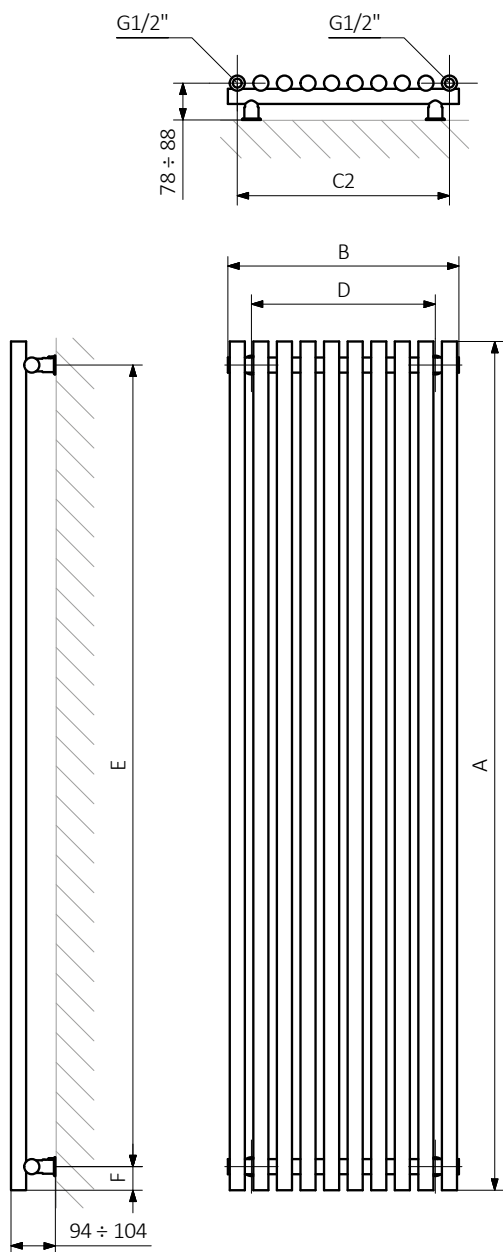


ZX



Z1

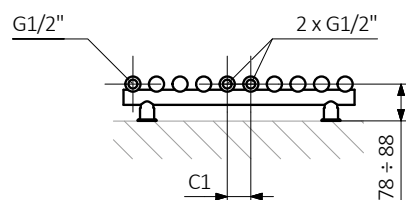


Z8

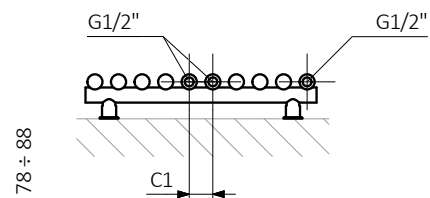


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Pipe:



PX

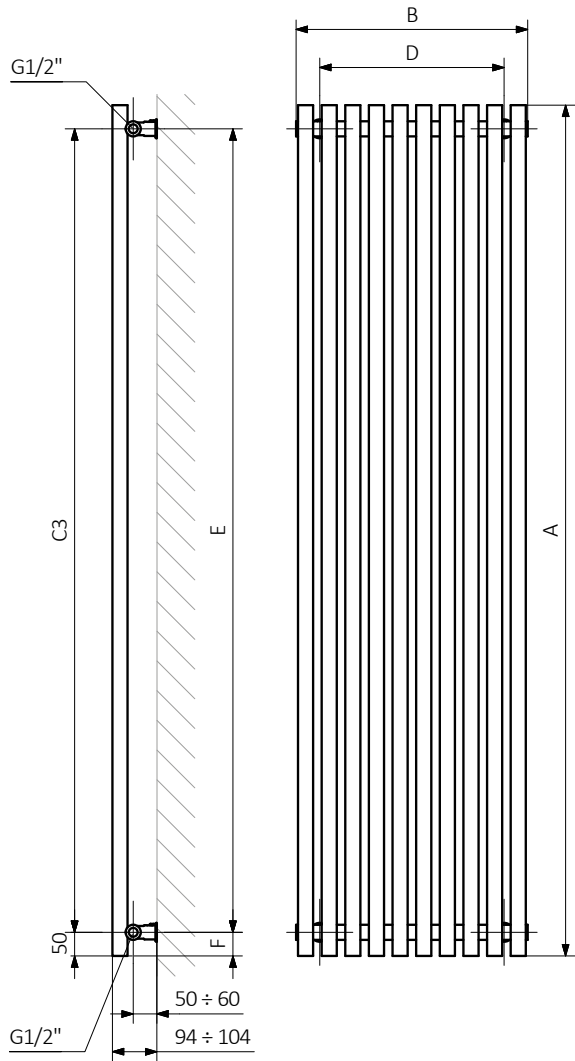

LX

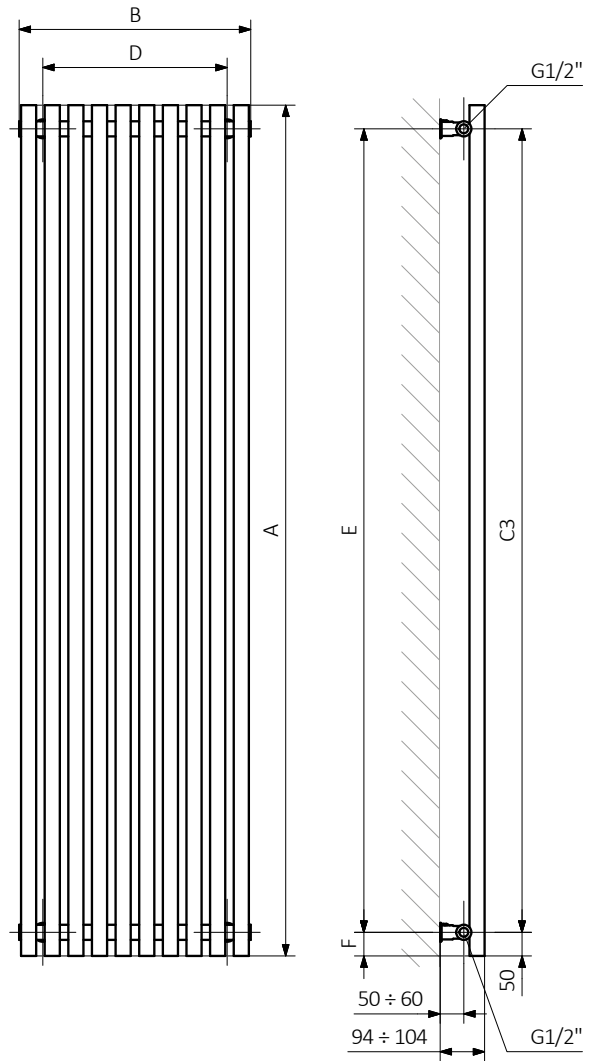

Tune VWS E s. 242



Colour included
in the price


design: *Terma*

Standard connections:

A \updownarrow 600:






A \updownarrow 1800:



Water version, see page 556.


Specifications:

| A \updownarrow [mm] | B \leftrightarrow [mm] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|--------------------------|-----------------------------|--|-----------|-----------|-----------|---|---|--|
| 600 | 590 | 400 | 490 | 500 | 50 | 5,77 | 13,24 | WLTSV060059 |
| 600 | 790 | 600 | 690 | 500 | 50 | 7,69 | 17,60 | WLTSV060079 |
| 600 | 990 | 800 | 890 | 500 | 50 | 9,62 | 21,95 | WLTSV060099 |
| 600 | 1190 | 1000 | 1090 | 500 | 50 | 11,54 | 26,31 | WLTSV060119 |
| 600 | 1390 | 1000 | 1290 | 500 | 50 | 13,47 | 30,66 | WLTSV060139 |
| 600 | 1590 | 1200 | 1490 | 500 | 50 | 15,26 | 34,62 | WLTSV060159 |
| 1800 | 290 | 600 | 190 | 1600 | 50 | 7,83 | 17,57 | WLTSV180029 |
| 1800 | 490 | 1000 | 390 | 1600 | 50 | 13,06 | 29,18 | WLTSV180049 |
| 1800 | 690 | 1500 | 590 | 1600 | 50 | 18,29 | 40,77 | WLTSV180069 |


We recommend: MOA BLUE heating
element – see page 706




Available sizes:




600 x 590
↓ ↔




600 x 790




600 x 990

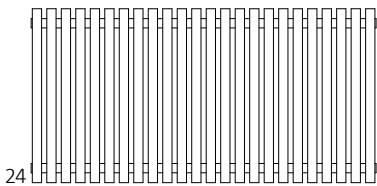


600 x 1190
↓ ↔

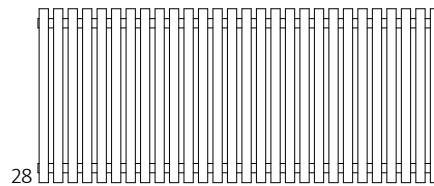


600 x 1390

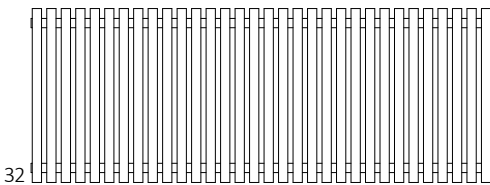


600 x 1590
↓ ↔



1800 x 290
↓ ↔

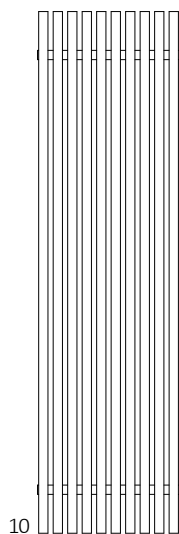


1800 x 490

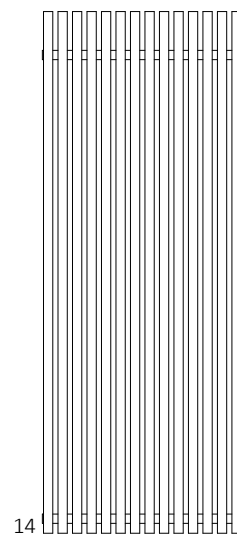


1800 x 690

E2

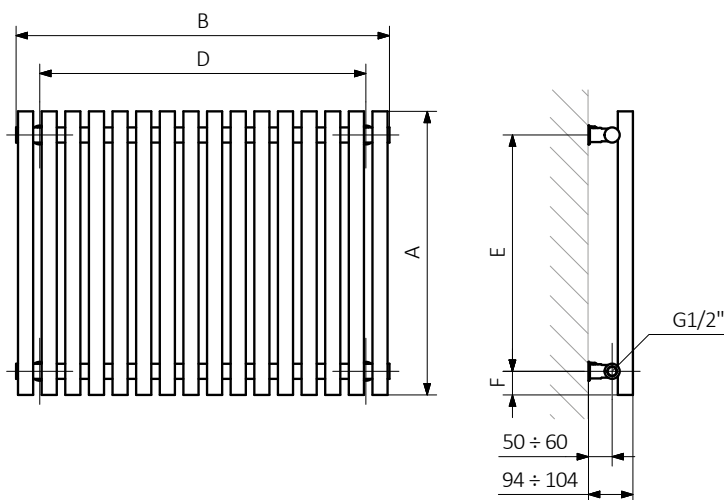


E7

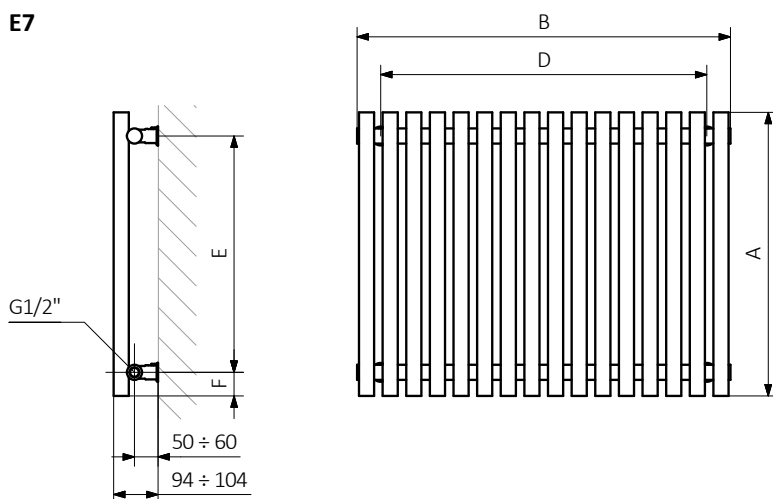


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator



Pipe:



E1



E8

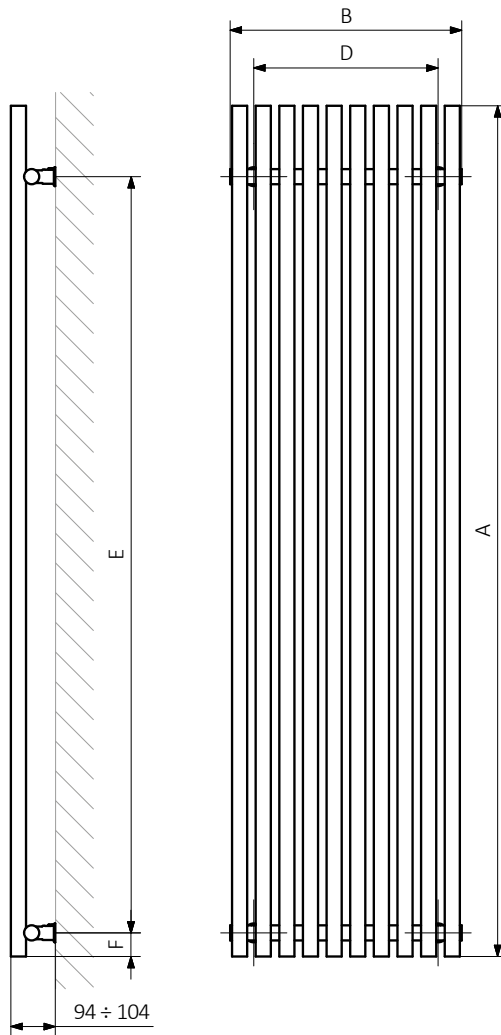


Tune HSD s. 244




  Colour included in the price

design: Terma

Standard connections:



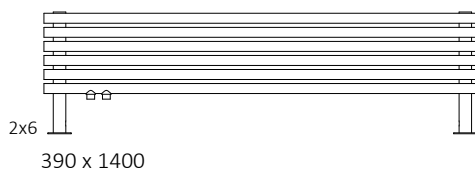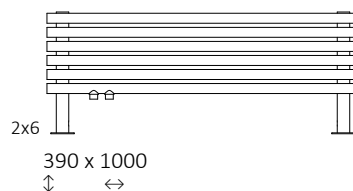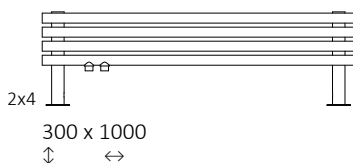

Available sizes:



Specifications:




Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | D [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|---|---|--|
| 300 | 1000 | 50 | 421 | 229 | 900 | 6,11 | 9,30 | WGTUH030100 |
| 300 | 1400 | 50 | 589 | 320 | 1300 | 8,32 | 12,34 | WGTUH030140 |
| 390 | 1000 | 50 | 564 | 305 | 900 | 9,05 | 13,58 | WGTUH039100 |
| 390 | 1400 | 50 | 790 | 428 | 1300 | 12,35 | 18,15 | WGTUH039140 |

We recommend: A set of integrated thermostatic valves for YL and YP connections – see page 652




Integrated pipe masking set – see page 675

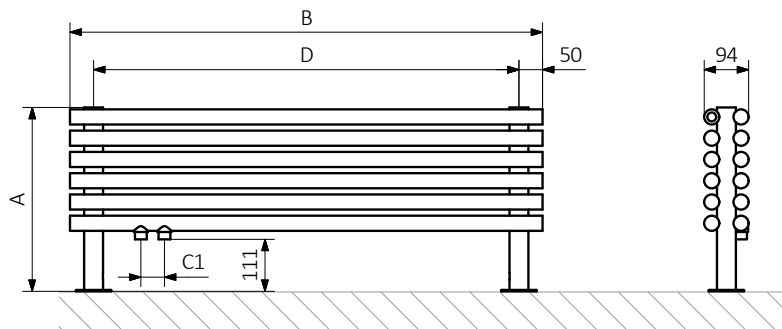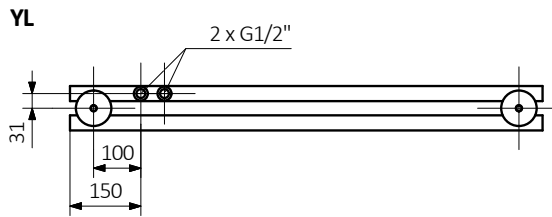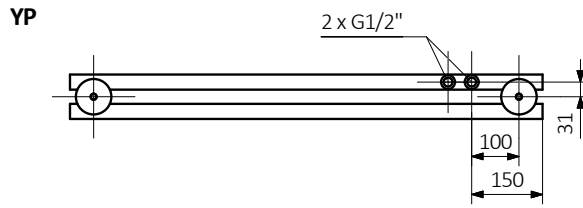


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:







Standard connections:




Electric radiators: see page 401.



Optional connections:

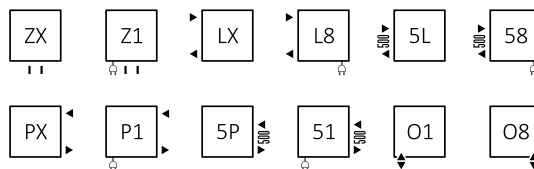

Available sizes:

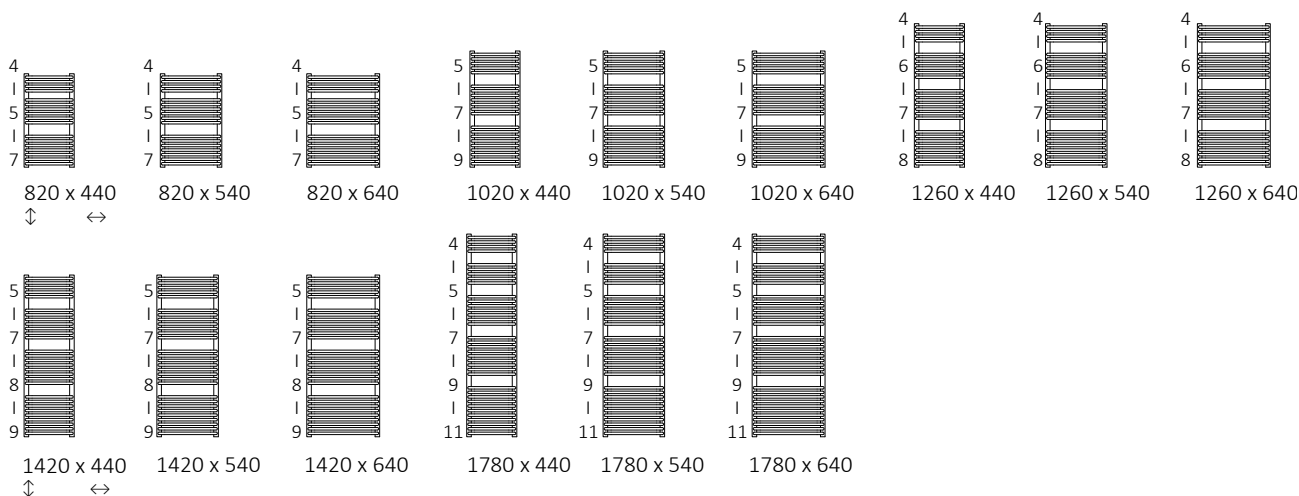

Specifications:

Working pressure: 800 kPa

Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ⊕ [W] | D [mm] | E [mm] | F [mm] | H [dm³] | ⚖️ [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|------------|------------|--|
| 820 | 440 | 50 | 400 | 533 | 288 | 600 | 400 | 640 | 90 | 5,44 | 12,15 | WGTYT082044 |
| 820 | 540 | 50 | 500 | 645 | 348 | 600 | 500 | 640 | 90 | 6,39 | 14,29 | WGTYT082054 |
| 820 | 640 | 50 | 600 | 755 | 407 | 800 | 600 | 640 | 90 | 7,35 | 16,43 | WGTYT082064 |
| 1020 | 440 | 50 | 400 | 666 | 358 | 600 | 400 | 840 | 90 | 7,03 | 15,67 | WGTYT102044 |
| 1020 | 540 | 50 | 500 | 806 | 433 | 800 | 500 | 840 | 90 | 8,29 | 18,47 | WGTYT102054 |
| 1020 | 640 | 50 | 600 | 943 | 507 | 1000 | 600 | 840 | 90 | 9,54 | 21,28 | WGTYT102064 |
| 1260 | 440 | 50 | 400 | 828 | 444 | 800 | 400 | 1080 | 90 | 8,46 | 18,82 | WGTYT126044 |
| 1260 | 540 | 50 | 500 | 1002 | 537 | 1000 | 500 | 1080 | 90 | 9,95 | 22,16 | WGTYT126054 |
| 1260 | 640 | 50 | 600 | 1173 | 628 | 1200 | 600 | 1080 | 90 | 11,44 | 25,50 | WGTYT126064 |
| 1420 | 440 | 50 | 400 | 930 | 497 | 1000 | 400 | 1240 | 90 | 9,73 | 21,63 | WGTYT142044 |
| 1420 | 540 | 50 | 500 | 1126 | 602 | 1200 | 500 | 1240 | 90 | 11,46 | 25,51 | WGTYT142054 |
| 1420 | 640 | 50 | 600 | 1317 | 704 | 1200 | 600 | 1240 | 90 | 13,20 | 29,38 | WGTYT142064 |
| 1780 | 440 | 50 | 400 | 1167 | 623 | 1200 | 400 | 1600 | 90 | 12,11 | 26,89 | WGTYT178044 |
| 1780 | 540 | 50 | 500 | 1412 | 753 | 1500 | 500 | 1600 | 90 | 14,26 | 31,70 | WGTYT178054 |
| 1780 | 640 | 50 | 600 | 1652 | 881 | 1500 | 600 | 1600 | 90 | 16,41 | 36,51 | WGTYT178064 |





We recommend: A set of integrated thermostatic valves for Z8 connection – see page 652



Integrated pipe masking set – see page 675




MOA heating element – see page 702

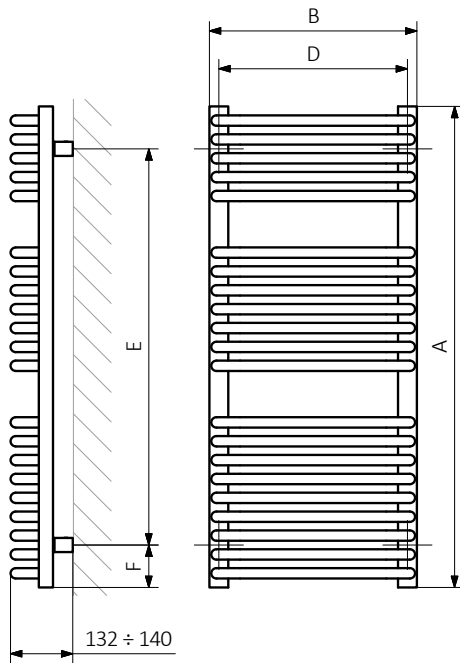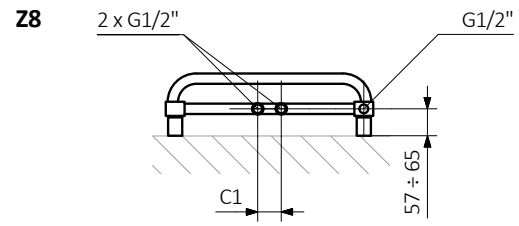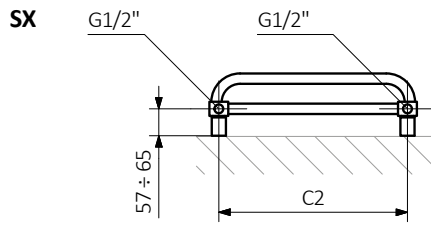


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Tytus One s. 248

The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




design: *Terma*


Standard connections:




Electric radiators: see page 599.



Optional connections:



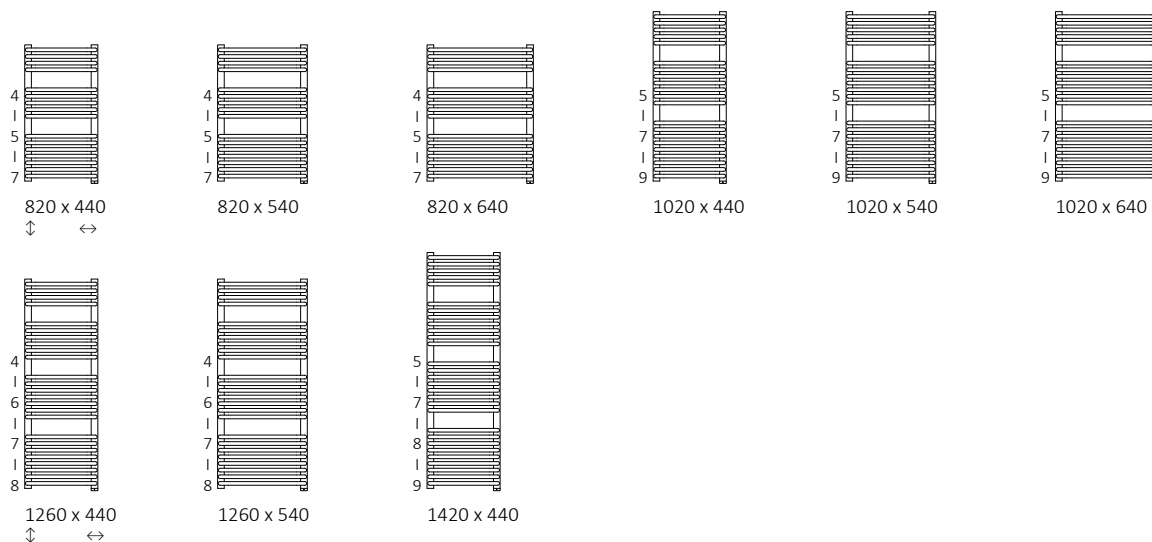


Available sizes:



Specifications:




Working pressure: 800 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 820 | 440 | 533 | 288 | 600 | 400 | 680 | 70 | 5,35 | 12,15 | WZTYN082044 |
| 820 | 540 | 645 | 348 | 600 | 500 | 680 | 70 | 6,31 | 14,29 | WZTYN082054 |
| 820 | 640 | 755 | 407 | 800 | 600 | 680 | 70 | 7,27 | 16,43 | WZTYN082064 |
| 1020 | 440 | 666 | 358 | 600 | 400 | 880 | 70 | 6,95 | 15,67 | WZTYN102044 |
| 1020 | 540 | 806 | 433 | 800 | 500 | 880 | 70 | 8,20 | 18,47 | WZTYN102054 |
| 1020 | 640 | 943 | 507 | 1000 | 600 | 880 | 70 | 9,46 | 21,28 | WZTYN102064 |
| 1260 | 440 | 828 | 444 | 800 | 400 | 1120 | 70 | 8,37 | 18,82 | WZTYN126044 |
| 1260 | 540 | 1002 | 537 | 1000 | 500 | 1120 | 70 | 9,87 | 22,16 | WZTYN126054 |
| 1420 | 440 | 930 | 497 | 1000 | 400 | 1280 | 70 | 9,65 | 21,63 | WZTYN142044 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675

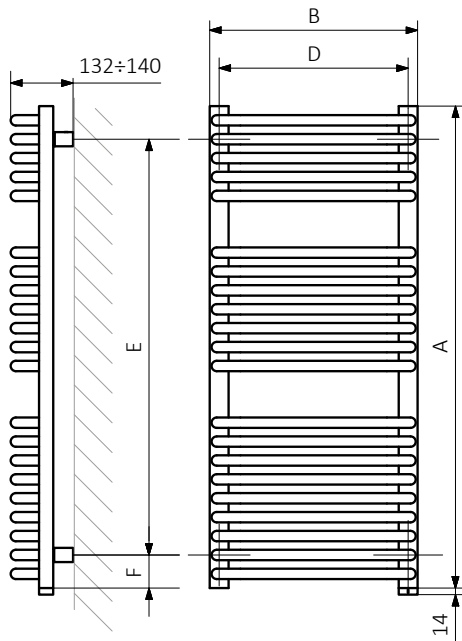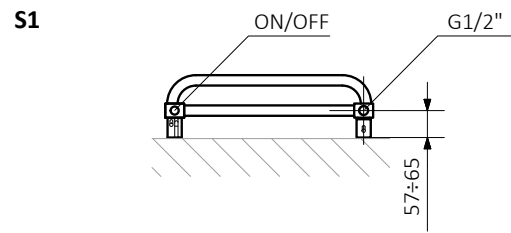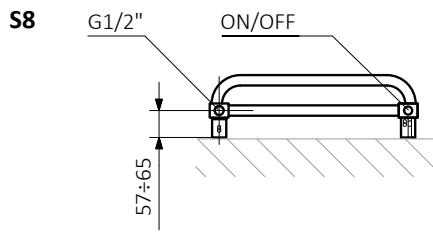


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator


Collector:




Pipe:



Standard connections:




Electric radiators: see page 401.




Optional connections:


A \updownarrow 510÷1710:



A \updownarrow 750÷1710:



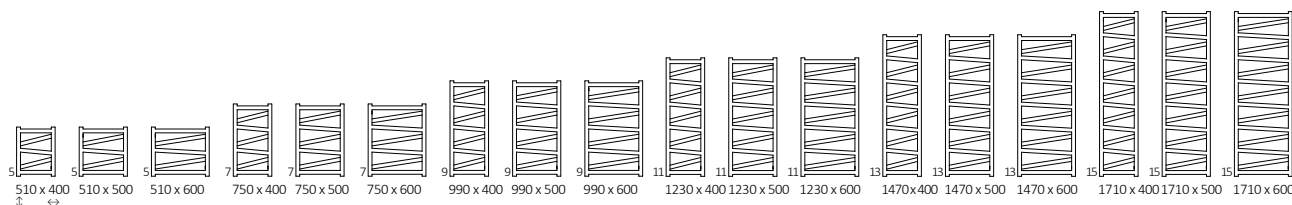


Available sizes:



Specifications:

Working pressure: 800 kPa Maximum operating temperature: 95°C

| A \updownarrow [mm] | B \leftrightarrow [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|--------------------------|-----------------------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|---|--|--|
| 510 | 400 | 50 | 360 | 163 | 89 | 200 | 350 | 330 | 90 | 1,36 | 3,78 | WGVPA051040 |
| 510 | 500 | 50 | 460 | 192 | 105 | 200 | 450 | 330 | 90 | 1,48 | 4,33 | WGVPA051050 |
| 510 | 600 | 50 | 560 | 220 | 120 | 200 | 550 | 330 | 90 | 1,61 | 4,89 | WGVPA051060 |
| 750 | 400 | 50 | 360 | 237 | 129 | 200 | 350 | 570 | 90 | 1,97 | 5,18 | WGVPA075040 |
| 750 | 600 | 50 | 560 | 322 | 176 | 300 | 550 | 570 | 90 | 2,32 | 6,73 | WGVPA075060 |
| 750 | 500 | 50 | 460 | 280 | 153 | 300 | 450 | 570 | 90 | 2,14 | 5,96 | WGVPA075050 |
| 990 | 400 | 50 | 360 | 312 | 169 | 300 | 350 | 810 | 90 | 2,58 | 6,59 | WGVPA099040 |
| 990 | 500 | 50 | 460 | 368 | 200 | 400 | 450 | 810 | 90 | 2,81 | 7,59 | WGVPA099050 |
| 990 | 600 | 50 | 560 | 423 | 230 | 400 | 550 | 810 | 90 | 3,04 | 8,58 | WGVPA099060 |
| 1230 | 400 | 50 | 360 | 382 | 207 | 400 | 350 | 1050 | 90 | 3,19 | 8,00 | WGVPA123040 |
| 1230 | 600 | 50 | 560 | 519 | 281 | 600 | 550 | 1050 | 90 | 3,75 | 10,43 | WGVPA123060 |
| 1230 | 500 | 50 | 460 | 451 | 244 | 400 | 450 | 1050 | 90 | 3,47 | 9,21 | WGVPA123050 |
| 1470 | 400 | 50 | 360 | 457 | 246 | 400 | 350 | 1290 | 90 | 3,8 | 9,41 | WGVPA147040 |
| 1470 | 500 | 50 | 460 | 540 | 291 | 600 | 450 | 1290 | 90 | 4,13 | 10,85 | WGVPA147050 |
| 1470 | 600 | 50 | 560 | 622 | 335 | 600 | 550 | 1290 | 90 | 4,46 | 12,28 | WGVPA147060 |
| 1710 | 400 | 50 | 360 | 531 | 285 | 600 | 350 | 1530 | 90 | 4,4 | 10,82 | WGVPA171040 |
| 1710 | 500 | 50 | 460 | 627 | 337 | 600 | 450 | 1530 | 90 | 4,79 | 12,48 | WGVPA171050 |
| 1710 | 600 | 50 | 560 | 722 | 388 | 800 | 550 | 1530 | 90 | 5,17 | 14,13 | WGVPA171060 |







We recommend: A set of integrated thermostatic valves for Z8 connection – see page 652



Integrated pipe masking set – see page 675




KTX 3 heating element – see page 696

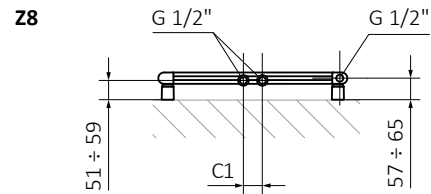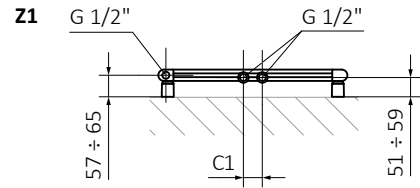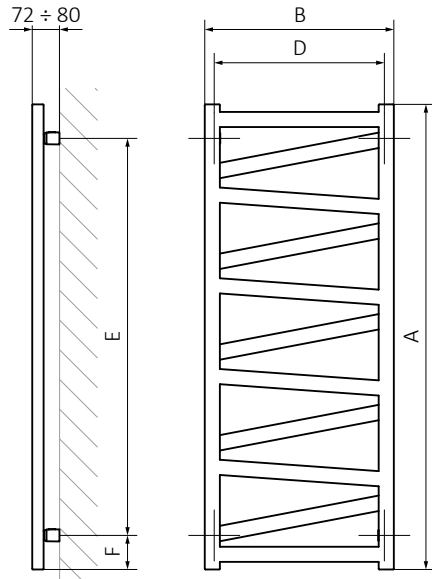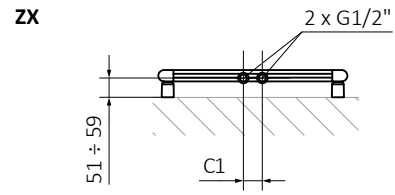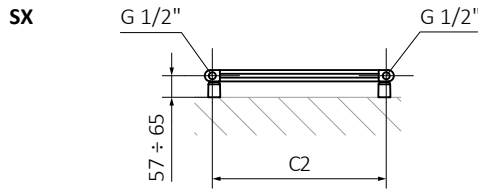


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Vipera One s. 250


The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




Standard connections:




Electric radiators: see page 599.



Optional connections:



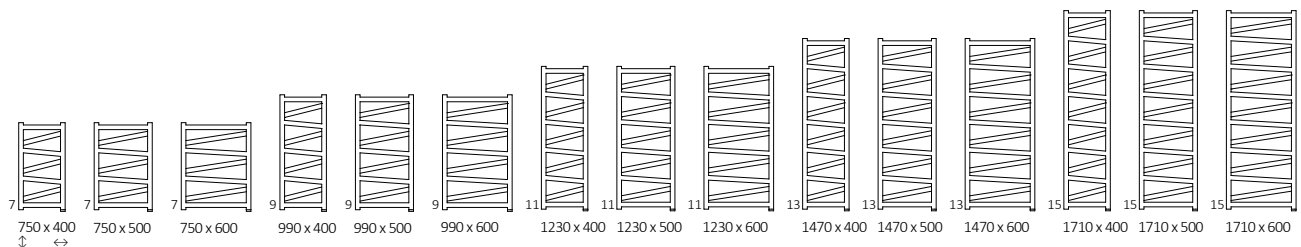


Available sizes:



Specifications:





Working pressure: 800 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| 750 | 400 | 237 | 129 | 200 | 350 | 610 | 70 | 1,97 | 5,18 | WZVPN075040 |
| 750 | 500 | 280 | 153 | 300 | 450 | 610 | 70 | 2,14 | 5,96 | WZVPN075050 |
| 750 | 600 | 322 | 176 | 300 | 550 | 610 | 70 | 2,32 | 6,73 | WZVPN075060 |
| 990 | 400 | 312 | 169 | 300 | 350 | 850 | 70 | 2,58 | 6,59 | WZVPN099040 |
| 990 | 500 | 368 | 200 | 400 | 450 | 850 | 70 | 2,81 | 7,59 | WZVPN099050 |
| 990 | 600 | 423 | 230 | 400 | 550 | 850 | 70 | 3,04 | 8,58 | WZVPN099060 |
| 1230 | 400 | 382 | 207 | 400 | 350 | 1090 | 70 | 3,19 | 8,00 | WZVPN123040 |
| 1230 | 500 | 451 | 244 | 400 | 450 | 1090 | 70 | 3,47 | 9,21 | WZVPN123050 |
| 1230 | 600 | 519 | 281 | 600 | 550 | 1090 | 70 | 3,75 | 10,43 | WZVPN123060 |
| 1470 | 400 | 457 | 246 | 400 | 350 | 1330 | 70 | 3,80 | 9,41 | WZVPN147040 |
| 1470 | 500 | 540 | 291 | 600 | 450 | 1330 | 70 | 4,13 | 10,85 | WZVPN147050 |
| 1470 | 600 | 622 | 335 | 600 | 550 | 1330 | 70 | 4,46 | 12,28 | WZVPN147060 |
| 1710 | 400 | 531 | 285 | 600 | 350 | 1570 | 70 | 4,40 | 10,82 | WZVPN171040 |
| 1710 | 500 | 627 | 337 | 600 | 450 | 1570 | 70 | 4,79 | 12,48 | WZVPN171050 |
| 1710 | 600 | 722 | 388 | 800 | 550 | 1570 | 70 | 5,17 | 14,13 | WZVPN171060 |

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654




Integrated pipe masking set – see page 675

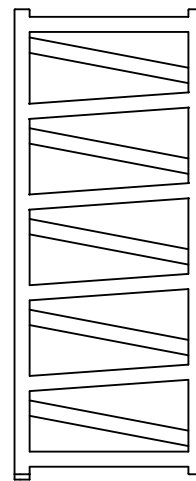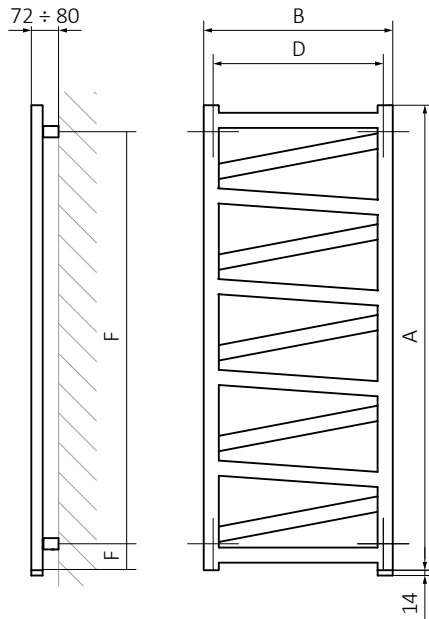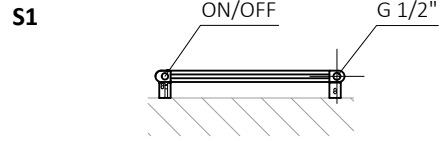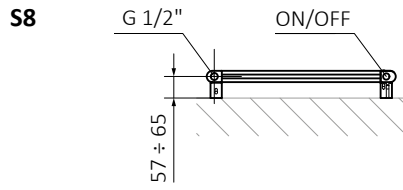


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:






Colour included in the price


Standard connections:




Electric radiators: see page 599.



Optional connections:

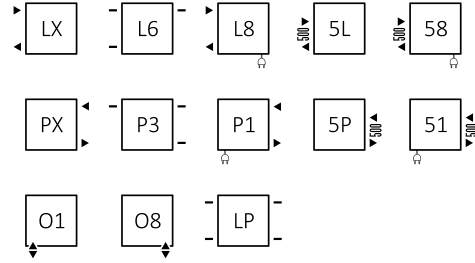

Available sizes:

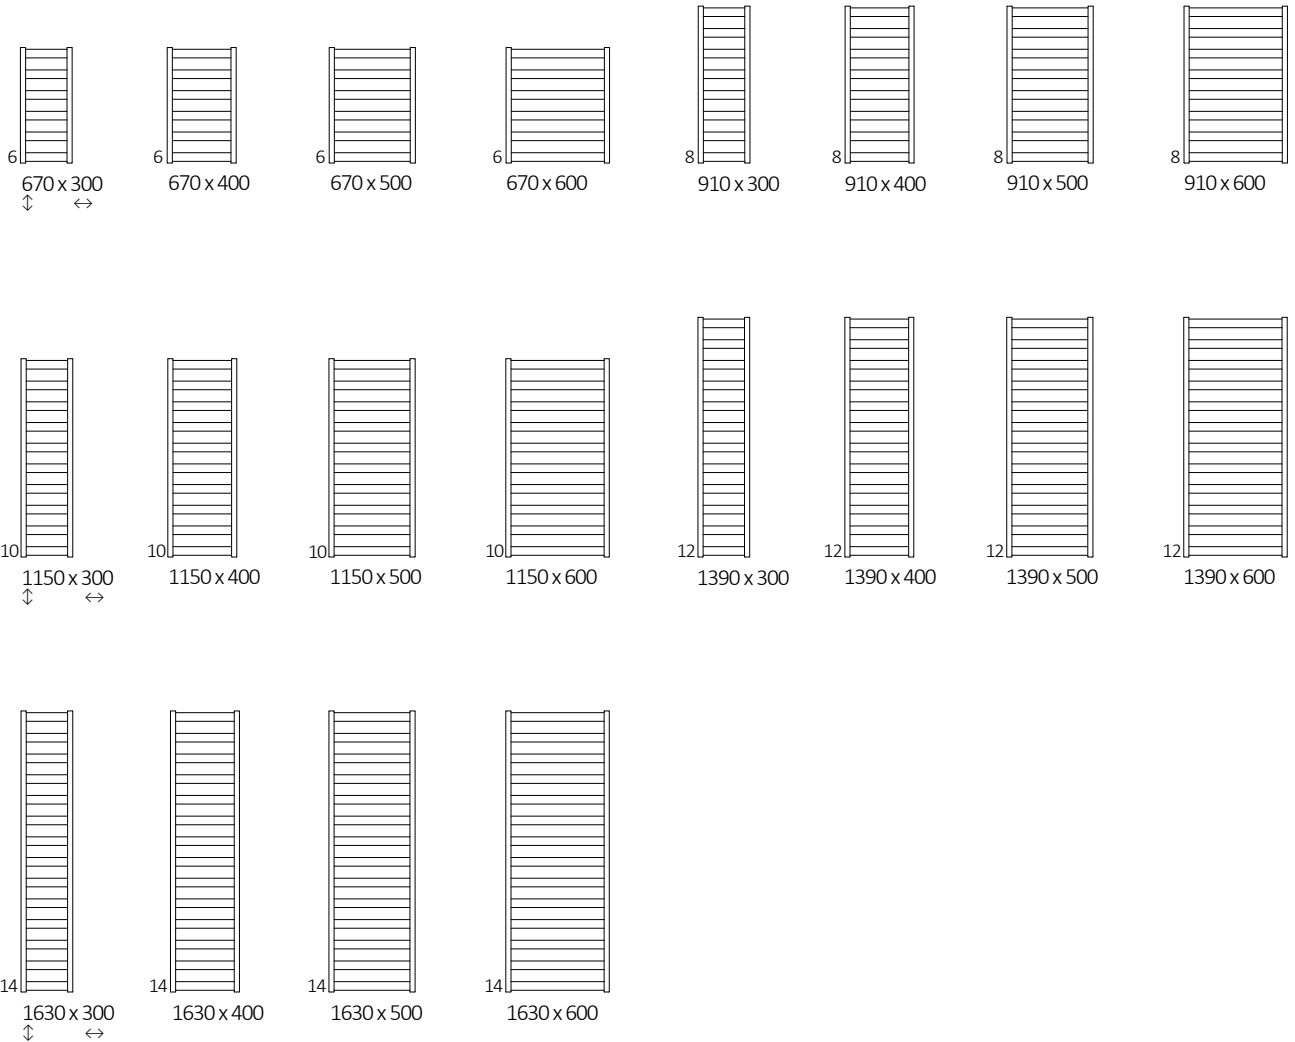

We recommend: A set of integrated thermostatic valves for Z8 connection – see page 652



Integrated pipe masking set – see page 675



KTX 3 heating element – see page 696



HAPPY SHARK hanger – see page 639




Specifications:


Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | ⊙ [W] | D [mm] | E [mm] | F [mm] | H [dm ²] | ⚖ [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|----------|-----------|-----------|-----------|-------------------------|-----------|--|
| Powder coating | | | | | | | | | | | | |
| 670 | 300 | 50 | 270 | 185 | 100 | 200 | 270 | 490 | 90 | 1,44 | 4,28 | WGVOV067030 |
| 670 | 400 | 50 | 370 | 230 | 124 | 200 | 370 | 490 | 90 | 1,63 | 5,17 | WGVOV067040 |
| 670 | 500 | 50 | 470 | 275 | 148 | 300 | 470 | 490 | 90 | 1,83 | 6,04 | WGVOV067050 |
| 670 | 600 | 50 | 570 | 320 | 172 | 300 | 570 | 490 | 90 | 2,03 | 6,93 | WGVOV067060 |
| 910 | 300 | 50 | 270 | 240 | 130 | 200 | 270 | 730 | 90 | 1,94 | 5,56 | WGVOV091030 |
| 910 | 400 | 50 | 370 | 295 | 159 | 300 | 370 | 730 | 90 | 2,21 | 6,72 | WGVOV091040 |
| 910 | 500 | 50 | 470 | 350 | 189 | 400 | 470 | 730 | 90 | 2,47 | 7,86 | WGVOV091050 |
| 910 | 600 | 50 | 570 | 405 | 218 | 400 | 570 | 730 | 90 | 2,73 | 9,01 | WGVOV091060 |
| 1150 | 300 | 50 | 270 | 300 | 162 | 300 | 270 | 970 | 90 | 2,45 | 6,85 | WGVOV115030 |
| 1150 | 400 | 50 | 370 | 366 | 197 | 400 | 370 | 970 | 90 | 2,78 | 8,27 | WGVOV115040 |
| 1150 | 500 | 50 | 470 | 433 | 233 | 400 | 470 | 970 | 90 | 3,11 | 9,68 | WGVOV115050 |
| 1150 | 600 | 50 | 570 | 501 | 269 | 600 | 570 | 970 | 90 | 3,44 | 11,10 | WGVOV115060 |
| 1390 | 300 | 50 | 270 | 356 | 192 | 400 | 270 | 1210 | 90 | 2,96 | 8,13 | WGVOV139030 |
| 1390 | 400 | 50 | 370 | 434 | 234 | 400 | 370 | 1210 | 90 | 3,35 | 9,81 | WGVOV139040 |
| 1390 | 500 | 50 | 470 | 512 | 275 | 600 | 470 | 1210 | 90 | 3,75 | 11,50 | WGVOV139050 |
| 1390 | 600 | 50 | 570 | 590 | 316 | 600 | 570 | 1210 | 90 | 4,14 | 13,19 | WGVOV139060 |
| 1630 | 300 | 50 | 270 | 414 | 223 | 400 | 270 | 1450 | 90 | 3,46 | 9,40 | WGVOV163030 |
| 1630 | 400 | 50 | 370 | 503 | 270 | 600 | 370 | 1450 | 90 | 3,92 | 11,37 | WGVOV163040 |
| 1630 | 500 | 50 | 470 | 592 | 318 | 600 | 470 | 1450 | 90 | 4,38 | 13,32 | WGVOV163050 |
| 1630 | 600 | 50 | 570 | 681 | 365 | 800 | 570 | 1450 | 90 | 4,84 | 15,29 | WGVOV163060 |
| Plated finishes | | | | | | | | | | | | |
| 670 | 300 | 50 | 270 | 130 | 70 | 120 | 270 | 490 | 90 | 1,44 | 4,15 | WGVOV067030 |
| 670 | 400 | 50 | 370 | 161 | 87 | 200 | 370 | 490 | 90 | 1,63 | 5,01 | WGVOV067040 |
| 670 | 500 | 50 | 470 | 193 | 104 | 200 | 470 | 490 | 90 | 1,83 | 5,86 | WGVOV067050 |
| 670 | 600 | 50 | 570 | 224 | 120 | 200 | 570 | 490 | 90 | 2,03 | 6,72 | WGVOV067060 |
| 910 | 300 | 50 | 270 | 168 | 91 | 200 | 270 | 730 | 90 | 1,94 | 5,39 | WGVOV091030 |
| 910 | 400 | 50 | 370 | 207 | 111 | 200 | 370 | 730 | 90 | 2,21 | 6,51 | WGVOV091040 |
| 910 | 500 | 50 | 470 | 245 | 132 | 300 | 470 | 730 | 90 | 2,47 | 7,62 | WGVOV091050 |
| 910 | 600 | 50 | 570 | 284 | 153 | 300 | 570 | 730 | 90 | 2,73 | 8,73 | WGVOV091060 |
| 1150 | 300 | 50 | 270 | 210 | 113 | 200 | 270 | 970 | 90 | 2,45 | 6,63 | WGVOV115030 |
| 1150 | 400 | 50 | 370 | 256 | 138 | 300 | 370 | 970 | 90 | 2,78 | 8,01 | WGVOV115040 |
| 1150 | 500 | 50 | 470 | 303 | 163 | 300 | 470 | 970 | 90 | 3,11 | 9,37 | WGVOV115050 |
| 1150 | 600 | 50 | 570 | 351 | 188 | 400 | 570 | 970 | 90 | 3,44 | 10,75 | WGVOV115060 |
| 1390 | 300 | 50 | 270 | 249 | 134 | 300 | 270 | 1210 | 90 | 2,96 | 7,87 | WGVOV139030 |
| 1390 | 400 | 50 | 370 | 304 | 164 | 300 | 370 | 1210 | 90 | 3,35 | 9,50 | WGVOV139040 |
| 1390 | 500 | 50 | 470 | 358 | 193 | 400 | 470 | 1210 | 90 | 3,75 | 11,13 | WGVOV139050 |
| 1390 | 600 | 50 | 570 | 413 | 221 | 400 | 570 | 1210 | 90 | 4,14 | 12,77 | WGVOV139060 |
| 1630 | 300 | 50 | 270 | 290 | 156 | 300 | 270 | 1450 | 90 | 3,46 | 9,10 | WGVOV163030 |
| 1630 | 400 | 50 | 370 | 352 | 189 | 400 | 370 | 1450 | 90 | 3,92 | 11,00 | WGVOV163040 |
| 1630 | 500 | 50 | 470 | 414 | 223 | 400 | 470 | 1450 | 90 | 4,38 | 12,89 | WGVOV163050 |
| 1630 | 600 | 50 | 570 | 477 | 256 | 400 | 570 | 1450 | 90 | 4,84 | 14,79 | WGVOV163060 |


SX

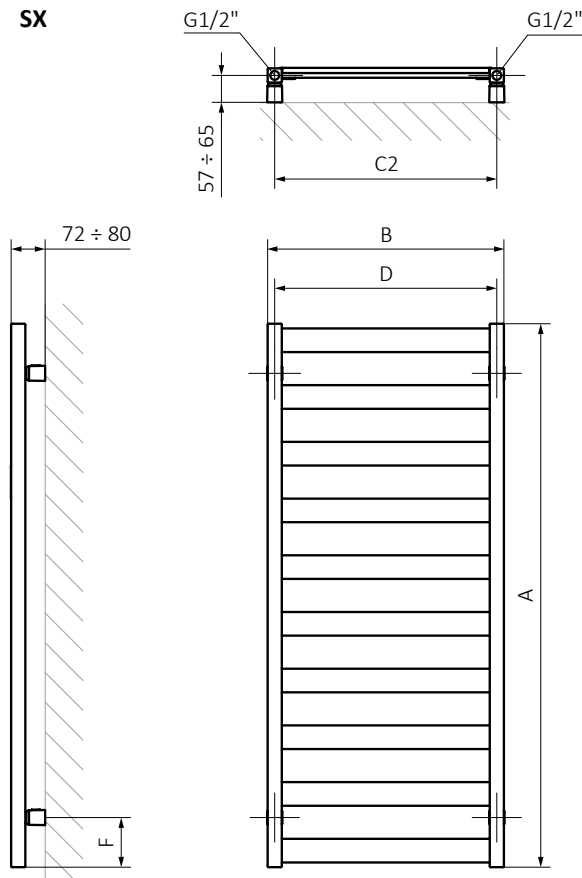



ZX



Z1

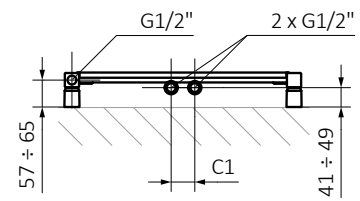


Z8

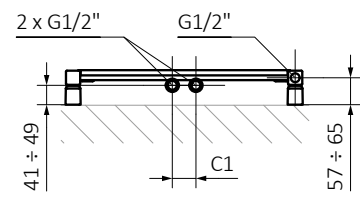


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:











Standard connections:



Electric radiators: see page 599.



Available sizes:

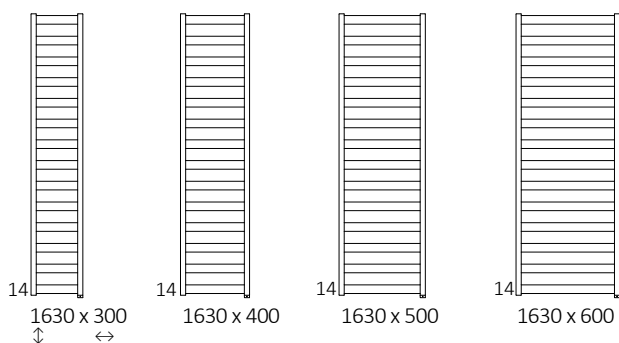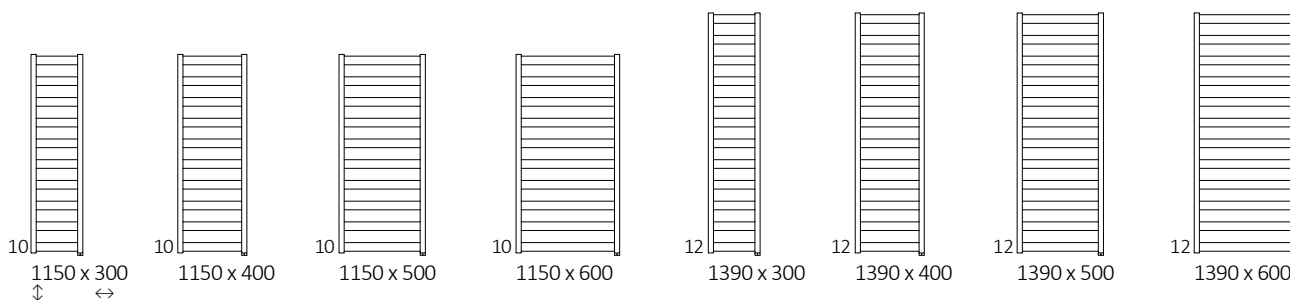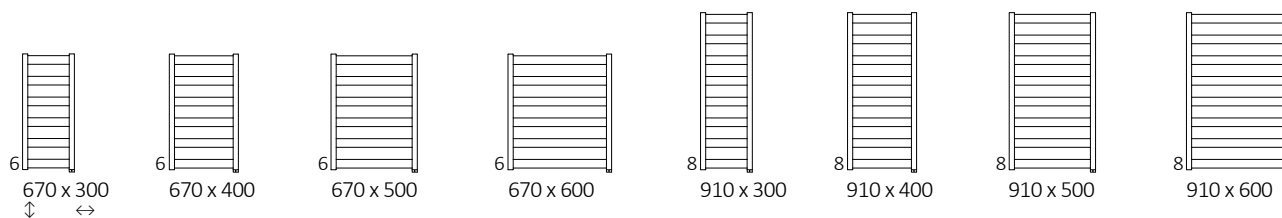

We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654



Integrated pipe masking set – see page 675






HAPPY SHARK hanger – see page 639




Specifications:



Working pressure: 600 kPa Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| Powder coating | | | | | | | | | | |
| 670 | 300 | 185 | 100 | 200 | 270 | 530 | 70 | 1,44 | 4,28 | WZVON067030 |
| 670 | 400 | 230 | 124 | 200 | 370 | 530 | 70 | 1,63 | 5,17 | WZVON067040 |
| 670 | 500 | 275 | 148 | 300 | 470 | 530 | 70 | 1,83 | 6,04 | WZVON067050 |
| 670 | 600 | 320 | 172 | 300 | 570 | 530 | 70 | 2,03 | 6,93 | WZVON067060 |
| 910 | 300 | 240 | 130 | 200 | 270 | 770 | 70 | 1,94 | 5,56 | WZVON091030 |
| 910 | 400 | 295 | 159 | 300 | 370 | 770 | 70 | 2,21 | 6,72 | WZVON091040 |
| 910 | 500 | 350 | 189 | 400 | 470 | 770 | 70 | 2,47 | 7,86 | WZVON091050 |
| 910 | 600 | 405 | 218 | 400 | 570 | 770 | 70 | 2,73 | 9,01 | WZVON091060 |
| 1150 | 300 | 300 | 162 | 300 | 270 | 1010 | 70 | 2,45 | 6,85 | WZVON115030 |
| 1150 | 400 | 366 | 197 | 400 | 370 | 1010 | 70 | 2,78 | 8,27 | WZVON115040 |
| 1150 | 500 | 433 | 233 | 400 | 470 | 1010 | 70 | 3,11 | 9,68 | WZVON115050 |
| 1150 | 600 | 501 | 269 | 600 | 570 | 1010 | 70 | 3,44 | 11,10 | WZVON115060 |
| 1390 | 300 | 356 | 192 | 400 | 270 | 1250 | 70 | 2,96 | 8,13 | WZVON139030 |
| 1390 | 400 | 434 | 234 | 400 | 370 | 1250 | 70 | 3,35 | 9,81 | WZVON139040 |
| 1390 | 500 | 512 | 275 | 600 | 470 | 1250 | 70 | 3,75 | 11,50 | WZVON139050 |
| 1390 | 600 | 590 | 316 | 600 | 570 | 1250 | 70 | 4,14 | 13,19 | WZVON139060 |
| 1630 | 300 | 414 | 223 | 400 | 270 | 1490 | 70 | 3,46 | 9,40 | WZVON163030 |
| 1630 | 400 | 503 | 270 | 600 | 370 | 1490 | 70 | 3,92 | 11,37 | WZVON163040 |
| 1630 | 500 | 592 | 318 | 600 | 470 | 1490 | 70 | 4,38 | 13,32 | WZVON163050 |
| 1630 | 600 | 681 | 365 | 800 | 570 | 1490 | 70 | 4,84 | 15,29 | WZVON163060 |
| Plated finishes | | | | | | | | | | |
| 670 | 300 | 130 | 70 | 120 | 270 | 530 | 70 | 1,44 | 4,15 | WZVON067030 |
| 670 | 400 | 161 | 87 | 200 | 370 | 530 | 70 | 1,63 | 5,01 | WZVON067040 |
| 670 | 500 | 193 | 104 | 200 | 470 | 530 | 70 | 1,83 | 5,86 | WZVON067050 |
| 670 | 600 | 224 | 120 | 200 | 570 | 530 | 70 | 2,03 | 6,72 | WZVON067060 |
| 910 | 300 | 168 | 91 | 200 | 270 | 770 | 70 | 1,94 | 5,39 | WZVON091030 |
| 910 | 400 | 207 | 111 | 200 | 370 | 770 | 70 | 2,21 | 6,51 | WZVON091040 |
| 910 | 500 | 245 | 132 | 300 | 470 | 770 | 70 | 2,47 | 7,62 | WZVON091050 |
| 910 | 600 | 284 | 153 | 300 | 570 | 770 | 70 | 2,73 | 8,73 | WZVON091060 |
| 1150 | 300 | 210 | 113 | 200 | 270 | 1010 | 70 | 2,45 | 6,63 | WZVON115030 |
| 1150 | 400 | 256 | 138 | 300 | 370 | 1010 | 70 | 2,78 | 8,01 | WZVON115040 |
| 1150 | 500 | 303 | 163 | 300 | 470 | 1010 | 70 | 3,11 | 9,37 | WZVON115050 |
| 1150 | 600 | 351 | 188 | 400 | 570 | 1010 | 70 | 3,44 | 10,75 | WZVON115060 |
| 1390 | 300 | 249 | 134 | 300 | 270 | 1250 | 70 | 2,96 | 7,87 | WZVON139030 |
| 1390 | 400 | 304 | 164 | 300 | 370 | 1250 | 70 | 3,35 | 9,50 | WZVON139040 |
| 1390 | 500 | 358 | 193 | 400 | 470 | 1250 | 70 | 3,75 | 11,13 | WZVON139050 |
| 1390 | 600 | 413 | 221 | 400 | 570 | 1250 | 70 | 4,14 | 12,77 | WZVON139060 |
| 1630 | 300 | 290 | 156 | 300 | 270 | 1490 | 70 | 3,46 | 9,10 | WZVON163030 |
| 1630 | 400 | 352 | 189 | 400 | 370 | 1490 | 70 | 3,92 | 11,00 | WZVON163040 |
| 1630 | 500 | 414 | 223 | 400 | 470 | 1490 | 70 | 4,38 | 12,89 | WZVON163050 |
| 1630 | 600 | 477 | 256 | 400 | 570 | 1490 | 70 | 4,84 | 14,79 | WZVON163060 |

S8




S1

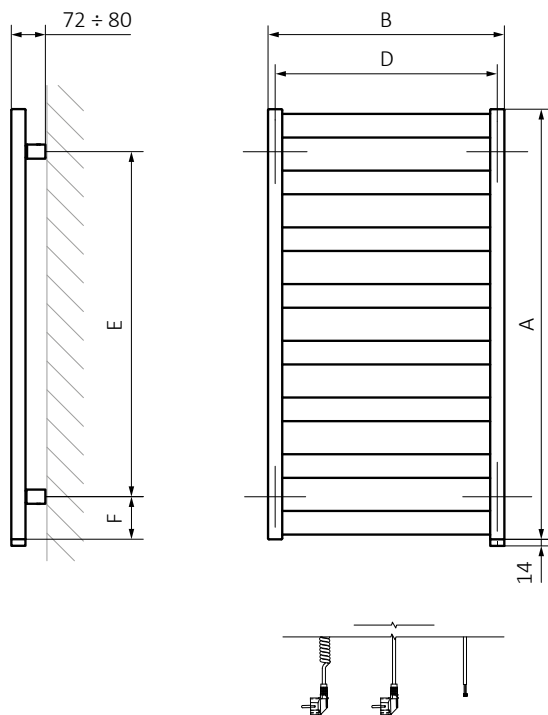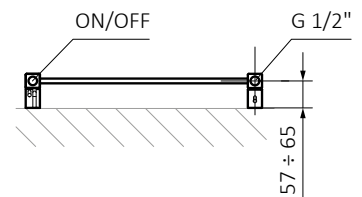



A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
 F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





Warp S s. 254




Standard connections:



Electric radiators: see page 599.



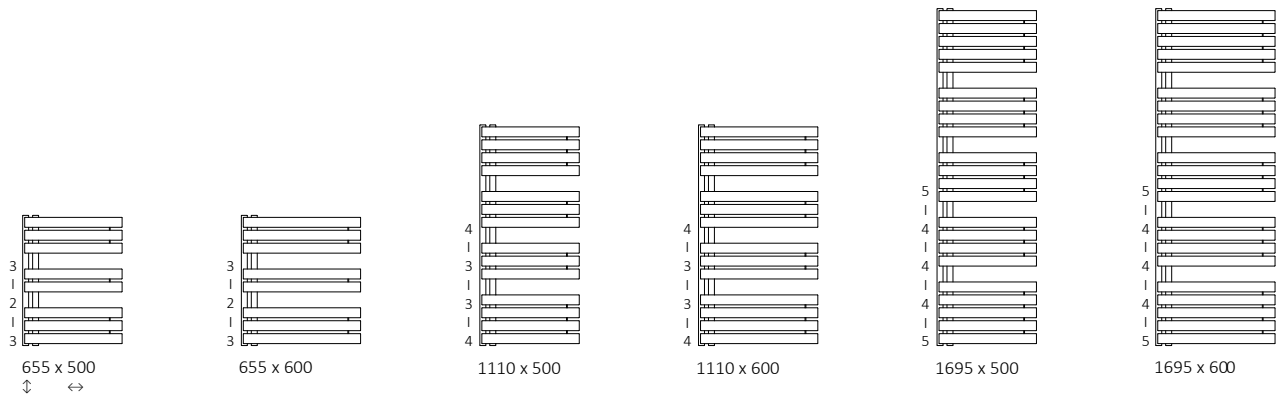


Available sizes:



Specifications:

Working pressure: 600 kPa


Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|---|---|--|
| 655 | 500 | 50 | 450 | 241 | 400 | 50 | 455 | 100 | 3,45 | 12,39 | WGWAS065050 |
| 655 | 600 | 50 | 506 | 271 | 600 | 50 | 455 | 100 | 3,98 | 14,56 | WGWAS065060 |
| 1110 | 500 | 50 | 764 | 406 | 800 | 50 | 910 | 100 | 5,99 | 21,30 | WGWAS111050 |
| 1110 | 600 | 50 | 857 | 456 | 800 | 50 | 910 | 100 | 6,91 | 25,10 | WGWAS111060 |
| 1695 | 500 | 50 | 1167 | 620 | 1200 | 50 | 1495 | 100 | 9,34 | 33,11 | WGWAS169050 |
| 1695 | 600 | 50 | 1310 | 696 | 1200 | 50 | 1495 | 100 | 10,79 | 39,07 | WGWAS169060 |

We recommend: Integrated thermostatic t-piece valve set for GD connection – see page 653




Integrated pipe masking set – see page 675

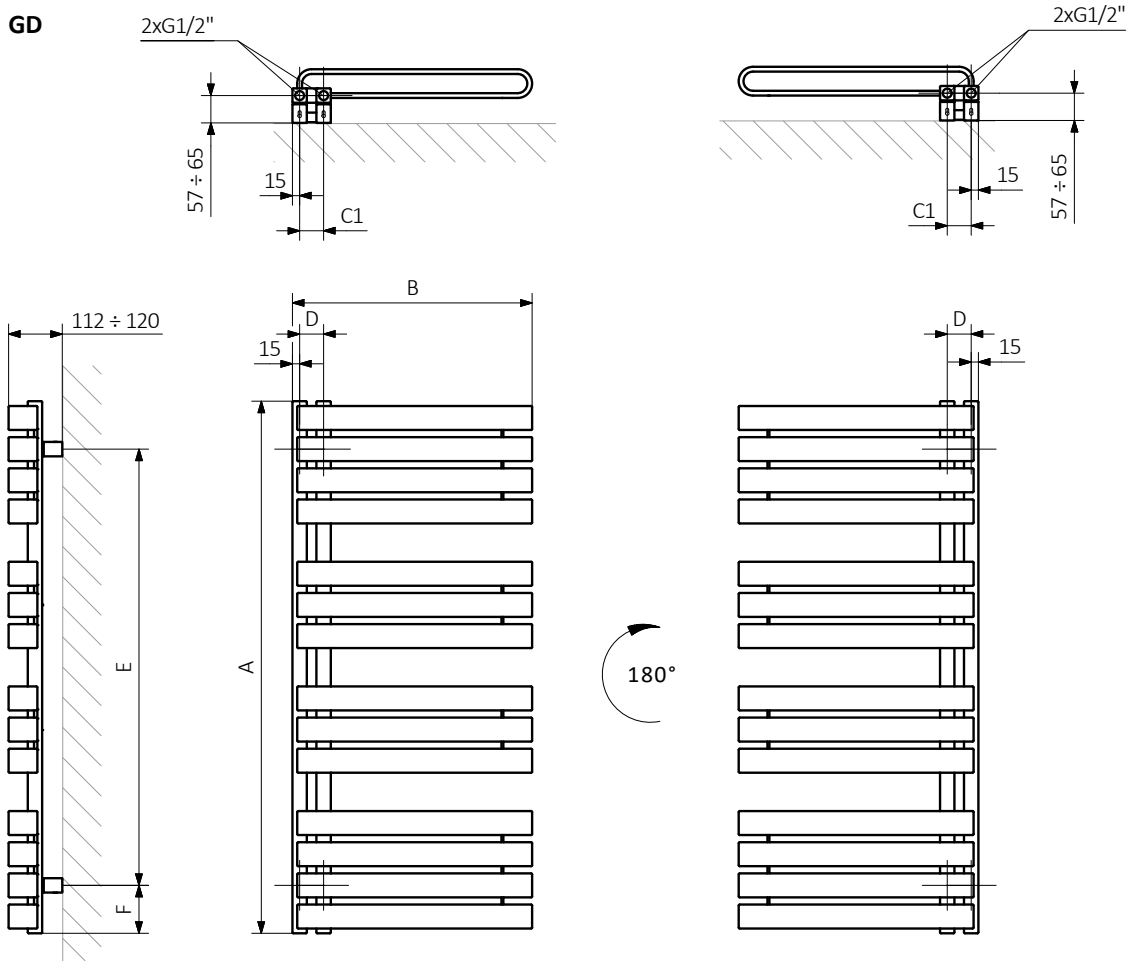


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:




Warp T s. 258




Standard connections:




Electric radiators: see page 599.



Optional connections:

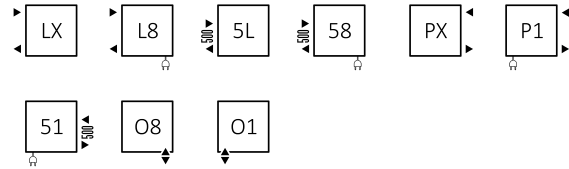

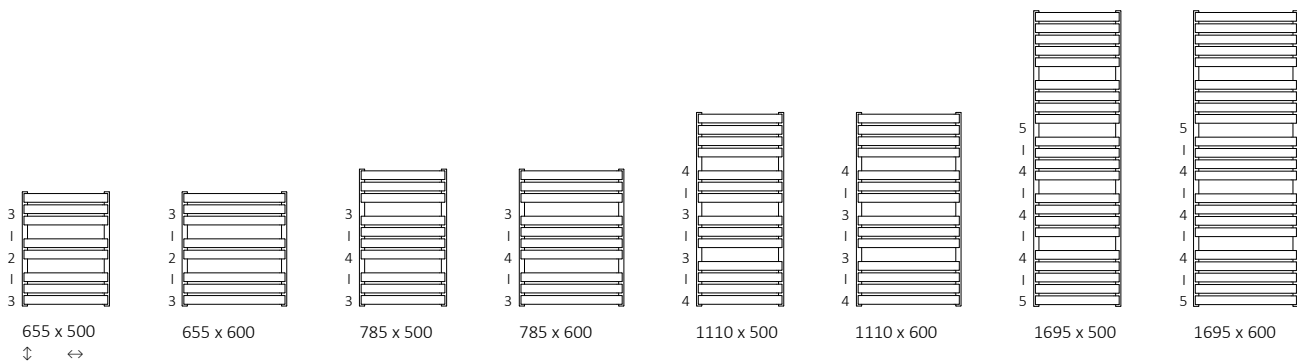


Available sizes:



Specifications:

Working pressure: 600 kPa

Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ²] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| 655 | 500 | 50 | 470 | 325 | 176 | 300 | 470 | 455 | 100 | 2,32 | 12,33 | WGWAT065050 |
| 655 | 600 | 50 | 570 | 383 | 208 | 400 | 570 | 455 | 100 | 2,59 | 14,45 | WGWAT065060 |
| 785 | 500 | 50 | 470 | 400 | 217 | 400 | 470 | 585 | 100 | 2,86 | 15,23 | WGWAT078050 |
| 785 | 600 | 50 | 570 | 470 | 255 | 400 | 570 | 585 | 100 | 3,19 | 17,88 | WGWAT078060 |
| 1110 | 500 | 50 | 470 | 553 | 298 | 600 | 470 | 910 | 100 | 4,02 | 21,19 | WGWAT111050 |
| 1110 | 600 | 50 | 570 | 650 | 350 | 600 | 570 | 910 | 100 | 4,48 | 24,92 | WGWAT111060 |
| 1695 | 500 | 50 | 470 | 846 | 453 | 800 | 470 | 1495 | 100 | 6,24 | 32,94 | WGWAT169050 |
| 1695 | 600 | 50 | 570 | 1000 | 535 | 1000 | 570 | 1495 | 100 | 6,96 | 38,80 | WGWAT169060 |

We recommend: A set of integrated thermostatic valves for ZX connection – see page 652




Integrated pipe masking set – see page 675






KTX 3 heating element – see page 696




SX

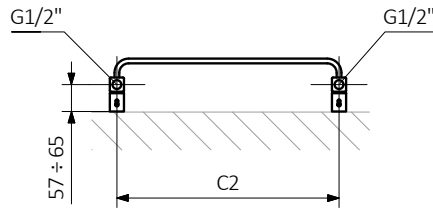



ZX

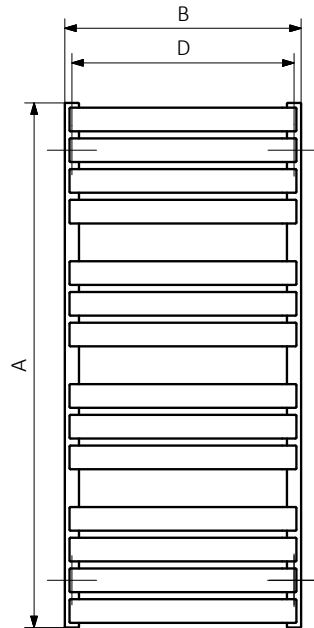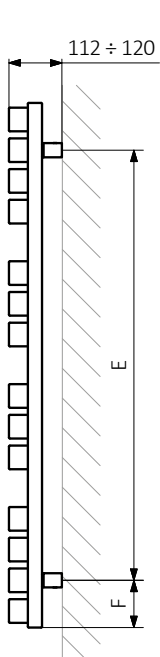

Z1

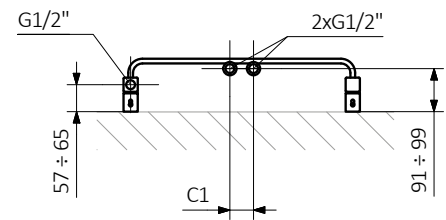


Z8

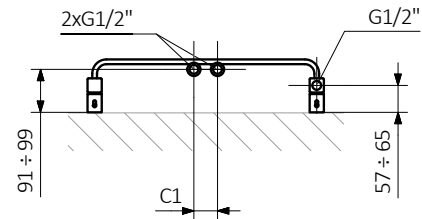


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Warp T One

s. 258


The radiator has a built-in ONE heating element.
Functions of the ONE heating element: see page 724.




Standard connections:



Electric radiators: see page 599.



Available sizes:

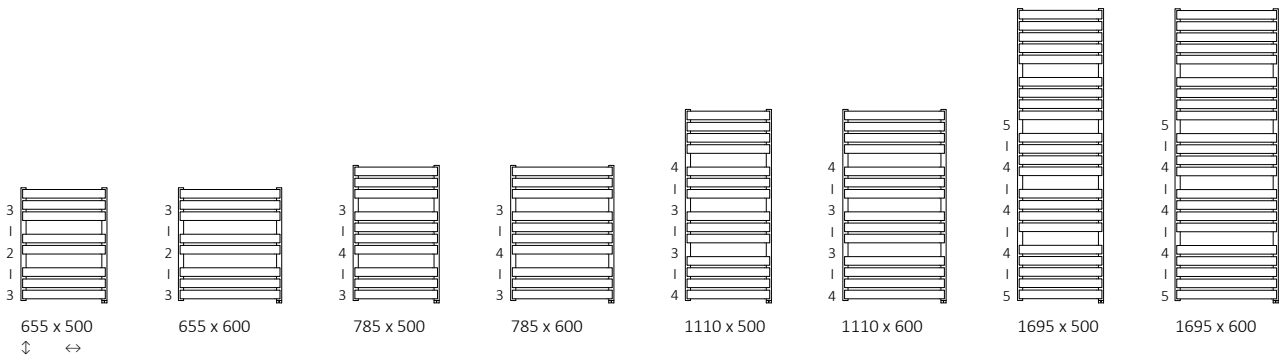

Specifications:

Working pressure: 600 kPa

Maximum operating temperature: 82°C

| A ↓ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|-------------------|-------------------|------|-----------|-----------|-----------|-------|-------|--|
| 655 | 500 | 325 | 176 | 300 | 470 | 515 | 70 | 2,23 | 12,33 | WZWTN065050 |
| 655 | 600 | 383 | 208 | 400 | 570 | 515 | 70 | 2,50 | 14,45 | WZWTN065060 |
| 785 | 500 | 400 | 217 | 400 | 470 | 645 | 70 | 2,77 | 15,23 | WZWTN078050 |
| 785 | 600 | 470 | 255 | 400 | 570 | 645 | 70 | 3,10 | 17,88 | WZWTN078060 |
| 1110 | 500 | 553 | 298 | 600 | 470 | 970 | 70 | 3,93 | 21,19 | WZWTN111050 |
| 1110 | 600 | 650 | 350 | 600 | 570 | 970 | 70 | 4,39 | 24,92 | WZWTN111060 |
| 1695 | 500 | 846 | 453 | 800 | 470 | 1555 | 70 | 6,15 | 32,94 | WZWTN169050 |
| 1695 | 600 | 1000 | 535 | 1000 | 570 | 1555 | 70 | 6,87 | 38,80 | WZWTN169060 |


We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654






Integrated pipe masking set – see page 675



S8

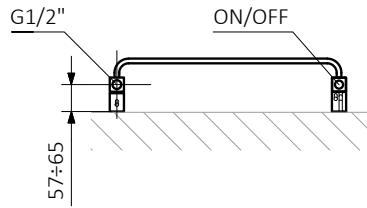


S1

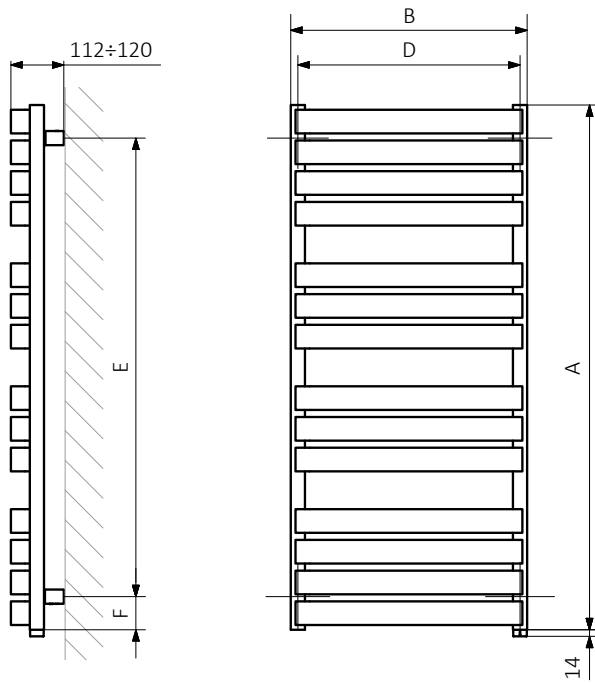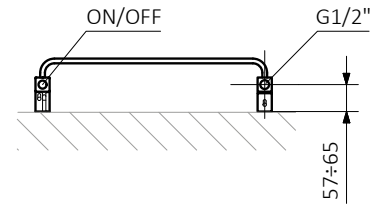


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator

Collector:




Pipe:




Warp T Bold s. 260




Standard connections:




Electric radiators: see page 599.



Optional connections:



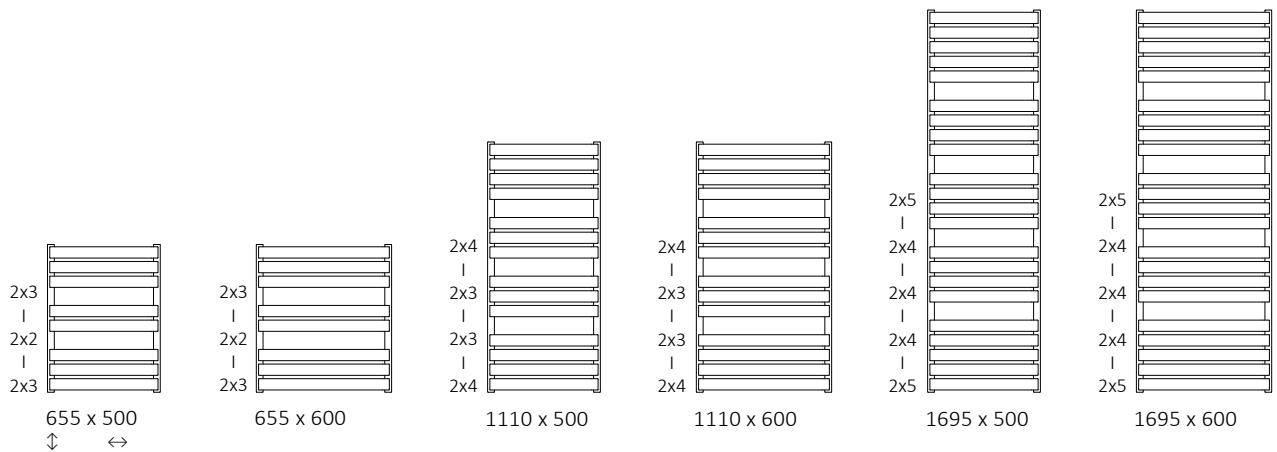


Available sizes:



Specifications:

Working pressure: 600 kPa

Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 787)</small> |
|-------------|-------------|------------|------------|-------------------|-------------------|---|-----------|-----------|-----------|--|--|--|
| 655 | 500 | 50 | 470 | 460 | 249 | 400 | 470 | 455 | 100 | 3,48 | 12,40 | WGWTB065050 |
| 655 | 600 | 50 | 570 | 545 | 294 | 600 | 570 | 455 | 100 | 4,00 | 14,56 | WGWTB065060 |
| 1110 | 500 | 50 | 470 | 780 | 419 | 800 | 470 | 910 | 100 | 6,04 | 21,30 | WGWTB111050 |
| 1110 | 600 | 50 | 570 | 924 | 491 | 1000 | 570 | 910 | 100 | 6,96 | 25,10 | WGWTB111060 |
| 1695 | 500 | 50 | 470 | 1190 | 636 | 1200 | 470 | 1495 | 100 | 9,42 | 33,12 | WGWTB169050 |
| 1695 | 600 | 50 | 570 | 1410 | 746 | 1500 | 570 | 1495 | 100 | 10,86 | 39,09 | WGWTB169060 |

We recommend: A set of integrated thermostatic valves for ZX connection – see page 652




Integrated pipe masking set – see page 675






KTX 4 heating element – see page 692




SX

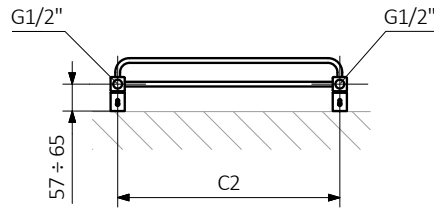



ZX

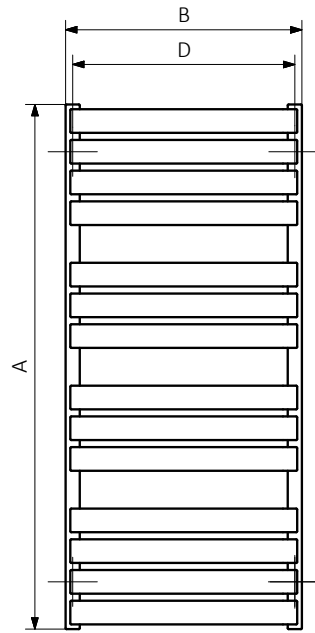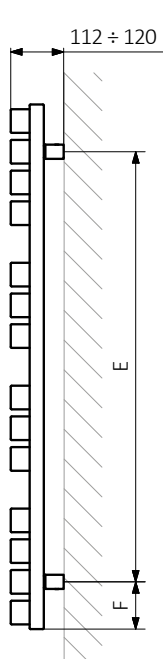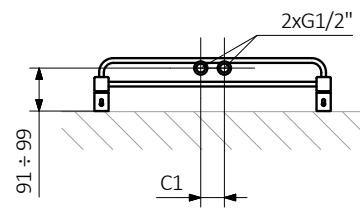

Z1

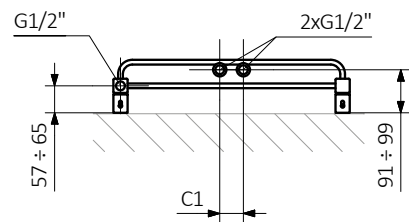


Z8

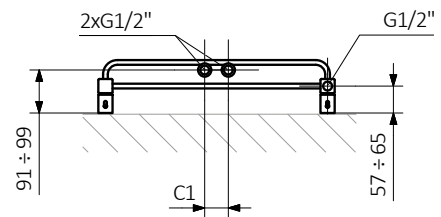


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:




Warp T Bold One

The radiator has a built-in ONE heating element. Functions of the ONE heating element: see page 724.


s. 260




Standard connections:



Electric radiators: see page 599.



Available sizes:

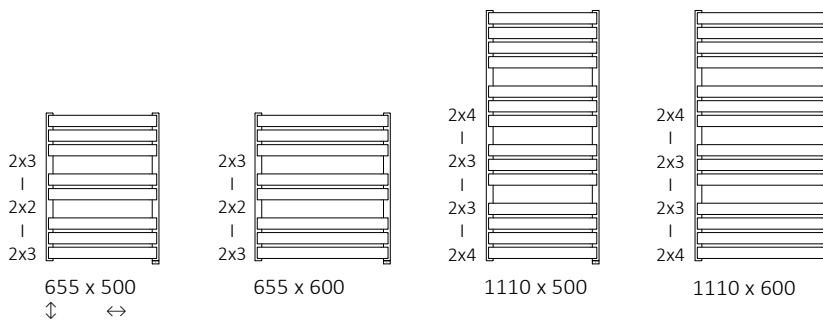

Specifications:

Working pressure: 600 kPa

Maximum operating temperature: 82°C

| A ↕ [mm] | B ↔ [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 788)</small> |
|-------------|-------------|-------------------|-------------------|------|-----------|-----------|-----------|-------|-------|--|
| 655 | 500 | 460 | 249 | 400 | 470 | 515 | 70 | 3,48 | 12,40 | WZWBN065050 |
| 655 | 600 | 545 | 294 | 600 | 570 | 515 | 70 | 4,00 | 14,56 | WZWBN065060 |
| 1110 | 500 | 780 | 419 | 800 | 470 | 970 | 70 | 6,04 | 21,30 | WZWBN111050 |
| 1110 | 600 | 924 | 491 | 1000 | 570 | 970 | 70 | 6,96 | 25,10 | WZWBN111060 |


We recommend: A set of integrated thermostatic valves with immersion tube for S1 and S8 connections – see page 654






Integrated pipe masking set – see page 675



S8

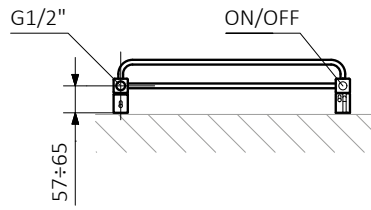


S1

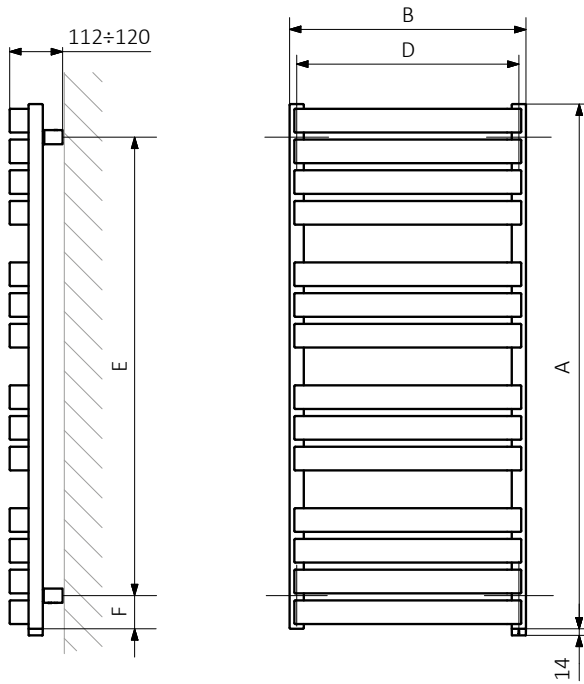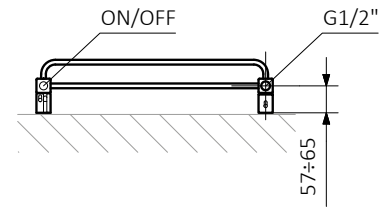


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets
F – Distance between a mounting bracket and the bottom of the radiator


Collector:




Pipe:




Standard connections:




Electric radiators: see page 599.



Optional connections:

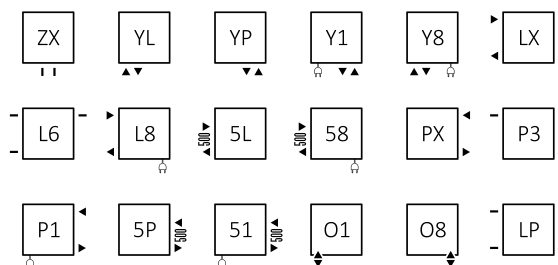

Available sizes:

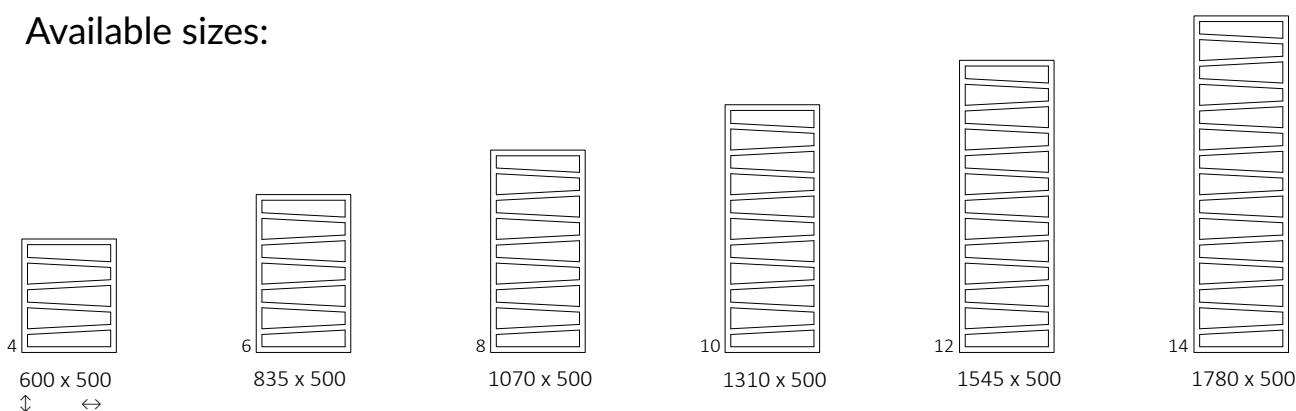

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A ↓ [mm] | B ↔ [mm] | C1 [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] | [W] | D [mm] | E [mm] | F [mm] | [dm³] | [kg] | Product code <small>(Configuration code p. 787)</small> |
|------------------------|-------------|------------|------------|-------------------|-------------------|---------|-----------|-----------|-----------|-----------|----------|--|
| Powder coating | | | | | | | | | | | | |
| 600 | 500 | 50 | 470 | 248 | 134 | 300 | 470 | 420 | 90 | 2,77 | 5,07 | WGZIG060050 |
| 835 | 500 | 50 | 470 | 320 | 172 | 300 | 470 | 655 | 90 | 3,74 | 6,86 | WGZIG083050 |
| 1070 | 500 | 50 | 470 | 406 | 218 | 400 | 470 | 890 | 90 | 4,72 | 8,64 | WGZIG107050 |
| 1310 | 500 | 50 | 470 | 490 | 263 | 600 | 470 | 1130 | 90 | 5,70 | 10,44 | WGZIG131050 |
| 1545 | 500 | 50 | 470 | 581 | 311 | 600 | 470 | 1365 | 90 | 6,67 | 12,23 | WGZIG154050 |
| 1780 | 500 | 50 | 470 | 627 | 335 | 600 | 470 | 1600 | 90 | 7,65 | 14,01 | WGZIG178050 |
| Plated finishes | | | | | | | | | | | | |
| 600 | 500 | 50 | 470 | 174 | 94 | 200 | 470 | 420 | 90 | 2,77 | 4,90 | WGZIG060050 |
| 835 | 500 | 50 | 470 | 224 | 120 | 200 | 470 | 655 | 90 | 3,74 | 6,60 | WGZIG083050 |
| 1070 | 500 | 50 | 470 | 284 | 153 | 300 | 470 | 890 | 90 | 4,72 | 8,40 | WGZIG107050 |
| 1310 | 500 | 50 | 470 | 343 | 184 | 400 | 470 | 1130 | 90 | 5,70 | 10,10 | WGZIG131050 |
| 1545 | 500 | 50 | 470 | 407 | 218 | 400 | 470 | 1365 | 90 | 6,67 | 11,80 | WGZIG154050 |
| 1780 | 500 | 50 | 470 | 439 | 235 | 400 | 470 | 1600 | 90 | 7,65 | 13,50 | WGZIG178050 |




We recommend: A set of integrated thermostatic valves for ZX connection – see page 652



Integrated pipe masking set – see page 675




ONE heating element – see page 690

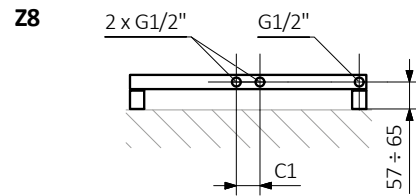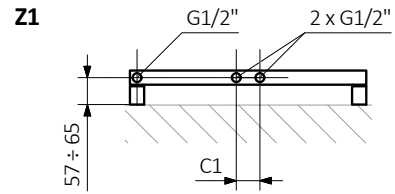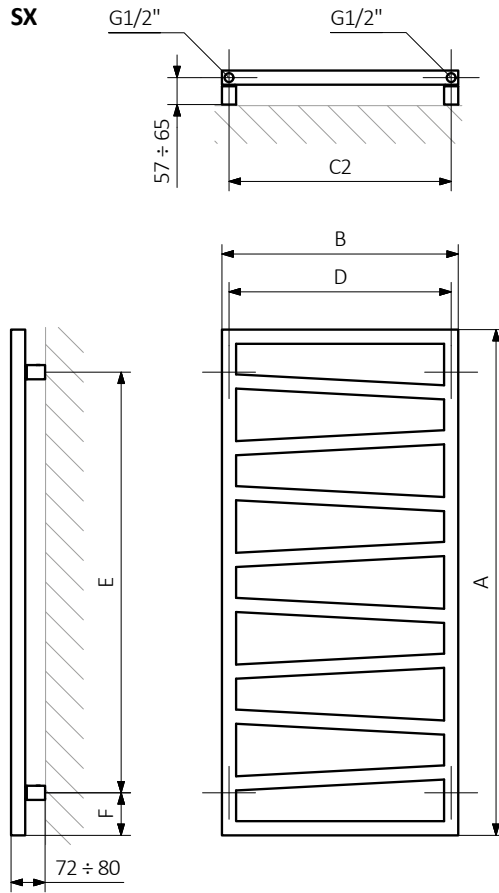

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:



Boiler type parameters

If your heating system is defined by parameters other than those listed beside or if it is used for room temperatures other than 20° C, you should use the correction factors table to find the correct radiator heating output calculation (next page).

| <i>Types of heat source</i> | <i>Parameters</i> | <i>Typical location</i> |
|-----------------------------|-------------------|-----------------------------------|
| <i>urban installation</i> | 90/70/20°C | <i>apartment in the old block</i> |
| <i>urban installation</i> | 75/65/20°C | <i>apartment in the new block</i> |
| <i>solid fuel boilers</i> | 90/70/20°C | <i>single-family house</i> |
| <i>gas and oil boilers</i> | 75/65/20°C | <i>single-family house</i> |
| <i>condensing boilers</i> | 55/45/20°C | <i>single-family house</i> |
| <i>heat pump</i> | 42/28/20°C | <i>single-family house</i> |
| <i>Condensing boiler</i> | 70/55/20°C | <i>single-family house</i> |

Room Temperatures

The room temperature has an impact on the performance of our body. Keeping the temperature within the room in accordance with our needs will allow us to not only consume as much energy as we really need, but it will make us feel more comfortable. It is known that the temperature should be adjusted to the individual lifestyle.

For example, living rooms should not exceed 21° C and the kitchen, where the temperature rises during cooking should be 19-20° C. A temperature that is too high in the bedroom is uncomfortable and will not support a good night of sleep, it is best to set the thermostat to 17-19° C.

The bathroom should be the warmest, up to 25° C. After all, none of us likes to get out of a hot bath and step into a cool room. Here we suggest that you appropriately match the temperature to the “character” of the room.

All indicated temperatures are intended as a guide only.

| | |
|---|---------|
| <i>Living room:</i> | 20-21°C |
| <i>Bedroom:</i> | 17-19°C |
| <i>Children's play room:</i> | 20-21°C |
| <i>Bathroom:</i> | 22-25°C |
| <i>Kitchen:</i> | 19°C |
| <i>Utility rooms, pantries and laundry rooms:</i> | 12-15°C |

Calculating your required heat output

In order to select a suitable radiator for a room, follow the heat requirement in accordance with the applicable standards. In order to estimate the demand for heat in your room, you can use the following rules:

- For rooms, foyers, hallways in a standard height building of 2.6 m high and with an ambient temperature of 20° C, use 70-80 W/m² in your calculations. If the room has more than one window, or more than one external wall, you should use 80-100 W/m².

- For a bathroom in a standard building with a height of 2.6 m and an ambient temperature of 24° C use 100-120 W/m² in your calculations, if one of the walls is an external wall or if there is a window, use 130-150 W/m² in your calculations.

These figures are estimates. To be able to define accurately your radiator heat requirements you should refer to the architect, builder or a qualified plumber.

Example:

Room: Bathroom, with an area of $S = 5 \text{ m}^2$ height of 2.6 m with one window.

Accepted indicator $q = 140 \text{ W/m}^2$

Heat demand for houses Q calculated as follows:

$$Q = S \times q$$

$$Q = 5 \times 140 \text{ W/m}^2$$

$$Q = 700 \text{ W}$$

Estimated radiator performance required to heat the above room is approx. 700 W.

Converting between different power outputs

Correction factor table is used to convert power output with parameters other than 75/65/20°C.

Example:

The heat demand of the room in this calculation is 1120 W. The designed central heating installation has the following parameters:

Flow temperature $T_z = 70^\circ \text{C}$

Return temperature $T_p = 55^\circ \text{C}$

The room temperature $T_i = 24^\circ \text{C}$

For such parameters the correction factor ratio in our table reads $k = 1.42$. Multiplying the heat demand (1120 W) by the correction factor k , we obtain a value of 1590 W, according to which we choose the radiator from the catalogue table within the product column "75/65/20°C".




In summary, for the performance of the radiator at 1120 W on the "lower" network parameters (for example 70/55/24°C) choose the heater which at the "higher" performance (75/65/20°C) will deliver 1,590 W.




Take advantage of the company website, which gives you the ability to make a quick heat demand calculations for a particular room and suggest the selection of radiators using the characteristics and technical parameters. This application is an easy and fast way to filter products according to your needs and expectations.




| Tz [°C] | Tp [°C] | Ti [°C] | | | | | |
|------------|------------|---------|------|------|------|-------------|-------------|
| | | 5 | 8 | 12 | 16 | 20 | 24 |
| 95 | 85 | 0.50 | 0.52 | 0.56 | 0.60 | 0.64 | 0.70 |
| | 80 | 0.52 | 0.55 | 0.59 | 0.63 | 0.68 | 0.73 |
| | 75 | 0.54 | 0.57 | 0.61 | 0.66 | 0.72 | 0.78 |
| | 70 | 0.57 | 0.60 | 0.65 | 0.70 | 0.76 | 0.83 |
| 90 | 80 | 0.54 | 0.57 | 0.61 | 0.66 | 0.71 | 0.77 |
| | 75 | 0.57 | 0.60 | 0.64 | 0.69 | 0.75 | 0.82 |
| | 70 | 0.59 | 0.63 | 0.67 | 0.73 | 0.80 | 0.87 |
| | 65 | 0.62 | 0.66 | 0.71 | 0.78 | 0.85 | 0.94 |
| 85 | 75 | 0.59 | 0.62 | 0.67 | 0.72 | 0.79 | 0.86 |
| | 70 | 0.62 | 0.65 | 0.71 | 0.77 | 0.84 | 0.92 |
| | 65 | 0.65 | 0.69 | 0.75 | 0.81 | 0.89 | 0.99 |
| | 60 | 0.69 | 0.73 | 0.79 | 0.87 | 0.96 | 1.07 |
| 80 | 70 | 0.64 | 0.68 | 0.74 | 0.81 | 0.88 | 0.97 |
| | 65 | 0.68 | 0.72 | 0.78 | 0.86 | 0.94 | 1.05 |
| | 60 | 0.72 | 0.76 | 0.83 | 0.92 | 1.02 | 1.14 |
| | 55 | 0.76 | 0.81 | 0.89 | 0.99 | 1.10 | 1.24 |
| 75 | 65 | 0.71 | 0.75 | 0.82 | 0.90 | 1.00 | 1.12 |
| | 60 | 0.75 | 0.80 | 0.88 | 0.97 | 1.08 | 1.21 |
| | 55 | 0.80 | 0.85 | 0.94 | 1.04 | 1.17 | 1.33 |
| | 50 | 0.85 | 0.91 | 1.01 | 1.13 | 1.29 | 1.48 |
| 70 | 60 | 0.79 | 0.84 | 0.93 | 1.03 | 1.15 | 1.30 |
| | 55 | 0.84 | 0.90 | 0.99 | 1.11 | 1.25 | 1.42 |
| | 50 | 0.89 | 0.96 | 1.07 | 1.21 | 1.37 | 1.59 |
| | 45 | 0.96 | 1.04 | 1.17 | 1.33 | 1.53 | 1.80 |
| 65 | 60 | 0.83 | 0.89 | 0.98 | 1.10 | 1.23 | 1.40 |
| | 55 | 0.88 | 0.95 | 1.05 | 1.18 | 1.34 | 1.54 |
| | 50 | 0.94 | 1.02 | 1.14 | 1.29 | 1.48 | 1.72 |
| 60 | 55 | 0.93 | 1.01 | 1.13 | 1.27 | 1.45 | 1.68 |
| | 50 | 1.00 | 1.08 | 1.22 | 1.39 | 1.60 | 1.88 |
| | 45 | 1.08 | 1.17 | 1.33 | 1.53 | 1.79 | 2.14 |
| 55 | 50 | 1.07 | 1.16 | 1.31 | 1.50 | 1.75 | 2.07 |
| | 45 | 1.15 | 1.26 | 1.43 | 1.66 | 1.96 | 2.37 |
| | 40 | 1.25 | 1.38 | 1.59 | 1.87 | 2.25 | 2.80 |
| 50 | 45 | 1.23 | 1.35 | 1.56 | 1.82 | 2.17 | 2.67 |
| | 40 | 1.34 | 1.49 | 1.73 | 2.05 | 2.50 | 3.16 |
| | 35 | 1.48 | 1.65 | 1.95 | 2.37 | 2.98 | 3.96 |
| 45 | 40 | 1.45 | 1.62 | 1.90 | 2.28 | 2.83 | 3.66 |
| | 35 | 1.60 | 1.80 | 2.15 | 2.64 | 3.38 | 4.61 |




Tz – flow temperature Tp – return temperature Ti – the temperature in the room




Electric radiators




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| POWDER COATING | | | | | | |
| Alex | 540 | 300 | 200 | 1,75 | 5,13 | WLALE054030 |
| Alex | 540 | 400 | 200 | 2,04 | 6,03 | WLALE054040 |
| Alex | 540 | 500 | 300 | 2,32 | 6,92 | WLALE054050 |
| Alex | 540 | 600 | 400 | 2,60 | 7,82 | WLALE054060 |
| Alex | 760 | 300 | 300 | 2,46 | 7,14 | WLALE076030 |
| Alex | 760 | 400 | 300 | 2,85 | 8,39 | WLALE076040 |
| Alex | 760 | 500 | 400 | 3,25 | 9,65 | WLALE076050 |
| Alex | 760 | 600 | 600 | 3,65 | 10,91 | WLALE076060 |
| Alex | 1140 | 300 | 400 | 3,78 | 10,92 | WLALE114030 |
| Alex | 1140 | 400 | 400 | 4,41 | 12,90 | WLALE114040 |
| Alex | 1140 | 500 | 600 | 5,03 | 14,87 | WLALE114050 |
| Alex | 1140 | 600 | 800 | 5,65 | 16,85 | WLALE114060 |
| Alex | 1580 | 500 | 800 | 6,90 | 20,33 | WLALE158050 |
| Alex | 1580 | 600 | 1000 | 7,75 | 23,03 | WLALE158060 |
| Alex | 1580 | 700 | 1000 | 8,60 | 25,72 | WLALE158070 |
| Alex | 1580 | 800 | 1200 | 9,45 | 28,41 | WLALE158080 |
| CHROME | | | | | | |
| Alex | 540 | 300 | 120 | 1,75 | 4,99 | WLALE054030 |
| Alex | 540 | 400 | 200 | 2,04 | 5,86 | WLALE054040 |
| Alex | 540 | 500 | 200 | 2,32 | 6,73 | WLALE054050 |
| Alex | 540 | 600 | 300 | 2,60 | 7,60 | WLALE054060 |
| Alex | 760 | 300 | 200 | 2,46 | 6,94 | WLALE076030 |
| Alex | 760 | 400 | 200 | 2,85 | 8,16 | WLALE076040 |
| Alex | 760 | 500 | 300 | 3,25 | 9,37 | WLALE076050 |
| Alex | 760 | 600 | 400 | 3,65 | 10,60 | WLALE076060 |
| Alex | 1140 | 300 | 300 | 3,78 | 10,62 | WLALE114030 |
| Alex | 1140 | 400 | 400 | 4,41 | 12,54 | WLALE114040 |
| Alex | 1140 | 500 | 400 | 5,03 | 14,45 | WLALE114050 |
| Alex | 1140 | 600 | 600 | 5,65 | 16,37 | WLALE114060 |
| Alex | 1580 | 500 | 600 | 6,90 | 19,76 | WLALE158050 |
| Alex | 1580 | 600 | 600 | 7,75 | 22,37 | WLALE158060 |
| Alex | 1580 | 700 | 800 | 8,60 | 24,98 | WLALE158070 |
| POWDER COATING | | | | | | |
| Alex One | 760 | 300 | 300 | 2,39 | 7,09 | WWALN076030 |
| Alex One | 760 | 400 | 300 | 2,79 | 8,34 | WWALN076040 |
| Alex One | 760 | 500 | 400 | 3,19 | 9,60 | WWALN076050 |
| Alex One | 760 | 600 | 600 | 3,58 | 10,85 | WWALN076060 |
| Alex One | 1140 | 300 | 400 | 3,72 | 10,87 | WWALN114030 |
| Alex One | 1140 | 400 | 400 | 4,34 | 12,85 | WWALN114040 |
| Alex One | 1140 | 500 | 600 | 4,97 | 14,83 | WWALN114050 |
| Alex One | 1140 | 600 | 800 | 5,59 | 16,80 | WWALN114060 |
| Alex One | 1580 | 500 | 800 | 6,83 | 20,27 | WWALN158050 |
| Alex One | 1580 | 600 | 1000 | 7,68 | 22,97 | WWALN158060 |
| Alex One | 1580 | 700 | 1000 | 8,53 | 25,66 | WWALN158070 |
| CHROME | | | | | | |
| Alex One | 760 | 300 | 200 | 2,39 | 6,89 | WWALN076030 |
| Alex One | 760 | 400 | 200 | 2,79 | 8,11 | WWALN076040 |
| Alex One | 760 | 500 | 300 | 3,19 | 9,32 | WWALN076050 |
| Alex One | 760 | 600 | 400 | 3,58 | 10,54 | WWALN076060 |
| Alex One | 1140 | 300 | 300 | 3,72 | 10,57 | WWALN114030 |




| Model | A ↕ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|--|---|--|
| Alex One | 1140 | 400 | 400 | 4,34 | 12,49 | WWALN114040 |
| Alex One | 1140 | 500 | 400 | 4,97 | 14,41 | WWALN114050 |
| Alex One | 1140 | 600 | 600 | 5,59 | 16,32 | WWALN114060 |
| Alex One | 1580 | 500 | 600 | 6,83 | 19,70 | WWALN158050 |
| Alex One | 1580 | 600 | 600 | 7,68 | 22,31 | WWALN158060 |
| Alex One | 1580 | 700 | 800 | 8,53 | 24,92 | WWALN158070 |
| POWDER COATING | | | | | | |
| Angus V E | 1140 | 360 | 400 | 5,18 | 15,70 | WLANG114036 |
| Angus V E | 1300 | 440 | 600 | 6,92 | 20,97 | WLANG130044 |
| Angus V E | 1460 | 520 | 800 | 8,88 | 26,90 | WLANG146052 |
| Angus V E | 1620 | 600 | 1000 | 11,07 | 33,54 | WLANG162060 |
| Angus V E | 1780 | 680 | 1200 | 13,48 | 40,84 | WLANG178068 |
| POWDER COATING | | | | | | |
| Angus H | 360 | 1140 | 400 | 5,18 | 15,70 | WLANH036114 |
| Angus H | 440 | 1300 | 600 | 6,92 | 20,97 | WLANH044130 |
| Angus H | 520 | 1460 | 800 | 8,88 | 26,90 | WLANH052146 |
| Angus H | 600 | 1620 | 800 | 11,07 | 33,54 | WLANH060162 |
| Angus H | 680 | 1780 | 1000 | 13,48 | 40,84 | WLANH068178 |
| POWDER COATING | | | | | | |
| Bone | 760 | 500 | 300 | 3,09 | 9,84 | WLBON076050 |
| Bone | 760 | 600 | 400 | 3,46 | 11,27 | WLBON076060 |
| Bone | 1260 | 500 | 600 | 4,93 | 15,44 | WLBON126050 |
| Bone | 1260 | 600 | 600 | 5,51 | 17,65 | WLBON126060 |
| Bone | 1510 | 500 | 600 | 5,92 | 18,48 | WLBON151050 |
| Bone | 1510 | 600 | 800 | 6,61 | 21,13 | WLBON151060 |
| CHROME | | | | | | |
| Bone | 760 | 500 | 200 | 3,09 | 9,59 | WLBON076050 |
| Bone | 760 | 600 | 300 | 3,46 | 10,99 | WLBON076060 |
| Bone | 1260 | 500 | 400 | 4,93 | 15,05 | WLBON126050 |
| Bone | 1260 | 600 | 400 | 5,51 | 17,21 | WLBON126060 |
| Bone | 1510 | 500 | 400 | 5,92 | 18,02 | WLBON151050 |
| Bone | 1510 | 600 | 600 | 6,61 | 20,59 | WLBON151060 |
| POWDER COATING | | | | | | |
| Bone Dw | 1610 | 500 | 600 | 5,92 | 18,48 | WLBSD161050 |
| Bone Dw | 1910 | 500 | 800 | 7,24 | 22,66 | WLBSD191050 |
| POWDER COATING | | | | | | |
| Bone One | 760 | 500 | 300 | 2,99 | 9,76 | WWBNN076050 |
| Bone One | 760 | 600 | 400 | 3,37 | 11,20 | WWBNN076060 |
| Bone One | 1260 | 500 | 600 | 4,84 | 15,37 | WWBNN126050 |
| Bone One | 1260 | 600 | 600 | 5,41 | 17,57 | WWBNN126060 |
| Bone One | 1510 | 500 | 600 | 5,82 | 18,39 | WWBNN151050 |
| Bone One | 1510 | 600 | 800 | 6,51 | 21,05 | WWBNN151060 |
| CHROME | | | | | | |
| Bone One | 760 | 500 | 200 | 2,99 | 9,51 | WWBNN076050 |
| Bone One | 760 | 600 | 300 | 3,37 | 10,92 | WWBNN076060 |
| Bone One | 1260 | 500 | 400 | 4,84 | 14,98 | WWBNN126050 |
| Bone One | 1260 | 600 | 400 | 5,41 | 17,13 | WWBNN126060 |
| Bone One | 1510 | 500 | 400 | 5,82 | 17,93 | WWBNN151050 |
| Bone One | 1510 | 600 | 600 | 6,51 | 20,51 | WWBNN151060 |
| POWDER COATING | | | | | | |
| Camber | 575 | 800 | 1000 | 3,10 | 15,40 | WLCAM057080 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| POWDER COATING | | | | | | |
| Cane E | 1300 | 390 | 600 | 6,8 | 19,01 | WLCAN130039 |
| Cane E | 1600 | 390 | 800 | 7,7 | 21,53 | WLCAN160039 |
| Cane E | 1900 | 390 | 800 | 8,6 | 24,71 | WLCAN190039 |
| POWDER COATING | | | | | | |
| Case Slim (Metal) | 1360 | 420 | 400 | 5,26 | 33,38 | WLCSS136042 |
| Case Slim (Metal) | 1360 | 520 | 600 | 6,23 | 40,72 | WLCSS136052 |
| Case Slim (Metal) | 1360 | 620 | 600 | 7,19 | 48,03 | WLCSS136062 |
| Case Slim (Metal) | 1585 | 420 | 400 | 6,18 | 38,93 | WLCSS158042 |
| Case Slim (Metal) | 1585 | 520 | 600 | 7,31 | 47,48 | WLCSS158052 |
| Case Slim (Metal) | 1585 | 620 | 800 | 8,45 | 56,03 | WLCSS158062 |
| Case Slim (Metal) | 1810 | 420 | 600 | 7,09 | 44,47 | WLCSS181042 |
| Case Slim (Metal) | 1810 | 520 | 600 | 8,40 | 54,24 | WLCSS181052 |
| Case Slim (Metal) | 1810 | 620 | 800 | 9,70 | 64,02 | WLCSS181062 |
| Case Slim (Glass) | 1360 | 420 | 400 | 5,26 | 40,49 | WLCSSG136042 |
| Case Slim (Glass) | 1360 | 520 | 600 | 6,23 | 49,54 | WLCSSG136052 |
| Case Slim (Glass) | 1360 | 620 | 600 | 7,19 | 58,63 | WLCSSG136062 |
| Case Slim (Glass) | 1585 | 420 | 400 | 6,18 | 47,30 | WLCSSG158042 |
| Case Slim (Glass) | 1585 | 520 | 600 | 7,31 | 57,83 | WLCSSG158052 |
| Case Slim (Glass) | 1585 | 620 | 800 | 8,45 | 68,36 | WLCSSG158062 |
| Case Slim (Glass) | 1810 | 420 | 600 | 7,09 | 54,01 | WLCSSG181042 |
| Case Slim (Glass) | 1810 | 520 | 600 | 8,40 | 66,05 | WLCSSG181052 |
| Case Slim (Glass) | 1810 | 620 | 800 | 9,70 | 78,09 | WLCSSG181062 |
| Case Slim (Mirror) | 1360 | 420 | 400 | 5,26 | 40,49 | WLCSSM136042 |
| Case Slim (Mirror) | 1360 | 520 | 600 | 6,23 | 49,53 | WLCSSM136052 |
| Case Slim (Mirror) | 1360 | 620 | 600 | 7,19 | 58,55 | WLCSSM136062 |
| Case Slim (Mirror) | 1585 | 420 | 400 | 6,18 | 47,22 | WLCSSM158042 |
| Case Slim (Mirror) | 1585 | 520 | 600 | 7,31 | 57,74 | WLCSSM158052 |
| Case Slim (Mirror) | 1585 | 620 | 800 | 8,45 | 68,28 | WLCSSM158062 |
| Case Slim (Mirror) | 1810 | 420 | 600 | 7,09 | 53,93 | WLCSSM181042 |
| Case Slim (Mirror) | 1810 | 520 | 600 | 8,40 | 65,96 | WLCSSM181052 |
| Case Slim (Mirror) | 1810 | 620 | 800 | 9,70 | 78,00 | WLCSSM181062 |
| Case Slim (Graphics) | 1360 | 420 | 400 | 5,26 | 41,49 | WLCSP136042 |
| Case Slim (Graphics) | 1360 | 520 | 600 | 6,23 | 50,54 | WLCSP136052 |
| Case Slim (Graphics) | 1360 | 620 | 600 | 7,19 | 59,63 | WLCSP136062 |
| Case Slim (Graphics) | 1585 | 420 | 400 | 6,18 | 48,30 | WLCSP158042 |
| Case Slim (Graphics) | 1585 | 520 | 600 | 7,31 | 58,83 | WLCSP158052 |
| Case Slim (Graphics) | 1585 | 620 | 800 | 8,45 | 69,36 | WLCSP158062 |
| Case Slim (Graphics) | 1810 | 420 | 600 | 7,09 | 55,01 | WLCSP181042 |
| Case Slim (Graphics) | 1810 | 520 | 600 | 8,40 | 67,05 | WLCSP181052 |
| Case Slim (Graphics) | 1810 | 620 | 800 | 9,70 | 79,09 | WLCSP181062 |
| Case Slim (Concrete) | 1360 | 420 | 400 | 5,26 | 36,47 | WLCSCB136042 |
| Case Slim (Concrete) | 1360 | 520 | 600 | 6,23 | 44,27 | WLCSCB136052 |
| Case Slim (Concrete) | 1360 | 620 | 600 | 7,19 | 52,11 | WLCSCB136062 |
| Case Slim (Concrete) | 1585 | 420 | 400 | 6,18 | 42,43 | WLCSCB158042 |
| Case Slim (Concrete) | 1585 | 520 | 600 | 7,31 | 51,50 | WLCSCB158052 |
| Case Slim (Concrete) | 1585 | 620 | 800 | 8,45 | 60,57 | WLCSCB158062 |
| Case Slim (Concrete) | 1810 | 420 | 600 | 7,09 | 48,30 | WLCSCB181042 |
| Case Slim (Concrete) | 1810 | 520 | 600 | 8,40 | 58,67 | WLCSCB181052 |
| Case Slim (Concrete) | 1810 | 620 | 800 | 9,70 | 69,03 | WLCSCB181062 |




| Model | A ↓ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|--|---|--|
| POWDER COATING | | | | | | |
| City | 510 | 500 | 300 | 1,82 | 8,06 | WLCIT051050 |
| City | 510 | 600 | 400 | 2,03 | 9,21 | WLCIT051060 |
| City | 780 | 500 | 400 | 2,81 | 12,40 | WLCIT078050 |
| City | 780 | 600 | 600 | 3,13 | 14,17 | WLCIT078060 |
| City | 1050 | 500 | 600 | 3,79 | 16,71 | WLCIT105050 |
| City | 1050 | 600 | 800 | 4,23 | 19,12 | WLCIT105060 |
| City | 1320 | 500 | 800 | 4,78 | 21,04 | WLCIT132050 |
| City | 1320 | 600 | 800 | 5,32 | 24,07 | WLCIT132060 |
| City | 1590 | 500 | 800 | 5,66 | 24,84 | WLCIT159050 |
| City | 1590 | 600 | 1000 | 6,30 | 28,40 | WLCIT159060 |
| City | 1860 | 500 | 1000 | 6,74 | 29,75 | WLCIT186050 |
| City | 1860 | 600 | 1200 | 7,52 | 34,04 | WLCIT186060 |
| POWDER COATING | | | | | | |
| City One | 780 | 500 | 400 | 2,74 | 12,34 | WWCIN078050 |
| City One | 780 | 600 | 600 | 3,06 | 14,11 | WWCIN078060 |
| City One | 1050 | 500 | 600 | 3,72 | 16,65 | WWCIN105050 |
| City One | 1050 | 600 | 800 | 4,16 | 19,06 | WWCIN105060 |
| City One | 1320 | 500 | 800 | 4,71 | 20,99 | WWCIN132050 |
| City One | 1320 | 600 | 800 | 5,25 | 24,01 | WWCIN132060 |
| City One | 1590 | 500 | 800 | 5,59 | 24,79 | WWCIN159050 |
| City One | 1590 | 600 | 1000 | 6,23 | 28,35 | WWCIN159060 |
| City One | 1860 | 500 | 1000 | 6,67 | 29,69 | WWCIN186050 |
| POWDER COATING | | | | | | |
| Delfin | 440 | 820 | 800 | 6,41 | 19,49 | WLDF044082 |
| Delfin | 440 | 1020 | 800 | 8,01 | 24,31 | WLDF044102 |
| Delfin | 440 | 1220 | 1000 | 9,60 | 29,12 | WLDF044122 |
| Delfin | 540 | 820 | 800 | 7,61 | 23,13 | WLDF054082 |
| Delfin | 540 | 1020 | 1000 | 9,50 | 28,86 | WLDF054102 |
| Delfin | 540 | 1220 | 1200 | 11,39 | 34,58 | WLDF054122 |
| Delfin | 640 | 820 | 1000 | 8,80 | 26,78 | WLDF064082 |
| Delfin | 640 | 1020 | 1200 | 10,99 | 33,40 | WLDF064102 |
| Delfin | 640 | 1220 | 1500 | 13,19 | 40,04 | WLDF064122 |
| POWDER COATING | | | | | | |
| Dexter | 860 | 400 | 400 | 2,70 | 9,51 | WLDEX086040 |
| Dexter | 860 | 500 | 400 | 2,99 | 11,07 | WLDEX086050 |
| Dexter | 860 | 600 | 600 | 3,27 | 12,64 | WLDEX086060 |
| Dexter | 1220 | 400 | 400 | 3,82 | 13,33 | WLDEX122040 |
| Dexter | 1220 | 500 | 600 | 4,21 | 15,52 | WLDEX122050 |
| Dexter | 1220 | 600 | 800 | 4,61 | 17,70 | WLDEX122060 |
| Dexter | 1760 | 400 | 600 | 5,55 | 19,41 | WLDEX176040 |
| Dexter | 1760 | 500 | 800 | 6,14 | 22,64 | WLDEX176050 |
| Dexter | 1760 | 600 | 1000 | 6,72 | 25,86 | WLDEX176060 |
| CHROME | | | | | | |
| Dexter | 860 | 500 | 300 | 2,99 | 10,77 | WLDEX086050 |
| Dexter | 860 | 600 | 400 | 3,27 | 12,29 | WLDEX086060 |
| Dexter | 1220 | 400 | 300 | 3,82 | 12,98 | WLDEX122040 |
| Dexter | 1220 | 500 | 400 | 4,21 | 15,10 | WLDEX122050 |
| Dexter | 1220 | 600 | 400 | 4,61 | 17,22 | WLDEX122060 |
| Dexter | 1760 | 400 | 400 | 5,55 | 18,90 | WLDEX176040 |
| Dexter | 1760 | 500 | 600 | 6,14 | 22,02 | WLDEX176050 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Dexter | 1760 | 600 | 600 | 6,72 | 25,15 | WLDEX176060 |
| POWDER COATING | | | | | | |
| Dexter One | 860 | 400 | 400 | 2,61 | 9,43 | WWDEN086040 |
| Dexter One | 860 | 500 | 400 | 2,90 | 11,00 | WWDEN086050 |
| Dexter One | 860 | 600 | 600 | 3,18 | 12,57 | WWDEN086060 |
| Dexter One | 1220 | 400 | 400 | 3,73 | 13,26 | WWDEN122040 |
| Dexter One | 1220 | 500 | 600 | 4,12 | 15,45 | WWDEN122050 |
| Dexter One | 1220 | 600 | 800 | 4,52 | 17,63 | WWDEN122060 |
| Dexter One | 1760 | 400 | 600 | 5,46 | 19,33 | WWDEN176040 |
| Dexter One | 1760 | 500 | 800 | 6,05 | 22,57 | WWDEN176050 |
| Dexter One | 1760 | 600 | 1000 | 6,63 | 25,79 | WWDEN176060 |
| CHROME | | | | | | |
| Dexter One | 860 | 400 | 200 | 2,61 | 9,18 | WWDEN086040 |
| Dexter One | 860 | 500 | 300 | 2,90 | 10,70 | WWDEN086050 |
| Dexter One | 860 | 600 | 400 | 3,18 | 12,22 | WWDEN086060 |
| Dexter One | 1220 | 400 | 300 | 3,73 | 12,91 | WWDEN122040 |
| Dexter One | 1220 | 500 | 400 | 4,12 | 15,03 | WWDEN122050 |
| Dexter One | 1220 | 600 | 400 | 4,52 | 17,15 | WWDEN122060 |
| Dexter One | 1760 | 400 | 400 | 5,46 | 18,82 | WWDEN176040 |
| Dexter One | 1760 | 500 | 600 | 6,05 | 21,95 | WWDEN176050 |
| Dexter One | 1760 | 600 | 600 | 6,63 | 25,08 | WWDEN176060 |
| POWDER COATING | | | | | | |
| Diamond | 880 | 400 | 300 | 2,58 | 7,60 | WLDIM088040 |
| Diamond | 880 | 500 | 300 | 2,97 | 8,81 | WLDIM088050 |
| Diamond | 880 | 600 | 400 | 3,36 | 10,01 | WLDIM088060 |
| Diamond | 1120 | 400 | 400 | 3,26 | 9,51 | WLDIM112040 |
| Diamond | 1120 | 500 | 400 | 3,74 | 11,02 | WLDIM112050 |
| Diamond | 1120 | 600 | 400 | 4,22 | 12,52 | WLDIM112060 |
| Diamond | 1360 | 400 | 400 | 3,93 | 11,43 | WLDIM136040 |
| Diamond | 1360 | 500 | 600 | 4,51 | 13,24 | WLDIM136050 |
| Diamond | 1360 | 600 | 600 | 5,09 | 15,03 | WLDIM136060 |
| Diamond | 1600 | 400 | 400 | 4,61 | 13,35 | WLDIM160040 |
| Diamond | 1600 | 500 | 600 | 5,28 | 15,46 | WLDIM160050 |
| Diamond | 1600 | 600 | 600 | 5,96 | 17,57 | WLDIM160060 |
| CHROME | | | | | | |
| Diamond | 880 | 400 | 200 | 2,58 | 7,42 | WLDIM088040 |
| Diamond | 880 | 500 | 200 | 2,97 | 8,60 | WLDIM088050 |
| Diamond | 880 | 600 | 300 | 3,36 | 9,77 | WLDIM088060 |
| Diamond | 1120 | 400 | 200 | 3,26 | 9,29 | WLDIM112040 |
| Diamond | 1120 | 500 | 300 | 3,74 | 10,76 | WLDIM112050 |
| Diamond | 1120 | 600 | 300 | 4,22 | 12,22 | WLDIM112060 |
| Diamond | 1360 | 400 | 300 | 3,93 | 11,16 | WLDIM136040 |
| Diamond | 1360 | 500 | 400 | 4,51 | 12,92 | WLDIM136050 |
| Diamond | 1360 | 600 | 400 | 5,09 | 14,67 | WLDIM136060 |
| Diamond | 1600 | 400 | 400 | 4,61 | 13,03 | WLDIM160040 |
| Diamond | 1600 | 500 | 400 | 5,28 | 15,09 | WLDIM160050 |
| Diamond | 1600 | 600 | 400 | 5,96 | 17,14 | WLDIM160060 |
| POWDER COATING | | | | | | |
| Domi | 786 | 400 | 300 | 2,13 | 6,50 | WLDOM078040 |
| Domi | 786 | 500 | 400 | 2,54 | 7,75 | WLDOM078050 |
| Domi | 786 | 600 | 400 | 2,86 | 8,93 | WLDOM078060 |




| Model | A ↕ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Domi | 1116 | 400 | 400 | 3,27 | 9,74 | WLDOM111040 |
| Domi | 1116 | 500 | 600 | 3,76 | 11,54 | WLDOM111050 |
| Domi | 1116 | 600 | 600 | 4,25 | 13,33 | WLDOM111060 |
| Domi | 1479 | 400 | 600 | 4,31 | 12,77 | WLDOM147040 |
| Domi | 1479 | 500 | 600 | 4,95 | 15,13 | WLDOM147050 |
| Domi | 1479 | 600 | 800 | 5,59 | 17,48 | WLDOM147060 |
| CHROME | | | | | | |
| Domi | 786 | 400 | 200 | 2,13 | 6,30 | WLDOM078040 |
| Domi | 786 | 500 | 300 | 2,54 | 7,51 | WLDOM078050 |
| Domi | 786 | 600 | 300 | 2,86 | 8,65 | WLDOM078060 |
| Domi | 1116 | 400 | 300 | 3,27 | 9,45 | WLDOM111040 |
| Domi | 1116 | 500 | 400 | 3,76 | 11,19 | WLDOM111050 |
| Domi | 1116 | 600 | 400 | 4,25 | 12,93 | WLDOM111060 |
| Domi | 1479 | 400 | 400 | 4,31 | 12,39 | WLDOM147040 |
| Domi | 1479 | 500 | 400 | 4,95 | 14,67 | WLDOM147050 |
| Domi | 1479 | 600 | 600 | 5,59 | 16,95 | WLDOM147060 |
| POWDER COATING | | | | | | |
| Easy | 640 | 200 | 120 | 1,76 | 4,44 | WLEAS064020 |
| Easy | 960 | 200 | 200 | 2,64 | 6,54 | WLEAS096020 |
| Easy | 1280 | 200 | 300 | 3,52 | 8,63 | WLEAS128020 |
| Easy | 1600 | 200 | 300 | 4,40 | 10,73 | WLEAS160020 |
| Easy | 1920 | 200 | 400 | 5,27 | 12,82 | WLEAS192020 |
| CHROME | | | | | | |
| Easy | 640 | 200 | 120 | 1,76 | 4,35 | WLEAS064020 |
| Easy | 960 | 200 | 120 | 2,64 | 6,40 | WLEAS096020 |
| Easy | 1280 | 200 | 200 | 3,52 | 8,45 | WLEAS128020 |
| Easy | 1600 | 200 | 200 | 4,40 | 10,50 | WLEAS160020 |
| POWDER COATING | | | | | | |
| Easy Dw | 1660 | 200 | 300 | 4,40 | 10,82 | WLEAW166020 |
| Easy Dw | 1980 | 200 | 400 | 5,27 | 12,82 | WLEAW198020 |
| POWDER COATING | | | | | | |
| Easy One | 960 | 200 | 200 | 2,53 | 6,45 | WWEAN096020 |
| Easy One | 1280 | 200 | 300 | 3,41 | 8,54 | WWEAN128020 |
| Easy One | 1600 | 200 | 300 | 4,29 | 10,64 | WWEAN160020 |
| Easy One | 1920 | 200 | 400 | 5,16 | 12,73 | WWEAN192020 |
| CHROME | | | | | | |
| Easy One | 960 | 200 | 120 | 2,53 | 6,31 | WWEAN096020 |
| Easy One | 1280 | 200 | 200 | 3,41 | 8,36 | WWEAN128020 |
| Easy One | 1600 | 200 | 200 | 4,29 | 10,41 | WWEAN160020 |
| POWDER COATING | | | | | | |
| Fiona | 660 | 400 | 300 | 2,18 | 6,25 | WLFIN066040 |
| Fiona | 660 | 430 | 300 | 2,29 | 6,57 | WLFIN066043 |
| Fiona | 660 | 480 | 300 | 2,46 | 7,11 | WLFIN066048 |
| Fiona | 660 | 500 | 300 | 2,54 | 7,33 | WLFIN066050 |
| Fiona | 660 | 530 | 300 | 2,64 | 7,66 | WLFIN066053 |
| Fiona | 660 | 580 | 300 | 2,82 | 8,20 | WLFIN066058 |
| Fiona | 660 | 600 | 400 | 2,89 | 8,42 | WLFIN066060 |
| Fiona | 660 | 630 | 400 | 3,00 | 8,75 | WLFIN066063 |
| Fiona | 660 | 680 | 400 | 3,18 | 9,34 | WLFIN066068 |
| Fiona | 900 | 400 | 300 | 2,93 | 8,37 | WLFIN090040 |
| Fiona | 900 | 430 | 400 | 3,08 | 8,81 | WLFIN090043 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|---------------|--------|--------|--|---|---|--|
| Fiona | 900 | 480 | 400 | 3,32 | 9,54 | WLFIN090048 |
| Fiona | 900 | 500 | 400 | 3,41 | 9,82 | WLFIN090050 |
| Fiona | 900 | 530 | 400 | 3,55 | 10,27 | WLFIN090053 |
| Fiona | 900 | 580 | 400 | 3,79 | 10,99 | WLFIN090058 |
| Fiona | 900 | 600 | 400 | 3,89 | 11,29 | WLFIN090060 |
| Fiona | 900 | 630 | 400 | 4,03 | 11,72 | WLFIN090063 |
| Fiona | 900 | 680 | 600 | 4,27 | 12,41 | WLFIN090068 |
| Fiona | 1140 | 400 | 400 | 3,69 | 10,51 | WLFIN114040 |
| Fiona | 1140 | 430 | 400 | 3,87 | 11,05 | WLFIN114043 |
| Fiona | 1140 | 480 | 400 | 4,17 | 11,97 | WLFIN114048 |
| Fiona | 1140 | 500 | 600 | 4,29 | 12,33 | WLFIN114050 |
| Fiona | 1140 | 530 | 600 | 4,47 | 12,88 | WLFIN114053 |
| Fiona | 1140 | 580 | 600 | 4,76 | 13,79 | WLFIN114058 |
| Fiona | 1140 | 600 | 600 | 4,88 | 14,15 | WLFIN114060 |
| Fiona | 1140 | 630 | 600 | 5,06 | 14,69 | WLFIN114063 |
| Fiona | 1140 | 680 | 600 | 5,36 | 15,58 | WLFIN114068 |
| Fiona | 1380 | 400 | 600 | 4,44 | 12,64 | WLFIN138040 |
| Fiona | 1380 | 430 | 600 | 4,66 | 13,30 | WLFIN138043 |
| Fiona | 1380 | 480 | 600 | 5,02 | 14,40 | WLFIN138048 |
| Fiona | 1380 | 500 | 600 | 5,16 | 14,83 | WLFIN138050 |
| Fiona | 1380 | 530 | 600 | 5,38 | 15,49 | WLFIN138053 |
| Fiona | 1380 | 580 | 600 | 5,73 | 16,57 | WLFIN138058 |
| Fiona | 1380 | 600 | 800 | 5,88 | 17,01 | WLFIN138060 |
| Fiona | 1380 | 630 | 800 | 6,09 | 17,66 | WLFIN138063 |
| Fiona | 1380 | 680 | 800 | 6,45 | 18,75 | WLFIN138068 |
| Fiona | 1620 | 400 | 600 | 5,20 | 14,77 | WLFIN162040 |
| Fiona | 1620 | 430 | 600 | 5,45 | 15,54 | WLFIN162043 |
| Fiona | 1620 | 480 | 600 | 5,87 | 16,81 | WLFIN162048 |
| Fiona | 1620 | 500 | 800 | 6,04 | 17,33 | WLFIN162050 |
| Fiona | 1620 | 530 | 800 | 6,29 | 18,09 | WLFIN162053 |
| Fiona | 1620 | 580 | 800 | 6,70 | 19,36 | WLFIN162058 |
| Fiona | 1620 | 600 | 800 | 6,87 | 19,87 | WLFIN162060 |
| Fiona | 1620 | 630 | 800 | 7,12 | 20,64 | WLFIN162063 |
| Fiona | 1620 | 680 | 1000 | 7,54 | 21,93 | WLFIN162068 |
| Fiona | 1860 | 400 | 600 | 5,95 | 16,91 | WLFIN186040 |
| Fiona | 1860 | 430 | 800 | 6,24 | 17,78 | WLFIN186043 |
| Fiona | 1860 | 480 | 800 | 6,72 | 19,24 | WLFIN186048 |
| Fiona | 1860 | 500 | 800 | 6,91 | 19,83 | WLFIN186050 |
| Fiona | 1860 | 530 | 800 | 7,20 | 20,70 | WLFIN186053 |
| Fiona | 1860 | 580 | 1000 | 7,67 | 22,15 | WLFIN186058 |
| Fiona | 1860 | 600 | 1000 | 7,87 | 22,74 | WLFIN186060 |
| Fiona | 1860 | 630 | 1000 | 8,15 | 23,61 | WLFIN186063 |
| Fiona | 1860 | 680 | 1000 | 8,63 | 25,10 | WLFIN186068 |
| CHROME | | | | | | |
| Fiona | 660 | 400 | 120 | 2,18 | 6,25 | WLFIN066040 |
| Fiona | 660 | 430 | 200 | 2,29 | 6,39 | WLFIN066043 |
| Fiona | 660 | 480 | 200 | 2,46 | 6,91 | WLFIN066048 |
| Fiona | 660 | 500 | 200 | 2,54 | 7,13 | WLFIN066050 |
| Fiona | 660 | 530 | 200 | 2,64 | 7,44 | WLFIN066053 |
| Fiona | 660 | 580 | 200 | 2,82 | 7,97 | WLFIN066058 |
| Fiona | 660 | 600 | 200 | 2,89 | 8,18 | WLFIN066060 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Fiona | 660 | 630 | 300 | 3,00 | 8,50 | WLFIN066063 |
| Fiona | 660 | 680 | 300 | 3,18 | 9,08 | WLFIN066068 |
| Fiona | 900 | 400 | 200 | 2,93 | 8,14 | WLFIN090040 |
| Fiona | 900 | 430 | 300 | 3,08 | 8,57 | WLFIN090043 |
| Fiona | 900 | 480 | 300 | 3,32 | 9,28 | WLFIN090048 |
| Fiona | 900 | 500 | 300 | 3,41 | 9,55 | WLFIN090050 |
| Fiona | 900 | 530 | 300 | 3,55 | 9,98 | WLFIN090053 |
| Fiona | 900 | 580 | 300 | 3,79 | 10,68 | WLFIN090058 |
| Fiona | 900 | 600 | 300 | 3,89 | 10,97 | WLFIN090060 |
| Fiona | 900 | 630 | 300 | 4,03 | 11,39 | WLFIN090063 |
| Fiona | 900 | 680 | 400 | 4,27 | 12,06 | WLFIN090068 |
| Fiona | 1140 | 400 | 300 | 3,69 | 10,22 | WLFIN114040 |
| Fiona | 1140 | 430 | 300 | 3,87 | 10,75 | WLFIN114043 |
| Fiona | 1140 | 480 | 300 | 4,17 | 11,64 | WLFIN114048 |
| Fiona | 1140 | 500 | 400 | 4,29 | 11,99 | WLFIN114050 |
| Fiona | 1140 | 530 | 400 | 4,47 | 12,52 | WLFIN114053 |
| Fiona | 1140 | 580 | 400 | 4,76 | 13,40 | WLFIN114058 |
| Fiona | 1140 | 600 | 400 | 4,88 | 13,75 | WLFIN114060 |
| Fiona | 1140 | 630 | 400 | 5,06 | 14,28 | WLFIN114063 |
| Fiona | 1140 | 680 | 400 | 5,36 | 15,14 | WLFIN114068 |
| Fiona | 1380 | 400 | 400 | 4,44 | 12,30 | WLFIN138040 |
| Fiona | 1380 | 430 | 400 | 4,66 | 12,93 | WLFIN138043 |
| Fiona | 1380 | 480 | 400 | 5,02 | 14,00 | WLFIN138048 |
| Fiona | 1380 | 500 | 400 | 5,16 | 14,42 | WLFIN138050 |
| Fiona | 1380 | 530 | 400 | 5,38 | 15,06 | WLFIN138053 |
| Fiona | 1380 | 580 | 400 | 5,73 | 16,11 | WLFIN138058 |
| Fiona | 1380 | 600 | 400 | 5,88 | 16,53 | WLFIN138060 |
| Fiona | 1380 | 630 | 600 | 6,09 | 17,16 | WLFIN138063 |
| Fiona | 1380 | 680 | 600 | 6,45 | 18,22 | WLFIN138068 |
| Fiona | 1620 | 400 | 400 | 5,20 | 14,37 | WLFIN162040 |
| Fiona | 1620 | 430 | 400 | 5,45 | 15,11 | WLFIN162043 |
| Fiona | 1620 | 480 | 400 | 5,87 | 16,35 | WLFIN162048 |
| Fiona | 1620 | 500 | 600 | 6,04 | 16,85 | WLFIN162050 |
| Fiona | 1620 | 530 | 600 | 6,29 | 17,58 | WLFIN162053 |
| Fiona | 1620 | 580 | 600 | 6,70 | 18,82 | WLFIN162058 |
| Fiona | 1620 | 600 | 600 | 6,87 | 19,31 | WLFIN162060 |
| Fiona | 1620 | 630 | 600 | 7,12 | 20,06 | WLFIN162063 |
| Fiona | 1620 | 680 | 600 | 7,54 | 21,31 | WLFIN162068 |
| POWDER COATING | | | | | | |
| Fiona One | 900 | 400 | 400 | 2,87 | 8,32 | WWFIE090040 |
| Fiona One | 900 | 430 | 400 | 3,01 | 8,76 | WWFIE090043 |
| Fiona One | 900 | 480 | 400 | 3,25 | 9,48 | WWFIE090048 |
| Fiona One | 900 | 500 | 400 | 3,35 | 9,78 | WWFIE090050 |
| Fiona One | 900 | 530 | 400 | 3,49 | 10,22 | WWFIE090053 |
| Fiona One | 900 | 580 | 400 | 3,73 | 10,94 | WWFIE090058 |
| Fiona One | 900 | 600 | 400 | 3,82 | 11,23 | WWFIE090060 |
| Fiona One | 900 | 630 | 400 | 3,97 | 11,68 | WWFIE090063 |
| Fiona One | 900 | 680 | 400 | 4,21 | 12,40 | WWFIE090068 |
| Fiona One | 1140 | 400 | 400 | 3,62 | 10,45 | WWFIE114040 |
| Fiona One | 1140 | 430 | 400 | 3,80 | 11,00 | WWFIE114043 |
| Fiona One | 1140 | 480 | 400 | 4,10 | 11,91 | WWFIE114048 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|---------------|--------|--------|--|---|---|--|
| Fiona One | 1140 | 500 | 400 | 4,22 | 12,28 | WWFIE114050 |
| Fiona One | 1140 | 530 | 600 | 4,40 | 12,82 | WWFIE114053 |
| Fiona One | 1140 | 580 | 600 | 4,70 | 13,74 | WWFIE114058 |
| Fiona One | 1140 | 600 | 600 | 4,82 | 14,09 | WWFIE114060 |
| Fiona One | 1140 | 630 | 600 | 5,00 | 14,64 | WWFIE114063 |
| Fiona One | 1140 | 680 | 600 | 5,30 | 15,55 | WWFIE114068 |
| Fiona One | 1380 | 400 | 600 | 4,38 | 12,59 | WWFIE138040 |
| Fiona One | 1380 | 430 | 600 | 4,59 | 13,25 | WWFIE138043 |
| Fiona One | 1380 | 480 | 600 | 4,95 | 14,34 | WWFIE138048 |
| Fiona One | 1380 | 500 | 600 | 5,09 | 14,77 | WWFIE138050 |
| Fiona One | 1380 | 530 | 600 | 5,31 | 15,43 | WWFIE138053 |
| Fiona One | 1380 | 580 | 600 | 5,67 | 16,52 | WWFIE138058 |
| Fiona One | 1380 | 600 | 600 | 5,81 | 16,96 | WWFIE138060 |
| Fiona One | 1380 | 630 | 800 | 6,03 | 17,61 | WWFIE138063 |
| Fiona One | 1380 | 680 | 800 | 6,38 | 18,70 | WWFIE138068 |
| Fiona One | 1620 | 400 | 800 | 5,13 | 14,73 | WWFIE162040 |
| Fiona One | 1620 | 430 | 600 | 5,38 | 15,49 | WWFIE162043 |
| Fiona One | 1620 | 480 | 600 | 5,80 | 16,76 | WWFIE162048 |
| Fiona One | 1620 | 500 | 600 | 5,97 | 17,28 | WWFIE162050 |
| Fiona One | 1620 | 530 | 800 | 6,22 | 18,04 | WWFIE162053 |
| Fiona One | 1620 | 580 | 800 | 6,64 | 19,31 | WWFIE162058 |
| Fiona One | 1620 | 600 | 800 | 6,81 | 19,83 | WWFIE162060 |
| Fiona One | 1620 | 630 | 800 | 7,06 | 20,59 | WWFIE162063 |
| Fiona One | 1620 | 680 | 800 | 7,47 | 21,85 | WWFIE162068 |
| Fiona One | 1860 | 400 | 800 | 5,89 | 16,86 | WWFIE186040 |
| Fiona One | 1860 | 430 | 800 | 6,18 | 17,74 | WWFIE186043 |
| Fiona One | 1860 | 480 | 800 | 6,65 | 19,19 | WWFIE186048 |
| Fiona One | 1860 | 500 | 800 | 6,84 | 19,77 | WWFIE186050 |
| Fiona One | 1860 | 530 | 800 | 7,13 | 20,65 | WWFIE186053 |
| Fiona One | 1860 | 580 | 1000 | 7,61 | 22,10 | WWFIE186058 |
| Fiona One | 1860 | 600 | 1000 | 7,80 | 22,69 | WWFIE186060 |
| Fiona One | 1860 | 630 | 1000 | 8,09 | 23,56 | WWFIE186063 |
| Fiona One | 1860 | 680 | 1000 | 8,56 | 25,01 | WWFIE186068 |
| CHROME | | | | | | |
| Fiona One | 900 | 400 | 200 | 2,87 | 8,09 | WWFIE090040 |
| Fiona One | 900 | 430 | 300 | 3,01 | 8,52 | WWFIE090043 |
| Fiona One | 900 | 480 | 300 | 3,25 | 9,22 | WWFIE090048 |
| Fiona One | 900 | 500 | 300 | 3,35 | 9,50 | WWFIE090050 |
| Fiona One | 900 | 530 | 300 | 3,49 | 9,93 | WWFIE090053 |
| Fiona One | 900 | 580 | 300 | 3,73 | 10,63 | WWFIE090058 |
| Fiona One | 900 | 600 | 300 | 3,82 | 10,91 | WWFIE090060 |
| Fiona One | 900 | 630 | 300 | 3,97 | 11,35 | WWFIE090063 |
| Fiona One | 900 | 680 | 300 | 4,21 | 12,05 | WWFIE090068 |
| Fiona One | 1140 | 400 | 300 | 3,62 | 10,16 | WWFIE114040 |
| Fiona One | 1140 | 430 | 300 | 3,80 | 10,70 | WWFIE114043 |
| Fiona One | 1140 | 480 | 300 | 4,10 | 11,58 | WWFIE114048 |
| Fiona One | 1140 | 500 | 400 | 4,22 | 11,94 | WWFIE114050 |
| Fiona One | 1140 | 530 | 400 | 4,40 | 12,46 | WWFIE114053 |
| Fiona One | 1140 | 580 | 400 | 4,70 | 13,35 | WWFIE114058 |
| Fiona One | 1140 | 600 | 400 | 4,82 | 13,70 | WWFIE114060 |
| Fiona One | 1140 | 630 | 400 | 5,00 | 14,23 | WWFIE114063 |




| Model | A ↓ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|--|---|--|
| Fiona One | 1140 | 680 | 400 | 5,30 | 15,11 | WWFIE114068 |
| Fiona One | 1380 | 400 | 400 | 4,38 | 12,25 | WWFIE138040 |
| Fiona One | 1380 | 430 | 400 | 4,59 | 12,88 | WWFIE138043 |
| Fiona One | 1380 | 480 | 400 | 4,95 | 13,94 | WWFIE138048 |
| Fiona One | 1380 | 500 | 400 | 5,09 | 14,36 | WWFIE138050 |
| Fiona One | 1380 | 530 | 400 | 5,31 | 15,00 | WWFIE138053 |
| Fiona One | 1380 | 580 | 400 | 5,67 | 16,06 | WWFIE138058 |
| Fiona One | 1380 | 600 | 400 | 5,81 | 16,48 | WWFIE138060 |
| Fiona One | 1380 | 630 | 600 | 6,03 | 17,11 | WWFIE138063 |
| Fiona One | 1380 | 680 | 600 | 6,38 | 18,17 | WWFIE138068 |
| Fiona One | 1620 | 400 | 400 | 5,13 | 14,32 | WWFIE162040 |
| Fiona One | 1620 | 430 | 400 | 5,38 | 15,06 | WWFIE162043 |
| Fiona One | 1620 | 480 | 400 | 5,80 | 16,30 | WWFIE162048 |
| Fiona One | 1620 | 500 | 600 | 5,97 | 16,80 | WWFIE162050 |
| Fiona One | 1620 | 530 | 600 | 6,22 | 17,53 | WWFIE162053 |
| Fiona One | 1620 | 580 | 600 | 6,64 | 18,77 | WWFIE162058 |
| Fiona One | 1620 | 600 | 600 | 6,81 | 19,27 | WWFIE162060 |
| Fiona One | 1620 | 630 | 600 | 7,06 | 20,01 | WWFIE162063 |
| Fiona One | 1620 | 680 | 600 | 7,47 | 21,23 | WWFIE162068 |
| POWDER COATING | | | | | | |
| Incorner | 465 | 350 | 300 | 1,53 | 6,61 | WLQIN046035 |
| Incorner | 735 | 350 | 400 | 2,34 | 10,06 | WLQIN073035 |
| Incorner | 1005 | 350 | 600 | 3,16 | 13,50 | WLQIN100035 |
| Incorner | 1275 | 350 | 800 | 3,98 | 16,95 | WLQIN127035 |
| Incorner | 1545 | 350 | 800 | 4,80 | 20,41 | WLQIN154035 |
| POWDER COATING | | | | | | |
| Iron D | 730 | 400 | 400 | 3,29 | 15,90 | WLIRD073040 |
| Iron D | 730 | 500 | 600 | 3,89 | 18,84 | WLIRD073050 |
| Iron D | 730 | 600 | 600 | 4,48 | 21,76 | WLIRD073060 |
| Iron D | 925 | 400 | 600 | 4,32 | 20,80 | WLIRD092040 |
| Iron D | 925 | 500 | 800 | 5,11 | 24,70 | WLIRD092050 |
| Iron D | 925 | 600 | 800 | 5,90 | 28,60 | WLIRD092060 |
| Iron D | 1120 | 400 | 800 | 5,36 | 25,69 | WLIRD112040 |
| Iron D | 1120 | 500 | 800 | 6,34 | 30,56 | WLIRD112050 |
| Iron D | 1120 | 600 | 1000 | 7,33 | 35,43 | WLIRD112060 |
| Iron D | 1315 | 400 | 800 | 6,39 | 30,58 | WLIRD131040 |
| Iron D | 1315 | 500 | 1000 | 7,57 | 36,41 | WLIRD131050 |
| Iron D | 1315 | 600 | 1200 | 8,76 | 42,28 | WLIRD131060 |
| Iron D | 1510 | 400 | 1000 | 7,42 | 35,46 | WLIRD151040 |
| Iron D | 1510 | 500 | 1000 | 8,80 | 42,28 | WLIRD151050 |
| Iron D | 1510 | 600 | 1200 | 10,18 | 49,11 | WLIRD151060 |
| Iron D | 1705 | 400 | 1000 | 8,45 | 40,35 | WLIRD170040 |
| Iron D | 1705 | 500 | 1200 | 10,03 | 48,15 | WLIRD170050 |
| Iron D | 1705 | 600 | 1500 | 11,61 | 55,95 | WLIRD170060 |
| POWDER COATING | | | | | | |
| Iron S | 730 | 400 | 400 | 3,30 | 15,95 | WLIRS073040 |
| Iron S | 730 | 500 | 600 | 3,90 | 18,92 | WLIRS073050 |
| Iron S | 730 | 600 | 800 | 4,51 | 21,92 | WLIRS073060 |
| Iron S | 925 | 400 | 600 | 4,34 | 20,87 | WLIRS092040 |
| Iron S | 925 | 500 | 800 | 5,14 | 24,82 | WLIRS092050 |
| Iron S | 925 | 600 | 800 | 5,95 | 28,80 | WLIRS092060 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Iron S | 1120 | 400 | 800 | 5,37 | 25,76 | WLIRS112040 |
| Iron S | 1120 | 500 | 800 | 6,37 | 30,71 | WLIRS112050 |
| Iron S | 1120 | 600 | 1000 | 7,38 | 35,69 | WLIRS112060 |
| Iron S | 1315 | 400 | 800 | 6,40 | 30,65 | WLIRS131040 |
| Iron S | 1315 | 500 | 1000 | 7,61 | 36,60 | WLIRS131050 |
| Iron S | 1315 | 600 | 1200 | 8,82 | 42,57 | WLIRS131060 |
| Iron S | 1510 | 400 | 1000 | 7,44 | 35,56 | WLIRS151040 |
| Iron S | 1510 | 500 | 1200 | 8,84 | 42,49 | WLIRS151050 |
| Iron S | 1510 | 600 | 1500 | 10,25 | 49,46 | WLIRS151060 |
| Iron S | 1705 | 400 | 1000 | 8,47 | 40,46 | WLIRS170040 |
| Iron S | 1705 | 500 | 1200 | 10,08 | 48,38 | WLIRS170050 |
| Iron S | 1705 | 600 | 1500 | 11,69 | 56,35 | WLIRS170060 |
| POWDER COATING | | | | | | |
| Kioto | 555 | 480 | 300 | 1,97 | 8,69 | WLKIO055048 |
| Kioto | 870 | 480 | 400 | 3,01 | 13,14 | WLKIO087048 |
| Kioto | 1185 | 480 | 600 | 4,05 | 17,59 | WLKIO118048 |
| Kioto | 1500 | 480 | 800 | 5,09 | 22,04 | WLKIO150048 |
| Kioto | 1815 | 480 | 1000 | 6,13 | 26,50 | WLKIO181048 |
| POWDER COATING | | | | | | |
| Kioto One | 870 | 480 | 400 | 2,96 | 13,10 | WWKIN087048 |
| Kioto One | 1185 | 480 | 600 | 4,00 | 17,55 | WWKIN118048 |
| Kioto One | 1500 | 480 | 800 | 5,04 | 22,00 | WWKIN150048 |
| Kioto One | 1815 | 480 | 1000 | 6,08 | 26,45 | WWKIN181048 |
| POWDER COATING | | | | | | |
| Lena | 660 | 400 | 300 | 2,23 | 6,41 | WLENO66040 |
| Lena | 660 | 436 | 300 | 2,36 | 6,80 | WLENO66043 |
| Lena | 660 | 486 | 300 | 2,54 | 7,34 | WLENO66048 |
| Lena | 660 | 500 | 300 | 2,59 | 7,50 | WLENO66050 |
| Lena | 660 | 536 | 300 | 2,72 | 7,89 | WLENO66053 |
| Lena | 660 | 586 | 400 | 2,90 | 8,44 | WLENO66058 |
| Lena | 660 | 600 | 400 | 2,95 | 8,59 | WLENO66060 |
| Lena | 660 | 636 | 400 | 3,08 | 8,97 | WLENO66063 |
| Lena | 660 | 686 | 400 | 3,26 | 9,53 | WLENO66068 |
| Lena | 900 | 400 | 300 | 3,01 | 8,60 | WLENO90040 |
| Lena | 900 | 436 | 400 | 3,18 | 9,12 | WLENO90043 |
| Lena | 900 | 486 | 400 | 3,42 | 9,84 | WLENO90048 |
| Lena | 900 | 500 | 400 | 3,48 | 10,05 | WLENO90050 |
| Lena | 900 | 536 | 400 | 3,65 | 10,58 | WLENO90053 |
| Lena | 900 | 586 | 400 | 3,89 | 11,30 | WLENO90058 |
| Lena | 900 | 600 | 400 | 3,96 | 11,50 | WLENO90060 |
| Lena | 900 | 636 | 600 | 4,13 | 12,03 | WLENO90063 |
| Lena | 900 | 686 | 600 | 4,37 | 12,75 | WLENO90068 |
| Lena | 1140 | 400 | 400 | 3,78 | 10,79 | WLENO114040 |
| Lena | 1140 | 436 | 400 | 3,99 | 11,44 | WLENO114043 |
| Lena | 1140 | 486 | 600 | 4,29 | 12,34 | WLENO114048 |
| Lena | 1140 | 500 | 600 | 4,38 | 12,61 | WLENO114050 |
| Lena | 1140 | 536 | 600 | 4,59 | 13,26 | WLENO114053 |
| Lena | 1140 | 586 | 600 | 4,89 | 14,17 | WLENO114058 |
| Lena | 1140 | 600 | 600 | 4,97 | 14,42 | WLENO114060 |
| Lena | 1140 | 636 | 600 | 5,19 | 15,07 | WLENO114063 |
| Lena | 1140 | 686 | 600 | 5,49 | 15,99 | WLENO114068 |




| Model | A ↓ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|---------------|--------|--------|--|--|---|--|
| Lena | 1380 | 400 | 600 | 4,55 | 12,98 | WLLN138040 |
| Lena | 1380 | 436 | 600 | 4,81 | 13,76 | WLLN138043 |
| Lena | 1380 | 486 | 600 | 5,17 | 14,85 | WLLN138048 |
| Lena | 1380 | 500 | 600 | 5,27 | 15,16 | WLLN138050 |
| Lena | 1380 | 536 | 600 | 5,53 | 15,94 | WLLN138053 |
| Lena | 1380 | 586 | 800 | 5,88 | 17,03 | WLLN138058 |
| Lena | 1380 | 600 | 800 | 5,98 | 17,33 | WLLN138060 |
| Lena | 1380 | 636 | 800 | 6,24 | 18,12 | WLLN138063 |
| Lena | 1380 | 686 | 800 | 6,60 | 19,22 | WLLN138068 |
| Lena | 1620 | 400 | 600 | 5,32 | 15,16 | WLLN162040 |
| Lena | 1620 | 436 | 600 | 5,63 | 16,08 | WLLN162043 |
| Lena | 1620 | 486 | 800 | 6,04 | 17,34 | WLLN162048 |
| Lena | 1620 | 500 | 800 | 6,16 | 17,71 | WLLN162050 |
| Lena | 1620 | 536 | 800 | 6,46 | 18,62 | WLLN162053 |
| Lena | 1620 | 586 | 800 | 6,88 | 19,90 | WLLN162058 |
| Lena | 1620 | 600 | 800 | 7,00 | 20,26 | WLLN162060 |
| Lena | 1620 | 636 | 800 | 7,30 | 21,17 | WLLN162063 |
| Lena | 1620 | 686 | 1000 | 7,72 | 22,45 | WLLN162068 |
| Lena | 1860 | 400 | 600 | 6,10 | 17,36 | WLLN186040 |
| Lena | 1860 | 436 | 800 | 6,44 | 18,40 | WLLN186043 |
| Lena | 1860 | 486 | 800 | 6,92 | 19,86 | WLLN186048 |
| Lena | 1860 | 500 | 800 | 7,05 | 20,25 | WLLN186050 |
| Lena | 1860 | 536 | 800 | 7,40 | 21,31 | WLLN186053 |
| Lena | 1860 | 586 | 1000 | 7,87 | 22,76 | WLLN186058 |
| Lena | 1860 | 600 | 1000 | 8,01 | 23,17 | WLLN186060 |
| Lena | 1860 | 636 | 1000 | 8,35 | 24,21 | WLLN186063 |
| Lena | 1860 | 686 | 1000 | 8,83 | 25,68 | WLLN186068 |
| CHROME | | | | | | |
| Lena | 660 | 400 | 200 | 2,23 | 6,23 | WLLN066040 |
| Lena | 660 | 436 | 200 | 2,36 | 6,61 | WLLN066043 |
| Lena | 660 | 486 | 200 | 2,54 | 7,14 | WLLN066048 |
| Lena | 660 | 500 | 200 | 2,59 | 7,29 | WLLN066050 |
| Lena | 660 | 536 | 200 | 2,72 | 7,67 | WLLN066053 |
| Lena | 660 | 586 | 200 | 2,90 | 8,20 | WLLN066058 |
| Lena | 660 | 600 | 200 | 2,95 | 8,35 | WLLN066060 |
| Lena | 660 | 636 | 300 | 3,08 | 8,72 | WLLN066063 |
| Lena | 660 | 686 | 300 | 3,26 | 9,26 | WLLN066068 |
| Lena | 900 | 400 | 200 | 3,01 | 8,36 | WLLN090040 |
| Lena | 900 | 436 | 300 | 3,18 | 8,87 | WLLN090043 |
| Lena | 900 | 486 | 300 | 3,42 | 9,57 | WLLN090048 |
| Lena | 900 | 500 | 300 | 3,48 | 9,77 | WLLN090050 |
| Lena | 900 | 536 | 300 | 3,65 | 10,28 | WLLN090053 |
| Lena | 900 | 586 | 300 | 3,89 | 10,98 | WLLN090058 |
| Lena | 900 | 600 | 300 | 3,96 | 11,18 | WLLN090060 |
| Lena | 900 | 636 | 400 | 4,13 | 11,69 | WLLN090063 |
| Lena | 900 | 686 | 400 | 4,37 | 12,39 | WLLN090068 |
| Lena | 1140 | 400 | 300 | 3,78 | 10,49 | WLLN114040 |
| Lena | 1140 | 436 | 300 | 3,99 | 11,12 | WLLN114043 |
| Lena | 1140 | 486 | 400 | 4,29 | 12,00 | WLLN114048 |
| Lena | 1140 | 500 | 400 | 4,38 | 12,26 | WLLN114050 |
| Lena | 1140 | 536 | 400 | 4,59 | 12,89 | WLLN114053 |




| Model | A ↓ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|--|---|--|
| Lena | 1140 | 586 | 400 | 4,89 | 13,77 | WLLLEN114058 |
| Lena | 1140 | 600 | 400 | 4,97 | 14,02 | WLLLEN114060 |
| Lena | 1140 | 636 | 400 | 5,19 | 14,65 | WLLLEN114063 |
| Lena | 1140 | 686 | 400 | 5,49 | 15,54 | WLLLEN114068 |
| Lena | 1380 | 400 | 400 | 4,55 | 12,62 | WLLLEN138040 |
| Lena | 1380 | 436 | 400 | 4,81 | 13,38 | WLLLEN138043 |
| Lena | 1380 | 486 | 400 | 5,17 | 14,44 | WLLLEN138048 |
| Lena | 1380 | 500 | 400 | 5,27 | 14,74 | WLLLEN138050 |
| Lena | 1380 | 536 | 400 | 5,53 | 15,50 | WLLLEN138053 |
| Lena | 1380 | 586 | 400 | 5,88 | 16,55 | WLLLEN138058 |
| Lena | 1380 | 600 | 600 | 5,98 | 16,84 | WLLLEN138060 |
| Lena | 1380 | 636 | 600 | 6,24 | 17,61 | WLLLEN138063 |
| Lena | 1380 | 686 | 600 | 6,60 | 18,68 | WLLLEN138068 |
| Lena | 1620 | 400 | 400 | 5,32 | 14,74 | WLLLEN162040 |
| Lena | 1620 | 436 | 400 | 5,63 | 15,64 | WLLLEN162043 |
| Lena | 1620 | 486 | 400 | 6,04 | 16,86 | WLLLEN162048 |
| Lena | 1620 | 500 | 600 | 6,16 | 17,22 | WLLLEN162050 |
| Lena | 1620 | 536 | 600 | 6,46 | 18,10 | WLLLEN162053 |
| Lena | 1620 | 586 | 600 | 6,88 | 19,34 | WLLLEN162058 |
| Lena | 1620 | 600 | 600 | 7,00 | 19,69 | WLLLEN162060 |
| Lena | 1620 | 636 | 600 | 7,30 | 20,57 | WLLLEN162063 |
| Lena | 1620 | 686 | 600 | 7,72 | 21,81 | WLLLEN162068 |
| POWDER COATING | | | | | | |
| Lima | 500 | 300 | 120 | 1,50 | 4,28 | WLLIM050030 |
| Lima | 500 | 400 | 200 | 1,79 | 5,17 | WLLIM050040 |
| Lima | 500 | 500 | 200 | 2,09 | 6,08 | WLLIM050050 |
| Lima | 500 | 600 | 300 | 2,39 | 7,00 | WLLIM050060 |
| Lima | 500 | 700 | 300 | 2,69 | 7,91 | WLLIM050070 |
| Lima | 820 | 300 | 300 | 2,53 | 7,19 | WLLIM082030 |
| Lima | 820 | 400 | 300 | 3,07 | 8,83 | WLLIM082040 |
| Lima | 820 | 500 | 400 | 3,61 | 10,46 | WLLIM082050 |
| Lima | 820 | 600 | 400 | 4,15 | 12,11 | WLLIM082060 |
| Lima | 820 | 700 | 600 | 4,68 | 13,74 | WLLIM082070 |
| Lima | 1140 | 300 | 400 | 3,57 | 10,11 | WLLIM114030 |
| Lima | 1140 | 400 | 400 | 4,35 | 12,48 | WLLIM114040 |
| Lima | 1140 | 500 | 600 | 5,13 | 14,85 | WLLIM114050 |
| Lima | 1140 | 600 | 800 | 5,90 | 17,21 | WLLIM114060 |
| Lima | 1140 | 700 | 800 | 6,68 | 19,58 | WLLIM114070 |
| Lima | 1460 | 300 | 400 | 4,66 | 13,19 | WLLIM146030 |
| Lima | 1460 | 400 | 600 | 5,68 | 16,29 | WLLIM146040 |
| Lima | 1460 | 500 | 800 | 6,69 | 19,38 | WLLIM146050 |
| Lima | 1460 | 600 | 800 | 7,71 | 22,48 | WLLIM146060 |
| Lima | 1460 | 700 | 1000 | 8,73 | 25,57 | WLLIM146070 |
| Lima | 1700 | 300 | 600 | 5,47 | 15,47 | WLLIM170030 |
| Lima | 1700 | 400 | 800 | 6,66 | 19,10 | WLLIM170040 |
| Lima | 1700 | 500 | 800 | 7,86 | 22,75 | WLLIM170050 |
| Lima | 1700 | 600 | 1000 | 9,05 | 26,38 | WLLIM170060 |
| Lima | 1700 | 700 | 1200 | 10,25 | 30,03 | WLLIM170070 |
| CHROME | | | | | | |
| Lima | 500 | 300 | 120 | 1,50 | 4,16 | WLLIM050030 |
| Lima | 500 | 400 | 120 | 1,79 | 5,03 | WLLIM050040 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Lima | 500 | 500 | 200 | 2,09 | 5,91 | WLLIM050050 |
| Lima | 500 | 600 | 200 | 2,39 | 6,80 | WLLIM050060 |
| Lima | 500 | 700 | 200 | 2,69 | 7,68 | WLLIM050070 |
| Lima | 820 | 300 | 200 | 2,53 | 6,99 | WLLIM082030 |
| Lima | 820 | 400 | 200 | 3,07 | 8,59 | WLLIM082040 |
| Lima | 820 | 500 | 300 | 3,61 | 10,17 | WLLIM082050 |
| Lima | 820 | 600 | 400 | 4,15 | 11,76 | WLLIM082060 |
| Lima | 820 | 700 | 400 | 4,68 | 13,34 | WLLIM082070 |
| Lima | 1140 | 300 | 300 | 3,57 | 9,83 | WLLIM114030 |
| Lima | 1140 | 400 | 300 | 4,35 | 12,13 | WLLIM114040 |
| Lima | 1140 | 500 | 400 | 5,13 | 14,43 | WLLIM114050 |
| Lima | 1140 | 600 | 400 | 5,90 | 16,72 | WLLIM114060 |
| Lima | 1140 | 700 | 600 | 6,68 | 19,02 | WLLIM114070 |
| Lima | 1460 | 300 | 300 | 4,66 | 12,83 | WLLIM146030 |
| Lima | 1460 | 400 | 400 | 5,68 | 15,84 | WLLIM146040 |
| Lima | 1460 | 500 | 600 | 6,69 | 18,83 | WLLIM146050 |
| Lima | 1460 | 600 | 600 | 7,71 | 21,84 | WLLIM146060 |
| Lima | 1460 | 700 | 800 | 8,73 | 24,84 | WLLIM146070 |
| Lima | 1700 | 300 | 400 | 5,47 | 15,05 | WLLIM170030 |
| Lima | 1700 | 400 | 600 | 6,66 | 18,57 | WLLIM170040 |
| Lima | 1700 | 500 | 600 | 7,86 | 22,11 | WLLIM170050 |
| Lima | 1700 | 600 | 800 | 9,05 | 25,63 | WLLIM170060 |
| Lima | 1700 | 700 | 800 | 10,25 | 29,16 | WLLIM170070 |
| POWDER COATING | | | | | | |
| Lima One | 820 | 300 | 300 | 2,47 | 7,14 | WWLIE082030 |
| Lima One | 820 | 400 | 300 | 3,01 | 8,78 | WWLIE082040 |
| Lima One | 820 | 500 | 400 | 3,54 | 10,41 | WWLIE082050 |
| Lima One | 820 | 600 | 400 | 4,08 | 12,05 | WWLIE082060 |
| Lima One | 820 | 700 | 600 | 4,62 | 13,69 | WWLIE082070 |
| Lima One | 1140 | 300 | 400 | 3,51 | 10,06 | WWLIE114030 |
| Lima One | 1140 | 400 | 400 | 4,28 | 12,43 | WWLIE114040 |
| Lima One | 1140 | 500 | 600 | 5,06 | 14,79 | WWLIE114050 |
| Lima One | 1140 | 600 | 800 | 5,84 | 17,16 | WWLIE114060 |
| Lima One | 1140 | 700 | 800 | 6,61 | 19,52 | WWLIE114070 |
| Lima One | 1460 | 300 | 400 | 4,60 | 13,15 | WWLIE146030 |
| Lima One | 1460 | 400 | 600 | 5,61 | 16,23 | WWLIE146040 |
| Lima One | 1460 | 500 | 800 | 6,63 | 19,33 | WWLIE146050 |
| Lima One | 1460 | 600 | 800 | 7,64 | 22,42 | WWLIE146060 |
| Lima One | 1460 | 700 | 1000 | 8,66 | 25,51 | WWLIE146070 |
| Lima One | 1700 | 300 | 600 | 5,40 | 15,41 | WWLIE170030 |
| Lima One | 1700 | 400 | 800 | 6,60 | 19,06 | WWLIE170040 |
| Lima One | 1700 | 500 | 800 | 7,79 | 22,69 | WWLIE170050 |
| Lima One | 1700 | 600 | 1000 | 8,99 | 26,33 | WWLIE170060 |
| CHROME | | | | | | |
| Lima One | 820 | 300 | 200 | 2,47 | 6,94 | WWLIE082030 |
| Lima One | 820 | 400 | 200 | 3,01 | 8,54 | WWLIE082040 |
| Lima One | 820 | 500 | 300 | 3,54 | 10,12 | WWLIE082050 |
| Lima One | 820 | 600 | 400 | 4,08 | 11,70 | WWLIE082060 |
| Lima One | 820 | 700 | 400 | 4,62 | 13,29 | WWLIE082070 |
| Lima One | 1140 | 300 | 300 | 3,51 | 9,78 | WWLIE114030 |
| Lima One | 1140 | 400 | 300 | 4,28 | 12,08 | WWLIE114040 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Lima One | 1140 | 500 | 400 | 5,06 | 14,37 | WWLIE114050 |
| Lima One | 1140 | 600 | 400 | 5,84 | 16,67 | WWLIE114060 |
| Lima One | 1140 | 700 | 600 | 6,61 | 18,96 | WWLIE114070 |
| Lima One | 1460 | 300 | 300 | 4,60 | 12,79 | WWLIE146030 |
| Lima One | 1460 | 400 | 400 | 5,61 | 15,78 | WWLIE146040 |
| Lima One | 1460 | 500 | 600 | 6,63 | 18,78 | WWLIE146050 |
| Lima One | 1460 | 600 | 600 | 7,64 | 21,78 | WWLIE146060 |
| Lima One | 1460 | 700 | 800 | 8,66 | 24,78 | WWLIE146070 |
| Lima One | 1700 | 300 | 400 | 5,40 | 14,99 | WWLIE170030 |
| Lima One | 1700 | 400 | 600 | 6,60 | 18,53 | WWLIE170040 |
| Lima One | 1700 | 500 | 600 | 7,79 | 22,05 | WWLIE170050 |
| Lima One | 1700 | 600 | 800 | 8,99 | 25,58 | WWLIE170060 |
| Lima One | 1700 | 700 | 800 | 10,18 | 29,11 | WWLIE170070 |
| POWDER COATING | | | | | | |
| Lukka | 940 | 400 | 400 | 2,83 | 9,89 | WLW51094040 |
| Lukka | 940 | 500 | 400 | 3,32 | 11,92 | WLW51094050 |
| Lukka | 940 | 600 | 600 | 3,82 | 13,95 | WLW51094060 |
| Lukka | 1180 | 400 | 400 | 3,51 | 12,50 | WLW51118040 |
| Lukka | 1180 | 500 | 600 | 4,11 | 15,07 | WLW51118050 |
| Lukka | 1180 | 600 | 600 | 4,70 | 17,63 | WLW51118060 |
| Lukka | 1420 | 400 | 600 | 4,19 | 15,12 | WLW51142040 |
| Lukka | 1420 | 500 | 600 | 4,89 | 18,21 | WLW51142050 |
| Lukka | 1420 | 600 | 800 | 5,59 | 21,30 | WLW51142060 |
| Lukka | 1660 | 400 | 600 | 4,87 | 17,72 | WLW51166040 |
| Lukka | 1660 | 500 | 800 | 5,67 | 21,35 | WLW51166050 |
| Lukka | 1660 | 600 | 800 | 6,47 | 24,97 | WLW51166060 |
| POWDER COATING | | | | | | |
| Mantis | 860 | 440 | 400 | 3,03 | 11,79 | WLMAT086044 |
| Mantis | 860 | 540 | 400 | 3,41 | 13,82 | WLMAT086054 |
| Mantis | 1260 | 440 | 600 | 4,44 | 17,46 | WLMAT126044 |
| Mantis | 1260 | 540 | 600 | 5,00 | 20,36 | WLMAT126054 |
| Mantis | 1560 | 440 | 600 | 5,47 | 21,47 | WLMAT156044 |
| Mantis | 1560 | 540 | 800 | 6,17 | 25,06 | WLMAT156054 |
| POWDER COATING | | | | | | |
| Mantis One | 860 | 440 | 400 | 2,94 | 11,72 | WWMAE086044 |
| Mantis One | 860 | 540 | 400 | 3,32 | 13,75 | WWMAE086054 |
| Mantis One | 1260 | 440 | 600 | 4,35 | 17,38 | WWMAE126044 |
| Mantis One | 1260 | 540 | 600 | 4,91 | 20,29 | WWMAE126054 |
| Mantis One | 1560 | 440 | 600 | 5,38 | 21,40 | WWMAE156044 |
| Mantis One | 1560 | 540 | 800 | 6,08 | 24,98 | WWMAE156054 |
| POWDER COATING | | | | | | |
| Marlin | 600 | 430 | 300 | 1,57 | 6,30 | WLMAR060043 |
| Marlin | 600 | 530 | 300 | 1,76 | 7,35 | WLMAR060053 |
| Marlin | 600 | 630 | 400 | 1,94 | 8,38 | WLMAR060063 |
| Marlin | 780 | 430 | 300 | 2,11 | 8,55 | WLMAR078043 |
| Marlin | 780 | 530 | 400 | 2,38 | 10,01 | WLMAR078053 |
| Marlin | 780 | 630 | 400 | 2,64 | 11,46 | WLMAR078063 |
| Marlin | 1185 | 430 | 400 | 3,25 | 13,15 | WLMAR118043 |
| Marlin | 1185 | 530 | 600 | 3,66 | 15,44 | WLMAR118053 |
| Marlin | 1185 | 630 | 800 | 4,08 | 17,73 | WLMAR118063 |
| Marlin | 1680 | 430 | 600 | 4,66 | 18,89 | WLMAR168043 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Marlin | 1680 | 530 | 800 | 5,27 | 22,24 | WLMAR168053 |
| Marlin | 1680 | 630 | 1000 | 5,87 | 25,56 | WLMAR168063 |
| CHROME | | | | | | |
| Marlin | 600 | 430 | 120 | 1,57 | 6,13 | WLMAR060043 |
| Marlin | 600 | 530 | 200 | 1,76 | 7,14 | WLMAR060053 |
| Marlin | 600 | 630 | 200 | 1,94 | 8,14 | WLMAR060063 |
| Marlin | 780 | 430 | 200 | 2,11 | 8,31 | WLMAR078043 |
| Marlin | 780 | 530 | 300 | 2,38 | 9,73 | WLMAR078053 |
| Marlin | 780 | 630 | 300 | 2,64 | 11,14 | WLMAR078063 |
| Marlin | 1185 | 430 | 300 | 3,25 | 12,79 | WLMAR118043 |
| Marlin | 1185 | 530 | 400 | 3,66 | 15,01 | WLMAR118053 |
| Marlin | 1185 | 630 | 600 | 4,08 | 17,23 | WLMAR118063 |
| Marlin | 1680 | 430 | 600 | 4,66 | 18,37 | WLMAR168043 |
| Marlin | 1680 | 530 | 600 | 5,27 | 21,62 | WLMAR168053 |
| Marlin | 1680 | 630 | 800 | 5,87 | 24,84 | WLMAR168063 |
| POWDER COATING | | | | | | |
| Marlin One | 600 | 430 | 300 | 1,50 | 6,26 | WWMRN060043 |
| Marlin One | 600 | 530 | 300 | 1,69 | 7,29 | WWMRN060053 |
| Marlin One | 600 | 630 | 400 | 1,88 | 8,33 | WWMRN060063 |
| Marlin One | 780 | 430 | 300 | 2,11 | 8,50 | WWMRN078043 |
| Marlin One | 780 | 530 | 400 | 2,38 | 9,96 | WWMRN078053 |
| Marlin One | 780 | 630 | 400 | 2,64 | 11,41 | WWMRN078063 |
| Marlin One | 1185 | 430 | 400 | 3,25 | 13,11 | WWMRN118043 |
| Marlin One | 1185 | 530 | 600 | 3,66 | 15,40 | WWMRN118053 |
| Marlin One | 1185 | 630 | 800 | 4,08 | 17,69 | WWMRN118063 |
| Marlin One | 1680 | 430 | 600 | 4,66 | 18,85 | WWMRN168043 |
| Marlin One | 1680 | 530 | 800 | 5,27 | 22,20 | WWMRN168053 |
| Marlin One | 1680 | 630 | 1000 | 5,87 | 25,52 | WWMRN168063 |
| CHROME | | | | | | |
| Marlin One | 600 | 430 | 120 | 1,50 | 6,08 | WWMRN060043 |
| Marlin One | 600 | 530 | 200 | 1,69 | 7,08 | WWMRN060053 |
| Marlin One | 600 | 630 | 200 | 1,88 | 8,09 | WWMRN060063 |
| Marlin One | 780 | 430 | 200 | 2,11 | 8,33 | WWMRN078043 |
| Marlin One | 780 | 530 | 300 | 2,38 | 9,76 | WWMRN078053 |
| Marlin One | 780 | 630 | 300 | 2,64 | 11,19 | WWMRN078063 |
| Marlin One | 1185 | 430 | 300 | 3,25 | 12,84 | WWMRN118043 |
| Marlin One | 1185 | 530 | 400 | 3,66 | 15,08 | WWMRN118053 |
| Marlin One | 1185 | 630 | 600 | 4,08 | 17,32 | WWMRN118063 |
| Marlin One | 1680 | 430 | 600 | 4,66 | 18,45 | WWMRN168043 |
| Marlin One | 1680 | 530 | 600 | 5,27 | 21,70 | WWMRN168053 |
| Marlin One | 1680 | 630 | 800 | 5,87 | 24,95 | WWMRN168063 |
| POWDER COATING | | | | | | |
| Michelle | 780 | 400 | 400 | 2,84 | 12,40 | WLMIC078040 |
| Michelle | 780 | 500 | 400 | 3,29 | 14,05 | WLMIC078050 |
| Michelle | 780 | 600 | 600 | 3,75 | 15,73 | WLMIC078060 |
| Michelle | 1200 | 400 | 600 | 4,46 | 19,45 | WLMIC120040 |
| Michelle | 1200 | 500 | 800 | 5,18 | 22,09 | WLMIC120050 |
| Michelle | 1200 | 600 | 800 | 5,90 | 24,72 | WLMIC120060 |
| Michelle | 1620 | 400 | 800 | 6,10 | 26,55 | WLMIC162040 |
| Michelle | 1620 | 500 | 1000 | 7,08 | 30,15 | WLMIC162050 |
| Michelle | 1620 | 600 | 1200 | 8,06 | 33,75 | WLMIC162060 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| CHROME | | | | | | |
| Michelle | 780 | 400 | 300 | 2,84 | 12,11 | WLMIC078040 |
| Michelle | 780 | 500 | 300 | 3,29 | 13,72 | WLMIC078050 |
| Michelle | 780 | 600 | 400 | 3,75 | 15,34 | WLMIC078060 |
| Michelle | 1200 | 400 | 400 | 4,46 | 19,01 | WLMIC120040 |
| Michelle | 1200 | 500 | 600 | 5,18 | 21,57 | WLMIC120050 |
| Michelle | 1200 | 600 | 600 | 5,90 | 24,11 | WLMIC120060 |
| Michelle | 1620 | 400 | 600 | 6,10 | 25,95 | WLMIC162040 |
| Michelle | 1620 | 500 | 800 | 7,08 | 29,43 | WLMIC162050 |
| Michelle | 1620 | 600 | 800 | 8,06 | 32,92 | WLMIC162060 |
| POWDER COATING | | | | | | |
| Mike | 435 | 430 | 200 | 1,25 | 4,63 | WLMIK043043 |
| Mike | 435 | 530 | 300 | 1,41 | 5,42 | WLMIK043053 |
| Mike | 460 | 230 | 120 | 0,92 | 2,99 | WLMIK046023 |
| Mike | 710 | 230 | 200 | 1,40 | 4,51 | WLMIK071023 |
| Mike | 735 | 430 | 400 | 2,07 | 7,60 | WLMIK073043 |
| Mike | 735 | 530 | 400 | 2,34 | 8,89 | WLMIK073053 |
| Mike | 960 | 230 | 300 | 1,89 | 6,05 | WLMIK096023 |
| Mike | 1035 | 430 | 400 | 2,89 | 10,55 | WLMIK103043 |
| Mike | 1035 | 530 | 600 | 3,26 | 12,33 | WLMIK103053 |
| Mike | 1210 | 230 | 300 | 2,38 | 7,59 | WLMIK121023 |
| Mike | 1335 | 430 | 600 | 3,71 | 13,52 | WLMIK133043 |
| Mike | 1335 | 530 | 800 | 4,19 | 15,79 | WLMIK133053 |
| Mike | 1460 | 230 | 400 | 2,86 | 9,12 | WLMIK146023 |
| Mike | 1635 | 430 | 800 | 4,53 | 16,48 | WLMIK163043 |
| Mike | 1635 | 530 | 800 | 5,11 | 19,25 | WLMIK163053 |
| Mike | 1710 | 230 | 400 | 3,35 | 10,65 | WLMIK171023 |
| CHROME | | | | | | |
| Mike | 435 | 430 | 120 | 1,25 | 4,49 | WLMIK043043 |
| Mike | 435 | 530 | 200 | 1,41 | 5,25 | WLMIK043053 |
| Mike | 460 | 230 | 120 | 0,92 | 2,90 | WLMIK046023 |
| Mike | 710 | 230 | 120 | 1,40 | 4,39 | WLMIK071023 |
| Mike | 735 | 430 | 200 | 2,07 | 7,36 | WLMIK073043 |
| Mike | 735 | 530 | 300 | 2,34 | 8,60 | WLMIK073053 |
| Mike | 960 | 230 | 200 | 1,89 | 5,88 | WLMIK096023 |
| Mike | 1035 | 430 | 300 | 2,89 | 10,23 | WLMIK103043 |
| Mike | 1035 | 530 | 400 | 3,26 | 11,95 | WLMIK103053 |
| Mike | 1210 | 230 | 200 | 2,38 | 7,37 | WLMIK121023 |
| Mike | 1335 | 430 | 400 | 3,71 | 13,10 | WLMIK133043 |
| Mike | 1335 | 530 | 600 | 4,19 | 15,30 | WLMIK133053 |
| Mike | 1460 | 230 | 300 | 2,86 | 8,86 | WLMIK146023 |
| Mike | 1635 | 430 | 600 | 4,53 | 15,97 | WLMIK163043 |
| Mike | 1635 | 530 | 600 | 5,11 | 18,64 | WLMIK163053 |
| Mike | 1710 | 230 | 300 | 3,35 | 10,35 | WLMIK171023 |
| POWDER COATING | | | | | | |
| Mike One | 710 | 230 | 200 | 1,34 | 4,34 | WWMIN071023 |
| Mike One | 735 | 430 | 400 | 2,00 | 7,36 | WWMIN073043 |
| Mike One | 735 | 530 | 400 | 2,27 | 8,60 | WWMIN073053 |
| Mike One | 960 | 230 | 300 | 1,82 | 5,83 | WWMIN096023 |
| Mike One | 1035 | 430 | 400 | 2,82 | 10,23 | WWMIN103043 |
| Mike One | 1035 | 530 | 600 | 3,20 | 11,95 | WWMIN103053 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Mike One | 1210 | 230 | 300 | 2,31 | 7,32 | WWMIN121023 |
| Mike One | 1335 | 430 | 600 | 3,64 | 13,10 | WWMIN133043 |
| Mike One | 1335 | 530 | 800 | 4,12 | 15,30 | WWMIN133053 |
| Mike One | 1460 | 230 | 400 | 2,80 | 8,81 | WWMIN146023 |
| Mike One | 1635 | 430 | 800 | 4,46 | 15,97 | WWMIN163043 |
| Mike One | 1635 | 530 | 800 | 5,05 | 18,64 | WWMIN163053 |
| Mike One | 1710 | 230 | 400 | 3,29 | 10,30 | WWMIN171023 |
| CHROME | | | | | | |
| Mike One | 710 | 230 | 120 | 1,34 | 4,34 | WWMIN071023 |
| Mike One | 735 | 430 | 200 | 2,00 | 7,36 | WWMIN073043 |
| Mike One | 735 | 530 | 300 | 2,27 | 8,60 | WWMIN073053 |
| Mike One | 960 | 230 | 120 | 1,82 | 5,83 | WWMIN096023 |
| Mike One | 1035 | 430 | 300 | 2,82 | 10,23 | WWMIN103043 |
| Mike One | 1035 | 530 | 400 | 3,20 | 11,95 | WWMIN103053 |
| Mike One | 1210 | 230 | 200 | 2,31 | 7,32 | WWMIN121023 |
| Mike One | 1335 | 430 | 400 | 3,64 | 13,10 | WWMIN133043 |
| Mike One | 1335 | 530 | 600 | 4,12 | 15,30 | WWMIN133053 |
| Mike One | 1460 | 230 | 200 | 2,80 | 8,81 | WWMIN146023 |
| Mike One | 1635 | 430 | 600 | 4,46 | 15,97 | WWMIN163043 |
| Mike One | 1635 | 530 | 600 | 5,05 | 18,64 | WWMIN163053 |
| Mike One | 1710 | 230 | 200 | 3,29 | 10,30 | WWMIN171023 |
| POWDER COATING | | | | | | |
| Nemo | 300 | 645 | 400 | 2,42 | 10,68 | WLNEM030064 |
| Nemo | 300 | 915 | 600 | 3,45 | 15,21 | WLNEM030091 |
| Nemo | 300 | 1185 | 800 | 4,48 | 19,76 | WLNEM030118 |
| Nemo | 300 | 1455 | 800 | 5,51 | 24,29 | WLNEM030145 |
| Nemo | 300 | 1725 | 1000 | 6,54 | 28,85 | WLNEM030172 |
| Nemo | 530 | 375 | 400 | 2,09 | 10,03 | WLNEM053037 |
| Nemo | 530 | 645 | 600 | 3,64 | 17,45 | WLNEM053064 |
| Nemo | 530 | 915 | 800 | 5,19 | 24,87 | WLNEM053091 |
| Nemo | 530 | 1185 | 1200 | 6,74 | 32,31 | WLNEM053118 |
| Nemo | 530 | 1455 | 1500 | 8,29 | 39,74 | WLNEM053145 |
| Nemo | 530 | 1725 | 1500 | 9,84 | 47,19 | WLNEM053172 |
| POWDER COATING | | | | | | |
| Outcorner | 465 | 300 | 300 | 1,56 | 6,77 | WLQON046030 |
| Outcorner | 735 | 300 | 400 | 2,39 | 10,31 | WLQON073030 |
| Outcorner | 1005 | 300 | 600 | 3,22 | 13,84 | WLQON100030 |
| Outcorner | 1275 | 300 | 800 | 4,05 | 17,37 | WLQON127030 |
| Outcorner | 1545 | 300 | 800 | 4,89 | 20,91 | WLQON154030 |
| RAW COPPER | | | | | | |
| Pająk E | 923 | 431 | 300 | 2,07 | 10,56 | WLP AJ092043 |
| Pająk E | 923 | 531 | 400 | 2,14 | 10,98 | WLP AJ092053 |
| Pająk E | 923 | 631 | 400 | 2,40 | 11,93 | WLP AJ092063 |
| Pająk E | 1323 | 431 | 400 | 2,64 | 12,10 | WLP AJ132043 |
| Pająk E | 1323 | 531 | 400 | 2,71 | 12,57 | WLP AJ132053 |
| Pająk E | 1323 | 631 | 600 | 2,96 | 13,48 | WLP AJ132063 |
| Pająk E | 1723 | 431 | 400 | 3,20 | 13,66 | WLP AJ172043 |
| Pająk E | 1723 | 531 | 600 | 3,26 | 14,12 | WLP AJ172053 |
| Pająk E | 1723 | 631 | 600 | 3,52 | 15,07 | WLP AJ172063 |
| POWDER COATING | | | | | | |
| Perła E | 1360 | 500 | 284 | – | 13,46 | WSPER136050 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Perla E | 1760 | 600 | 455 | – | 18,52 | WSPER176060 |
| Perla E | 1360 | 500 | 213 | – | 13,17 | WSPER136050 |
| Perla E | 1760 | 600 | 284 | – | 18,09 | WSPER176060 |
| POWDER COATING | | | | | | |
| Poc 2 | 600 | 450 | 300 | 3,19 | 9,06 | WLZUL060045 |
| Poc 2 | 600 | 500 | 400 | 3,45 | 9,84 | WLZUL060050 |
| Poc 2 | 600 | 600 | 400 | 3,99 | 11,42 | WLZUL060060 |
| Poc 2 | 840 | 450 | 400 | 4,29 | 12,23 | WLZUL084045 |
| Poc 2 | 840 | 500 | 600 | 4,64 | 13,29 | WLZUL084050 |
| Poc 2 | 840 | 600 | 600 | 5,36 | 15,41 | WLZUL084060 |
| Poc 2 | 840 | 700 | 800 | 6,07 | 17,52 | WLZUL084070 |
| Poc 2 | 1040 | 450 | 600 | 5,26 | 15,06 | WLZUL104045 |
| Poc 2 | 1040 | 500 | 600 | 5,70 | 16,35 | WLZUL104050 |
| Poc 2 | 1040 | 600 | 800 | 6,56 | 18,92 | WLZUL104060 |
| Poc 2 | 1040 | 700 | 800 | 7,42 | 21,49 | WLZUL104070 |
| Poc 2 | 1240 | 450 | 800 | 6,19 | 17,73 | WLZUL124045 |
| Poc 2 | 1240 | 500 | 800 | 6,70 | 19,25 | WLZUL124050 |
| Poc 2 | 1240 | 600 | 1000 | 7,71 | 22,28 | WLZUL124060 |
| Poc 2 | 1240 | 700 | 1000 | 8,72 | 25,29 | WLZUL124070 |
| Poc 2 | 1400 | 500 | 800 | 7,53 | 21,67 | WLZUL140050 |
| Poc 2 | 1400 | 600 | 1000 | 8,66 | 25,06 | WLZUL140060 |
| Poc 2 | 1400 | 700 | 1200 | 9,79 | 28,45 | WLZUL140070 |
| POWDER COATING | | | | | | |
| Pola | 780 | 500 | 400 | 3,34 | 9,70 | WLPAL078050 |
| Pola | 780 | 600 | 400 | 3,79 | 11,06 | WLPAL078060 |
| Pola | 1180 | 500 | 600 | 5,39 | 15,65 | WLPAL118050 |
| Pola | 1180 | 600 | 800 | 6,14 | 17,92 | WLPAL118060 |
| Pola | 1580 | 500 | 800 | 7,44 | 21,60 | WLPAL158050 |
| Pola | 1580 | 600 | 1000 | 8,49 | 24,79 | WLPAL158060 |
| CHROME | | | | | | |
| Pola | 780 | 500 | 300 | 3,34 | 9,42 | WLPAL078050 |
| Pola | 780 | 600 | 300 | 3,79 | 10,75 | WLPAL078060 |
| Pola | 1180 | 500 | 400 | 5,39 | 15,21 | WLPAL118050 |
| Pola | 1180 | 600 | 600 | 6,14 | 17,41 | WLPAL118060 |
| Pola | 1580 | 500 | 600 | 7,44 | 20,99 | WLPAL158050 |
| Pola | 1580 | 600 | 800 | 8,49 | 24,08 | WLPAL158060 |
| POWDER COATING | | | | | | |
| Pola One | 780 | 500 | 400 | 3,27 | 9,64 | WWPAN078050 |
| Pola One | 780 | 600 | 400 | 3,72 | 11,00 | WWPAN078060 |
| Pola One | 1180 | 500 | 600 | 5,33 | 15,60 | WWPAN118050 |
| Pola One | 1180 | 600 | 800 | 6,07 | 17,87 | WWPAN118060 |
| Pola One | 1580 | 500 | 800 | 7,38 | 21,55 | WWPAN158050 |
| Pola One | 1580 | 600 | 1000 | 8,42 | 24,73 | WWPAN158060 |
| CHROME | | | | | | |
| Pola One | 780 | 500 | 300 | 3,27 | 9,42 | WWPAN078050 |
| Pola One | 780 | 600 | 300 | 3,72 | 10,75 | WWPAN078060 |
| Pola One | 1180 | 500 | 400 | 5,33 | 15,21 | WWPAN118050 |
| Pola One | 1180 | 600 | 600 | 6,07 | 17,41 | WWPAN118060 |
| Pola One | 1580 | 500 | 600 | 7,38 | 20,99 | WWPAN158050 |
| Pola One | 1580 | 600 | 800 | 8,42 | 24,08 | WWPAN158060 |




| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| POWDER COATING | | | | | | |
| Quadrus Bold | 870 | 450 | 600 | 4,11 | 19,03 | WLQBA087045 |
| Quadrus Bold | 870 | 600 | 800 | 5,08 | 24,35 | WLQBA087060 |
| Quadrus Bold | 1185 | 450 | 800 | 5,57 | 25,74 | WLQBA118045 |
| Quadrus Bold | 1185 | 600 | 1000 | 6,88 | 32,95 | WLQBA118060 |
| POWDER COATING | | | | | | |
| Quadrus Bold One | 870 | 450 | 600 | 4,05 | 18,98 | WWQBN087045 |
| Quadrus Bold One | 870 | 600 | 800 | 5,01 | 24,30 | WWQBN087060 |
| Quadrus Bold One | 1185 | 450 | 800 | 5,50 | 25,69 | WWQBN118045 |
| Quadrus Bold One | 1185 | 600 | 1000 | 6,81 | 32,90 | WWQBN118060 |
| POWDER COATING | | | | | | |
| Quadrus Slim | 870 | 450 | 400 | 2,60 | 10,92 | WLQUS087045 |
| Quadrus Slim | 870 | 600 | 600 | 3,03 | 13,26 | WLQUS087060 |
| Quadrus Slim | 1185 | 450 | 600 | 3,50 | 14,60 | WLQUS118045 |
| Quadrus Slim | 1185 | 600 | 800 | 4,07 | 17,73 | WLQUS118060 |
| POWDER COATING | | | | | | |
| Quadrus Slim One | 870 | 450 | 400 | 2,53 | 10,86 | WWQSN087045 |
| Quadrus Slim One | 870 | 600 | 600 | 2,96 | 13,21 | WWQSN087060 |
| Quadrus Slim One | 1185 | 450 | 600 | 3,43 | 14,54 | WWQSN118045 |
| Quadrus Slim One | 1185 | 600 | 800 | 4,00 | 17,67 | WWQSN118060 |
| POWDER COATING | | | | | | |
| Retro | 430 | 504 | 120 | 1,05 | 5,42 | WLRE1043050 |
| Retro | 800 | 504 | 200 | 1,88 | 9,01 | WLRE1080050 |
| Retro | 1170 | 504 | 300 | 2,71 | 12,60 | WLRE1117050 |
| Retro | 1540 | 504 | 400 | 3,54 | 16,19 | WLRE1154050 |
| CHROME | | | | | | |
| Retro | 430 | 504 | 120 | 1,05 | 5,30 | WLRE1043050 |
| Retro | 800 | 504 | 120 | 1,88 | 8,90 | WLRE1080050 |
| Retro | 1170 | 504 | 200 | 2,71 | 12,40 | WLRE1117050 |
| Retro | 1540 | 504 | 300 | 3,54 | 15,90 | WLRE1154050 |
| POWDER COATING | | | | | | |
| Ribbon V E | 1800 | 290 | 600 | 3,33 | 28,52 | WLRVE180029 |
| Ribbon V E | 1800 | 390 | 800 | 4,45 | 38,03 | WLRVE180039 |
| Ribbon V E | 1800 | 490 | 1000 | 5,57 | 47,55 | WLRVE180049 |
| POWDER COATING | | | | | | |
| Simple | 480 | 500 | 200 | 1,96 | 5,43 | WLSIM048050 |
| Simple | 600 | 500 | 200 | 2,45 | 6,72 | WLSIM060050 |
| Simple | 720 | 500 | 300 | 2,94 | 8,02 | WLSIM072050 |
| Simple | 840 | 500 | 300 | 3,43 | 9,32 | WLSIM084050 |
| Simple | 960 | 500 | 400 | 3,92 | 10,61 | WLSIM096050 |
| Simple | 1080 | 500 | 400 | 4,41 | 11,90 | WLSIM108050 |
| Simple | 1200 | 500 | 400 | 4,90 | 13,20 | WLSIM120050 |
| Simple | 1440 | 500 | 600 | 5,89 | 15,80 | WLSIM144050 |
| Simple | 1680 | 500 | 600 | 6,87 | 18,39 | WLSIM168050 |
| Simple | 1920 | 500 | 800 | 7,85 | 20,99 | WLSIM192050 |
| CHROME | | | | | | |
| Simple | 480 | 500 | 120 | 1,96 | 5,31 | WLSIM048050 |
| Simple | 600 | 500 | 120 | 2,45 | 6,56 | WLSIM060050 |
| Simple | 720 | 500 | 200 | 2,94 | 7,83 | WLSIM072050 |
| Simple | 840 | 500 | 200 | 3,43 | 9,10 | WLSIM084050 |
| Simple | 960 | 500 | 300 | 3,92 | 10,37 | WLSIM096050 |




| Model | A ↓ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|--|---|--|
| Simple | 1080 | 500 | 300 | 4,41 | 11,63 | WLSIM108050 |
| Simple | 1200 | 500 | 300 | 4,90 | 12,90 | WLSIM120050 |
| Simple | 1440 | 500 | 400 | 5,89 | 15,44 | WLSIM144050 |
| Simple | 1680 | 500 | 400 | 6,87 | 17,96 | WLSIM168050 |
| POWDER COATING | | | | | | |
| Simple Dw | 1515 | 500 | 600 | 5,89 | 15,80 | WLSDW151050 |
| Simple Dw | 1755 | 500 | 600 | 6,87 | 18,39 | WLSDW175050 |
| Simple Dw | 1995 | 500 | 800 | 7,85 | 20,99 | WLSDW199050 |
| POWDER COATING | | | | | | |
| Simple One | 720 | 500 | 300 | 2,87 | 7,96 | WWSIE072050 |
| Simple One | 840 | 500 | 300 | 3,36 | 9,26 | WWSIE084050 |
| Simple One | 960 | 500 | 400 | 3,85 | 10,55 | WWSIE096050 |
| Simple One | 1080 | 500 | 400 | 4,34 | 11,85 | WWSIE108050 |
| Simple One | 1200 | 500 | 400 | 4,83 | 13,14 | WWSIE120050 |
| Simple One | 1440 | 500 | 600 | 5,81 | 15,74 | WWSIE144050 |
| Simple One | 1680 | 500 | 600 | 6,79 | 18,33 | WWSIE168050 |
| Simple One | 1920 | 500 | 800 | 7,78 | 20,93 | WWSIE192050 |
| CHROME | | | | | | |
| Simple One | 720 | 500 | 200 | 2,87 | 7,77 | WWSIE072050 |
| Simple One | 840 | 500 | 200 | 3,36 | 9,04 | WWSIE084050 |
| Simple One | 960 | 500 | 300 | 3,85 | 10,31 | WWSIE096050 |
| Simple One | 1080 | 500 | 300 | 4,34 | 11,58 | WWSIE108050 |
| Simple One | 1200 | 500 | 300 | 4,83 | 12,84 | WWSIE120050 |
| Simple One | 1440 | 500 | 400 | 5,81 | 15,38 | WWSIE144050 |
| Simple One | 1680 | 500 | 400 | 6,79 | 17,90 | WWSIE168050 |
| POWDER COATING | | | | | | |
| Sherwood V E | 1000 | 330 | 600 | 5,53 | 18,10 | WLSTV100033 |
| Sherwood V E | 1300 | 330 | 600 | 7,05 | 23,06 | WLSTV130033 |
| Sherwood V E | 1300 | 440 | 800 | 9,80 | 29,81 | WLSTV130044 |
| Sherwood V E | 1600 | 330 | 800 | 8,58 | 28,04 | WLSTV160033 |
| Sherwood V E | 1600 | 440 | 1000 | 11,92 | 36,22 | WLSTV160044 |
| Sherwood V E | 1600 | 540 | 1200 | 13,45 | 43,99 | WLSTV160054 |
| Sherwood V E | 1900 | 330 | 800 | 10,10 | 33,01 | WLSTV190033 |
| Sherwood V E | 1900 | 440 | 1200 | 14,05 | 42,62 | WLSTV190044 |
| Sherwood V E | 1900 | 540 | 1500 | 15,84 | 51,79 | WLSTV190054 |
| POWDER COATING | | | | | | |
| Triga E | 560 | 480 | 400 | 5,72 | 14,77 | WLTRG056048 |
| Triga E | 560 | 680 | 600 | 8,01 | 20,74 | WLTRG056068 |
| Triga E | 560 | 880 | 600 | 10,31 | 26,71 | WLTRG056088 |
| Triga E | 560 | 1080 | 800 | 12,60 | 32,68 | WLTRG056108 |
| Triga E | 560 | 1280 | 1000 | 14,90 | 38,65 | WLTRG056128 |
| Triga E | 610 | 480 | 400 | 6,22 | 15,97 | WLTRG061048 |
| Triga E | 610 | 680 | 600 | 8,71 | 22,42 | WLTRG061068 |
| Triga E | 610 | 880 | 800 | 11,21 | 28,87 | WLTRG061088 |
| Triga E | 610 | 1080 | 800 | 13,70 | 35,32 | WLTRG061108 |
| Triga E | 610 | 1280 | 1000 | 16,19 | 41,76 | WLTRG061128 |
| Triga E | 900 | 380 | 400 | 7,29 | 18,30 | WLTRG090038 |
| Triga E | 900 | 480 | 600 | 9,11 | 22,92 | WLTRG090048 |
| Triga E | 900 | 580 | 800 | 10,94 | 27,53 | WLTRG090058 |
| Triga E | 900 | 680 | 800 | 12,76 | 32,15 | WLTRG090068 |
| Triga E | 1300 | 380 | 600 | 10,48 | 25,97 | WLTRG130038 |

| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Triga E | 1300 | 480 | 800 | 13,10 | 32,50 | WLTRG130048 |
| Triga E | 1300 | 580 | 1000 | 15,72 | 39,03 | WLTRG130058 |
| Triga E | 1300 | 680 | 1200 | 18,34 | 45,56 | WLTRG130068 |
| Triga E | 1700 | 380 | 800 | 13,67 | 33,64 | WLTRG170038 |
| Triga E | 1700 | 480 | 1000 | 17,09 | 42,08 | WLTRG170048 |
| Triga E | 1700 | 580 | 1200 | 20,51 | 50,53 | WLTRG170058 |
| Triga E | 1700 | 680 | 1500 | 23,93 | 58,98 | WLTRG170068 |
| Triga E | 1900 | 380 | 1000 | 15,26 | 37,47 | WLTRG190038 |
| Triga E | 1900 | 480 | 1200 | 19,08 | 46,87 | WLTRG190048 |
| Triga E | 1900 | 580 | 1500 | 22,90 | 56,28 | WLTRG190058 |
| Triga E | 1900 | 680 | 1500 | 26,72 | 65,68 | WLTRG190068 |
| POWDER COATING | | | | | | |
| Triga M E | 1700 | 680 | 600 | 10,55 | 37,76 | WLTRL170068 |
| Triga M E | 1700 | 780 | 800 | 13,97 | 46,21 | WLTRL170078 |
| Triga M E | 1700 | 880 | 1000 | 17,39 | 54,65 | WLTRL170088 |
| Triga M E | 1900 | 680 | 800 | 11,75 | 42,01 | WLTRL190068 |
| Triga M E | 1900 | 780 | 1000 | 15,57 | 51,42 | WLTRL190078 |
| Triga M E | 1900 | 880 | 1200 | 19,39 | 60,83 | WLTRL190088 |
| POWDER COATING | | | | | | |
| Triga AN E | 1700 | 280 | 1000 | 11,64 | 32,04 | WLVER170028 |
| Triga AN E | 1900 | 280 | 1000 | 12,95 | 35,52 | WLVER190028 |
| POWDER COATING | | | | | | |
| Triga Anc E | 1700 | 280 | 1000 | 11,64 | 32,04 | WLVEC170028 |
| Triga Anc E | 1900 | 280 | 1000 | 12,95 | 35,52 | WLVEC190028 |
| POWDER COATING | | | | | | |
| Triga AW E | 1700 | 430 | 1200 | 14,33 | 39,47 | WLVRA170043 |
| Triga AW E | 1900 | 430 | 1200 | 15,93 | 43,72 | WLVRA190043 |
| POWDER COATING | | | | | | |
| Tune VWD E | 600 | 590 | 800 | 10,72 | 24,39 | WLTUV060059 |
| Tune VWD E | 600 | 790 | 1000 | 14,30 | 32,50 | WLTUV060079 |
| Tune VWD E | 600 | 990 | 1200 | 17,87 | 40,60 | WLTUV060099 |
| Tune VWD E | 600 | 1190 | 1500 | 21,45 | 48,71 | WLTUV060119 |
| Tune VWD E | 600 | 1390 | 1500 | 25,03 | 56,82 | WLTUV060139 |
| Tune VWD E | 1800 | 290 | 1000 | 15,26 | 34,07 | WLTUV180029 |
| Tune VWD E | 1800 | 490 | 1500 | 25,44 | 56,67 | WLTUV180049 |
| POWDER COATING | | | | | | |
| Tune VWS E | 600 | 590 | 400 | 5,77 | 13,24 | WLTSV060059 |
| Tune VWS E | 600 | 790 | 600 | 7,69 | 17,60 | WLTSV060079 |
| Tune VWS E | 600 | 990 | 800 | 9,62 | 21,95 | WLTSV060099 |
| Tune VWS E | 600 | 1190 | 1000 | 11,54 | 26,31 | WLTSV060119 |
| Tune VWS E | 600 | 1390 | 1000 | 13,47 | 30,66 | WLTSV060139 |
| Tune VWS E | 600 | 1590 | 1200 | 15,26 | 34,62 | WLTSV060159 |
| Tune VWS E | 1800 | 290 | 600 | 7,83 | 17,57 | WLTSV180029 |
| Tune VWS E | 1800 | 490 | 1000 | 13,06 | 29,18 | WLTSV180049 |
| Tune VWS E | 1800 | 690 | 1500 | 18,29 | 40,77 | WLTSV180069 |
| POWDER COATING | | | | | | |
| Tytus | 820 | 440 | 600 | 5,44 | 16,56 | WLTYT082044 |
| Tytus | 820 | 540 | 600 | 6,39 | 19,47 | WLTYT082054 |
| Tytus | 820 | 640 | 800 | 7,35 | 22,38 | WLTYT082064 |
| Tytus | 1020 | 440 | 600 | 7,03 | 21,36 | WLTYT102044 |
| Tytus | 1020 | 540 | 800 | 8,29 | 25,18 | WLTYT102054 |


| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Tytus | 1020 | 640 | 1000 | 9,54 | 29,01 | WLTYT102064 |
| Tytus | 1260 | 440 | 800 | 8,46 | 25,67 | WLTYT126044 |
| Tytus | 1260 | 540 | 1000 | 9,95 | 30,22 | WLTYT126054 |
| Tytus | 1260 | 640 | 1200 | 11,44 | 34,77 | WLTYT126064 |
| Tytus | 1420 | 440 | 1000 | 9,73 | 29,51 | WLTYT142044 |
| Tytus | 1420 | 540 | 1200 | 11,46 | 34,79 | WLTYT142054 |
| Tytus | 1420 | 640 | 1200 | 13,20 | 40,07 | WLTYT142064 |
| Tytus | 1780 | 440 | 1200 | 12,11 | 36,70 | WLTYT178044 |
| Tytus | 1780 | 540 | 1500 | 14,26 | 43,25 | WLTYT178054 |
| Tytus | 1780 | 640 | 1500 | 16,41 | 49,80 | WLTYT178064 |
| POWDER COATING | | | | | | |
| Tytus One | 820 | 440 | 600 | 5,35 | 16,48 | WWTYN082044 |
| Tytus One | 820 | 540 | 600 | 6,31 | 19,40 | WWTYN082054 |
| Tytus One | 820 | 640 | 800 | 7,27 | 22,32 | WWTYN082064 |
| Tytus One | 1020 | 440 | 600 | 6,95 | 21,30 | WWTYN102044 |
| Tytus One | 1020 | 540 | 800 | 8,20 | 25,11 | WWTYN102054 |
| Tytus One | 1020 | 640 | 1000 | 9,46 | 28,94 | WWTYN102064 |
| Tytus One | 1260 | 440 | 800 | 8,37 | 25,60 | WWTYN126044 |
| Tytus One | 1260 | 540 | 1000 | 9,87 | 30,15 | WWTYN126054 |
| Tytus One | 1420 | 440 | 1000 | 9,65 | 29,45 | WWTYN142044 |
| POWDER COATING | | | | | | |
| Vipera | 510 | 400 | 200 | 1,36 | 4,88 | WLVPA051040 |
| Vipera | 510 | 500 | 200 | 1,48 | 5,53 | WLVPA051050 |
| Vipera | 510 | 600 | 200 | 1,61 | 6,19 | WLVPA051060 |
| Vipera | 750 | 400 | 200 | 1,97 | 6,78 | WLVPA075040 |
| Vipera | 750 | 600 | 300 | 2,14 | 7,69 | WLVPA075050 |
| Vipera | 750 | 500 | 300 | 2,32 | 8,61 | WLVPA075060 |
| Vipera | 990 | 400 | 300 | 2,58 | 8,68 | WLVPA099040 |
| Vipera | 990 | 500 | 400 | 2,81 | 9,87 | WLVPA099050 |
| Vipera | 990 | 600 | 400 | 3,04 | 11,04 | WLVPA099060 |
| Vipera | 1230 | 400 | 400 | 3,19 | 10,58 | WLVPA123040 |
| Vipera | 1230 | 600 | 400 | 3,47 | 12,02 | WLVPA123050 |
| Vipera | 1230 | 500 | 600 | 3,75 | 13,47 | WLVPA123060 |
| Vipera | 1470 | 400 | 400 | 3,80 | 12,49 | WLVPA147040 |
| Vipera | 1470 | 500 | 600 | 4,13 | 14,20 | WLVPA147050 |
| Vipera | 1470 | 600 | 600 | 4,46 | 15,89 | WLVPA147060 |
| Vipera | 1710 | 400 | 600 | 4,40 | 14,38 | WLVPA171040 |
| Vipera | 1710 | 500 | 600 | 4,79 | 16,36 | WLVPA171050 |
| Vipera | 1710 | 600 | 800 | 5,17 | 18,32 | WLVPA171060 |
| POWDER COATING | | | | | | |
| Vipera One | 750 | 400 | 200 | 1,97 | 6,78 | WWVPN075040 |
| Vipera One | 750 | 500 | 300 | 2,14 | 7,69 | WWVPN075050 |
| Vipera One | 750 | 600 | 300 | 2,32 | 8,61 | WWVPN075060 |
| Vipera One | 990 | 400 | 300 | 2,58 | 8,68 | WWVPN099040 |
| Vipera One | 990 | 500 | 400 | 2,81 | 9,87 | WWVPN099050 |
| Vipera One | 990 | 600 | 400 | 3,04 | 11,04 | WWVPN099060 |
| Vipera One | 1230 | 400 | 400 | 3,19 | 10,58 | WWVPN123040 |
| Vipera One | 1230 | 500 | 400 | 3,47 | 12,02 | WWVPN123050 |
| Vipera One | 1230 | 600 | 600 | 3,75 | 13,47 | WWVPN123060 |
| Vipera One | 1470 | 400 | 400 | 3,80 | 12,49 | WWVPN147040 |
| Vipera One | 1470 | 500 | 600 | 4,13 | 14,20 | WWVPN147050 |

| Model | A ↓ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|--|---|--|
| Vipera One | 1470 | 600 | 600 | 4,46 | 15,89 | WWVPN147060 |
| Vipera One | 1710 | 400 | 600 | 4,40 | 14,38 | WWVPN171040 |
| Vipera One | 1710 | 500 | 600 | 4,79 | 16,36 | WWVPN171050 |
| Vipera One | 1710 | 600 | 800 | 5,17 | 18,32 | WWVPN171060 |
| POWDER COATING | | | | | | |
| Vivo | 670 | 300 | 200 | 1,44 | 5,45 | WLVOV067030 |
| Vivo | 670 | 400 | 200 | 1,63 | 6,49 | WLVOV067040 |
| Vivo | 670 | 500 | 300 | 1,83 | 7,52 | WLVOV067050 |
| Vivo | 670 | 600 | 300 | 2,03 | 8,57 | WLVOV067060 |
| Vivo | 910 | 300 | 200 | 1,94 | 7,13 | WLVOV091030 |
| Vivo | 910 | 400 | 300 | 2,21 | 8,51 | WLVOV091040 |
| Vivo | 910 | 500 | 400 | 2,47 | 9,86 | WLVOV091050 |
| Vivo | 910 | 600 | 400 | 2,73 | 11,22 | WLVOV091060 |
| Vivo | 1150 | 300 | 300 | 2,45 | 8,83 | WLVOV115030 |
| Vivo | 1150 | 400 | 400 | 2,78 | 10,52 | WLVOV115040 |
| Vivo | 1150 | 500 | 400 | 3,11 | 12,20 | WLVOV115050 |
| Vivo | 1150 | 600 | 600 | 3,44 | 13,89 | WLVOV115060 |
| Vivo | 1390 | 300 | 400 | 2,96 | 10,53 | WLVOV139030 |
| Vivo | 1390 | 400 | 400 | 3,35 | 12,52 | WLVOV139040 |
| Vivo | 1390 | 500 | 600 | 3,75 | 14,54 | WLVOV139050 |
| Vivo | 1390 | 600 | 600 | 4,14 | 16,54 | WLVOV139060 |
| Vivo | 1630 | 300 | 400 | 3,46 | 12,20 | WLVOV163030 |
| Vivo | 1630 | 400 | 600 | 3,92 | 14,55 | WLVOV163040 |
| Vivo | 1630 | 500 | 600 | 4,38 | 16,87 | WLVOV163050 |
| Vivo | 1630 | 600 | 800 | 4,84 | 19,21 | WLVOV163060 |
| CHROME | | | | | | |
| Vivo | 670 | 300 | 120 | 1,44 | 5,32 | WLVOV067030 |
| Vivo | 670 | 400 | 200 | 1,63 | 6,33 | WLVOV067040 |
| Vivo | 670 | 500 | 200 | 1,83 | 7,34 | WLVOV067050 |
| Vivo | 670 | 600 | 200 | 2,03 | 8,36 | WLVOV067060 |
| Vivo | 910 | 300 | 200 | 1,94 | 6,96 | WLVOV091030 |
| Vivo | 910 | 400 | 200 | 2,21 | 8,30 | WLVOV091040 |
| Vivo | 910 | 500 | 300 | 2,47 | 9,62 | WLVOV091050 |
| Vivo | 910 | 600 | 300 | 2,73 | 10,94 | WLVOV091060 |
| Vivo | 1150 | 300 | 200 | 2,45 | 8,61 | WLVOV115030 |
| Vivo | 1150 | 400 | 300 | 2,78 | 10,26 | WLVOV115040 |
| Vivo | 1150 | 500 | 300 | 3,11 | 11,89 | WLVOV115050 |
| Vivo | 1150 | 600 | 400 | 3,44 | 13,54 | WLVOV115060 |
| Vivo | 1390 | 300 | 300 | 2,96 | 10,27 | WLVOV139030 |
| Vivo | 1390 | 400 | 300 | 3,35 | 12,21 | WLVOV139040 |
| Vivo | 1390 | 500 | 400 | 3,75 | 14,17 | WLVOV139050 |
| Vivo | 1390 | 600 | 400 | 4,14 | 16,12 | WLVOV139060 |
| Vivo | 1630 | 300 | 300 | 3,46 | 11,90 | WLVOV163030 |
| Vivo | 1630 | 400 | 400 | 3,92 | 14,18 | WLVOV163040 |
| Vivo | 1630 | 500 | 400 | 4,38 | 16,44 | WLVOV163050 |
| Vivo | 1630 | 600 | 400 | 4,84 | 18,71 | WLVOV163060 |
| POWDER COATING | | | | | | |
| Vivo One | 670 | 300 | 200 | 1,44 | 5,45 | WWVON067030 |
| Vivo One | 670 | 400 | 200 | 1,63 | 6,49 | WWVON067040 |
| Vivo One | 670 | 500 | 300 | 1,83 | 7,52 | WWVON067050 |
| Vivo One | 670 | 600 | 300 | 2,03 | 8,57 | WWVON067060 |

| Model | A ↓ | B ↔ |  [W] |  [dm ³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|---|---|--|
| Vivo One | 910 | 300 | 200 | 1,94 | 7,13 | WWVON091030 |
| Vivo One | 910 | 400 | 300 | 2,21 | 8,51 | WWVON091040 |
| Vivo One | 910 | 500 | 400 | 2,47 | 9,86 | WWVON091050 |
| Vivo One | 910 | 600 | 400 | 2,73 | 11,22 | WWVON091060 |
| Vivo One | 1150 | 300 | 300 | 2,45 | 8,83 | WWVON115030 |
| Vivo One | 1150 | 400 | 400 | 2,78 | 10,52 | WWVON115040 |
| Vivo One | 1150 | 500 | 400 | 3,11 | 12,20 | WWVON115050 |
| Vivo One | 1150 | 600 | 600 | 3,44 | 13,89 | WWVON115060 |
| Vivo One | 1390 | 300 | 400 | 2,96 | 10,53 | WWVON139030 |
| Vivo One | 1390 | 400 | 400 | 3,35 | 12,52 | WWVON139040 |
| Vivo One | 1390 | 500 | 600 | 3,75 | 14,54 | WWVON139050 |
| Vivo One | 1390 | 600 | 600 | 4,14 | 16,54 | WWVON139060 |
| Vivo One | 1630 | 300 | 400 | 3,46 | 12,20 | WWVON163030 |
| Vivo One | 1630 | 400 | 600 | 3,92 | 14,55 | WWVON163040 |
| Vivo One | 1630 | 500 | 600 | 4,38 | 16,87 | WWVON163050 |
| Vivo One | 1630 | 600 | 800 | 4,84 | 19,21 | WWVON163060 |
| CHROME | | | | | | |
| Vivo One | 670 | 300 | 120 | 1,44 | 5,32 | WWVON067030 |
| Vivo One | 670 | 400 | 200 | 1,63 | 6,33 | WWVON067040 |
| Vivo One | 670 | 500 | 200 | 1,83 | 7,34 | WWVON067050 |
| Vivo One | 670 | 600 | 200 | 2,03 | 8,36 | WWVON067060 |
| Vivo One | 910 | 300 | 200 | 1,94 | 6,96 | WWVON091030 |
| Vivo One | 910 | 400 | 200 | 2,21 | 8,30 | WWVON091040 |
| Vivo One | 910 | 500 | 300 | 2,47 | 9,62 | WWVON091050 |
| Vivo One | 910 | 600 | 300 | 2,73 | 10,94 | WWVON091060 |
| Vivo One | 1150 | 300 | 200 | 2,45 | 8,61 | WWVON115030 |
| Vivo One | 1150 | 400 | 300 | 2,78 | 10,26 | WWVON115040 |
| Vivo One | 1150 | 500 | 300 | 3,11 | 11,89 | WWVON115050 |
| Vivo One | 1150 | 600 | 400 | 3,44 | 13,54 | WWVON115060 |
| Vivo One | 1390 | 300 | 300 | 2,96 | 10,27 | WWVON139030 |
| Vivo One | 1390 | 400 | 300 | 3,35 | 12,21 | WWVON139040 |
| Vivo One | 1390 | 500 | 400 | 3,75 | 14,17 | WWVON139050 |
| Vivo One | 1390 | 600 | 400 | 4,14 | 16,12 | WWVON139060 |
| Vivo One | 1630 | 300 | 300 | 3,46 | 11,90 | WWVON163030 |
| Vivo One | 1630 | 400 | 400 | 3,92 | 14,18 | WWVON163040 |
| Vivo One | 1630 | 500 | 400 | 4,38 | 16,44 | WWVON163050 |
| Vivo One | 1630 | 600 | 400 | 4,84 | 18,71 | WWVON163060 |
| POWDER COATING | | | | | | |
| Warp S | 655 | 500 | 400 | 3,45 | 15,18 | WLWAS065050 |
| Warp S | 655 | 600 | 600 | 3,98 | 17,78 | WLWAS065060 |
| Warp S | 1110 | 500 | 800 | 5,99 | 26,15 | WLWAS169050 |
| Warp S | 1110 | 600 | 800 | 6,91 | 30,70 | WLWAS169060 |
| Warp S | 1695 | 500 | 1200 | 9,34 | 40,68 | WLWAS169050 |
| Warp S | 1695 | 600 | 1200 | 10,79 | 47,81 | WLWAS169060 |
| POWDER COATING | | | | | | |
| Warp T | 655 | 500 | 300 | 2,32 | 14,21 | WLWAT065050 |
| Warp T | 655 | 600 | 400 | 2,59 | 16,55 | WLWAT065060 |
| Warp T | 785 | 500 | 400 | 2,86 | 17,55 | WLWAT078050 |
| Warp T | 785 | 600 | 400 | 3,19 | 20,46 | WLWAT078060 |
| Warp T | 1110 | 500 | 600 | 4,02 | 24,45 | WLWAT111050 |
| Warp T | 1110 | 600 | 600 | 4,48 | 28,55 | WLWAT111060 |

| Model | A ↓ | B ↔ |  [W] |  [dm³] |  [kg] | Product code <small>(Configuration code p. 789)</small> |
|-----------------------|--------|--------|--|--|---|--|
| Warp T | 1695 | 500 | 800 | 6,24 | 37,99 | WLWAT169050 |
| Warp T | 1695 | 600 | 1000 | 6,96 | 44,44 | WLWAT169060 |
| POWDER COATING | | | | | | |
| Warp T One | 655 | 500 | 300 | 2,23 | 14,13 | WWWWTN065050 |
| Warp T One | 655 | 600 | 400 | 2,50 | 16,47 | WWWWTN065060 |
| Warp T One | 785 | 500 | 400 | 2,77 | 17,47 | WWWWTN078050 |
| Warp T One | 785 | 600 | 400 | 3,10 | 20,39 | WWWWTN078060 |
| Warp T One | 1110 | 500 | 600 | 3,93 | 24,37 | WWWWTN111050 |
| Warp T One | 1110 | 600 | 600 | 4,39 | 28,48 | WWWWTN111060 |
| Warp T One | 1695 | 500 | 800 | 6,15 | 37,92 | WWWWTN169050 |
| Warp T One | 1695 | 600 | 1000 | 6,87 | 44,36 | WWWWTN169060 |
| POWDER COATING | | | | | | |
| Warp T Bold | 655 | 500 | 400 | 3,48 | 15,22 | WLWTB065050 |
| Warp T Bold | 655 | 600 | 600 | 4,00 | 17,80 | WLWTB065060 |
| Warp T Bold | 1110 | 500 | 800 | 6,04 | 26,19 | WLWTB111050 |
| Warp T Bold | 1110 | 600 | 1000 | 6,96 | 30,74 | WLWTB111060 |
| Warp T Bold | 1695 | 500 | 1200 | 9,42 | 40,75 | WLWTB169050 |
| Warp T Bold | 1695 | 600 | 1500 | 10,86 | 47,89 | WLWTB169060 |
| POWDER COATING | | | | | | |
| Warp T Bold One | 655 | 500 | 400 | 3,48 | 15,22 | WWWBWN065050 |
| Warp T Bold One | 655 | 600 | 600 | 4,00 | 17,80 | WWWBWN065060 |
| Warp T Bold One | 1110 | 500 | 800 | 6,04 | 26,19 | WWWBWN111050 |
| Warp T Bold One | 1110 | 600 | 1000 | 6,96 | 30,74 | WWWBWN111060 |
| POWDER COATING | | | | | | |
| Zigzag | 600 | 500 | 300 | 2,77 | 7,31 | WLZIG060050 |
| Zigzag | 835 | 500 | 300 | 3,74 | 9,89 | WLZIG083050 |
| Zigzag | 1070 | 500 | 400 | 4,72 | 12,46 | WLZIG107050 |
| Zigzag | 1310 | 500 | 600 | 5,70 | 15,06 | WLZIG131050 |
| Zigzag | 1545 | 500 | 600 | 6,67 | 17,63 | WLZIG154050 |
| Zigzag | 1780 | 500 | 600 | 7,65 | 20,21 | WLZIG178050 |

How heat circulates in an electric radiator

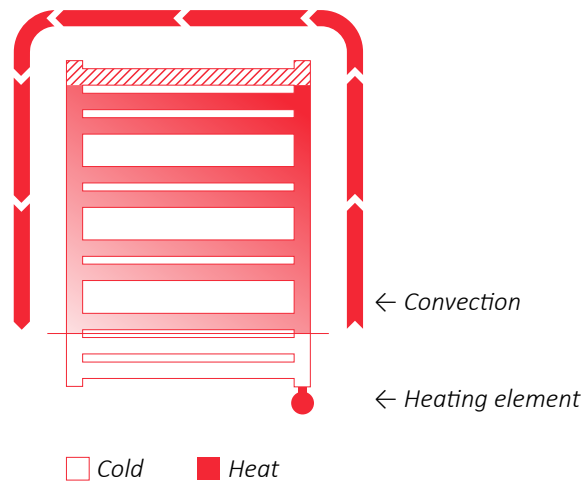

The electric radiator with a heating medium liquid is fitted with a heating element in one of the collectors as a source of heat. The heating medium is heated by the hot heating element. This causes the heating medium to raise up, and as a consequence this starts the circulation of the heating medium throughout the radiator. While moving up, the hot particles of the heating liquid mix with particles of the cold liquid (so-called diffusion phenomenon), causing the heating medium to move along the horizontal pipes of the radiator. The cooled liquid drops to the lower parts of the radiator to rise again after being reheated (see picture).

In conclusion, the collector directly connected to the heating element will always be the warmest part of the radiator (especially its upper section), while the lower pipes will always remain cooler. Such a phenomenon is absolutely standard.

Note: If the heating element is installed directly into the radiator collector (not through a T-piece or valve), the two lowest tubes of the radiator will remain cold.

Bespoke Shelves,
Hangers & Masking Fascias
for Terma Radiators


EASY Shelf

Available material:



Dedicated to the radiator: Easy

| Size [mm] (the width of the radiator) | B [mm] | Material | Product code Code and Configuration |
|---|-----------|----------|--|
| 200 | 180 | Beech | WRPEAS020 KBUK |
| 200 | 180 | Oak | WRPEAS020 KDAB |
| 200 | 180 | Teak | WRPEAS020 KTEK |

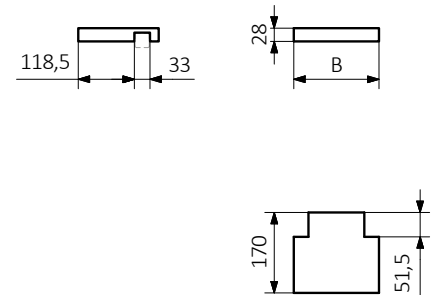


STAND Shelf

Available material:



Dedicated to the radiator: Stand

| Size [mm] (the width of the radiator) | B [mm] | Material | Product code Code and Configuration |
|---|-----------|----------|--|
| 300 | 236 | BEECH | WRPSCA030 KBUK |
| 300 | 236 | OAK | WRPSCA030 KDAB |
| 300 | 236 | TEAK | WRPSCA030 KTEK |
| 400 | 336 | BEECH | WRPSCA040 KBUK |
| 400 | 336 | OAK | WRPSCA040 KDAB |
| 400 | 336 | TEAK | WRPSCA040 KTEK |
| 500 | 436 | BEECH | WRPSCA050 KBUK |
| 500 | 436 | OAK | WRPSCA050 KDAB |
| 500 | 436 | TEAK | WRPSCA050 KTEK |




SIMPLE shelf

Available material: Beech Oak Teak

Dedicated to the radiator: Simple.

| Size [mm] <small>(the width of the radiator)</small> | B [mm] | Material | Product code <small>Code and Configuration</small> |
|--|-----------|----------|---|
| 500 | 440 | Beech | WRPSIM050 KBUK |
| 500 | 440 | Oak | WRPSIM050 KDAB |
| 500 | 440 | Teak | WRPSIM050 KTEK |

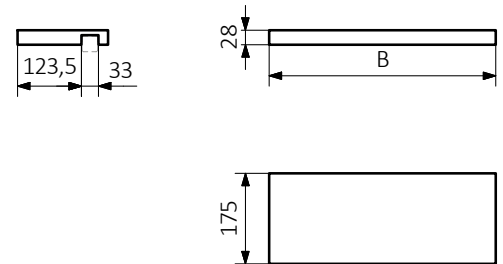


TRIGA shelf

Available material: Beech Oak Teak Mounting Brackets:

Dedicated to the radiator: Triga.

| Size [mm] <small>(the width of the radiator)</small> | B [mm] | Material | Product code <small>Code and Configuration</small> |
|--|-----------|----------|---|
| 380 | 410 | Beech | WRPTRG038 KBUK |
| 380 | 410 | Oak | WRPTRG038 KDAB |
| 380 | 410 | Teak | WRPTRG038 KTEK |
| 480 | 510 | Beech | WRPTRG048 KBUK |
| 480 | 510 | Oak | WRPTRG048 KDAB |
| 480 | 510 | Teak | WRPTRG048 KTEK |
| 580 | 610 | Beech | WRPTRG058 KBUK |
| 580 | 610 | Oak | WRPTRG058 KDAB |
| 580 | 610 | Teak | WRPTRG058 KTEK |
| 680 | 710 | Beech | WRPTRG068 KBUK |
| 680 | 710 | Oak | WRPTRG068 KDAB |
| 680 | 710 | Teak | WRPTRG068 KTEK |

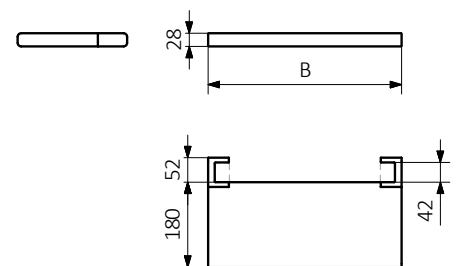


TRIGA shelf with towel rail




Available material:    Mounting Brackets: 

Dedicated to the radiator: Triga.
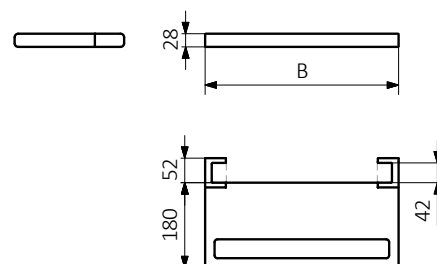
| Size [mm] | B [mm] | Material | Product code Code and Configuration |
|-----------------------------|-----------|----------|--|
| (the width of the radiator) | | | |
| 380 | 410 | Beech | WRQTRG038 KBUK |
| 380 | 410 | Oak | WRQTRG038 KDAB |
| 380 | 410 | Teak | WRQTRG038 KTEK |
| 480 | 510 | Beech | WRQTRG048 KBUK |
| 480 | 510 | Oak | WRQTRG048 KDAB |
| 480 | 510 | Teak | WRQTRG048 KTEK |
| 580 | 610 | Beech | WRQTRG058 KBUK |
| 580 | 610 | Oak | WRQTRG058 KDAB |
| 580 | 610 | Teak | WRQTRG058 KTEK |
| 680 | 710 | Beech | WRQTRG068 KBUK |
| 680 | 710 | Oak | WRQTRG068 KDAB |
| 680 | 710 | Teak | WRQTRG068 KTEK |




TRIGA towel rail

Available material:    Mounting Brackets: 

Dedicated to the radiator: Triga.

| Size [mm] | B [mm] | Material | Product code Code and Configuration |
|-----------------------------|-----------|----------|--|
| (the width of the radiator) | | | |
| 380 | 410 | Beech | WRRTRG038 KBUK |
| 380 | 410 | Oak | WRRTRG038 KDAB |
| 380 | 410 | Teak | WRRTRG038 KTEK |
| 480 | 510 | Beech | WRRTRG048 KBUK |
| 480 | 510 | Oak | WRRTRG048 KDAB |
| 480 | 510 | Teak | WRRTRG048 KTEK |
| 580 | 610 | Beech | WRRTRG058 KBUK |
| 580 | 610 | Oak | WRRTRG058 KDAB |
| 580 | 610 | Teak | WRRTRG058 KTEK |
| 680 | 710 | Beech | WRRTRG068 KBUK |
| 680 | 710 | Oak | WRRTRG068 KDAB |
| 680 | 710 | Teak | WRRTRG068 KTEK |

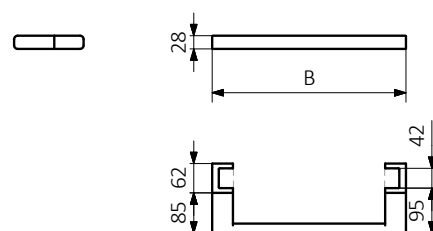


HANDY GRIP hanger

Colour Options: ● ○

Dedicated to the radiator with round tubular profiles.
Set includes two hangers.

| Colour | Product code |
|--------|--------------|
| White | TGWBI010 |
| Chrome | TGWCR008 |

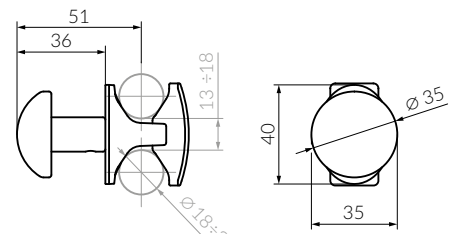


HANDY VIP hanger

Colour Options: ● ○

Dedicated to the radiator with round tubular profiles.
Set includes two hangers.

| Colour | Product code |
|--------|--------------|
| White | TGWBI005 |
| Chrome | TGWCR005 |

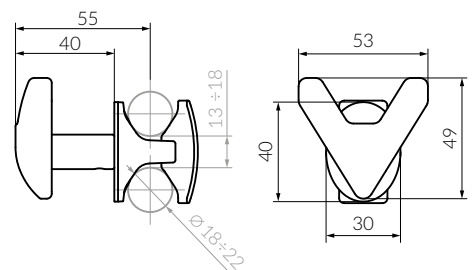

KUKA hanger

Colour Options: ●

Dedicated to the radiator:

Kuka 50 – Sherwood V, Sherwood H


Kuka 70 – Sherwood V (produced until July 2016),

Sherwood H (produced until July 2016), Cyklon




| Size | Colour | Product code |
|------------|--------|----------------|
| 50 x 10 mm | Chrome | WRWKUK001 KCRO |
| 70 x 11 mm | Chrome | WRWKUK002 KCRO |

Kuka 50



Kuka 70

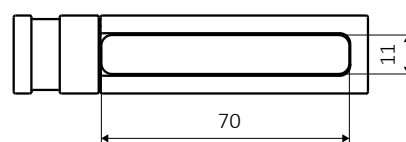

SPARK hanger

Colour Options: ●

Dedicated to the radiator:

Diamond


| Version | Size | Colour | Product code |
|---------|-------|--------|----------------|
| SPARK 1 | 25 mm | Chrome | WRWSP1025 KCRO |
| SPARK 2 | 25 mm | Chrome | WRWSP2025 KCRO |
| SPARK 3 | 25 mm | Chrome | WRWSP3025 KCRO |



Spark 1

Spark 2

Spark 3

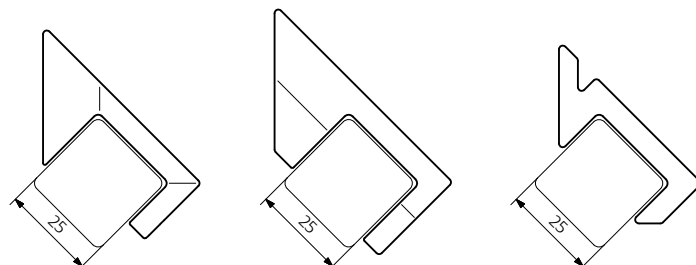


Yo! hanger

Dedicated to the radiator with round tubular profiles.

Yo! hanger fits to the following Terma radiators
Aero H, Aero HG, Alex, Alex One, Domi, Fiona, Fiona One, Lena,
Lima, Lima One, POC 2, Pola, Pola One, Tytus, Tytus One

| Colour | Product code |
|--------|----------------|
| Brown | WRWYOY001 SBRZ |
| Red | WRWYOY001 SCZE |
| Green | WRWYOY001 SZIE |
| Yellow | WRWYOY001 SZOL |
| Gray | WRWYOY001 SSZA |
| Blue | WRWYOY001 SNIE |
| White | WRWYOY001 SBIA |
| Black | WRWYOY001 SCZA |

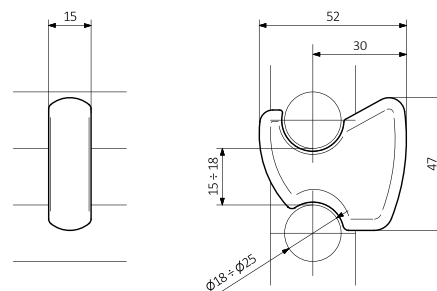

ZIP H hanger

Colour Options: ●

Dedicated to the radiator:

Zip H 10 – Dexter, Dexter Pro, City, Kioto, Lukka, Marlin,
Mantis, Incorner, Outcorner, Quadrus Slim, Quadrus
Bold, Warp S, Warp T, Warp T Bold, Vivo.



Zip H 20 – Bone.

| Size | Colour | Product code |
|-------|--------|----------------|
| 10 mm | Chrome | WRWZIP008 KCRO |
| 20 mm | Chrome | WRWZIP010 KCRO |



Zip H 10

Zip H 20



ZIP V hanger

Colour Options: ●

Dedicated to the radiator:

Zip V 10 – Nemo


Zip V 20 – Intra, Intra M

Zip V 30 – Angus, Easy, Triga (AW, AN), Sherwood, Simple, ZigZag.

Zip V 40 – Triga.



| Size | Colour | Product code |
|-------|--------|----------------|
| 10 mm | Chrome | WRWZIP009 KCRO |
| 20 mm | Chrome | WRWZIP011 KCRO |
| 30 mm | Chrome | WRWZIP012 KCRO |
| 40 mm | Chrome | WRWZIP013 KCRO |

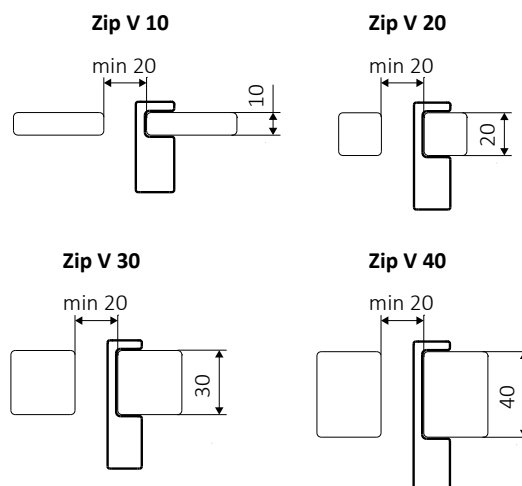


Curved towel rail hanger – BASIC

Colour Options: ● ○

Towel rail suitable for radiators with curved round tubes. There are two variants (for two widths of radiators): 400 mm and 500 mm.

Dedicated to the radiator with curved round tubes: Lena, Domi

| Size | Colour | Product code |
|-------------|--------|--------------|
| Ø16/L340 mm | White | TGWBI004 |
| Ø16/L340 mm | Chrome | TGWCR004 |
| Ø16/L430 mm | White | TGWBI002 |
| Ø16/L430 mm | Chrome | TGWCR002 |

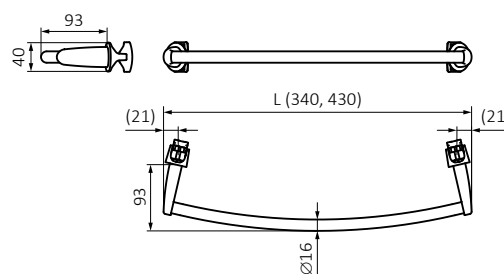


Straight towel rail hanger – BASIC

Colour Options: ● ○

Towel rail suitable for radiators with straight round bars.

There are two variants (for two widths of radiators): 400 mm and 500 mm.
Dedicated to the radiator with straight round bars: Fiona, Mike.

| Size | Colour | Product code |
|-------------|--------|--------------|
| Ø16/L370 mm | White | TGWBI003 |
| Ø16/L370 mm | Chrome | TGWCR003 |
| Ø16/L460 mm | White | TGWBI001 |
| Ø16/L460 mm | Chrome | TGWCR001 |

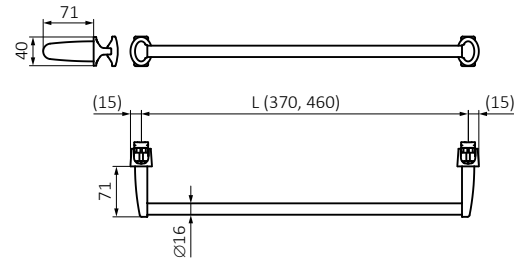



HAPPY HIPPO hanger

Colour Options: RAL Colour Palette and Terma Special Colours.
Not available in chrome.

Dedicated to the radiator: Vivo.

| Size [mm] (the width of the radiator) | Colour | Product code |
|--|--|--------------|
| 300 | RAL + Special colours palette (without chrome) | WRWH1C024 |
| 400 | RAL + Special colours palette (without chrome) | WRWH1C034 |
| 500 | RAL + Special colours palette (without chrome) | WRWH1C044 |
| 600 | RAL + Special colours palette (without chrome) | WRWH1C054 |

Configuration code p. 791

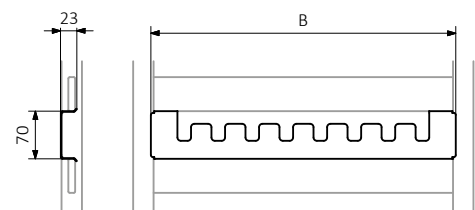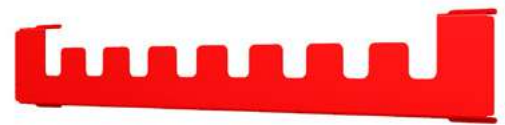


HAPPY RABBIT hanger

Colour Options: RAL Colour Palette and Terma Special Colours.
Not available in chrome.

Dedicated to the radiator: Vivo

| Size [mm] (the width of the radiator) | Colour | Product code <i>Configuration code p. 791</i> |
|--|--|--|
| 300 | RAL + Special colours palette (without chrome) | WRWH1B024 |
| 400 | RAL + Special colours palette (without chrome) | WRWH1B034 |
| 500 | RAL + Special colours palette (without chrome) | WRWH1B044 |
| 600 | RAL + Special colours palette (without chrome) | WRWH1B054 |

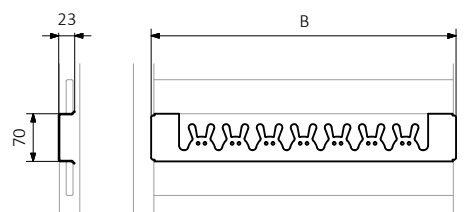


HAPPY SHARK hanger

Colour Options: RAL Colour Palette and Terma Special Colours.
Not available in chrome.

Dedicated to the radiator: Vivo

| Size [mm] (the width of the radiator) | Colour | Product code <i>Configuration code p. 791</i> |
|--|--|--|
| 300 | RAL + Special colours palette (without chrome) | WRWH1A024 |
| 400 | RAL + Special colours palette (without chrome) | WRWH1A034 |
| 500 | RAL + Special colours palette (without chrome) | WRWH1A044 |
| 600 | RAL + Special colours palette (without chrome) | WRWH1A054 |


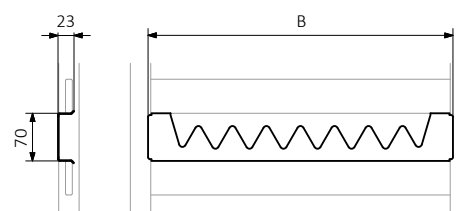


SIMPLE hanger

Colour Options: RAL Colour Palette and Terma Special Colours.
Not available in chrome.

Dedicated to the radiator: Simple.

| Size | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--|--|
| 500 mm | RAL + Special colours palette (without chrome) | WRWSIM004 |

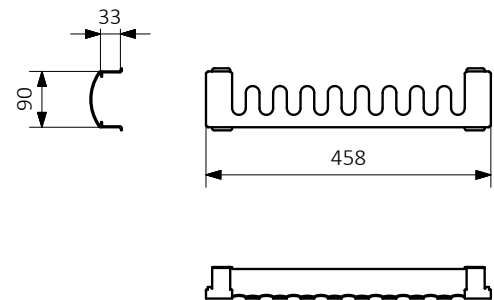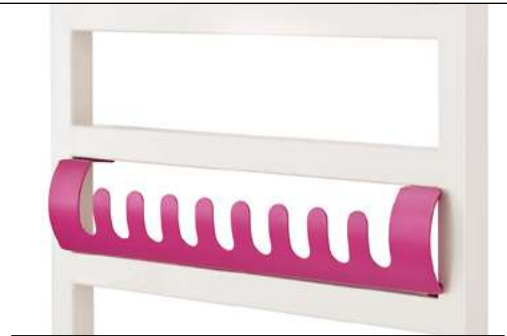


Case Slim hanger

Colour Options: RAL Colour Palette and Terma Special Colours,
available in chrome

Dedicated to the radiator: Case Slim

| Size | B [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|-----------|---|--|
| 420 mm | 448 | RAL + Special colours palette (with chrome) | WRRCSS042 |
| 520 mm | 548 | RAL + Special colours palette (with chrome) | WRRCSS052 |
| 620 mm | 648 | RAL + Special colours palette (with chrome) | WRRCSS062 |

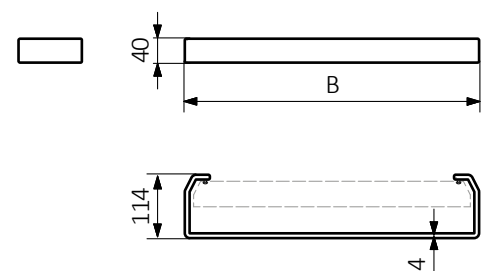


Michelle fascia

Colour Options: RAL Colour Palette and Terma Special Colours, available in chrome.

Dedicated to the Michelle radiator.

| Size | Orientation | Product code |
|---------|-------------|----------------------------------|
| | | <i>Configuration code p. 791</i> |
| 780 mm | Left | WRCMIC078L |
| 780 mm | Right | WRCMIC078P |
| 1200 mm | Left | WRCMIC120L |
| 1200 mm | Right | WRCMIC120P |
| 1620 mm | Left | WRCMIC162L |
| 1620 mm | Right | WRCMIC162P |

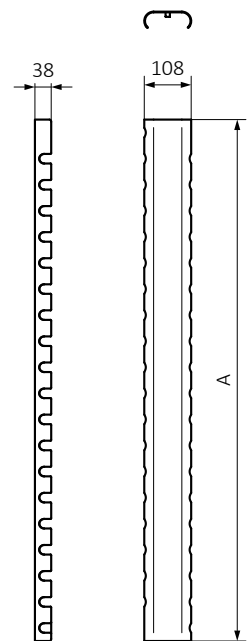


Iron D and Iron S fascia

Colour Options: RAL Colour Palette and Terma Special Colours.
Not available in chrome.

Dedicated to the Iron D and Iron S radiators.

| Size | Product code |
|---------|----------------------------------|
| | <i>Configuration code p. 791</i> |
| 730 mm | WRCIRX073 |
| 925 mm | WRCIRX092 |
| 1120 mm | WRCIRX112 |
| 1315 mm | WRCIRX131 |
| 1510 mm | WRCIRX151 |
| 1705 mm | WRCIRX170 |

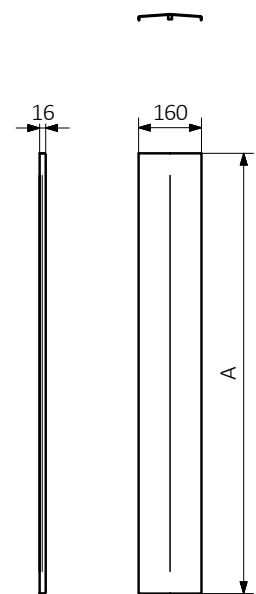

Valve sets

Dexter manual valve set

Available versions:



The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.




Colour Options: ○●○

Connections:



Dedicated to the radiator:


Dexter

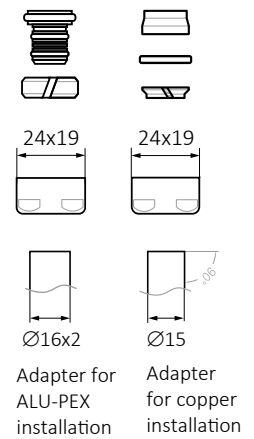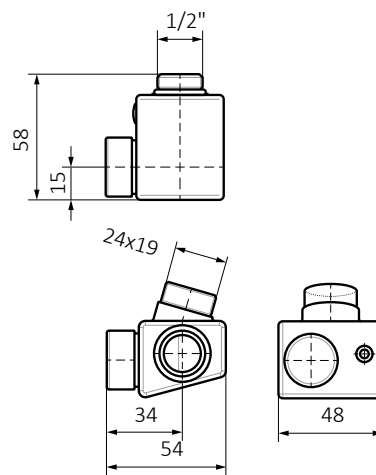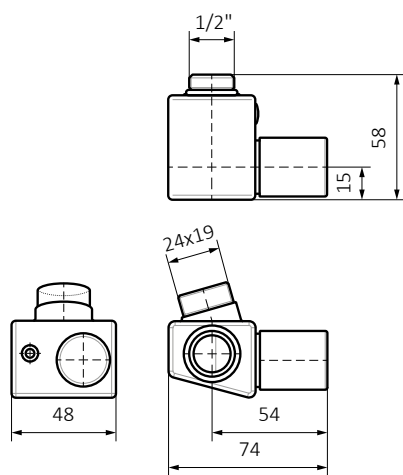

| Position | Size | Colour | Product code |
|----------|----------------------|--------|--------------|
| Left | GZ 1/2" - Ø16x2, Ø15 | White | TGERCD2-BI |
| Right | GZ 1/2" - Ø16x2, Ø15 | White | TGERCD1-BI |
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | TGERCD1-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | TGERCD2-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | TGERCD1-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | TGERCD2-ST |

Dexter thermostatic valve set

Available versions:



The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.




Colour Options: ○●○

Connections:



Dedicated to the radiator:

Dexter

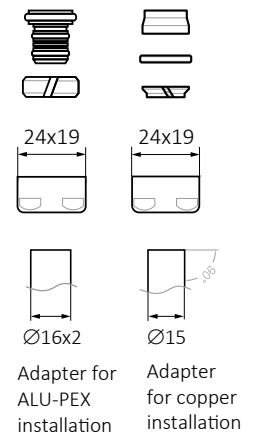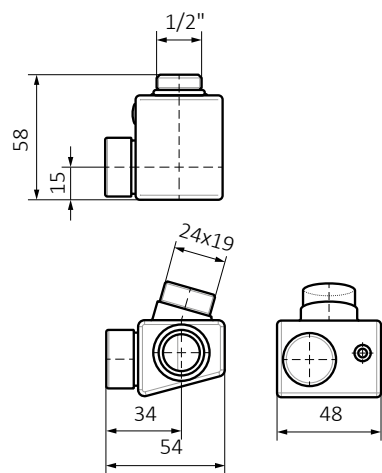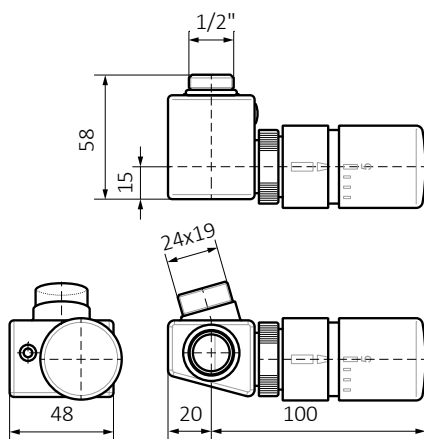


| Position | Size | Colour | Product code |
|----------|----------------------|--------|--------------|
| Left | GZ 1/2" - Ø16x2, Ø15 | White | TGETCG1-BI |
| Right | GZ 1/2" - Ø16x2, Ø15 | White | TGETCG2-BI |
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | TGETCG6-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | TGETCG7-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | TGETCG1-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | TGETCG2-ST |

Brass Wood angled regulatnig valve set




Colour Options: ●

Connections:

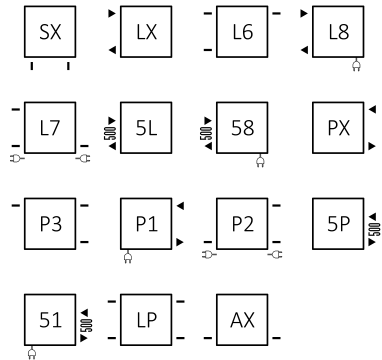

Dedicated to the radiator:

Pająk


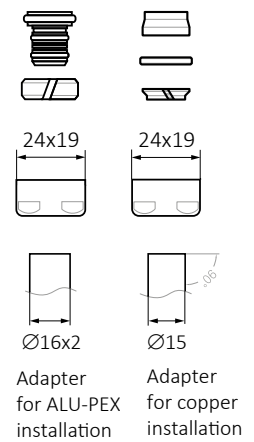
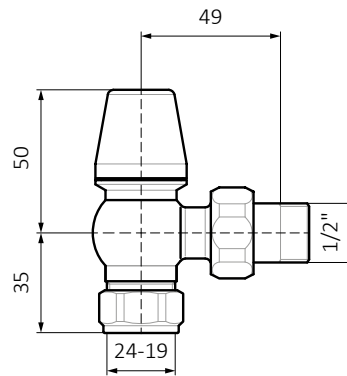
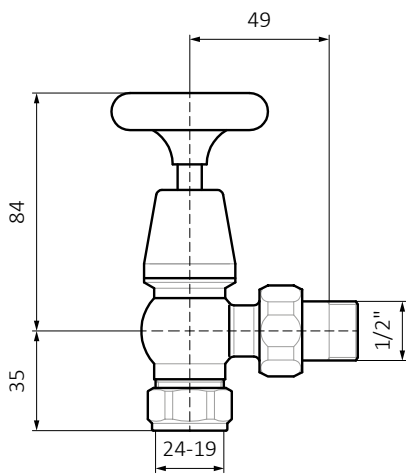


| Size | Colour | Product code |
|----------------------|--------------|--------------|
| GZ 1/2" - Ø16x2, Ø15 | Brush Copper | TGERME001 |

Angled manual valves set

Colour Options: ●●

Connections:

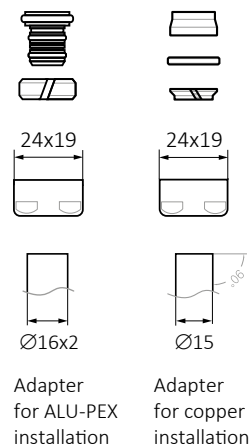


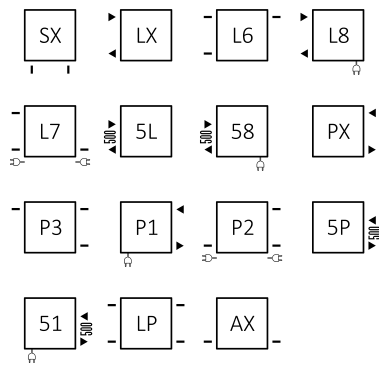


| Size | Colour | Product code |
|----------------------|--------|--------------|
| GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZRCK1-CR |
| GZ 1/2" - Ø16x2, Ø15 | Satin | WRZRCK1-ST |

Star angled manual valves set

Colour Options: ●

Connections:

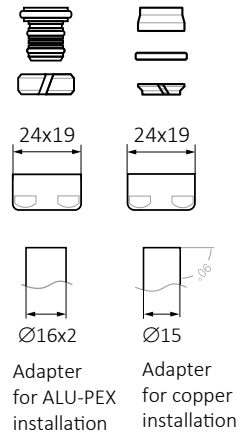
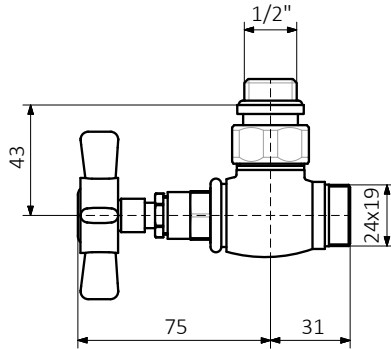
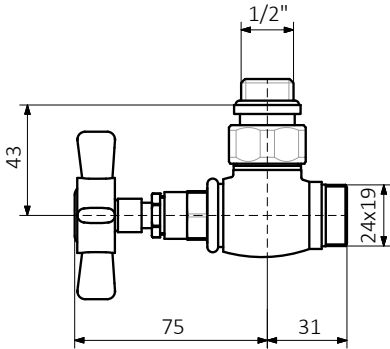
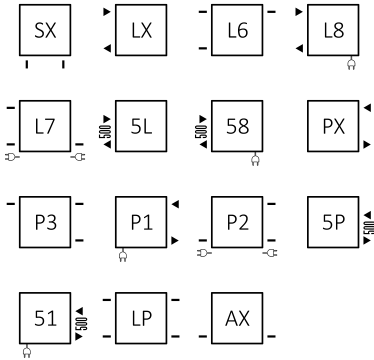


| Size | Colour | Product code |
|----------------------|--------|--------------|
| GZ 1/2" - Ø16x2, Ø15 | Chrome | TGERSTCR01 |

Angled thermostatic valve set

Colour Options: ●●

Connections:

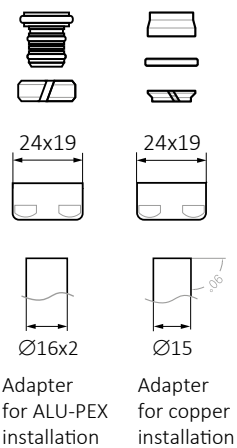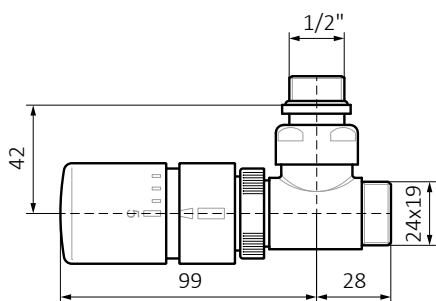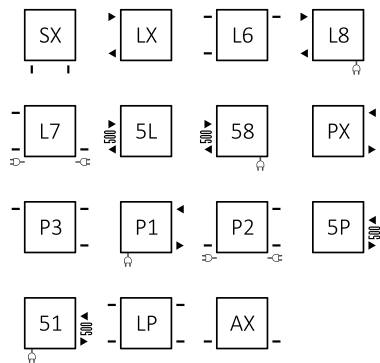

| Size | Colour | Product code |
|----------------------|--------|--------------|
| GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZTCG3-CR |
| GZ 1/2" - Ø16x2, Ø15 | Satin | WRZTCG3-ST |

3-axis manual valve set


Available versions:



The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.

Colour Options: ●●

Connections:

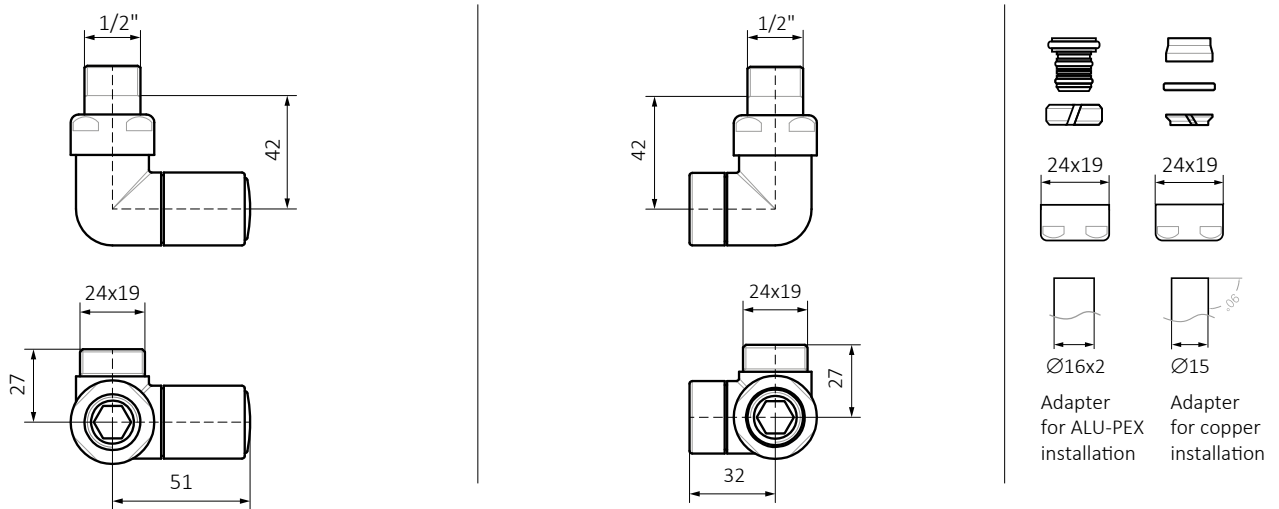

| Position | Size | Colour | Product code |
|----------|----------------------|--------|--------------|
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZRC31-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZRC32-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZRC31-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZRC32-ST |

3-axis thermostatic valve set




Available versions:



The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.

Colour Options: ●●

Connections:

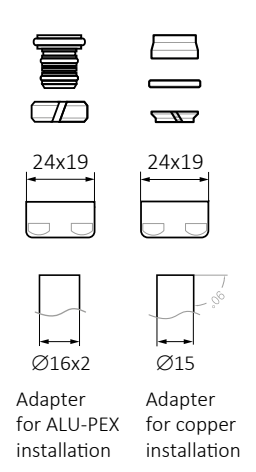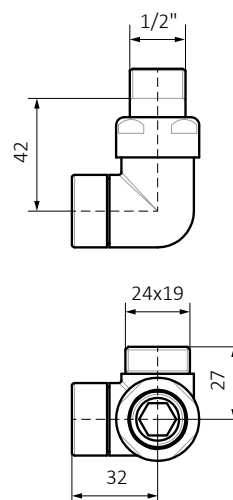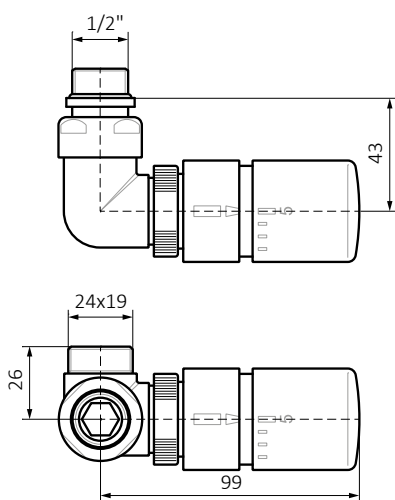

| Position | Size | Colour | Product code |
|----------|----------------------|--------|--------------|
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZTCG1-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZTCG2-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZTCG8-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZTCG9-ST |

3-axis thermostatic valve and lockshield integrated with T-piece set


Available versions:



The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.

Colour Options: ●●

Connections:

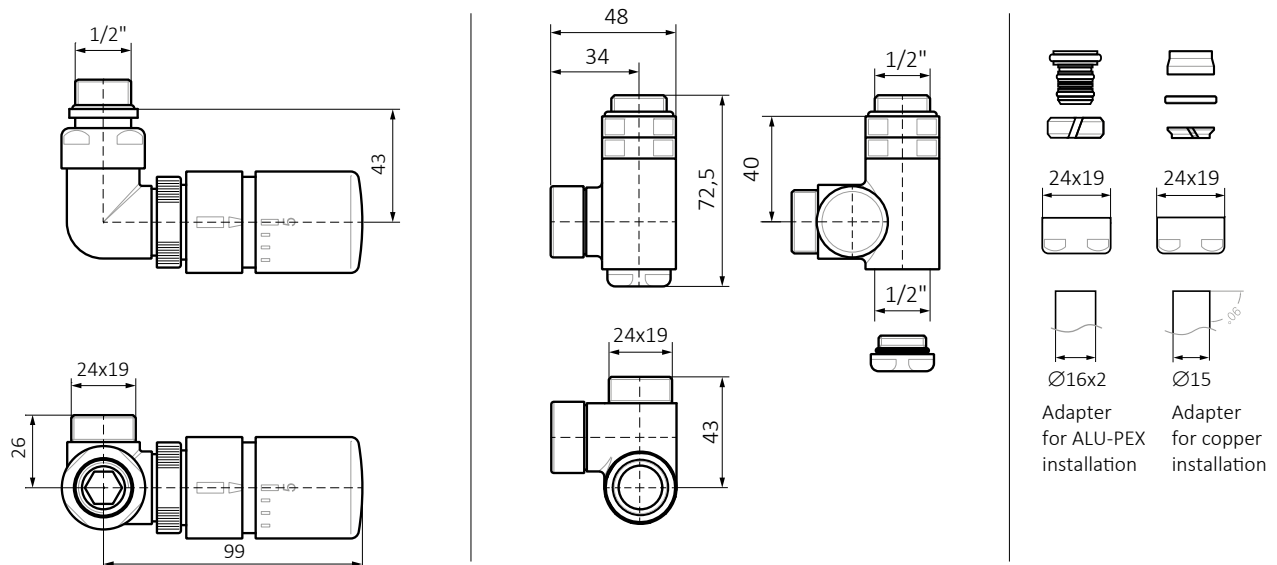

| Position | Size | Colour | Product code |
|----------|----------------------|--------|--------------|
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZTCG4-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZTCG5-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZTCG4-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZTCG5-ST |

Integrated thermostatic valve set


Available versions:




The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.

Colour Options: ● ●





Connections:

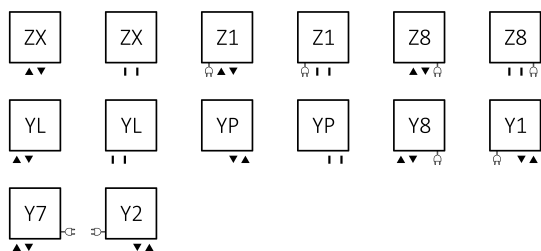

Angled valve - 90°

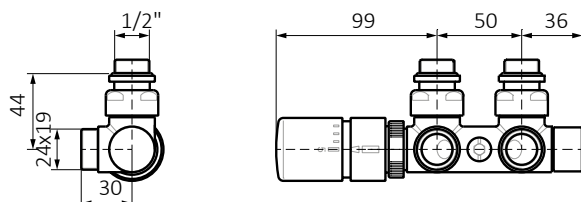

Inline valve

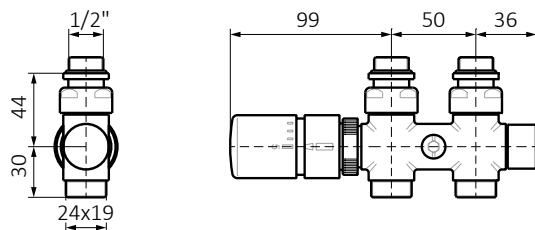

Adapter for ALU-PEX installation

Adapter for copper installation

| Position | Size | Colour | Product code |
|---------------------------|----------------------|--------|--------------|
| Angled valve - 90° | | | |
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZT5G1-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZT5G2-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZT5G1-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZT5G2-ST |
| Inline valve | | | |
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZT5G3-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZT5G4-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZT5G3-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZT5G4-ST |

Integrated thermostatic T-piece valve set

Available versions:



The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.






Colour Options: ● ●

Dedicated to the radiator:

Michelle, Warp S, Iron D, Iron S



Note: Due to the protection of the thermal fuse of the heating element, we recommend installing the element on the return side

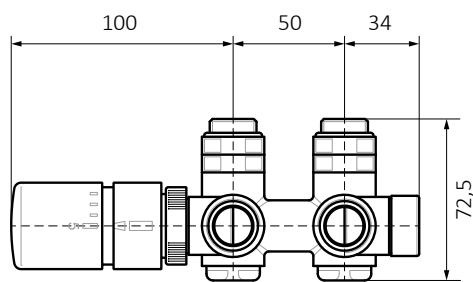

Adapter for ALU-PEX installation



Adapter for copper installation

| Position | Size | Colour | Product code |
|----------|----------------------|--------|--------------|
| Left | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZT5G14-CR |
| Right | GZ 1/2" - Ø16x2, Ø15 | Chrome | WRZT5G15-CR |
| Left | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZT5G14-ST |
| Right | GZ 1/2" - Ø16x2, Ø15 | Satin | WRZT5G15-ST |

Integrated thermostatic valve with immersion tube set

Available versions:




The left or right-hand version determines the position of the thermostatic insert or manual valve with male thread.

Colour Options: ●●



Connections



Angled valve - 90°

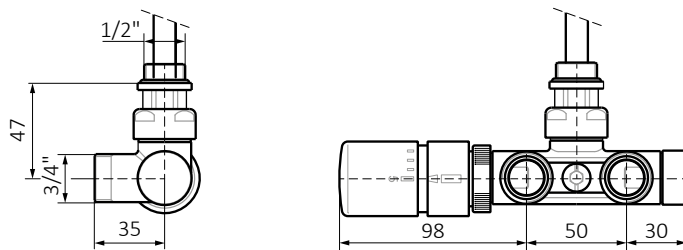

Inline valve

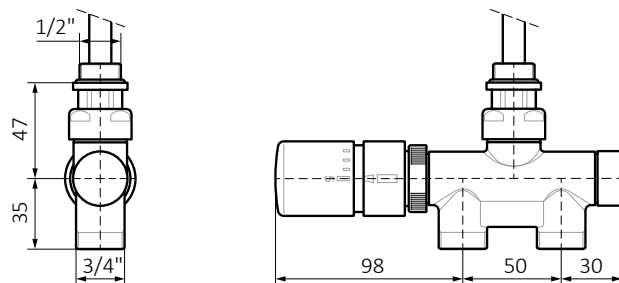


Adapter for ALU-PEX installation
Adapter for copper installation

| Position | Size | Colour | Product code |
|---------------------------|--------------------|--------|--------------|
| Angled valve - 90° | | | |
| Left | GZ 1/2"-Ø16x2, Ø15 | Chrome | WRZT5G5-CR |
| Right | GZ 1/2"-Ø16x2, Ø15 | Chrome | WRZT5G6-CR |
| Left | GZ 1/2"-Ø16x2, Ø15 | Satin | WRZT5G5-ST |
| Right | GZ 1/2"-Ø16x2, Ø15 | Satin | WRZT5G6-ST |
| Inline valve | | | |
| — | GZ 1/2"-Ø16x2, Ø15 | Chrome | WRZT5G7-CR |
| — | GZ 1/2"-Ø16x2, Ø15 | Satin | WRZT5G7-ST |




Integrated lockshield valves set

Colour Options: ● ○

Connections:


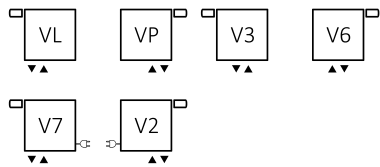


Angled valve - 90°

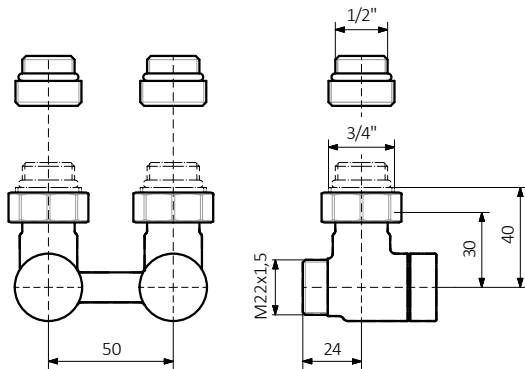

Adapter for ALU-PEX installation Adapter for copper installation

Inline valve

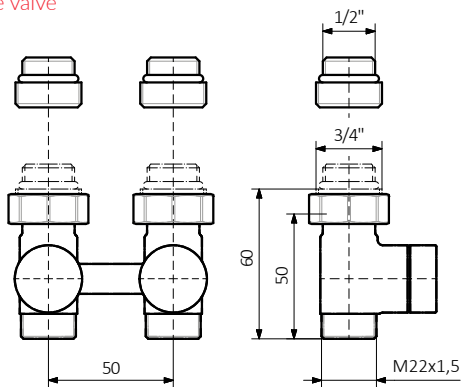

| Size | Colour | Product code |
|--------------------------------|--------|--------------|
| Angled valve - 90° | | |
| GW 3/4" (GZ 1/2") - Ø16x2, Ø15 | Chrome | WRZOSSC1-CR |
| GW 3/4" (GZ 1/2") - Ø16x2, Ø15 | Satin | WRZOSSC1-ST |
| Inline valve | | |
| GW 3/4" (GZ 1/2") - Ø16x2, Ø15 | Chrome | WRZOSSC2-CR |
| GW 3/4" (GZ 1/2") - Ø16x2, Ø15 | Satin | WRZOSSC2-ST |

Valves and accessories

Integrated thermostatic valve with immersion tube


Angled valve - 90°

Available versions:



Colour Options: ○ ● ● ● ●


| Position | Size | Colour | Product code |
|----------|-------------------|-------------|--------------|
| Left | GZ 1/2" - GZ 3/4" | White | TGZTBI008 |
| Right | GZ 1/2" - GZ 3/4" | White | TGZTBI009 |
| Right | GZ 1/2" - GZ 3/4" | Chrome | TGZTCR018 |
| Left | GZ 1/2" - GZ 3/4" | Chrome | TGZTCR019 |
| Right | GZ 1/2" - GZ 3/4" | Satin | TGZTST016 |
| Left | GZ 1/2" - GZ 3/4" | Satin | TGZTST017 |
| Right | GZ 1/2" - GZ 3/4" | Black matt | TGZTCM007 |
| Left | GZ 1/2" - GZ 3/4" | Black matt | TGZTCM006 |
| Right | GZ 1/2" - GZ 3/4" | Black gloss | TGZTCZ007 |
| Left | GZ 1/2" - GZ 3/4" | Black gloss | TGZTCZ006 |

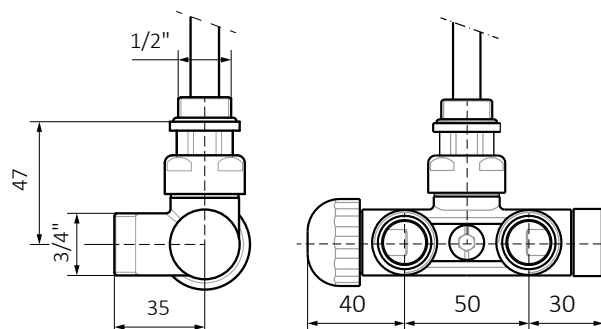

Inline valve

Colour Options: ○ ● ●

| Position | Size | Colour | Product code |
|----------|-------------------|--------|--------------|
| - | GZ 1/2" - GZ 3/4" | White | TGZTBI010 |
| - | GZ 1/2" - GZ 3/4" | Chrome | TGZTCR18 |
| - | GZ 1/2" - GZ 3/4" | Satin | TGZTST018 |

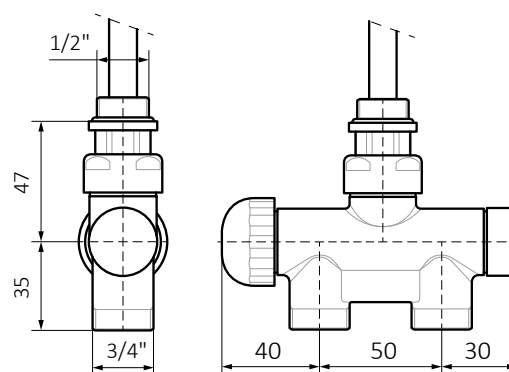

Integrated thermostatic valve


Angled valve - 90°

Available versions:



Colour Options: ○ ● ● ● ●

| Position | Size | Colour | Product code |
|----------|--------------------|-------------|--------------|
| Left | GZ 1/2" - GZ 24x19 | White | TGZTBI011 |
| Right | GZ 1/2" - GZ 24x19 | White | TGZTBI012 |
| Left | GZ 1/2" - GZ 24x19 | Chrome | TGZTCR005 |
| Right | GZ 1/2" - GZ 24x19 | Chrome | TGZTCR006 |
| Left | GZ 1/2" - GZ 24x19 | Satin | TGZTST005 |
| Right | GZ 1/2" - GZ 24x19 | Satin | TGZTST006 |
| Left | GZ 1/2" - GZ 24x19 | Black matt | TGZTCM001 |
| Right | GZ 1/2" - GZ 24x19 | Black matt | TGZTCM002 |
| Left | GZ 1/2" - GZ 24x19 | Black gloss | TGZTCZ001 |
| Right | GZ 1/2" - GZ 24x19 | Black gloss | TGZTCZ002 |

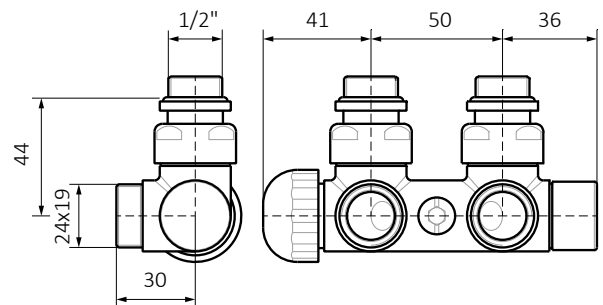


Inline valve

Available versions:



Colour Options: ● ○

| Position | Size | Colour | Product code |
|----------|--------------------|--------|--------------|
| Left | GZ 1/2" - GZ 24x19 | Chrome | TGZTCR013 |
| Right | GZ 1/2" - GZ 24x19 | Chrome | TGZTCR014 |
| Left | GZ 1/2" - GZ 24x19 | Satin | TGZTST012 |
| Right | GZ 1/2" - GZ 24x19 | Satin | TGZTST013 |

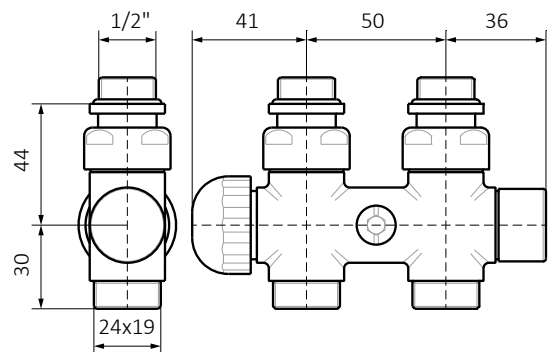

Integrated thermostatic T-piece valve


Available versions:



Colour Options: ○ ● ●

Note: Due to the protection of the thermal fuse of the heating element, we recommend installing the element on the return side

| Position | Size | Colour | Product code |
|----------|------------------------------|--------|--------------|
| Left | GZ 1/2" - GW 1/2" - GZ 24-19 | White | TGZTBI013 |
| Right | GZ 1/2" - GW 1/2" - GZ 24-19 | White | TGZTBI014 |
| Left | GZ 1/2" - GW 1/2" - GZ 24-19 | Chrome | TGZTCR022 |
| Right | GZ 1/2" - GW 1/2" - GZ 24-19 | Chrome | TGZTCR021 |
| Left | GZ 1/2" - GW 1/2" - GZ 24-19 | Satin | TGZTST020 |
| Right | GZ 1/2" - GW 1/2" - GZ 24-19 | Satin | TGZTST021 |

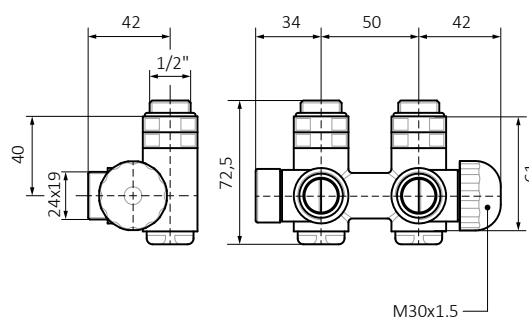


Lockshield valve integrated with T-piece

Available versions:



Colour Options: ○ ● ● ● ●

| Position | Size | Colour | Product code |
|----------|------------------------------|-------------|--------------|
| Left | GZ 1/2" - GW 1/2" - GZ 24x19 | White | TGZOBI009 |
| Right | GZ 1/2" - GW 1/2" - GZ 24x19 | White | TGZOBI010 |
| Left | GZ 1/2" - GW 1/2" - GZ 24x19 | Chrome | TGZO CR010 |
| Right | GZ 1/2" - GW 1/2" - GZ 24x19 | Chrome | TGZO CR012 |
| Left | GZ 1/2" - GW 1/2" - GZ 24x19 | Satin | TGZO ST008 |
| Right | GZ 1/2" - GW 1/2" - GZ 24x19 | Satin | TGZO ST010 |
| Left | GZ 1/2" - GW 1/2" - GZ 24x19 | Black matt | TGZO CM004 |
| Right | GZ 1/2" - GW 1/2" - GZ 24x19 | Black matt | TGZO CM005 |
| Left | GZ 1/2" - GW 1/2" - GZ 24x19 | Black gloss | TGZO CZ004 |
| Right | GZ 1/2" - GW 1/2" - GZ 24x19 | Black gloss | TGZO CZ005 |

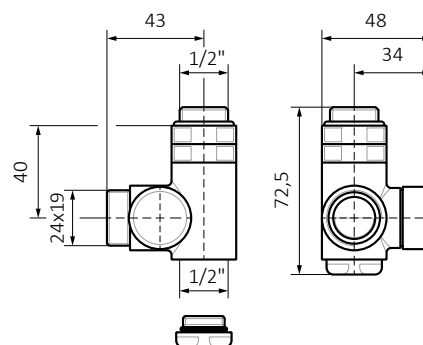


Integrated lockshield valve

Angled valve - 90°

Colour Options:


| Size | Colour | Product code |
|--------------------------------|------------|--------------|
| GW 3/4" (GZ 1/2") - GZ M22x1,5 | Chrome | TGEOCR001 |
| GW 3/4" (GZ 1/2") - GZ M22x1,5 | Satin | TGEOST001 |
| GW 3/4" (GZ 1/2") - GZ M22x1,5 | Black matt | TGEOCM001 |

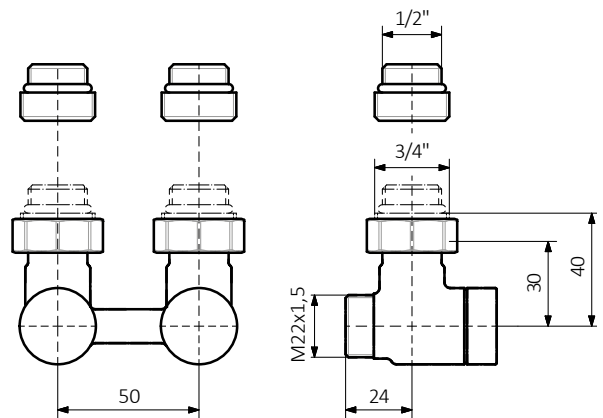

Inline valve

Colour Options:

| Size | Colour | Product code |
|--------------------------------|------------|--------------|
| GW 3/4" (GZ 1/2") - GZ M22x1,5 | Chrome | TGEOCR002 |
| GW 3/4" (GZ 1/2") - GZ M22x1,5 | Satin | TGEOST002 |
| GW 3/4" (GZ 1/2") - GZ M22x1,5 | Black matt | TGEOCM002 |

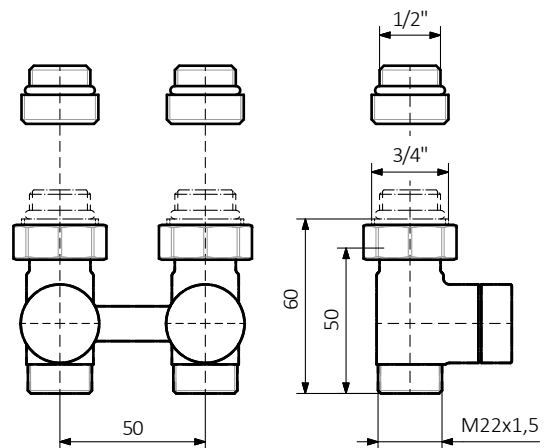


3-axis thermostatic valve

Available versions:




Colour Options: ○ ● ● ● ● ●

| Position | Size | Colour | Product code |
|----------|--------------------|-------------|--------------|
| Left | GZ 1/2" - GZ 24x19 | White | TGZTBI002 |
| Right | GZ 1/2" - GZ 24x19 | White | TGZTBI003 |
| Left | GZ 1/2" - GZ 24x19 | Chrome | TGZTCR002 |
| Right | GZ 1/2" - GZ 24x19 | Chrome | TGZTCR004 |
| Left | GZ 1/2" - GZ 24x19 | Satin | TGZTST002 |
| Right | GZ 1/2" - GZ 24x19 | Satin | TGZTST004 |
| Left | GZ 1/2" - GZ 24x19 | Black matt | TGZTCM003 |
| Right | GZ 1/2" - GZ 24x19 | Black matt | TGZTCM004 |
| Left | GZ 1/2" - GZ 24x19 | Black gloss | TGZTCZ003 |
| Right | GZ 1/2" - GZ 24x19 | Black gloss | TGZTCZ004 |

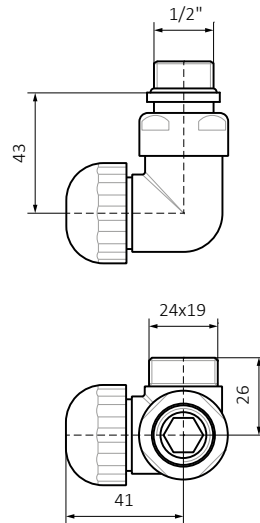


3-axis manual valve

Available versions:



Colour Options: ○ ● ● ● ● ●

| Position | Size | Colour | Product code |
|----------|--------------------|-------------|--------------|
| Left | GZ 1/2" - GZ 24x19 | White | TGZRBI002 |
| Right | GZ 1/2" - GZ 24x19 | White | TGZRBI004 |
| Left | GZ 1/2" - GZ 24x19 | Chrome | TGZRRCR002 |
| Right | GZ 1/2" - GZ 24x19 | Chrome | TGZRRCR004 |
| Left | GZ 1/2" - GZ 24x19 | Satin | TGZRST002 |
| Right | GZ 1/2" - GZ 24x19 | Satin | TGZRST004 |
| Left | GZ 1/2" - GZ 24x19 | Black matt | TGZRRCM002 |
| Right | GZ 1/2" - GZ 24x19 | Black matt | TGZRRCM003 |
| Left | GZ 1/2" - GZ 24x19 | Black gloss | TGZRRCZ002 |
| Right | GZ 1/2" - GZ 24x19 | Black gloss | TGZRRCZ003 |

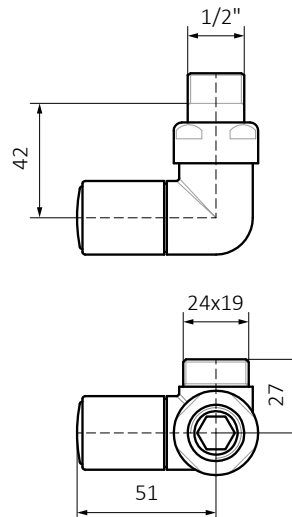


3-axis lockshield valve

Available versions:



Colour Options: ○ ● ● ● ● ●


| Position | Size | Colour | Product code |
|----------|--------------------|-------------|--------------|
| Left | GZ 1/2" - GZ 24x19 | White | TGZOBI002 |
| Right | GZ 1/2" - GZ 24x19 | White | TGZOBI004 |
| Left | GZ 1/2" - GZ 24x19 | Chrome | TGZOCCR002 |
| Right | GZ 1/2" - GZ 24x19 | Chrome | TGZOCCR004 |
| Left | GZ 1/2" - GZ 24x19 | Satin | TGZOST002 |
| Right | GZ 1/2" - GZ 24x19 | Satin | TGZOST004 |
| Left | GZ 1/2" - GZ 24x19 | Black matt | TGZOCCM002 |
| Right | GZ 1/2" - GZ 24x19 | Black matt | TGZOCCM003 |
| Left | GZ 1/2" - GZ 24x19 | Black gloss | TGZOCCZ002 |
| Right | GZ 1/2" - GZ 24x19 | Black gloss | TGZOCCZ003 |

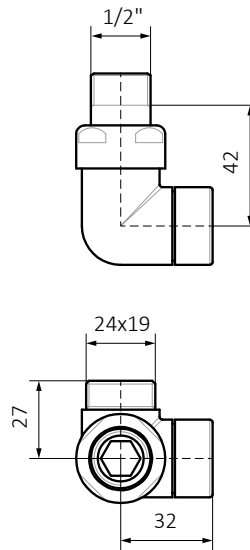

Angled thermostatic valve

Colour Options: ○ ● ● ● ● ●


| Size | Colour | Product code |
|--------------------|-------------|--------------|
| GZ 1/2" - GZ 24x19 | White | TGZTBI005 |
| GZ 1/2" - GZ 24x19 | Chrome | TGZTCR009 |
| GZ 1/2" - GZ 24x19 | Satin | TGZTST009 |
| GZ 1/2" - GZ 24x19 | Black matt | TGZTCM005 |
| GZ 1/2" - GZ 24x19 | Black gloss | TGZTCZ005 |



Angled manual valve

Colour Options: ○ ● ● ● ● ●


| Size | Colour | Product code |
|--------------------|-------------|--------------|
| GZ 1/2" - GZ 24x19 | White | TGZRBI006 |
| GZ 1/2" - GZ 24x19 | Chrome | TGZRRCR006 |
| GZ 1/2" - GZ 24x19 | Satin | TGZRST006 |
| GZ 1/2" - GZ 24x19 | Black matt | TGZRMC001 |
| GZ 1/2" - GZ 24x19 | Black gloss | TGZRZC001 |



Angled lockshield valve

Colour Options: ○ ● ● ● ● ●


| Size | Colour | Product code |
|--------------------|-------------|--------------|
| GZ 1/2" - GZ 24x19 | White | TGZOBI006 |
| GZ 1/2" - GZ 24x19 | Chrome | TGZOCCR013 |
| GZ 1/2" - GZ 24x19 | Satin | TGZOZST006 |
| GZ 1/2" - GZ 24x19 | Black matt | TGZOZCM001 |
| GZ 1/2" - GZ 24x19 | Black gloss | TGZOZCZ001 |



Straight thermostatic valve

Colour Options: ○●●


| Size | Colour | Product code |
|--------------------|--------|--------------|
| GZ 1/2" - GZ 24x19 | White | TGZTBI006 |
| GZ 1/2" - GZ 24x19 | Chrome | TGZTCR015 |
| GZ 1/2" - GZ 24x19 | Satin | TGZTST019 |

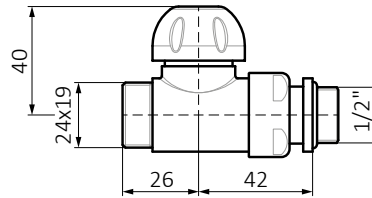

Straight manual valve

Colour Options: ○●●


| Size | Colour | Product code |
|--------------------|--------|--------------|
| GZ 1/2" - GZ 24x19 | White | TGZRBI007 |
| GZ 1/2" - GZ 24x19 | Chrome | TGZRRCR009 |
| GZ 1/2" - GZ 24x19 | Satin | TGZRST007 |

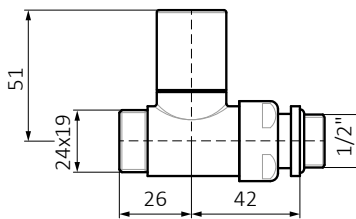

Straight lockshield valve

Colour Options: ○●●○


| Size | Colour | Product code |
|--------------------|--------|--------------|
| GZ 1/2" - GZ 24x19 | White | TGZOBI007 |
| GZ 1/2" - GZ 24x19 | Chrome | TGZOCR008 |
| GZ 1/2" - GZ 24x19 | Satin | TGZOST012 |

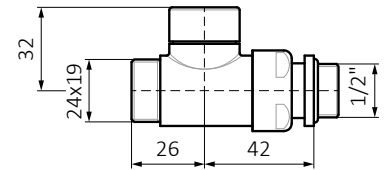

T-piece

Colour Options: ○●●●


| Size | Colour | Product code |
|-----------------------------|------------|--------------|
| GZ 1/2" - GW 1/2" - GW 1/2" | White | WRT1C2 916 |
| GZ 1/2" - GW 1/2" - GW 1/2" | Chrome | WRT1C2 CRO |
| GZ 1/2" - GW 1/2" - GW 1/2" | Satin | WRT1C2 SMA |
| GZ 1/2" - GW 1/2" - GW 1/2" | Black matt | WRT1C2 9M5 |



Adapter for alupex – 24x19

Colour Options: 

| Size | Colour | Product code |
|------------------|-------------|--------------|
| GW 24x19 – Ø16x2 | Chrome | TGACR019 |
| GW 24x19 – Ø16x2 | Satin | TGAST017 |
| GW 24x19 – Ø16x2 | Black matt | TGACM001 |
| GW 24x19 – Ø16x2 | Black gloss | TGACZ001 |




Adapter for alupex – 3/4"

Adapter for an integrated thermostatic valve with immersion pipe

Colour Options: 

| Size | Colour | Product code |
|-----------------|-------------|--------------|
| GW 3/4" – Ø16x2 | Chrome | TGACR015 |
| GW 3/4" – Ø16x2 | Satin | TGAST015 |
| GW 3/4" – Ø16x2 | Black matt | TGACM002 |
| GW 3/4" – Ø16x2 | Black gloss | TGACZ005 |




Adapter for alupex – M22x1,5

Adapter for integrated lockshield valve

Colour Options: ● ○ ●


| Size | Colour | Product code |
|--------------------|------------|--------------|
| GW M22x1,5 – Ø16x2 | Chrome | TGACR011 |
| GW M22x1,5 – Ø16x2 | Satin | TGAST011 |
| GW M22x1,5 – Ø16x2 | Black matt | TGACM003 |

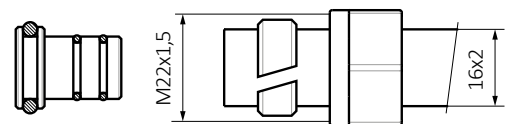

Adapter for copper – 24x19

Colour Options: ● ○


| Size | Colour | Product code |
|----------------|--------|--------------|
| GW 24x19 – Ø15 | Chrome | TGACR003 |
| GW 24x19 – Ø15 | Satin | TGAST003 |

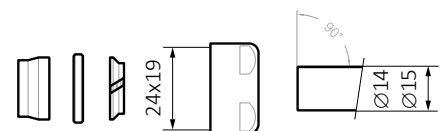

Adapter for copper – 3/4"

Colour Options: ●●


| Size | Colour | Product code |
|---------------|--------|--------------|
| GW 3/4" - Ø15 | Chrome | TGACR018 |
| GW 3/4" - Ø15 | Satin | TGAST014 |



Adapter for copper – M22x1,5

Colour Options: ●●●


| Size | Colour | Product code |
|------------------|------------|--------------|
| GW M22x1,5 - Ø15 | Chrome | TGACR006 |
| GW M22x1,5 - Ø15 | Satin | TGAST006 |
| GW M22x1,5 - Ø15 | Black matt | TGACM004 |

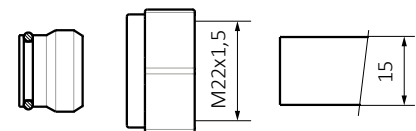

Adapter for steel – 24x19

Colour Options: ●●


| Size | Colour | Product code |
|--------------------|--------|--------------|
| GW 24x19 – GW 1/2" | Chrome | TGACR007 |
| GW 24x19 – GW 1/2" | Satin | TGAST007 |



Adapter for steel – M22x1,5

Colour Options: ●●


| Size | Colour | Product code |
|----------------------|--------|--------------|
| GW M22x1,5 – GW 1/2" | Chrome | TGACR012 |
| GW M22x1,5 – GW 1/2" | Satin | TGAST012 |



ETNA thermostatic head

Colour Options: ○ ●


| Size | Colour | Product code |
|---------|--------|--------------|
| M30x1,5 | White | TGGBI002 |
| M30x1,5 | Chrome | TGGCR002 |

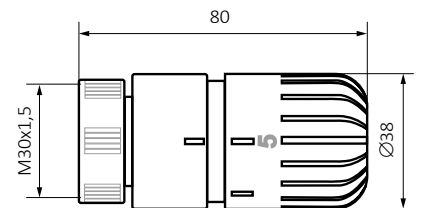

NOBLE thermostatic head

Colour Options: ○ ● ● ● ●


| Size | Colour | Product code |
|---------|-------------|--------------|
| M30x1,5 | White | TGGBI007 |
| M30x1,5 | Chrome | TGGCR004 |
| M30x1,5 | Satin | TGGST002 |
| M30x1,5 | Black matt | TGGCM002 |
| M30x1,5 | Black gloss | TGGCZ001 |

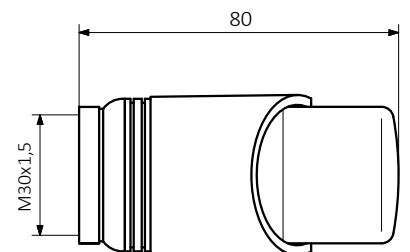

SLIM thermostatic head

Colour Options: ○ ● ○ ● ●

| Size | Colour | Product code |
|---------|-------------|--------------|
| M30x1,5 | White | TGGBI001 |
| M30x1,5 | Chrome | TGGCR001 |
| M30x1,5 | Satin | TGGST001 |
| M30x1,5 | Black matt | TGGCM001 |
| M30x1,5 | Black gloss | TGGCZ002 |

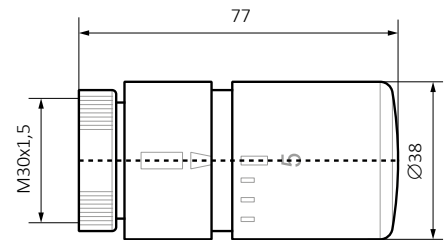


Blank plug with concealing cover

Available versions:

Colour Options: ● ○

| Size | Colour | Product code |
|---------|--------|--------------|
| GZ 1/2" | Chrome | WRZK001-CR |
| GZ 1/2" | White | WRZK001-BI |

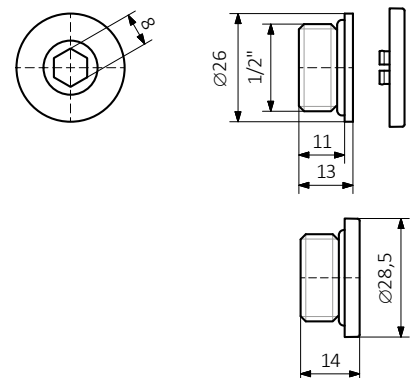


Blank plug

Available versions:

Colour Options: ●

| Size | Colour | Product code |
|---------|--------|--------------|
| GZ 1/2" | Chrome | MMEHYKR0001 |

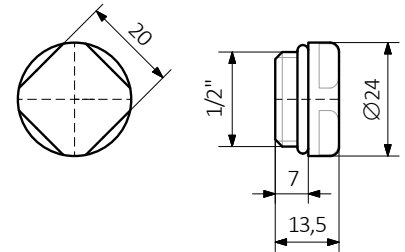

Nut spacer


Available versions:

Colour Options: ●●


| Size | Colour | Product code |
|---------------------|--------|--------------|
| GW 1/2" - GZ 1/2" | Chrome | TGUCR001 |
| GW 1/2" - GZ 1/2" | Satin | TGUST001 |
| GW 24x19 - GZ 24x19 | Chrome | TGUCR002 |
| GW 24x19 - GZ 24x19 | Satin | TGUST002 |



Size 1/2"

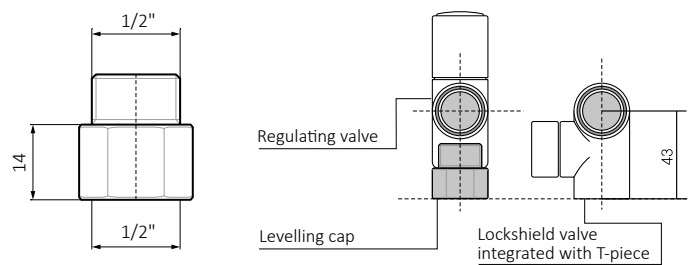

Size 24x19

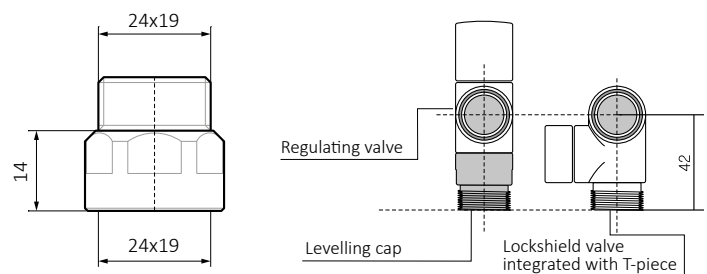


Bleed valve

Colour Options: ● ○ ●


| Size | Colour | Product code |
|---------|--------|--------------|
| GZ 1/2" | Chrome | WRZO001-CR |
| GZ 1/2" | Biały | WRZO001-BI |
| GZ 1/4" | Nickel | MMEHYOD0005 |



Size 1/2"

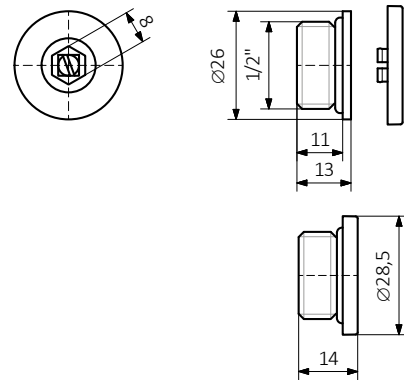


Size 1/4"

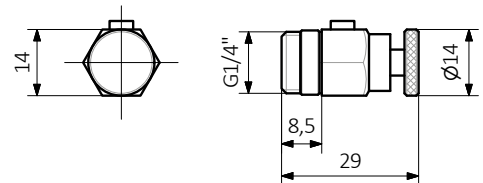

Pipe masking set – 70 mm

Colour Options: ○ ● ● ● ●

| Size | Colour | Product code |
|----------------|-------------|--------------|
| Ø18/Ø55/L70 mm | Chrome | TGPCR001 |
| Ø18/Ø55/L70 mm | Satin | TGPST001 |
| Ø18/Ø55/L70 mm | White | TGPBI001 |
| Ø18/Ø55/L70 mm | Black matt | TGPCM001 |
| Ø18/Ø55/L70 mm | Black gloss | TGPCZ001 |





TERMA special spanner set

Terma special spanner set for radiator and heating element fitting.

Type: flat, two-sided

Size: 20-22, 22-24, 26-27, 27-28


| Size | Product code |
|----------------------------|--------------|
| 20-22, 22-24, 26-27, 27-28 | WRNKPS0001 |

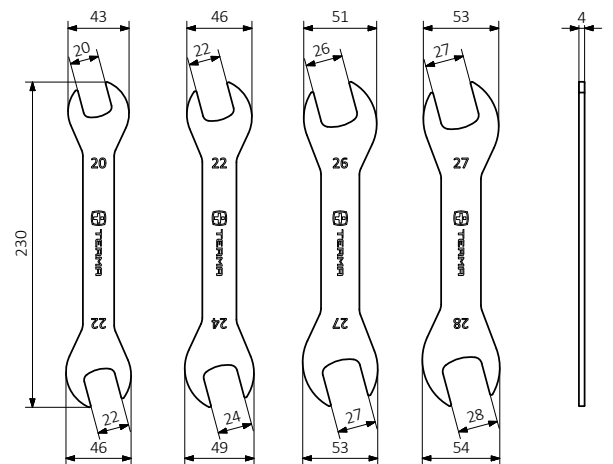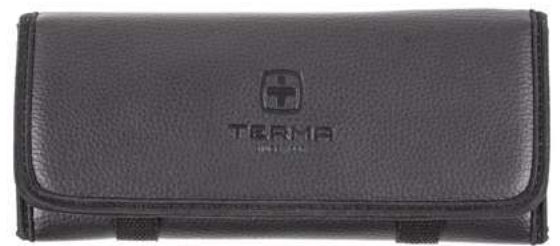

Integrated pipe masking set

Colour Options: ○●●●●

| Size | Colour | Product code |
|-------|-------------|--------------|
| 50 mm | Chrome | TGPCR002 |
| 50 mm | Satin | TGPST003 |
| 50 mm | White | TGPBI005 |
| 50 mm | Black matt | TGPCM002 |
| 50 mm | Black gloss | TGPCZ002 |

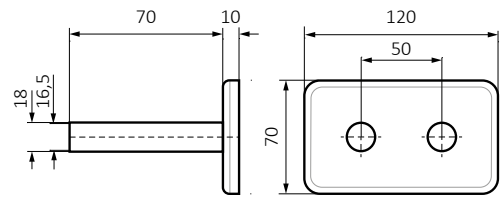

Brush

Material: beech and natural bristles

| Size | Product code |
|---------|--------------|
| 1000 mm | TGI007 |







Cast iron radiator valve sets and accessories

CLASSIC ART manual angled valve

Colour Options: ● ●

Connections:

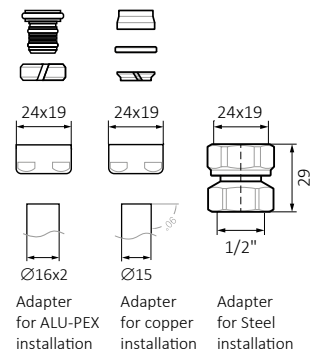

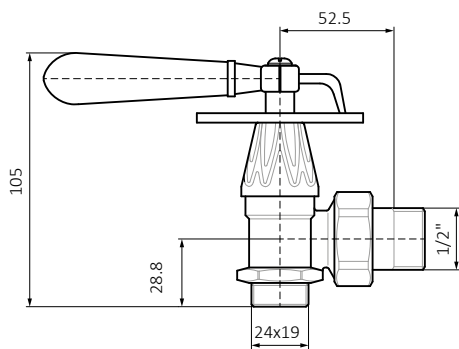
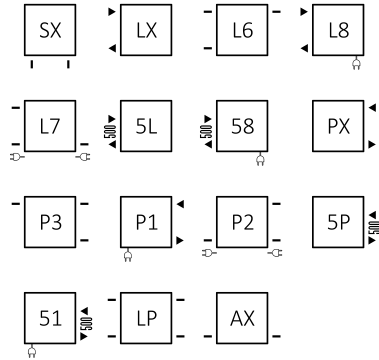


| Size | Colour | Product code |
|-----------------------------|---|--------------|
| GZ 1/2"-Ø16x2, Ø15, GW 1/2" | anthracite | TGERANT01 |
| GZ 1/2"-Ø16x2, Ø15, GW 1/2" | brushed bronze | TGERANT03 |
| GZ 1/2"-Ø16x2, Ø15, GW 1/2" | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRZRAW01* |

MINIMALIST manual angled valve set

Colour Options: 

Connections:

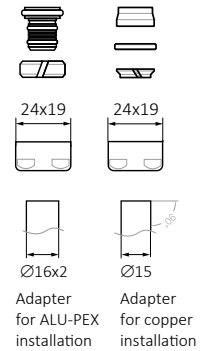


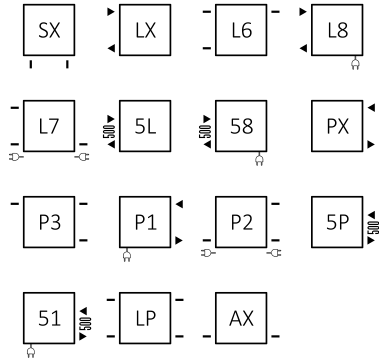


| Size | Colour | Product code |
|----------------------|---|--------------|
| GZ 1/2" - Ø16x2, Ø15 | anthracite | TGERAN002 |
| GZ 1/2" - Ø16x2, Ø15 | brushed bronze | TGERBR002 |
| GZ 1/2" - Ø16x2, Ø15 | brushed copper | TGERME003 |
| GZ 1/2" - Ø16x2, Ø15 | satin nickel | TGERST005 |
| GZ 1/2" - Ø16x2, Ø15 | chrome | TGZRCR017 |
| GZ 1/2" - Ø16x2, Ø15 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRZRAW03* |

ARTISTIC thermostatic angled valve set

Colour Options: ●●●

Connections:

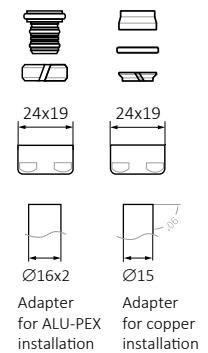

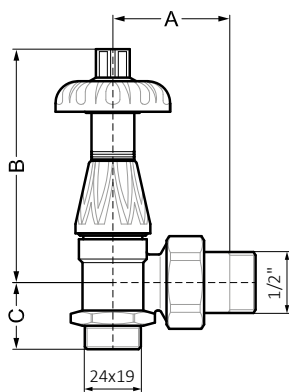
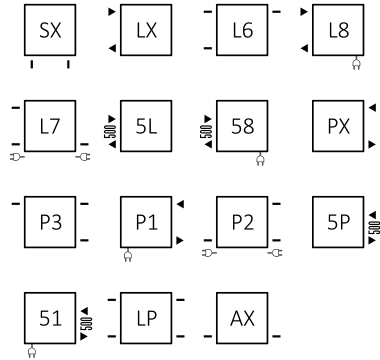


| Size | Colour | Product code <small>*Configuration code p. 791</small> |
|----------------------|---|---|
| GZ 1/2" - Ø16x2, Ø15 | anthracite | TGETAN002 |
| GZ 1/2" - Ø16x2, Ø15 | brushed bronze | TGETBR003 |
| GZ 1/2" - Ø16x2, Ø15 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRZTKAR01* |

WOOD thermostatic angled valve set

Colour Options: ● ● ● ●

Connections:

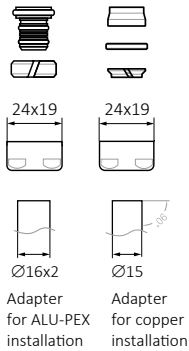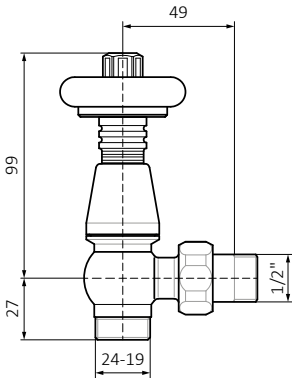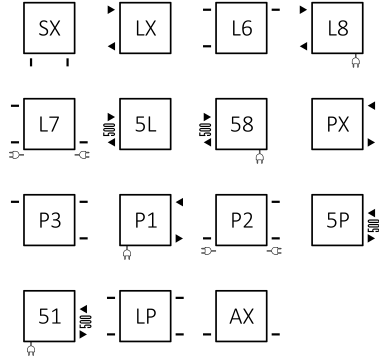


| Size | Colour | Product code |
|----------------------|----------------|--------------|
| GZ 1/2" - Ø16x2, Ø15 | brushed bronze | TGETBR002 |
| GZ 1/2" - Ø16x2, Ø15 | satin nickel | TGETST005 |
| GZ 1/2" - Ø16x2, Ø15 | brushed copper | TGETME001 |

ARTISTIC pipe masking set

Colour Options: ●●


| Size | Colour | Product code |
|--------------|---|-----------------------------------|
| | | <i>*Configuration code p. 791</i> |
| Ø18/Ø50/L160 | anthracite | TGPAN001 |
| Ø18/Ø50/L160 | brushed bronze | TGPBR001 |
| Ø18/Ø50/L160 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRMRAW01* |

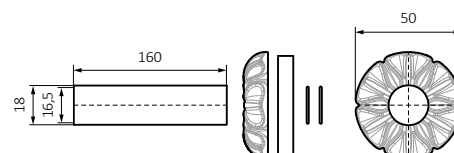

Pipe masking set – 160 mm

Colour Options: ●●●●○●●


| Size | Colour | Product code |
|--------------|---|-----------------------------------|
| | | <i>*Configuration code p. 791</i> |
| Ø18/Ø50/L160 | brushed bronze | TGPBR002 |
| Ø18/Ø50/L160 | brushed copper | TGPME001 |
| Ø18/Ø50/L160 | satin nickel | TGPNI001 |
| Ø18/Ø50/L160 | anthracite | TGPAN002 |
| Ø18/Ø50/L160 | white | TGPBI001 |
| Ø18/Ø50/L160 | brass | TGPMS001 |
| Ø18/Ø50/L160 | chrome | TGPCR004 |
| Ø18/Ø50/L160 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRMRAW02* |

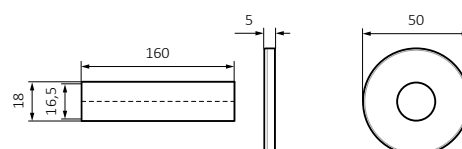

AluPEX adapter reducer – 24 × 19

Colour Options: 


| Size | Colour | Product code <small>*Configuration code p. 791</small> |
|----------------|---|---|
| GW 24-19-Ø16x2 | satin nickel | TGAST019 |
| GW 24-19-Ø16x2 | brushed bronze | TGABS006 |
| GW 24-19-Ø16x2 | anthracite | TGAAN001 |
| GW 24-19-Ø16x2 | brushed copper | TGAME001 |
| GW 24-19-Ø16x2 | brass | TGAMS001 |
| GW 24-19-Ø16x2 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRAADAP01* |




Steel adapter reducer – 24 × 19

Colour Options: 


| Size | Colour | Product code <small>*Configuration code p. 791</small> |
|------------------|---|---|
| GW 24-19-GW 1/2" | satin nickel | TGAST020 |
| GW 24-19-GW 1/2" | brushed bronze | TGABS005 |
| GW 24-19-GW 1/2" | anthracite | TGAAN003 |
| GW 24-19-GW 1/2" | brushed copper | TGAME003 |
| GW 24-19-GW 1/2" | brass | TGAMS003 |
| GW 24-19-GW 1/2" | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRAADAP02* |



Copper adapter reducer – 24×19

Colour Options: 

| Size | Colour | Product code <small>*Configuration code p. 791</small> |
|--------------|---|---|
| GW 24-19-Ø15 | satın nickel | TGAST018 |
| GW 24-19-Ø15 | brushed bronze | TGABS003 |
| GW 24-19-Ø15 | anthracite | TGAAN002 |
| GW 24-19-Ø15 | brushed copper | TGAME002 |
| GW 24-19-Ø15 | brass | TGAMS002 |
| GW 24-19-Ø15 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | WRAADAP03* |

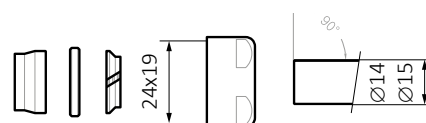

Bleed valve

Colour Options: 

| Size | Colour | Product code <small>*Configuration code p. 791</small> |
|------|---|---|
| 1/2" | anthracite | MMEHYOD0008 |
| 1/2" | bronze | MMEHYOD0009 |
| 1/2" | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | PLVODP01* |




Reducing bush 5/4" × 1/2"

Matching radiator colour

| Size | Thread | Product code |
|------|--------|--------------|
| 5/4" | left | PLVKOR-Z01 |
| 5/4" | right | PLVKOR-Z02 |

Configuration code p. 791

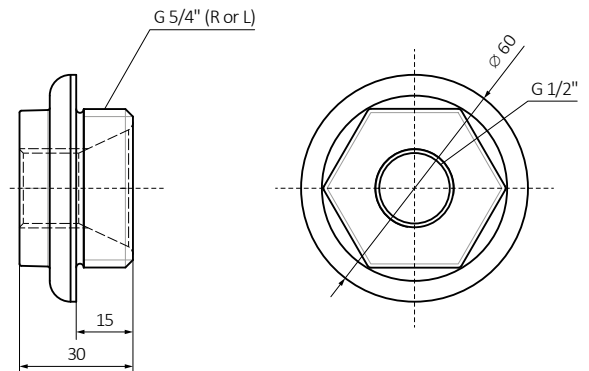


Blanking plug 5/4"

Matching radiator colour


| Size | Thread | Product code |
|------|--------|--------------|
| 5/4" | left | PLVKOR-Z03 |
| 5/4" | right | PLVKOR-Z04 |

Configuration code p. 791

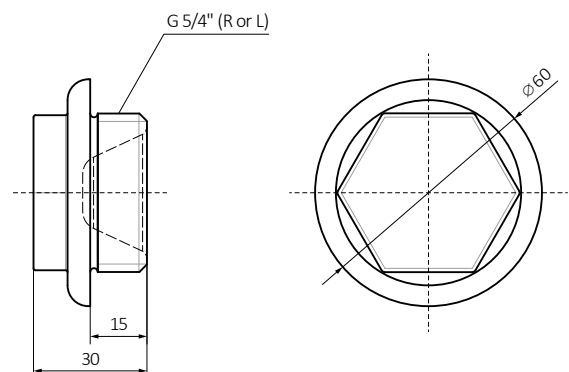


Joining nipple 5/4"

| type | Product code |
|-----------|--------------|
| cast iron | MMECSGZ0011 |
| steel | MMECSGZ0018 |

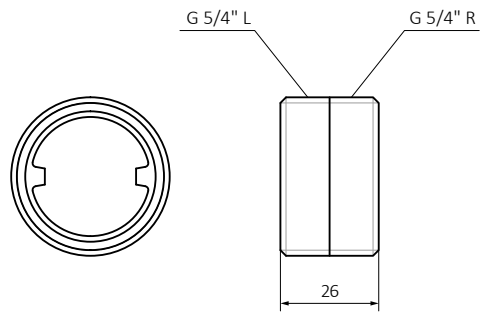

Gasket for cast iron

| Size | Product code |
|-----------------|--------------|
| 5/4"; gr.1,5 mm | MTSININ0053 |

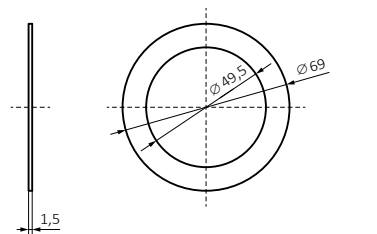


Cast iron radiator wall bracket


| Radiator | A [mm] | B [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|---------------------------|-----------|-----------|--|--|
| Oxford, Plain 3 Column | 190 | 155 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | PLV-HAK-220 |
| Plain, Kaszub | 175 | 140 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | PLV-HAK-180 |
| Bart | 120 | 86 | Matching radiator colour (RAL & Terma Cast Iron Special Colours) | PLV-HAK-070 |



Oxford, Plain and Kaszub

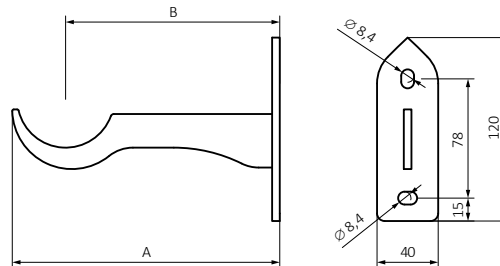


Bart

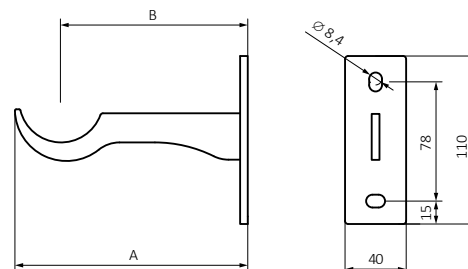

Cast iron radiator joining key

| Colour | Product code |
|------------------------------|--------------|
| 800 mm (10 sections x 80 mm) | WRNGZ600 |

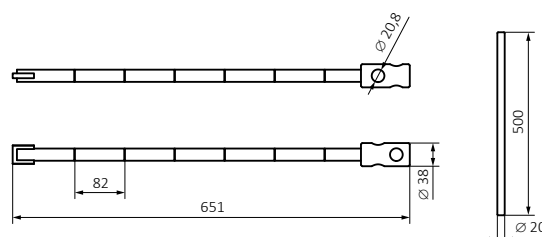

Heating elements

ONE s. 724



Compliant with the EU directives:
2009/125/WE and 2015/1188



photo: chrome, spiral cable

Functionality

The ONE heating element allows you to set two temperature levels. A sensitive electronic sensor allows the device to maintain the set temperature. The device shows the current mode using a multi-coloured LED. The heating element is characterized with a very low power consumption in standby mode.

Timer

The timer automatically turns the heating element off after 2 hours.

Remote Control

The heating element is capable of wireless IR communication with an external wall controller, which enhances the use of the ONE heating element with additional features. For information on TTIR and DTIR IR controllers see pages 758 and 760.

Intelligent Building Systems

In the event of a power failure, the heating element remembers the previous setting (last setting used), which is useful when the device is controlled by external timers and intelligent building systems.

Safety

The ONE heating element is equipped with a number of safety features including; a 'frost' protection setting (ANTIFREEZE), a double protection against overheating and an 'active' protection to prevent overheating when used in a dry radiator. Device displays a warning in case of malfunction

Design

The heating element has a metal housing available in chrome or powder coated finish. It is available in four shapes designed to match radiator collectors. The heating element has a single hidden button to activate and change

the settings. There are radiators available with the ONE integrated into the radiator where the only part of the ONE that is visible is the status indicator. See the Radiators section.

Colour

Available colours: RAL, Terma special colours and chrome



KTX 4

① s. 728



Compliant with the EU directives:
2009/125/WE and 2015/1188



photo: chrome, straight cable

Functionality

The KTX 4 has 5 temperature settings that range from 30°C to 60°C. An electronic sensor guarantees precise temperature control. The device displays the currently set temperature level and indicates the status of the heating cycle or standby state. The KTX 4 is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726. The KTX 4 is also equipped with actual heating time counter for energy consumption calculations.

Timer

An enhanced timer automatically turns the heating element off after 1, 2, 3 or 4 hours.

Remote Control

The heater is capable of wireless IR communication with an external wall controller, which enhances the use of the heating element with additional features. Information on the TTIR and DTIR IR controllers can be found on pages 758 and 760.

Intelligent Building Systems

In case of power loss the KTX 4 remembers its settings making it suitable for connection with external timers and intelligent building systems.

Safety

The KTX 4 is equipped with a 'frost' protection (ANTIFREEZE). It also has double protection against the element overheating as well as a safety feature that prevents damage in case of operation in a dry radiator. A device error or malfunction is identified by a display of error codes.

Design

Equipped with an easy to read single digit LED display in blue. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



KTX 4 BLUE ① s. 730



Compliant with the EU directives:
2009/125/WE and 2015/1188



photo: silver, coiled cable

Functionality

The heating element can be fully controlled through the BLUE-Line control mobile application. The mobile application allows you to control both the temperature of the radiator (30-60° C) and the room temperature (15-30° C); program any number of 7-day schedules; program advanced timer. The buttons on the controller's housing allow you to set the operating temperature in a simplified way or run a simplified Timer (up to 4 hours). The device displays the currently set temperature level and indicates the status of the heating cycle or standby mode. The KTX 4 is designed to use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726. The KTX 4 is also equipped

with actual heating time counter for energy consumption calculations.

Remote Control

Any portable device, smartphone or tablet, with Bluetooth® can be used for remote control. BLUE-Line control mobile application for Android and iOS is available via Google Play® or Apple Store®. With one mobile device, it is possible to program and control any number of BLUE devices (radiator and heating elements) within range of the mobile device.

Intelligent Building Systems

In case of power loss the KTX4 remembers its settings making it suitable for connection with external timers and intelligent building systems*.

Safety

The KTX 4 is equipped with a 'frost' protection (ANTIFREEZE). It also has double protection against the element overheating as well as a safety feature that prevents damage in case of operation in a dry radiator. A device error or malfunction is identified by a display of error codes.

Design

Equipped with an easy to read single digit LED display in blue.

Colour

Available colours: white, silver, chrome and black. Fascia always comes in silver regardless of the housing colour. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



KTX 3 s. 732



photo: white, terminal block under a masking cover

Functionality

The KTX 3 offers adjustable temperature levels ranging from 30°C to 60°C in steps of 1°C. An electronic temperature sensor guarantees precise temperature control. The device displays the current set temperature level and indicates the status of the heating cycle or standby state. It also has an easy interface for controller programming. The KTX 3 is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726.

Daily Timer

A 24-hour timer allows you to program up to 4 intervals for heating at a preselected tem-

perature or to switch between heating and power off states.

Dryer Function

A function that allows a controlled temperature and drying time, after which the heater will return back to its previous state.

Intelligent Building Systems

In the event of a power failure, the heating element remembers the previous setting (last setting used), which is useful when the device is controlled by external timers and intelligent building systems.

Safety

The KTX 3 is equipped with a 'frost' protection (ANTIFREEZE). It also has double protection against the heating element overheating. A device error or malfunction is identified by

a display of error codes. The KTX 3 also has an additional safety feature that prevents it from working in a dry radiator.

Design

Equipped with an easy to read LCD display with a clock. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



KTX 2 s. 734



photo: black, spiral cable

Functionality

This KTX 2 has a five step temperature control which ranges from 30°C to 60°C. An electronic temperature sensor ensures precise temperature control. The device displays its current temperature setting. The KTX 2 is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726.

Timer

The KTX 2 heating element has a 2-hour timer with two working modes. One mode is used while the KTX 2 is active and heating. In this mode the KTX 2 will maintain the previously set temperature and then switch itself off

after 2 hours. The second mode can be used to turn the KTX 2 on (when previously off) for a period of 2 hours, following these 2 hours the KTX 2 will turn off.

Intelligent Building Systems

The KTX 2 remembers its previous settings even when the power supply is lost. It is therefore suitable to be used with external timers or intelligent building systems.

Safety

The KTX 2 is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator and displays a warning in case of malfunction.

Design

The KTX 2 heating element has an easy to use interface. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



KTX 1 s. 736



photo: silver, spiral cable

Functionality

The KTX 1 has two settings: 50% and 100% of the nominal power. It is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726.

Intelligent Building Systems

In the event of a power failure the heater remembers its setting (last setting used), which is useful when the device is controlled by external timers and intelligent building systems.

Safety

The KTX 1 is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator. The heating element displays warning indicators in case of malfunction.

Design

The KTX 1 has large, ergonomic buttons. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



MOA s. 738



photo: chrome, straight cable

Functionality

The MOA offers 5 temperature settings ranging from 30°C to 60°C. It is equipped with an electronic temperature sensor that guarantees precise temperature control. The MOA displays the currently set temperature level and the status of the heating cycle using an LED indicator. The heating element has a very low power consumption in a standby mode.

Dryer Function

This function allows the setting of a higher heating power for two hours, after which the device returns to the previous state.

Intelligent Building Systems

In the event of a power failure the MOA remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

The MOA is equipped with 'frost' protection (ANTIFREEZE). It also has a double protection against overheating of the radiator and displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Design

The MOA version with a straight cable without a plug, is also available with a cable-masking cover option.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



MOA IR s. 740



Compliant with the EU directives:
2009/125/WE and 2015/1188



photo: silver, straight cable

Functionality

MOA offers 5 temperature settings ranging from 30°C to 60°C. It is equipped with an electronic temperature sensor that guarantees precise temperature control. MOA displays the currently set temperature level and the status of the heating cycle using illuminated diodes. The heating element has a very low power consumption in a standby mode.

Dryer Function

This function allows the setting of a higher heating power for two hours, after which the device returns to the previous state.

Remote Control

The heating element is capable of wireless IR communication with an external wall controller DTIR or TTIR, which enhances the use of the heating element with additional features. Information on the TTIR and DTIR IR controllers can be found on pages 758 and 760.

Intelligent Building Systems

In the event of a power failure the MOA remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

MOA is equipped with frost protection (ANTIFREEZE). It has a double protection against overheating of the radiator and an active safety feature in case of operation in a dry radiator. It displays warning indications in case of malfunction.

Design

MOA version with a straight cable and without a plug, is also available with an optional cable masking cover.

Colour

Available housing colours: white, silver, chrome and black. The front fascia always in black colour. Heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



MOA BLUE ① s. 742



Compliant with the EU directives:
2009/125/WE and 2015/1188



photo: Colour in der Abbildung: silber / straight cable

Functionality

The BLUE-Line control app offers full control and functionality of the heating element. It allows you to control both the internal temperature of the radiator (30-60°C) or the ambient room temperature (15-30°C). In addition it offers full 7 day timer functionality, where you can program any number of heating schedules throughout each day as required. Buttons on the control head of the element allow the user to set the temperature in a simplified way or run 2 Hour Drying Function. The app shows the selected temperature level and the element indicates the operation mode in use such as timer, weekly schedule mode or Bluetooth communication with the device control.

Remote Control

You can use any portable device such as a Bluetooth® enabled smartphone or a tablet to control the heating element remotely. The BLUE-Line control app for Android and iOS is available at their respective online stores. One application can program and control any number of BLUE series devices (heating elements and radiators) within reach of the mobile device.

Safety

MOA is equipped with frost protection (ANTI-FREEZE). It also has double protection against overheating of the radiator. It displays warning indicators in case of malfunction.

Design

Blue LEDs signify the current operating temperature and an RGB LED signals current mode of operation.

Colour

Available in: white, silver, chrome and black. The front fascia always in Silver colour. Heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



 TERMA



TERMA



 Bluetooth

DRY

① s. 744



photo: silver, straight cable

Functionality

Thanks to an electronic sensor the DRY heating element maintains a constant temperature of 48°C. It also has the ability to be programmed further to different temperature levels. The heating element has a very low power consumption in a standby mode.

Timer

An enhanced timer automatically turns the heating element off after 1, 2, 3, 4 or 5 hours.

Intelligent Building Systems

In the event of a power failure the DRY remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

In the event of a power failure the DRY remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Design

The heating element is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator. The DRY displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Colour

Available housing colours: white, silver, chrome and black. The front fascia always in black colour. The DRY can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.





photo: chrome, straight cable

Functionality

The TDY offers 3 temperature settings ranging from 40°C to 60°C. It is equipped with an electronic temperature sensor that guarantees precise temperature control. The heating element has a very low power consumption in a standby mode.

Automatic power-off function

Automatic Timer sets the operating time between 60 - 180 minutes (default setting is 120 minutes). The clear display shows time left until automatic switch off. NOTE: No continuous operation possible. While the heating element is on, the heating temperature can be adjusted according to one's preference.

Safety

The TDY is equipped with 'frost' protection (ANTIFREEZE). It also has a double protection against overheating of the radiator and displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Design

The TDY is supplied with a straight cable without a plug, it is also available with a cable-masking cover as an optional extra.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



MEG s. 748



photo: chrome, spiral cable

Functionality

The MEG heating element offers 5 temperature settings ranging from 30°C to 60°C. An electronic temperature sensor guarantees precise temperature control. The device displays the currently set temperature level and indicates the status of the heating cycle.

Intelligent Building Systems

In the event of a power failure the MEG remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

The MEG heating element is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator. The MEG also displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Design

The MEG heating element is supplied with a straight cable without a plug. It is available with a cable-masking cover as an optional extra.

Colour

Available colours: white, silver, chrome and black. The MEG can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



REG 3

① s. 750



photo: white with grey ring, straight cable

Functionality

The REG 3 offers two temperature settings of 50°C and 65°C. It is equipped with a bi-metallic temperature sensor. The device displays currently set temperature level.

Intelligent Building Systems

The REG 3 is suitable for connection to external timers and intelligent building systems.

Safety

The REG 3 is equipped with a double protection against overheating of the radiator.

Design

The REG 3 has small controller housing in a universal shape reminiscent of a drop of water. It is controlled via a rotating ring-shaped switch that turns the heating element on and off and allows the selection of temperature settings.

Colour

Available colours: white with grey ring, silver with grey ring, silver with chrome ring, black with chrome ring. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



TERMA

REG 2 s. 752



photo: white, straight cable

Functionality

The REG 2 maintains a constant temperature of 65°C and is equipped with a bimetallic temperature sensor. A small, spherical controller indicates on/off operation by the display of an LED.

Intelligent Building Systems

The REG 2 is suitable for connection to external timers and intelligent building systems.

Safety

The REG 2 is equipped with a double protection against overheating of the radiator.

Design

The REG 2 is one of the smallest heating elements on the market. Its main objective is simplicity of use. It does not have an on/off switch on its housing so it must be activated externally either by a timer or switched fused spur. A version equipped with a plug with an on/off switch is available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.



photo: straight cable

Functionality

The SIM is a basic, simple heating element. The SIM has built-in protection against overheating and is fitted with a bimetal temperature limiter. The device is available in a wide range of power outputs up to 1500 W.

Intelligent Building Systems

The SIM is suitable for connection to external timers and intelligent building systems.

Safety

The SIM has an exceptionally high degree of moisture ingress protection and is fitted with a thermal fuse to prevent overheating of the radiator.

Design

The SIM has a stainless steel housing. It does not have an on/off switch on its housing so it must be controlled externally either by a timer or switched fused spur. A version with a switch located on the plug is available.

Colour

Housing: stainless steel. Available cable colours: white or grey.

SPCS00023B
TERMA
14142206
W200 V230
CE IP67

Heating elements

Technical Information

Heating element comparison tool

| | SIM | REG 3 | REG 2 | MEG | MOA | MOA IR | MOA Blue |
|---|----------------|----------------|----------------|----------------|----------------|---|--|
| adjustable parameter | radiator temp. | radiator temp. | radiator temp. | radiator temp. | radiator temp. | radiator temp. / room temp. ^{[1][2]} | radiator temp. / room temp. |
| work settings range / no. of settings | 65°C/1 | 50-65°C/2 | 65°C / 1 | 30-60°C / 5 | 30-65°C / 5 | 30-65°C / 5 | 15-30°C / 5 ^[4] 30-60°C / 5 ^[4] |
| symmetrical casing – installation on the left or right side | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Type of mains connection | P/R | P/W/U | T/R | P/W/U | P/W/U | P/W/U | P/W/U |
| Device protection class | Class I | Class I | Class I | Class I | Class I | Class I | Class I |
| Ingress protection | IP67 | IPx5 | IPx5 | IPx4 | IPx5 | IPx5 | IPx5 |
| Terma Split system | – | – | – | – | – | – | – |
| Electronic temperature sensor | – | – | – | ✓ | ✓ | ✓ | ✓ |
| Available wattages | 100-1500 W | 120-1200 W | 120-1200 W | 120-1200 W | 120-1200 W | 120-1200 W | 120-1200 W |
| Timer / no. of timer settings | – | – | – | – | 2h/1 | 2h/1 | 4h/48 |
| 24h timer | – | – | – | – | – | ✓ ^[1] | ✓ |
| Weekly timer | – | – | – | – | – | ✓ ^[2] | ✓ |
| Wireless communication technology | – | – | – | – | – | IR | BLE |
| Protection from operating in a dry radiator | – | – | – | ✓ | ✓ | ✓ | ✓ |
| Real time heating meter | – | – | – | – | – | – | – |
| Antifreeze | – | – | – | ✓ | ✓ | ✓ | ✓ |
| Double overheating protection (overheating and fire) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Compliant with the EU directives: 2009/125/WE and 2015/1188 | – | – | – | – | – | ✓ ^[2] | ✓ |

P – Straight cable without plug
R – Straight cable with plug and switch
S – Without cable (terminal block under a masking cover)
T – Spiral cable with plug and switch
U – Spiral cable with plug
W – Straight cable with plug

| DRY | TDY | KTX 1 | KTX 2 | KTX 3 | KTX 4 | KTX 4 Blue | One | DTIR | TTIR |
|----------------|----------------|----------------------------|---------------------|---------------------|---|--|---|------------|-----------|
| radiator temp. | radiator temp. | Power output adjustment | radiator temp. | radiator temp. | radiator temp. / room temp. ^{[1][2]} | radiator temp. / room temp. | radiator temp. / room temp. ^{[1][2]} | room temp. | |
| 48°C (42-60) | 40-60° C / 3 | 50-100% / 2 ^[3] | 30-60° C / 5 | 30-60° C / 30 | 30-60° C / 5 | 15-30° C / 5 ^[4] 30-60° C / 5 ^[4] | 45-60° C / 2 | 5-30° C | 10-30° C |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ ^[6] | – | – |
| P/W/U | P/W/U | P/W/U/S | P/W/U/S | P/W/U/S | P/W/U/S | P/W/U/S | P/W/U | – | – |
| Class I | Class I | Class I | Class I | Class I | Class I | Class I | Class I | Class III | Class III |
| IPx5 | IPx5 | IPx4 | IPx5 ^[7] | IPx5 ^[7] | IPx5 ^[7] | IPx5 | IPx5 | IP30 | IP30 |
| – | – | ✓ | ✓ | ✓ | ✓ | ✓ | – | – | – |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 120-1200 W | 120-1200 W | 120-1000 W | 120-1000 W | 120-1000 W | 120-1000 W | 120-1000 W | 120-1000 W | – | – |
| 5h/5 | 3h/5 | – | 2h/1 | 4h/8 | 4h/4 | 4h/48 | 2h/1 | 4h/16 | 4h/8 |
| – | – | – | – | ✓ ^[5] | ✓ ^[1] | ✓ | ✓ ^[2] | ✓ | – |
| – | – | – | – | – | ✓ ^[2] | ✓ | ✓ ^[2] | – | ✓ |
| – | – | – | – | – | IR | BLE | IR | IR | IR |
| ✓ | ✓ | – | – | ✓ | ✓ | ✓ | ✓ | – | – |
| – | – | – | – | – | ✓ | ✓ | – | – | – |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | – | – |
| – | – | – | – | – | ✓ ^[2] | ✓ | ✓ ^[2] | – | – |

¹ Only if paired with DT-IR

² Only if paired with TT-IR

³ Power output adjustment 50%/100%

⁴ Bluetooth mobile app allows to adjust temp. with 1°C precision

⁵ Simplified day clock, 4 zones

⁶ Does not apply to One T and ONE D

⁷ If mains connection type is "S" then IPx4

Functions and features:

Functionality

The ONE heating element allows you to set two temperature levels. A sensitive electronic sensor allows the device to maintain the set temperature. The device shows the current mode using a multi-coloured LED. The heating element is characterized with a very low power consumption in standby mode.

Timer

The timer automatically turns the heating element off after 2 hours.

Remote Control

The heating element is capable of wireless IR communication with an external wall controller, which enhances the use of the ONE heating element with additional features. For information on TTIR and DTIR IR controllers see pages 758 and 760.

Intelligent Building Systems

In the event of a power failure, the heating element remembers the previous setting (last setting used), which is useful when the device is controlled by external timers and intelligent building systems.

Safety

The ONE heating element is equipped with a number of safety features including; a 'frost' protection setting (ANTIFREEZE), a double protection against overheating and an 'active' protection to prevent overheating when used in a dry radiator. Device displays a warning in case of malfunction

Design

The heating element has a metal housing available in chrome or powder coated finish. It is available in four shapes designed to match

radiator collectors. The heating element has a single hidden button to activate and change the settings. There are radiators available with the ONE integrated into the radiator where the only part of the ONE that is visible is the status indicator. See the Radiators section.

Colour

Available colours: RAL, Terma special colours and chrome

Specifications:

- Power supply: 230 V / 50 Hz
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5


Configurations table:

Example of product code: **WE** **ODL** **04** **T** **CRO** **W**




Code elements highlighted in blue.


| Model | Power [W] | Packaging | Colour | Cable Type |
|---------------------------------|----------------|---------------|------------------------------|--------------------------------------|
| WE ODL ONE D Left | 01 120 | T Tube | 916 White | P Straight cable without plug |
| ODP ONE D Right | 02 200 | | CRO Chrome | W Straight cable with plug |
| OKX ONE 30x30 | 03 300 | | or any other colour shown on | U Spiral cable with plug |
| OPX ONE 30x40 | 04 400 | | p. 18 | |
| OTL ONE T Left | 06 600 | | | |
| OTP ONE T Right | 08 800 | | | |
| | 10 1000 | | | |

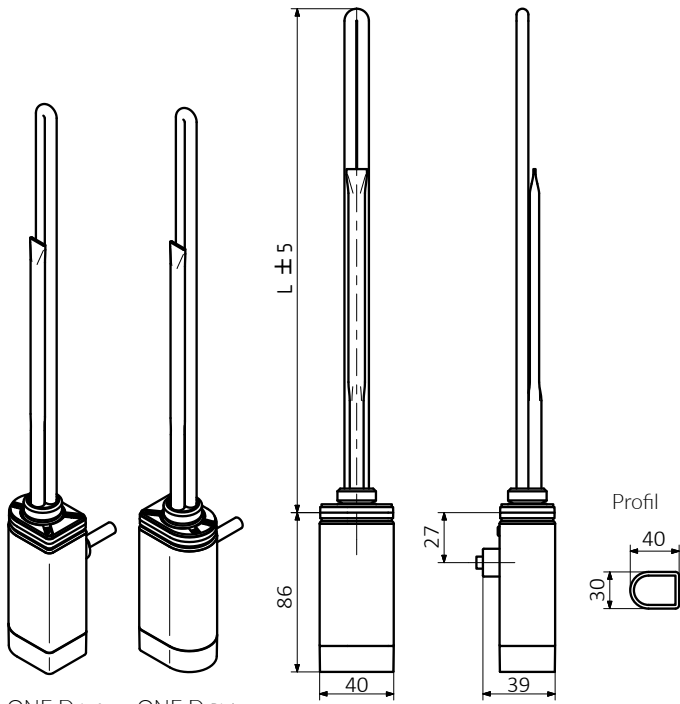


ONE D Left ONE D Right

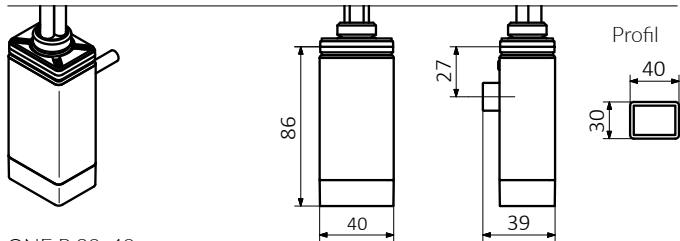

ONE P 30x40

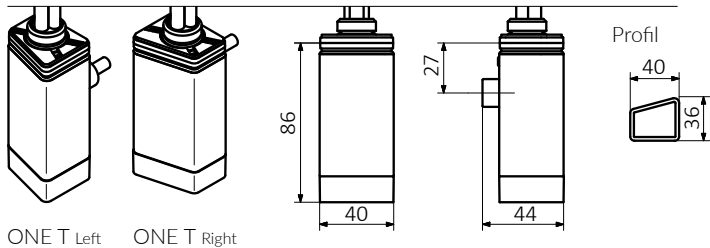


ONE T Left ONE T Right

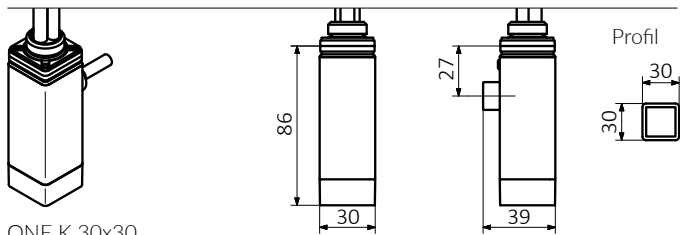


ONE K 30x30


Straight cable without plug
(standard length 1,5 m)



Straight cable with plug
(standard length 1,5 m)



Spiral cable with plug
(standard length 2,5 m)



| | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|
| L [mm] | 310 | 270 | 295 | 330 | 360 | 470 | 560 |
| Power [w] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 |

Terma-Split TS 1

Functions and features:

The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. The TS 1 screws into the radiator and is tightened with a standard 24 mm spanner, then the controller can be fitted onto the Terma-Split connector. The connector is then hidden within the controller case.

- Easy and safe installation.
- The ability to remove the controller, e.g. for repair without a need to remove the TS 1.
- Easy positioning of the controller. The controller can be turned within a range of 340°, allowing the face to be always visible.
- Heating element power ranging from 120 to 1000 W with the ability to work with any of the KTX range of controllers.

Specifications:

Device protection class: Class I


Power supply: 230 V / 50 Hz

Configurations table:

Example of product code: **WE** **TS1** **04** **K** **---** **D**

Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Split connector |
|----------------------------------|----------------|--------------|-----------------|----------------------------------|
| WE TS1 Terma Split | 01 120 | K Box | --- None | D Split connector Class I |
| | 02 200 | | | |
| | 03 300 | | | |
| | 04 400 | | | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |

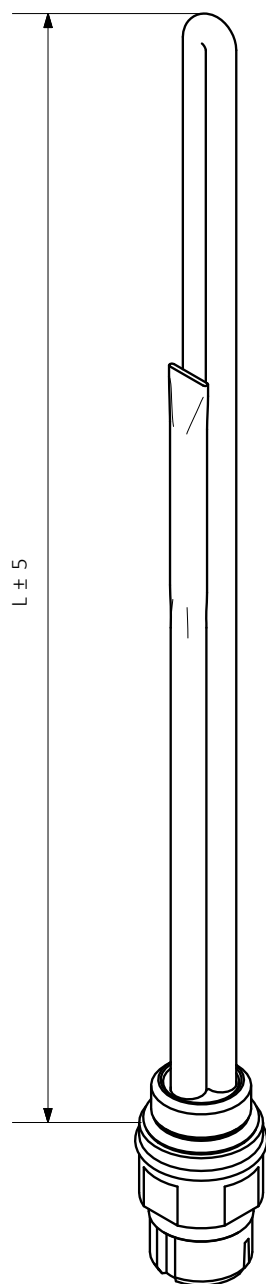

| | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|
| L [mm] | 325 | 285 | 310 | 345 | 375 | 485 | 575 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 |

Functions and features:

Functionality

The KTX 4 has 5 temperature settings that range from 30°C to 60°C. An electronic sensor guarantees precise temperature control. The device displays the currently set temperature level and indicates the status of the heating cycle or standby state. The KTX 4 is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726. The KTX 4 is also equipped with actual heating time counter for energy consumption calculations.

Timer

An enhanced timer automatically turns the heating element off after 1, 2, 3 or 4 hours.

Remote Control

The heater is capable of wireless IR communication with an external wall controller, which enhances the use of the heating element with additional features. Information on the TTIR and DTIR IR controllers can be found on pages 758 and 760.

Intelligent Building Systems

In case of power loss the KTX 4 remembers its settings making it suitable for connection with external timers and intelligent building systems.

Safety

The KTX 4 is equipped with a 'frost' protection (ANTIFREEZE). It also has double protection against the element overheating as well as a safety feature that prevents damage in case of operation in a dry radiator. A device error or malfunction is identified by a display of error codes.

Design

Equipped with an easy to read single digit LED display in blue. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

| | |
|--------------------------|--|
| Power supply: | 230 V / 50 Hz |
| Heating element: | Terma Split I |
| Device protection class: | Class I |
| Radiator connection: | G 1/2" |
| Ingress protection [IP]: | IPx4: MS version (with terminal block); IPx5: Version with cable |


Configurations table:

Example of product code: **WE**KT4TSMAW



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|----------------------------|-------------------------------|--------------|-------------------|---|
| WE KT4 KTX 4 | - without the heating element | K Box | 916 White | W Straight cable with plug |
| | | | SMA Silver | P Straight cable without plug |
| | | | CRO Chrome | U Spiral cable with plug |
| | | | 905 Black | S Without cable (terminal block under a masking cover) |

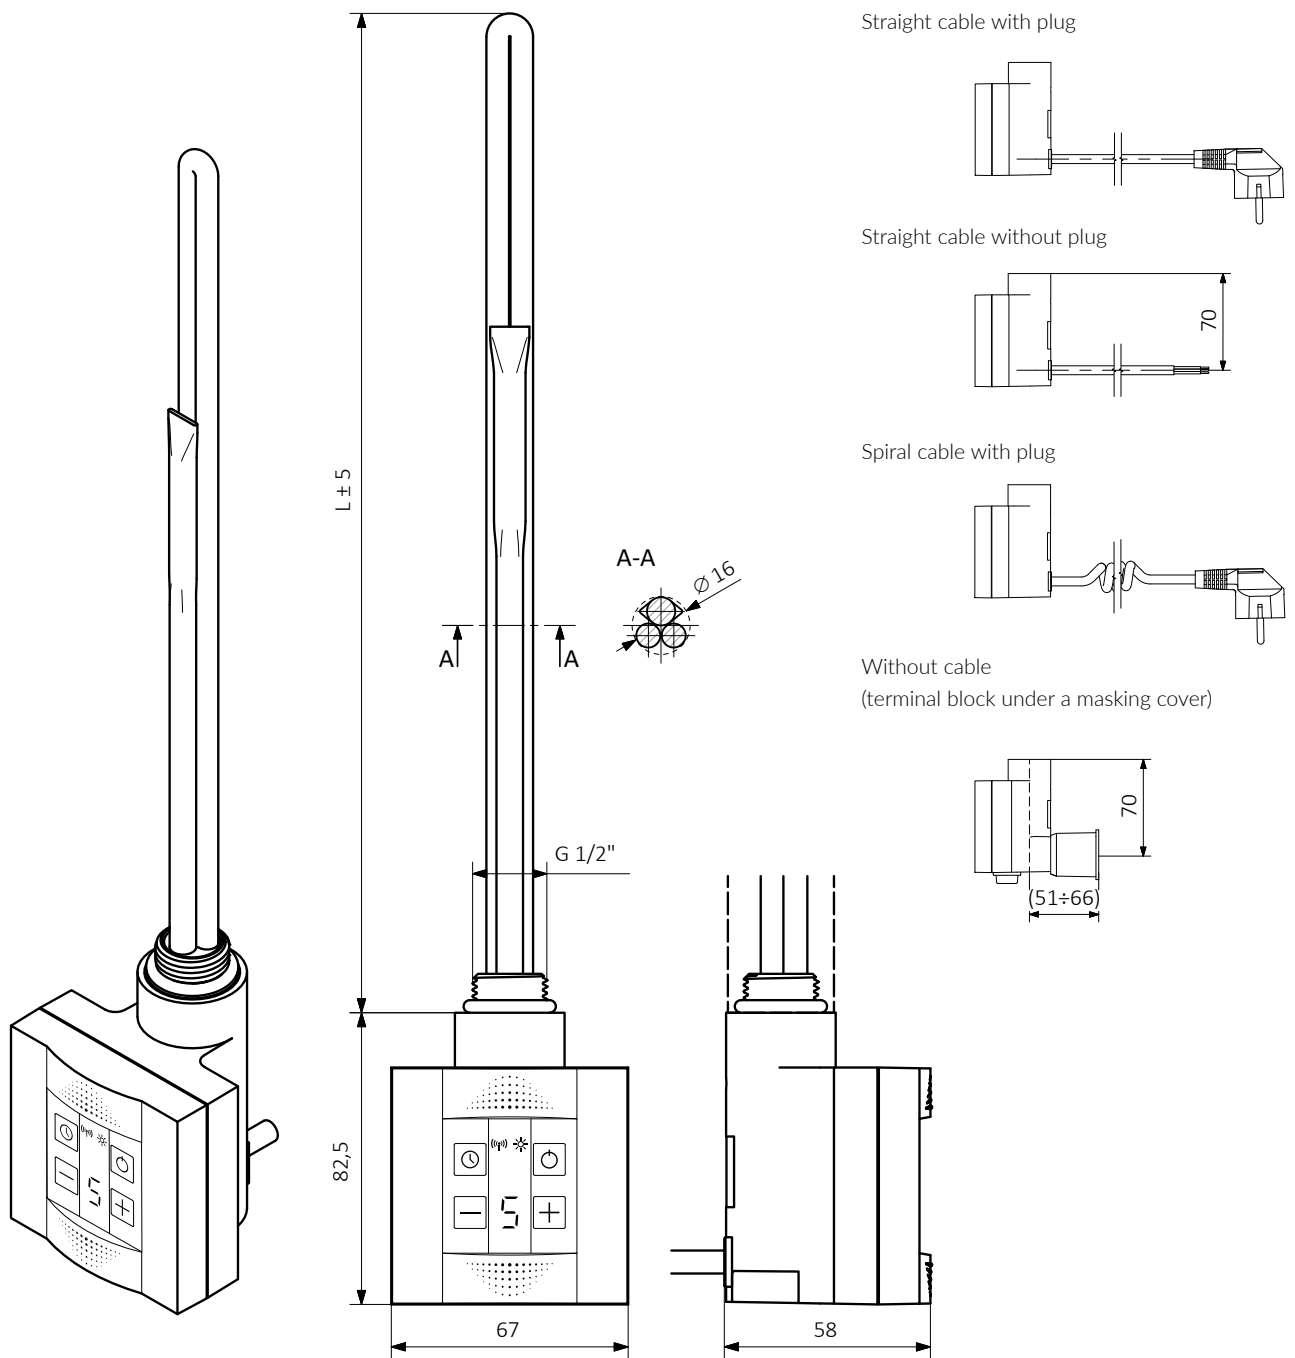

| | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|
| L [mm] | 325 | 285 | 310 | 345 | 375 | 485 | 575 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 |

KTX 4 BLUE s. 694

design: Przemysław Jan Majchrzak

Functions and features:

Functionality

The heating element can be fully controlled through the BLUE-Line control mobile application. The mobile application allows you to control both the temperature of the radiator (30-60° C) and the room temperature (15-30° C); program any number of 7-day schedules; program advanced timer. The buttons on the controller's housing allow you to set the operating temperature in a simplified way or run a simplified Timer (up to 4 hours). The device displays the currently set temperature level and indicates the status of the heating cycle or standby mode. The KTX 4 is designed to use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726. The KTX 4 is also equipped with actual heating time counter for energy consumption calculations.

Remote Control

Any portable device, smartphone or tablet, with Bluetooth® can be used for remote control. BLUE-Line control mobile application for Android and iOS is available via Google Play® or Apple Store®. With one mobile device, it is possible to program and control any number of BLUE devices (radiator and heating elements) within range of the mobile device.

Intelligent Building Systems

In case of power loss the KTX4 remembers its settings making it suitable for connection with external timers and intelligent building systems*.

Safety

The KTX 4 is equipped with a 'frost' protection (ANTIFREEZE). It also has double protection against the element overheating as well as a safety feature that prevents damage in case of operation in a dry radiator. A device error or malfunction is identified by a display of error codes.

Design

Equipped with an easy to read single digit LED display in blue.

Colour

Available colours: white, silver, chrome and black. Fascia always comes in silver regardless of the housing colour. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

| | |
|--------------------------|---------------|
| Power supply: | 230 V / 50 Hz |
| Heating element: | Terma Split I |
| Device protection class: | Class I |
| Radiator connection: | G 1/2" |
| Ingress protection [IP]: | IPx5 |


Configurations table:

Example of product code: **WE**K4B**T**CROW



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|---------------------|-------------------------------|--------------|--|--|
| WE K4B KTX 4 | - without the heating element | K Box | 916 White SMA Silver CRO Chrome 905 Black | W Straight cable with plug P Straight cable without plug U Spiral cable with plug |

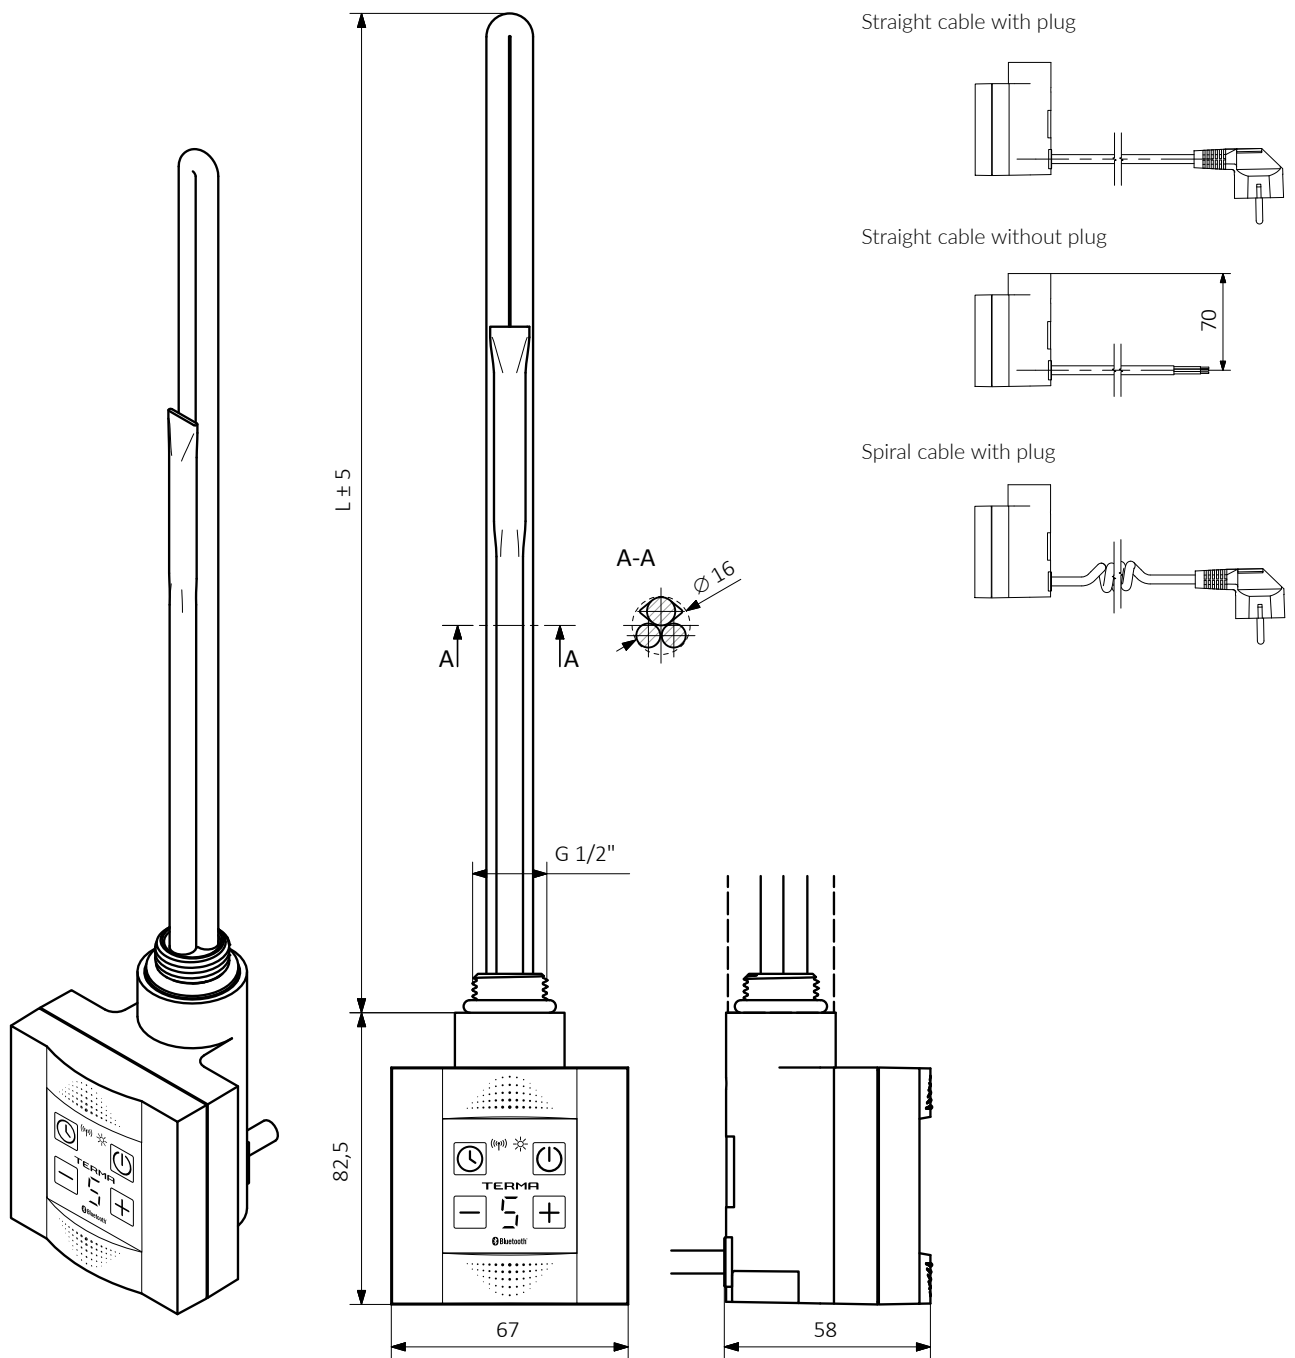

| | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|
| L [mm] | 325 | 285 | 310 | 345 | 375 | 485 | 575 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 |

Functions and features:

Functionality

The KTX 3 offers adjustable temperature levels ranging from 30°C to 60°C in steps of 1°C. An electronic temperature sensor guarantees precise temperature control. The device displays the current set temperature level and indicates the status of the heating cycle or standby state. It also has an easy interface for controller programming. The KTX 3 is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726.

Daily Timer

A 24-hour timer allows you to program up to 4 intervals for heating at a preselected temperature or to switch between heating and power off states.

Dryer Function

A function that allows a controlled temperature and drying time, after which the heater will return back to its previous state.

Intelligent Building Systems

In the event of a power failure, the heating element remembers the previous setting (last setting used), which is useful when the device is controlled by external timers and intelligent building systems.

Safety

The KTX 3 is equipped with a 'frost' protection (ANTIFREEZE). It also has double protection against the heating element overheating. A device error or malfunction is identified by a display of error codes. The KTX 3 also has an additional safety feature that prevents it from working in a dry radiator.

Design

Equipped with an easy to read LCD display with a clock. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

| | |
|---------------------------------|--|
| Power supply: | 230 V / 50 Hz |
| Heating element: | Terma Split I |
| Device protection class: | Class I |
| Radiator connection: | G 1/2" |
| Ingress protection [IP]: | IPx4: MS version (with terminal block); IPx5: Version with cable |


Configurations table:

Example of product code: **WE**K3B T SMA W



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|-----------------|-------------------------------|--------------|-------------------|---|
| WE KTX 3 | - without the heating element | K Box | 916 White | W Straight cable with plug |
| | | | SMA Silver | P Straight cable without plug |
| | | | CRO Chrome | U Spiral cable with plug |
| | | | 905 Black | S Without cable (terminal block under a masking cover) |

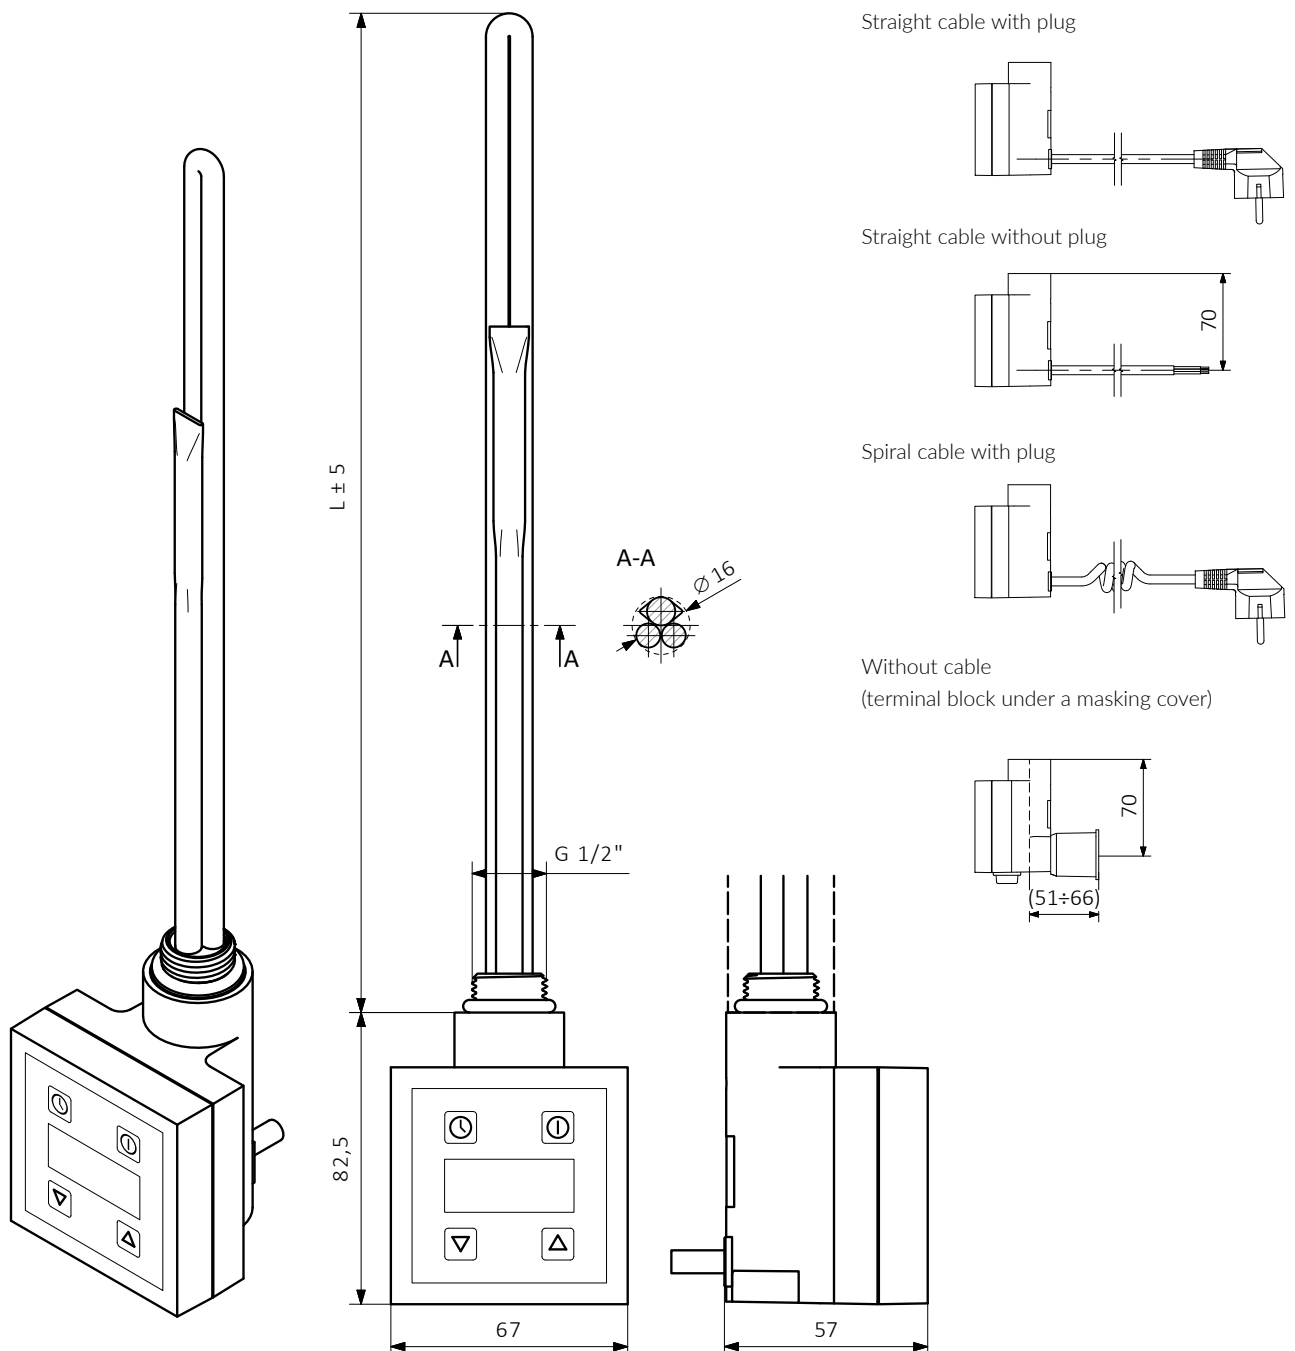

| | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|
| L [mm] | 325 | 285 | 310 | 345 | 375 | 485 | 575 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 |

Functions and features:

Functionality

This KTX 2 has a five step temperature control which ranges from 30°C to 60°C. An electronic temperature sensor ensures precise temperature control. The device displays its current temperature setting. The KTX 2 is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726.

Timer

The KTX 2 heating element has a 2-hour timer with two working modes. One mode is used while the KTX 2 is active and heating. In this

mode the KTX 2 will maintain the previously set temperature and then switch itself off after 2 hours. The second mode can be used to turn the KTX 2 on (when previously off) for a period of 2 hours, following these 2 hours the KTX 2 will turn off.

Intelligent Building Systems

The KTX 2 remembers its previous settings even when the power supply is lost. It is therefore suitable to be used with external timers or intelligent building systems.

Safety

The KTX 2 is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator and displays a warning in case of malfunction.

Design

The KTX 2 heating element has an easy to use interface. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

- Power supply:** 230 V / 50 Hz
- Heating element:** Terma Split I
- Device protection class:** Class I
- Radiator connection:** G 1/2"
- Ingress protection [IP]:** IPx4: MS version (with terminal block); IPx5: Version with cable

Configurations table:


Example of product code:

WE **KT2** **T** **SMA** **W**

Model code Packaging code Colour or finish code Cable type and plug code

Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|----------------------------|-------------------------------|--------------|-------------------|---|
| WE KT2 KTX 2 | - without the heating element | K Box | 916 White | W Straight cable with plug |
| | | | SMA Silver | P Straight cable without plug |
| | | | CRO Chrome | U Spiral cable with plug |
| | | | 905 Black | S Without cable (terminal block under a masking cover) |

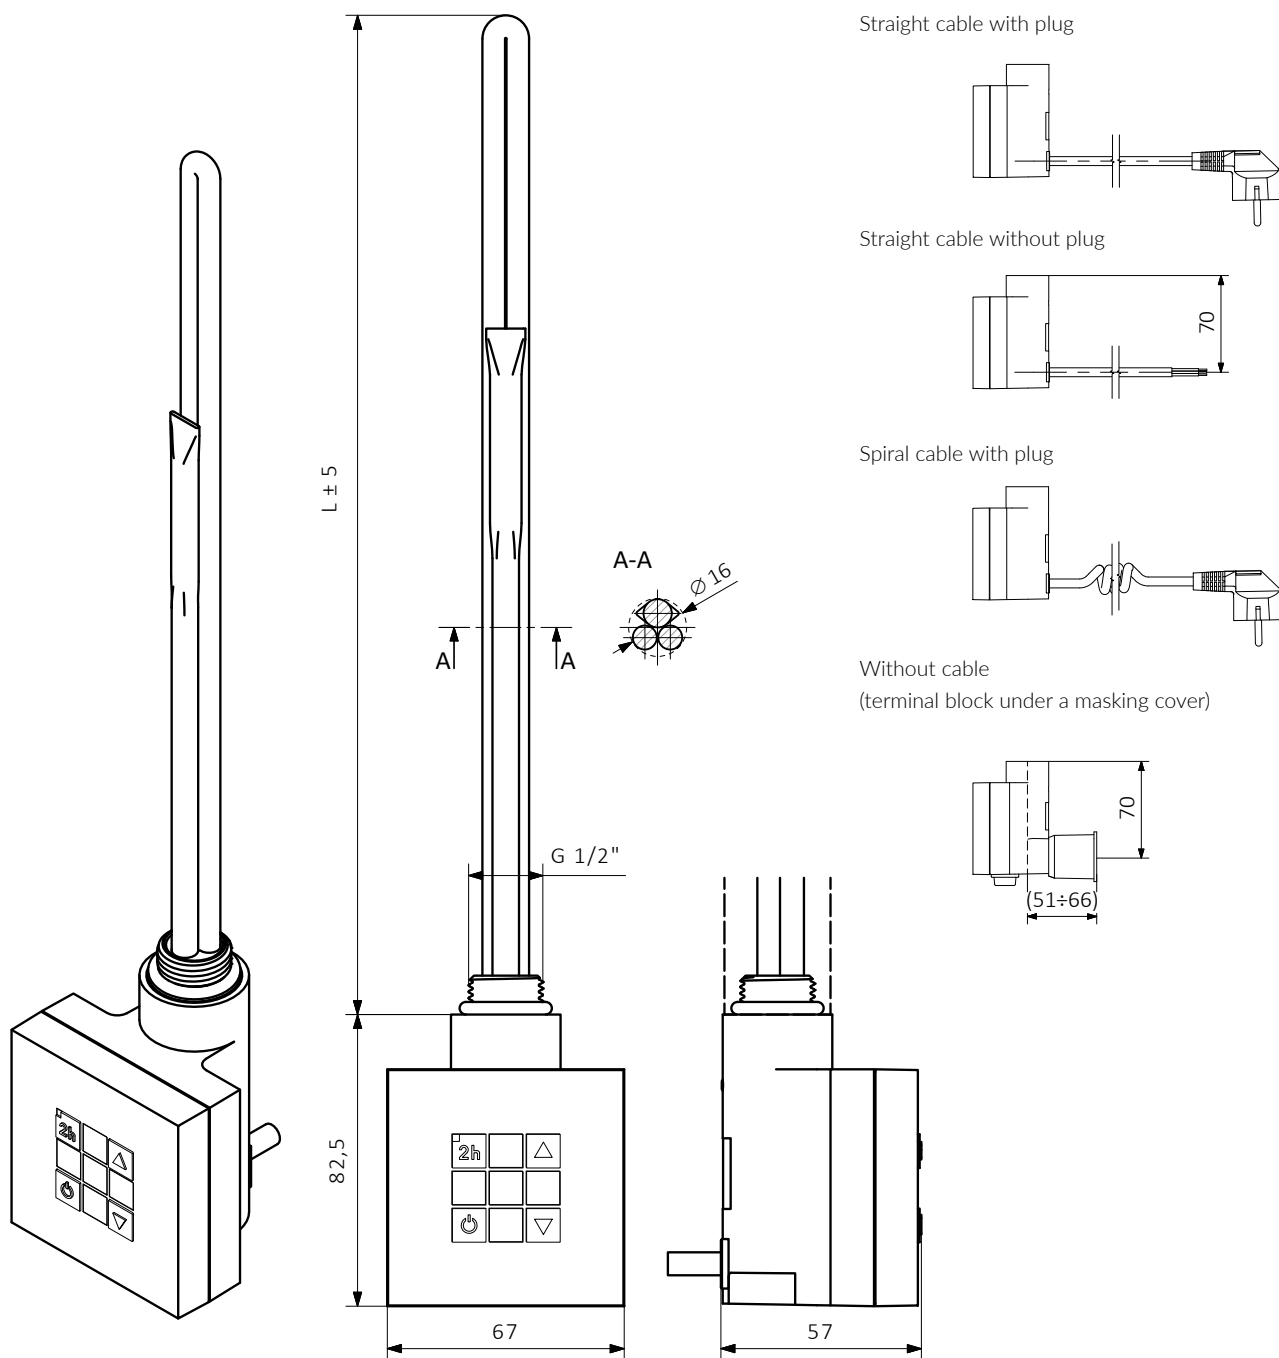

| | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|
| L [mm] | 325 | 285 | 310 | 345 | 375 | 485 | 575 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 |

Functions and features:

Functionality

The KTX 1 has two settings: 50% and 100% of the nominal power. It is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma-Split System. The Terma-Split connector makes it possible to disconnect the TS 1 from the controller head. More information on the TS 1 can be found on page 726.

Intelligent Building Systems

In the event of a power failure the heater remembers its setting (last setting used), which is useful when the device is controlled by external timers and intelligent building systems.

Safety

The KTX 1 is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator. The heating element displays warning indicators in case of malfunction.

Design

The KTX 1 has large, ergonomic buttons. A version without a cable (a terminal block under a masking cover with an on/off switch) is also available.

Colour

Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

| | |
|--------------------------|---------------|
| Power supply: | 230 V / 50 Hz |
| Heating element: | Terma Split I |
| Device protection class: | Class I |
| Radiator connection: | G 1/2" |
| Ingress protection [IP]: | IPx4 |


Configurations table:

Example of product code: **WE**KT1T**SMA**W



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|----------------------------|-------------------------------|--------------|-------------------|---|
| WE KT1 KTX 1 | - without the heating element | K Box | 916 White | W Straight cable with plug |
| | | | SMA Silver | P Straight cable without plug |
| | | | CRO Chrome | U Spiral cable with plug |
| | | | 905 Black | S Without cable (terminal block under a masking cover) |

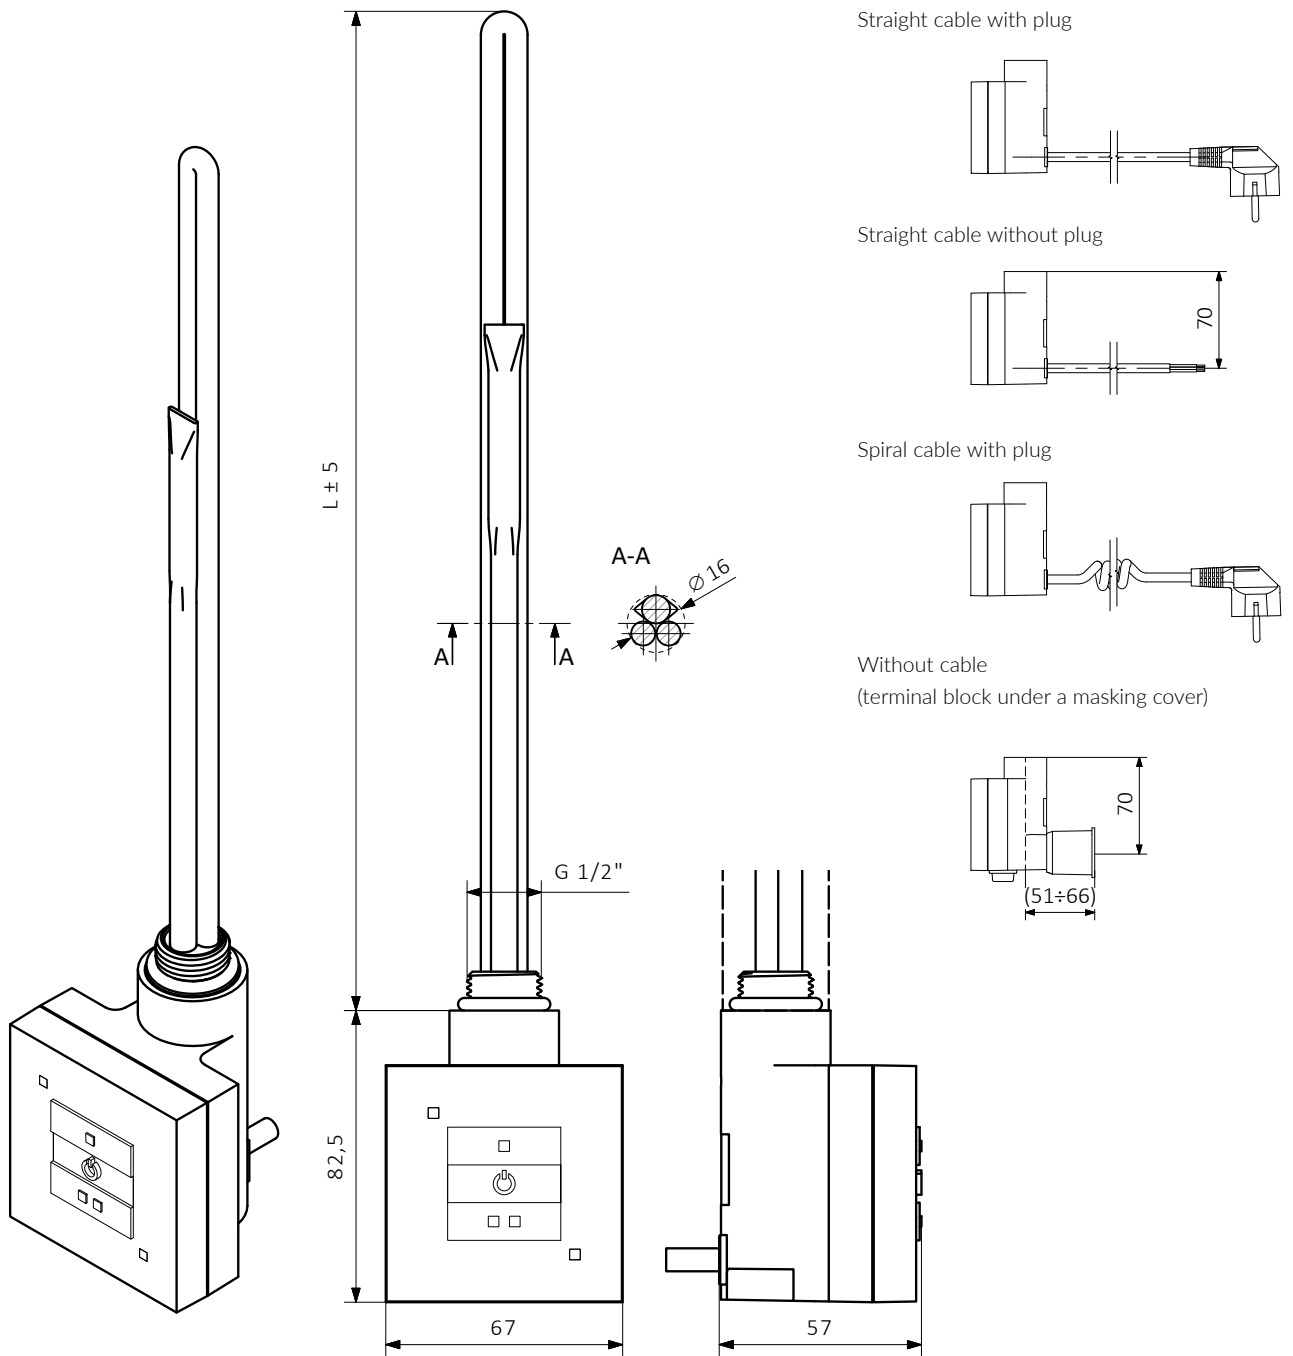

| | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|
| L [mm] | 325 | 285 | 310 | 345 | 375 | 485 | 575 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 |

Functions and features:

Functionality

The MOA offers 5 temperature settings ranging from 30°C to 60°C. It is equipped with an electronic temperature sensor that guarantees precise temperature control. The MOA displays the currently set temperature level and the status of the heating cycle using an LED indicator. The heating element has a very low power consumption in a standby mode.

Dryer Function

This function allows the setting of a higher heating power for two hours, after which the device returns to the previous state.

Intelligent Building Systems

In the event of a power failure the MOA remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

The MOA is equipped with 'frost' protection (ANTIFREEZE). It also has a double protection against overheating of the radiator and displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Design

The MOA version with a straight cable without a plug, is also available with a cable-masking cover option.

Colour


Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

- Power supply: 230 V / 50 Hz
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5


Configurations table:

Example of product code: **WE**MAT04TSMAW



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|--------------------------|----------------|---------------------|-------------------|---|
| WE MOA MOA | 01 120 | F Plain foil | 916 White | W Straight cable with plug |
| MAT MOA + T-piece | 02 200 | T Tube | SMA Silver | M Straight cable without plug (with a cable-masking cover) |
| | 03 300 | | CRO Chrome | U Spiral cable with plug |
| | 04 400 | | 905 Black | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

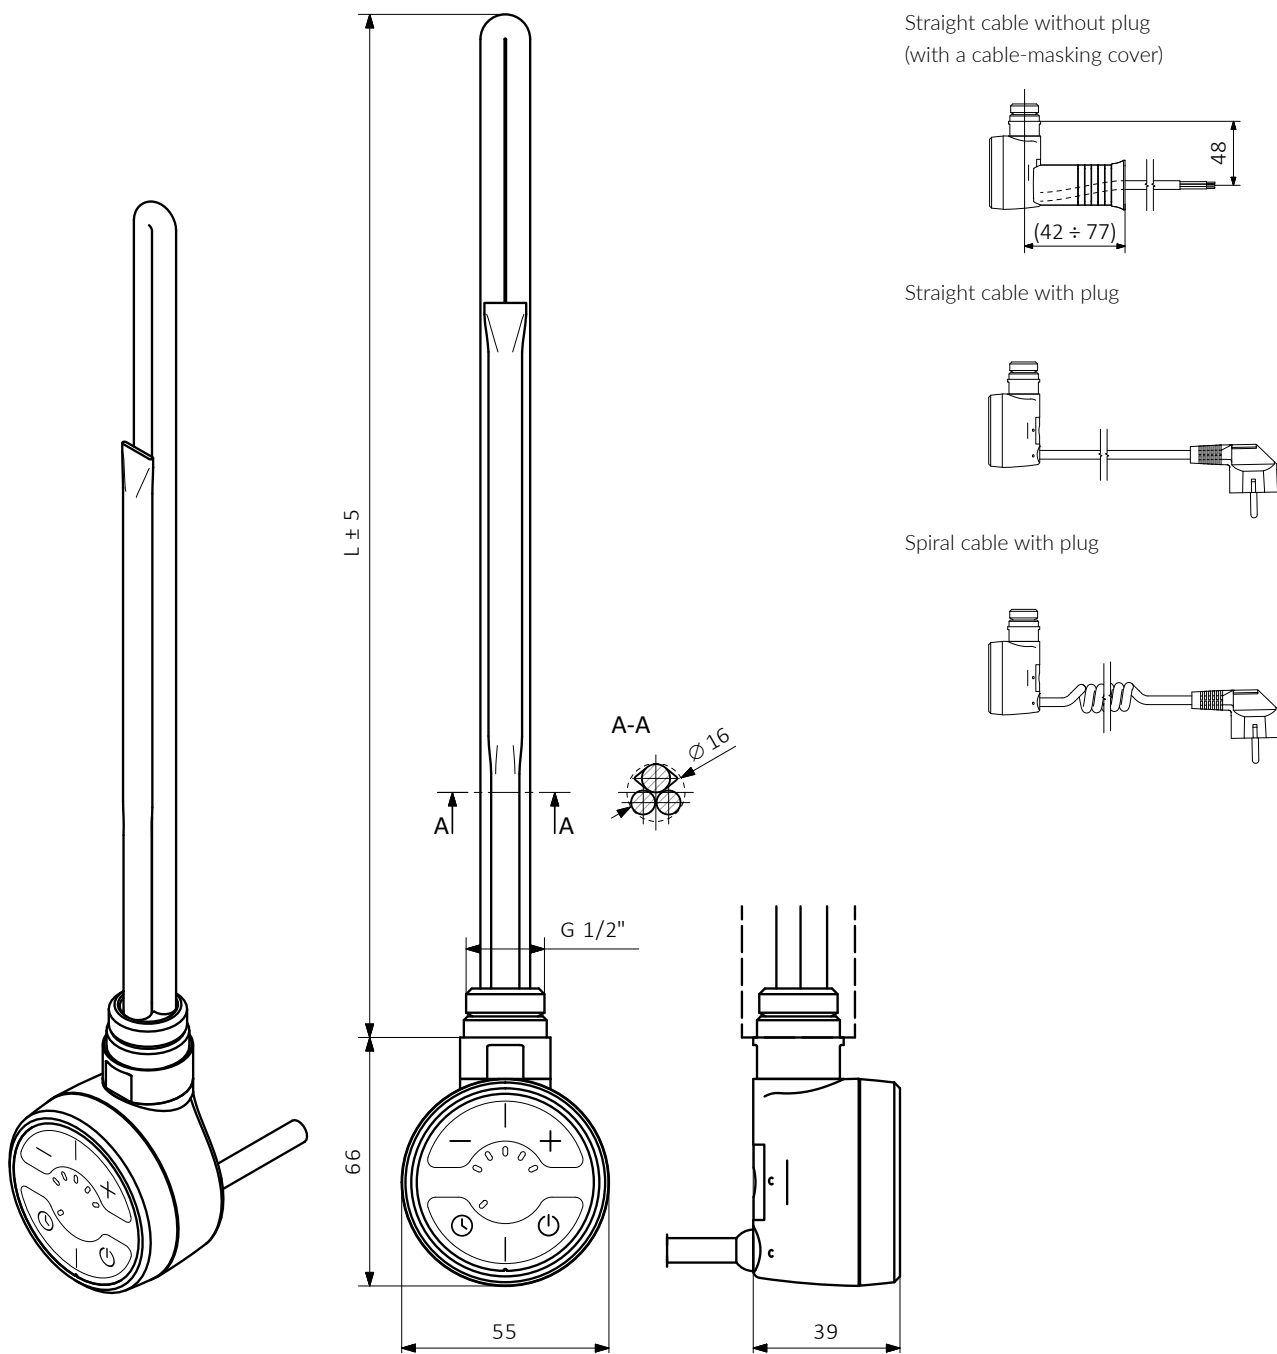

| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

MOA offers 5 temperature settings ranging from 30°C to 60°C. It is equipped with an electronic temperature sensor that guarantees precise temperature control. MOA displays the currently set temperature level and the status of the heating cycle using illuminated diodes. The heating element has a very low power consumption in a standby mode.

Dryer Function

This function allows the setting of a higher heating power for two hours, after which the device returns to the previous state.

Remote Control

The heating element is capable of wireless IR communication with an external wall controller DTIR or TTIR, which enhances the use of

the heating element with additional features. Information on the TTIR and DTIR IR controllers can be found on pages 758 and 760.

Intelligent Building Systems

In the event of a power failure the MOA remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

MOA is equipped with frost protection (ANTI-FREEZE). It has a double protection against overheating of the radiator and an active safety feature in case of operation in a dry radiator. It displays warning indications in case of malfunction.

Design

MOA version with a straight cable and without a plug, is also available with an optional cable masking cover.

Colour

Available housing colours: white, silver, chrome and black. The front fascia always in black colour. Heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:


- Power supply: 230 V / 50 Hz
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5

Configurations table:

Example of product code: **WE**^{Element power code} **MOR**^{Model code} **04**^{Power} **T**^{Packaging code} **SMA**^{Colour or finish code} **W**^{Cable type and plug code}

Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|-----------------------------|----------------|---------------------|-------------------|---|
| WE MOR MOA IR | 01 120 | F Plain foil | 916 White | M Straight cable without plug (with a cable-masking cover) |
| MRT MOA IR + T-piece | 02 200 | T Tube | SMA Silver | W Straight cable with plug |
| | 03 300 | | CRO Chrome | U Spiral cable with plug |
| | 04 400 | | 905 Black | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

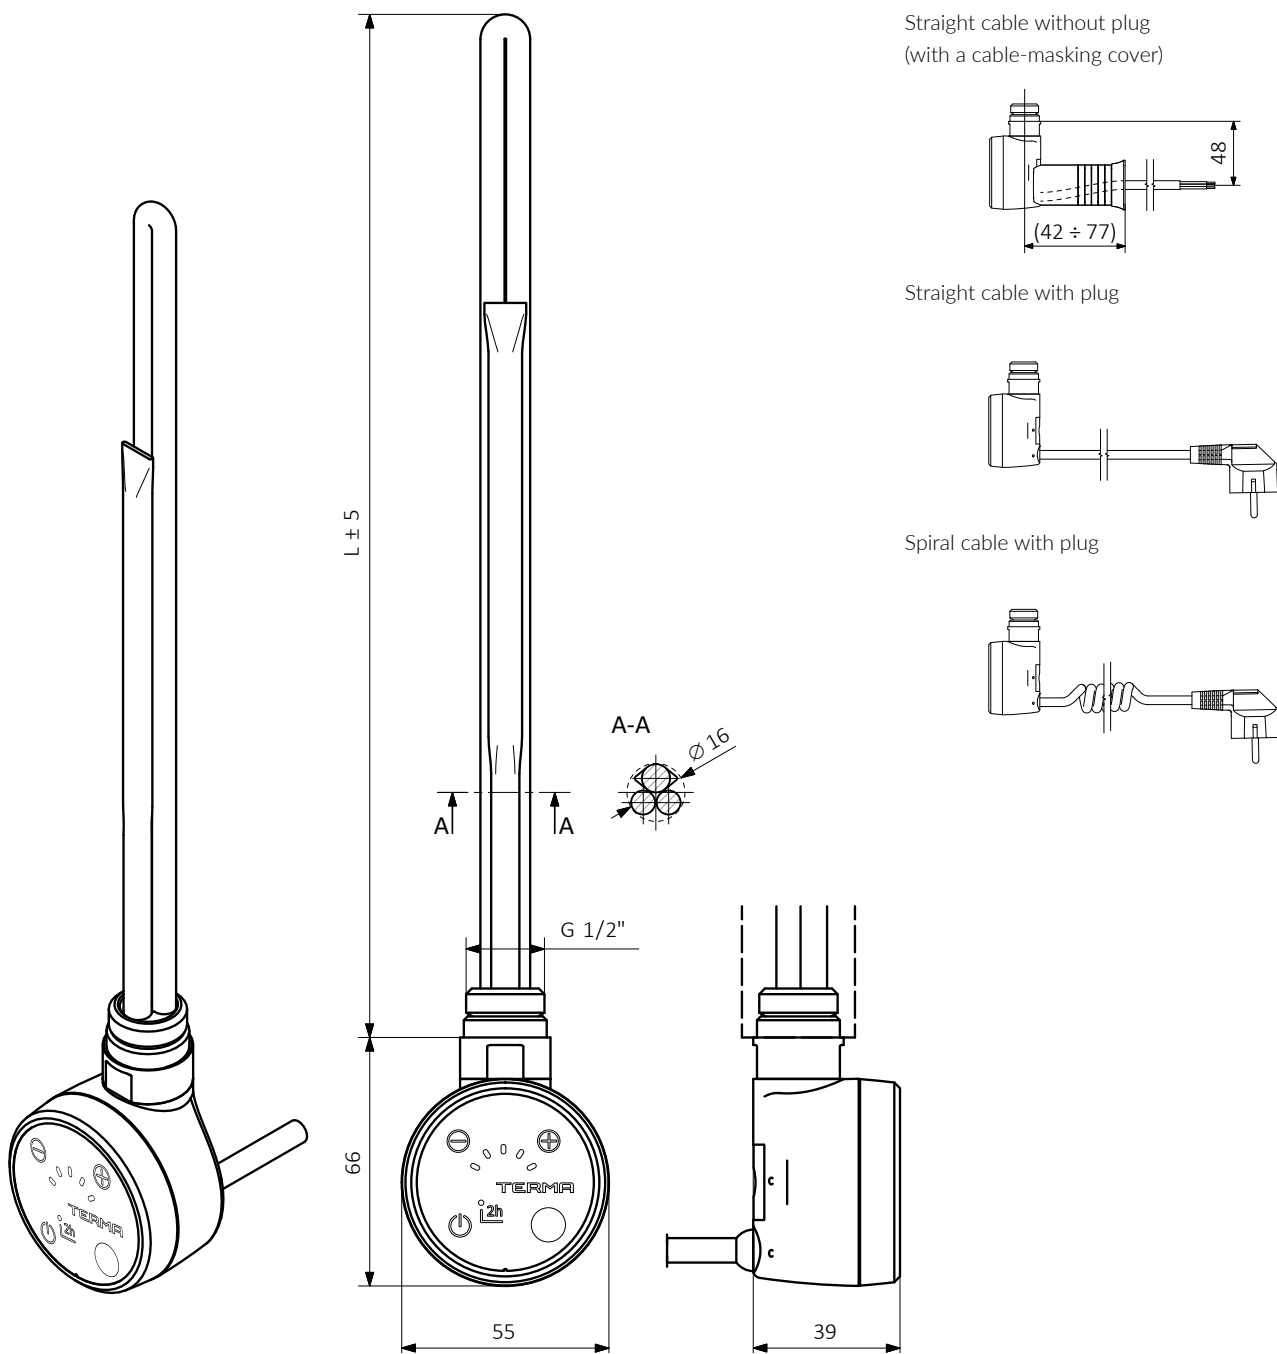

| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

The BLUE-Line control app offers full control and functionality of the heating element. It allows you to control both the internal temperature of the radiator (30-60°C) or the ambient room temperature (15-30°C). In addition it offers full 7 day timer functionality, where you can program any number of heating schedules throughout each day as required. Buttons on the control head of the element allow the user to set the temperature in a simplified way or run 2 Hour Drying Function. The app shows the selected temperature level and the element indicates the operation mode in use such as timer, weekly schedule mode or Bluetooth communication with the device control.

Remote Control

You can use any portable device such as a Bluetooth® enabled smartphone or a tablet to control the heating element remotely. The BLUE-Line control app for Android and iOS is available at their respective online stores. One application can program and control any number of BLUE series devices (heating elements and radiators) within reach of the mobile device.

Safety

MOA is equipped with frost protection (ANTI-FREEZE). It also has double protection against overheating of the radiator. It displays warning indicators in case of malfunction.

Design

Blue LEDs signify the current operating temperature and an RGB LED signals current mode of operation.

Colour


Available in: white, silver, chrome and black. The front fascia always in Silver colour. Heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

- Power supply: 230 V / 50 Hz
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5


Configurations table:

Example of product code: **WE** **MOB** **04** **T** **SMA** **W**



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|-------------------------------|----------------|---------------------|-------------------|---|
| WE MOB MOA Blue | 01 120 | F Plain foil | 916 White | M Straight cable without plug (with a cable-masking cover) |
| MBT MOA Blue + T-piece | 02 200 | T Tube | SMA Silver | W Straight cable with plug |
| | 03 300 | | CRO Chrome | U Spiral cable with plug |
| | 04 400 | | 905 Black | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

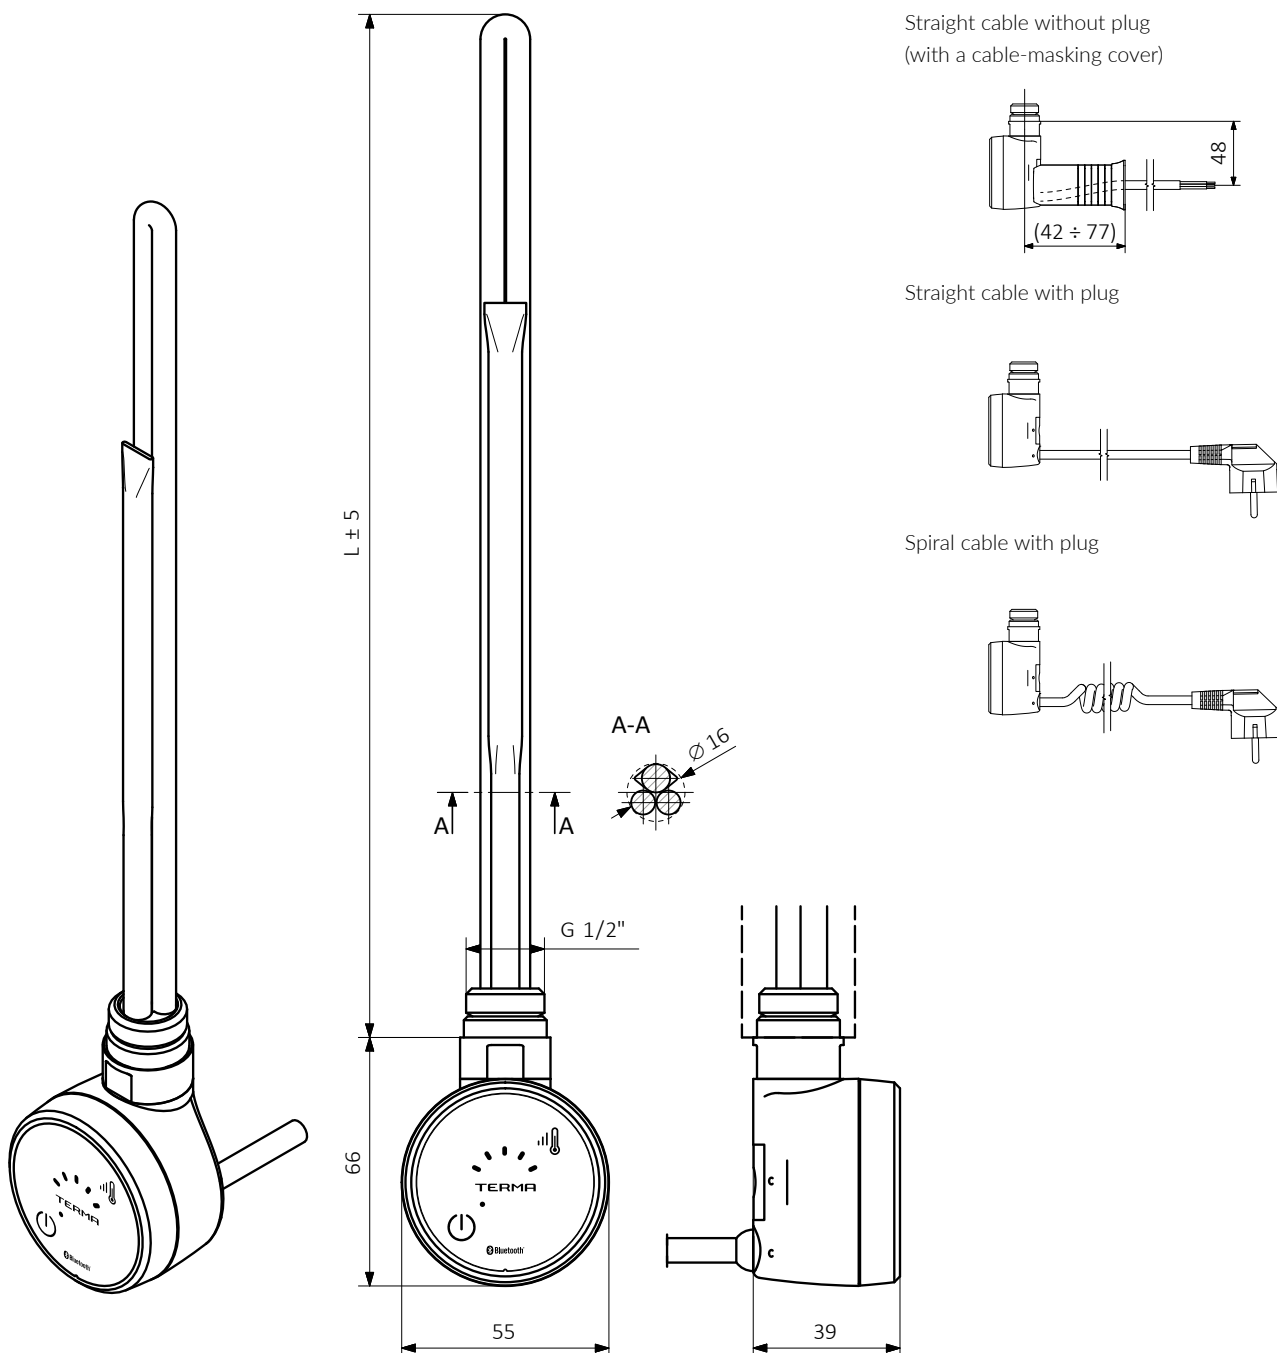

| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

Thanks to an electronic sensor the DRY heating element maintains a constant temperature of 48°C. It also has the ability to be programmed further to different temperature levels. The heating element has a very low power consumption in a standby mode.

Timer

An enhanced timer automatically turns the heating element off after 1, 2, 3, 4 or 5 hours.

Intelligent Building Systems

In the event of a power failure the DRY remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Safety

In the event of a power failure the DRY remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Design

The heating element is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator. The DRY displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Colour

Available housing colours: white, silver, chrome and black. The front fascia always in black colour. The DRY can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

- Power supply: 230 V / 50 Hz
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5

Configurations table:


Example of product code: **WE** **DRY** **04** **T** **SMA** **W**

Element power code Colour or finish code Cable type and plug code

Model code Packaging code

Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|--------------------------|----------------|---------------------|-------------------|---|
| WE DRY DRY | 01 120 | F Plain foil | 916 White | M Straight cable without plug (with a cable-masking cover) |
| DYT DRY + T-piece | 02 200 | T Tube | SMA Silver | W Straight cable with plug |
| | 03 300 | | CRO Chrome | U Spiral cable with plug |
| | 04 400 | | 905 Black | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

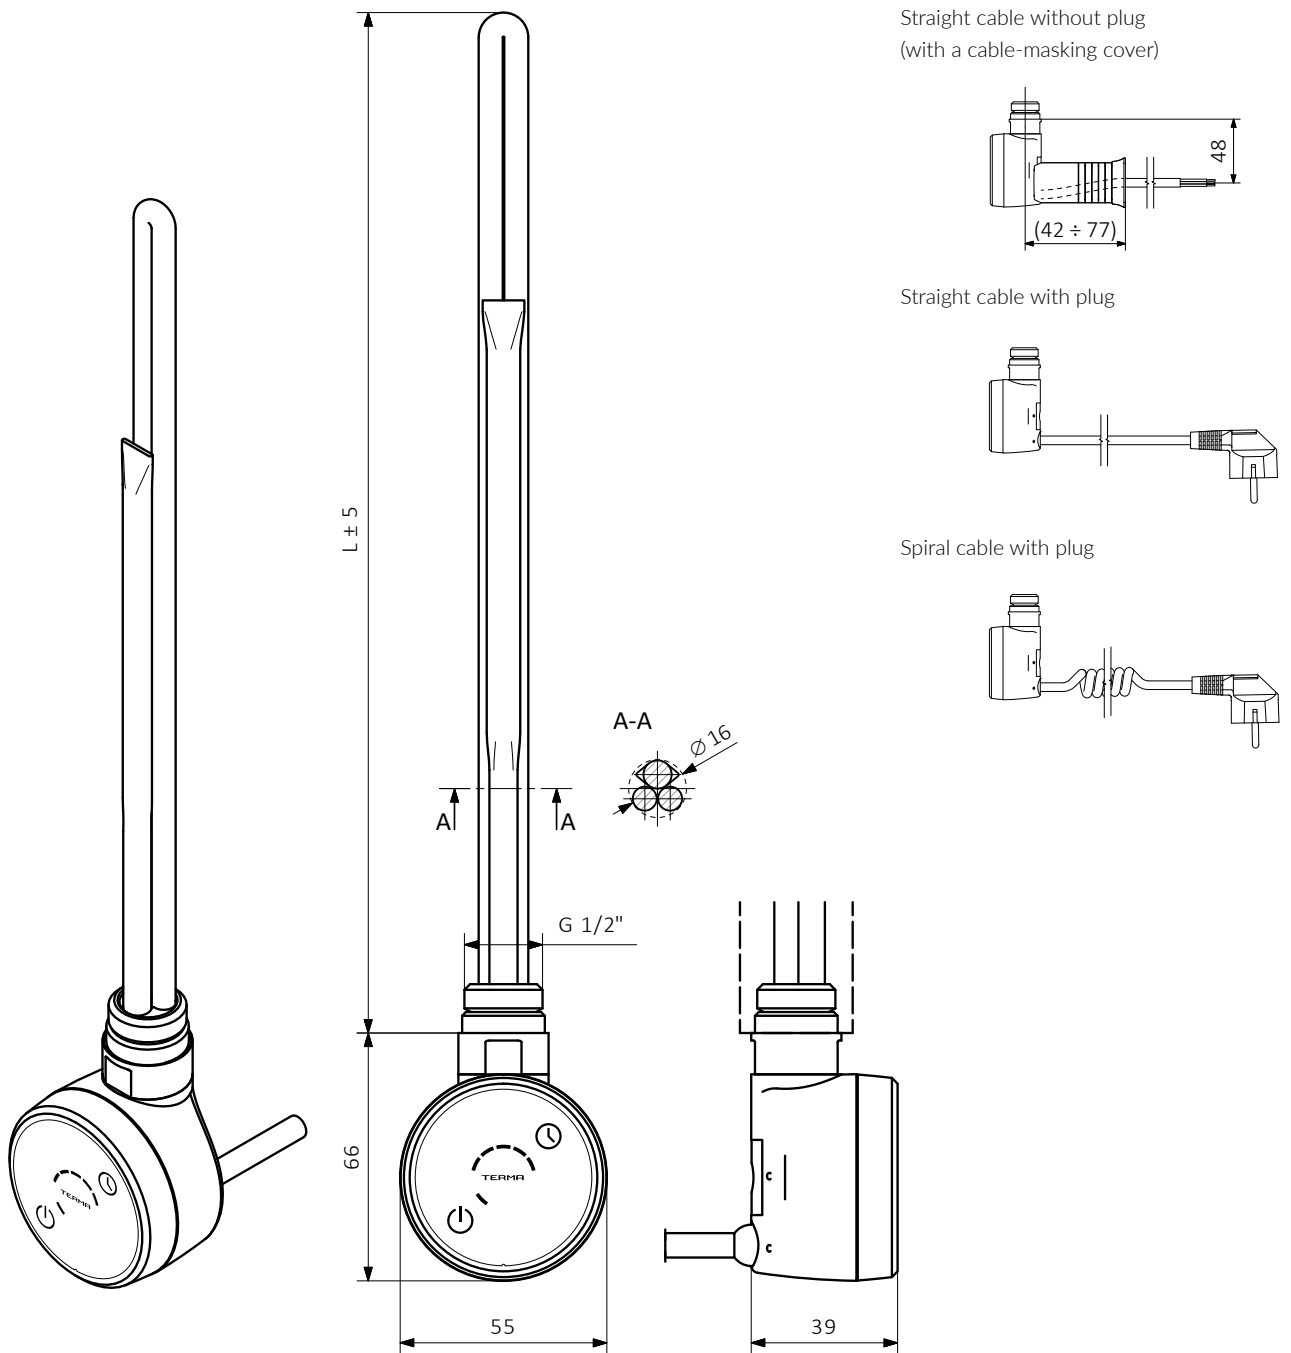

| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

The TDY offers 3 temperature settings ranging from 40°C to 60°C. It is equipped with an electronic temperature sensor that guarantees precise temperature control. The heating element has a very low power consumption in a standby mode.

Automatic power-off function

Automatic Timer sets the operating time between 60 -180 minutes (default setting is 120 minutes). The clear display shows time left until automatic switch off. NOTE: No continuous operation possible. While the heating element is on, the heating temperature can be adjusted according to one's preference.

Safety

The TDY is equipped with 'frost' protection (ANTIFREEZE). It also has a double protection against overheating of the radiator and displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Design

The TDY is supplied with a straight cable without a plug, it is also available with a cable-masking cover as an optional extra.

Colour


Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

- Power supply: 230 V / 50 Hz
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5


Configurations table:

Example of product code: **WE**TDY04TSMAW



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|-------------------|-----------|--------------|------------|--|
| WE TDY DRY | 01 120 | F Plain foil | 916 White | M Straight cable without plug (with a cable-masking cover) |
| TYT DRY + T-piece | 02 200 | T Tube | SMA Silver | W Straight cable with plug |
| | 03 300 | | CRO Chrome | U Spiral cable with plug |
| | 04 400 | | 905 Black | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

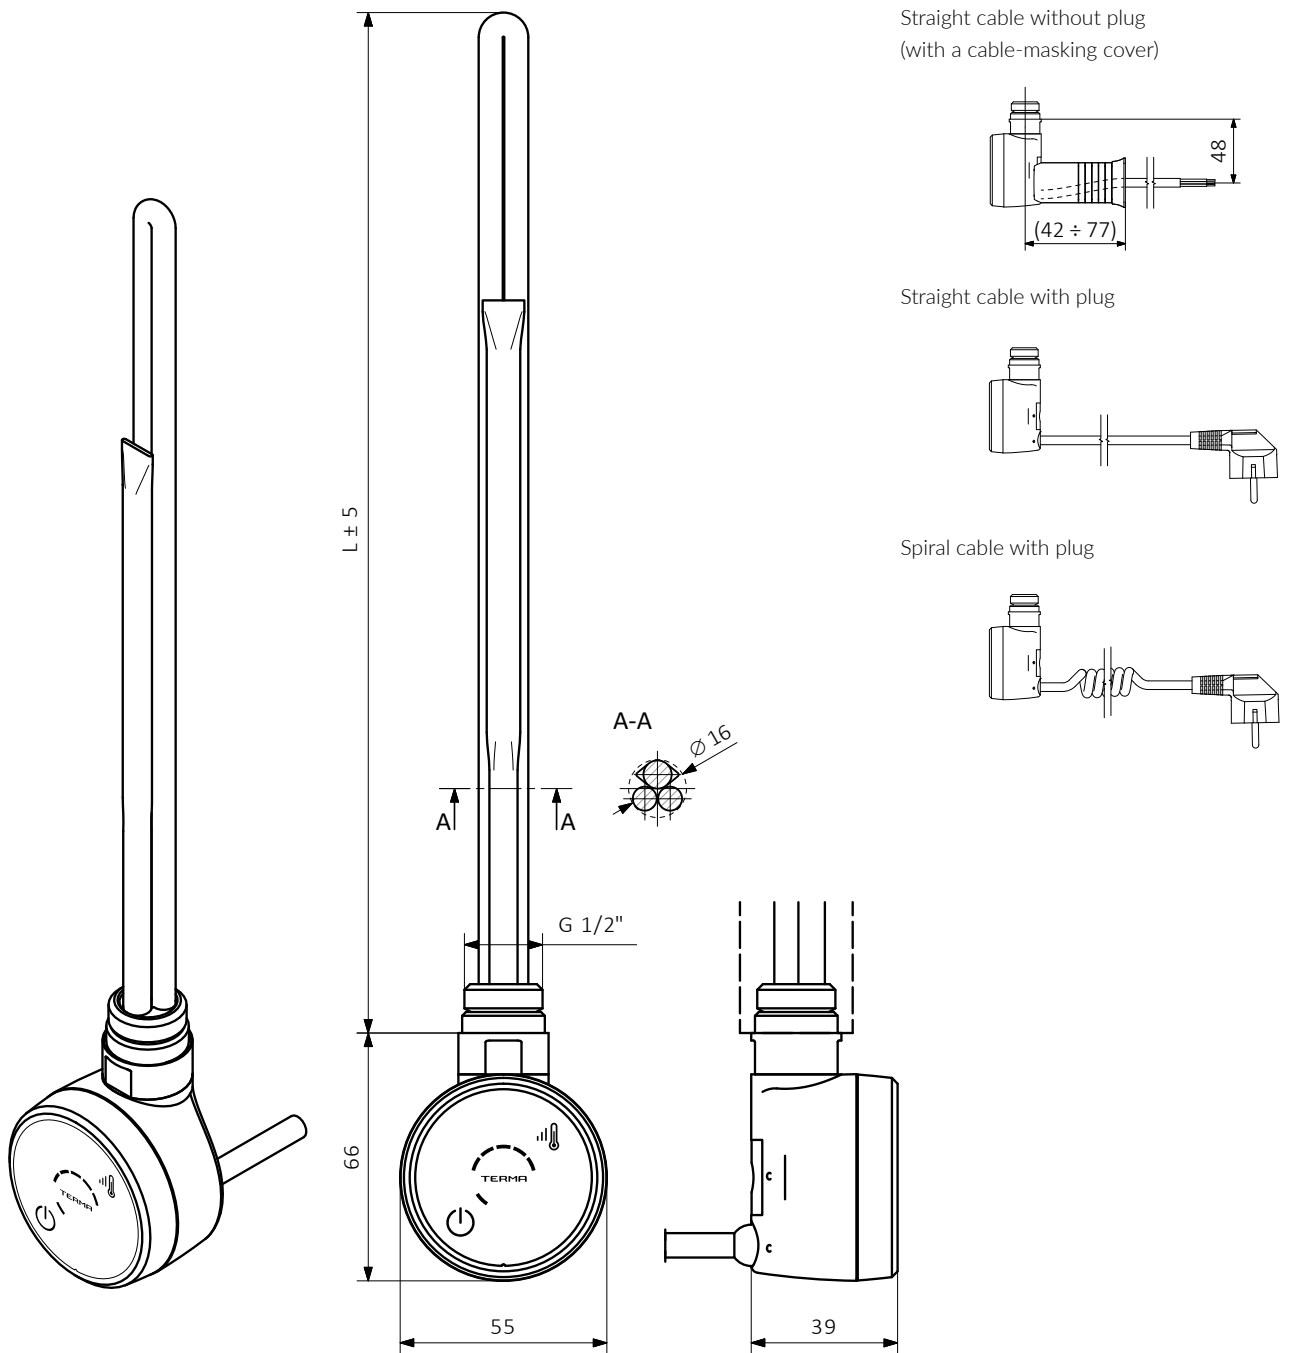

| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

The MEG heating element offers 5 temperature settings ranging from 30°C to 60°C. An electronic temperature sensor guarantees precise temperature control. The device displays the currently set temperature level and indicates the status of the heating cycle.

Safety

The MEG heating element is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator. The MEG also displays a warning in case of malfunction. It has an active safety feature in case of operation in a dry radiator.

Colour

Available colours: white, silver, chrome and black. The MEG can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Intelligent Building Systems

In the event of a power failure the MEG remembers its previous settings therefore making it suitable for connection to external timers and intelligent building systems.

Design


The MEG heating element is supplied with a straight cable without a plug. It is available with a cable-masking cover as an optional extra.

Specifications:

- Power supply: 230 V / 50 Hz
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx4


Configurations table:

Example of product code: **WE**MEG:04 T SMA W



Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour | Cable Type |
|-------------------|-----------|--------------|------------|--|
| WE MEG MEG | 01 120 | F Plain foil | 916 White | M Straight cable without plug (with a cable-masking cover) |
| MGT MEG + T-piece | 02 200 | T Tube | SMA Silver | W Straight cable with plug |
| | 03 300 | | CRO Chrome | U Spiral cable with plug |
| | 04 400 | | 905 Black | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

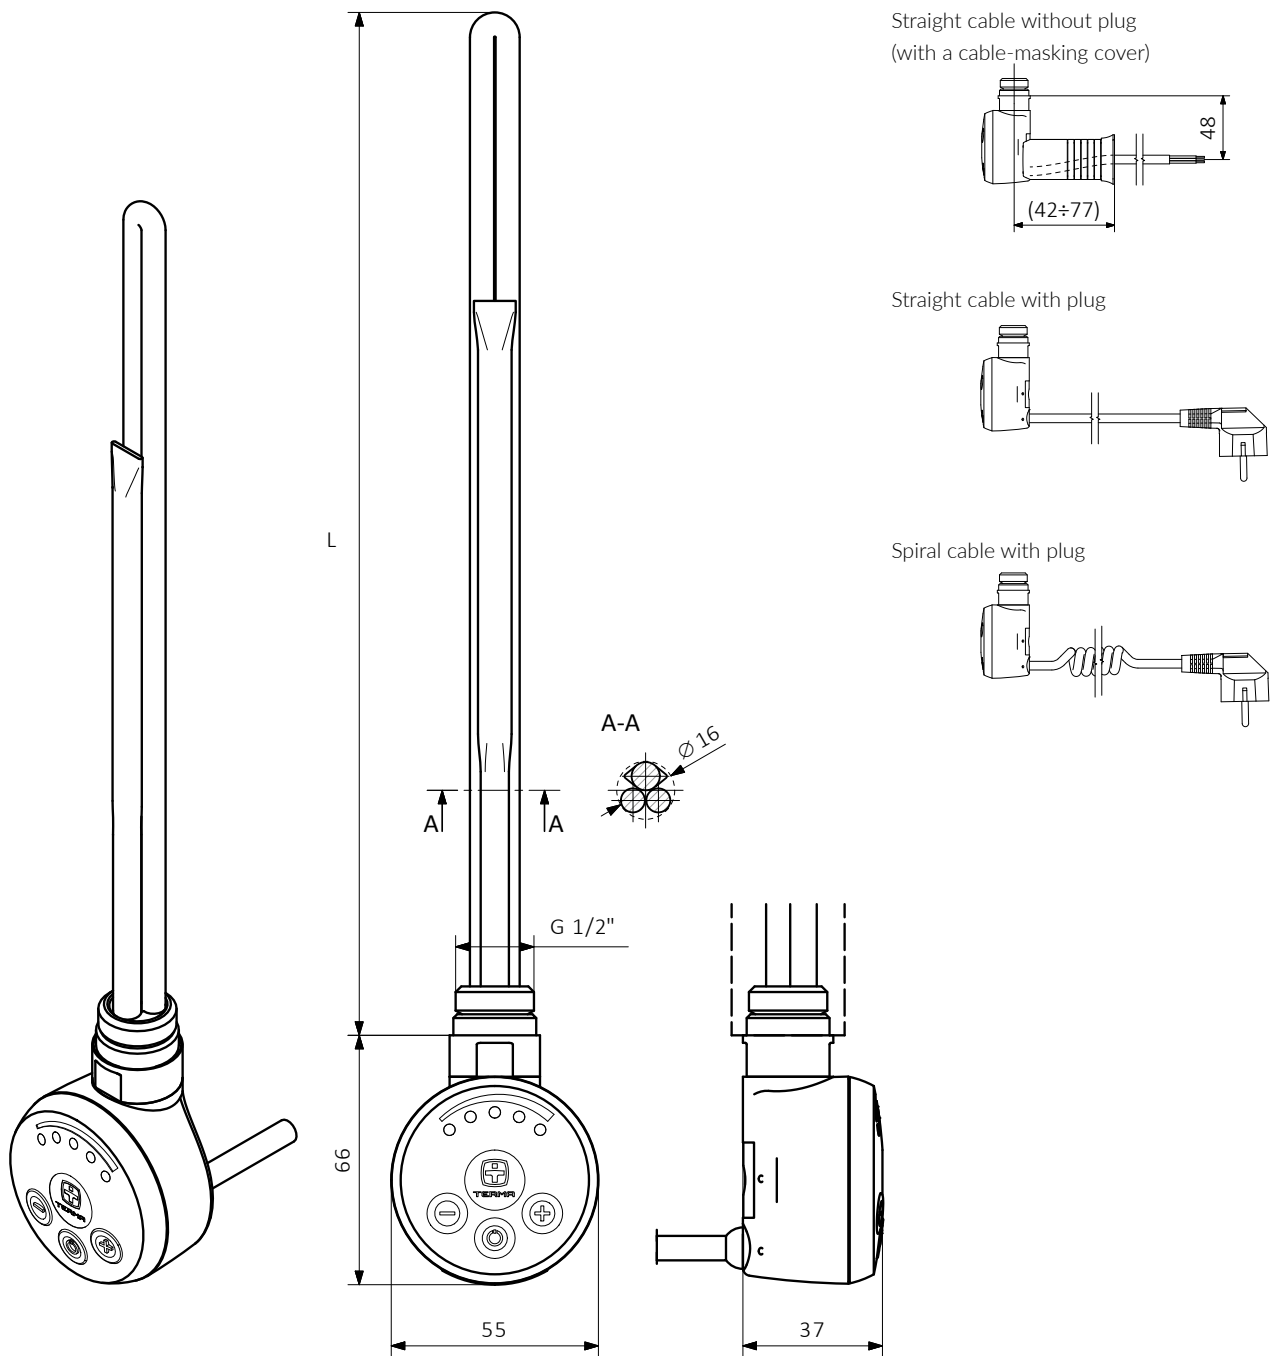

| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

The REG 3 offers two temperature settings of 50°C and 65°C. It is equipped with a bi-metallic temperature sensor. The device displays currently set temperature level.

Intelligent Building Systems

The REG 3 is suitable for connection to external timers and intelligent building systems.

Safety

The REG 3 is equipped with a double protection against overheating of the radiator.

Design

The REG 3 has small controller housing in a universal shape reminiscent of a drop of water. It is controlled via a rotating ring-shaped switch that turns the heating element on and off and allows the selection of temperature settings.

Colour


Available colours: white with grey ring, silver with grey ring, silver with chrome ring, black with chrome ring. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

- Power supply: 230 V AC
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5


Configurations table:

Example of product code: **WE**R3G04TSMAW




Code elements highlighted in blue.


| Model | Power [W] | Packaging | Colour | Cable Type |
|---------------------|-----------|--------------|-----------------------------|-------------------------------|
| WE R3G REG 3 | 01 120 | F Plain foil | 916 White with grey ring | M Straight cable without plug |
| R3T REG 3+ T-piece | 02 200 | T Tube | SMA Silver with grey ring | W Straight cable with plug |
| | 03 300 | | CRO Silver with chrome ring | U Spiral cable with plug |
| | 04 400 | | 905 Black with chrome ring | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

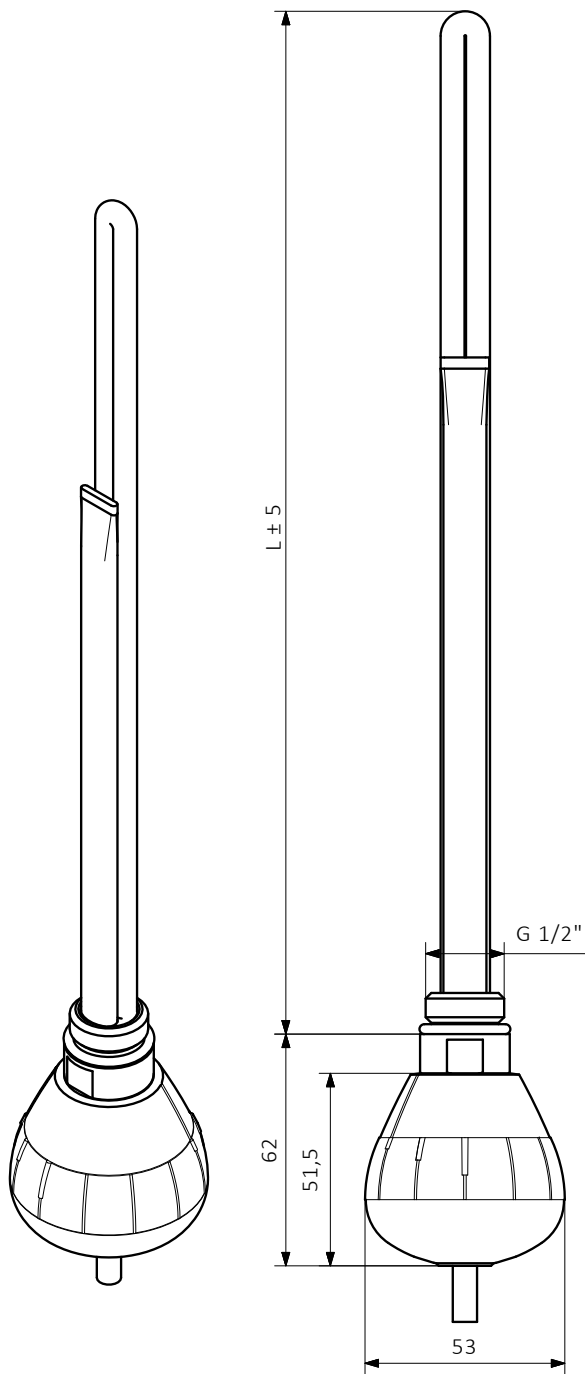


Straight cable without plug



Straight cable with plug



Spiral cable with plug



| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

The REG 2 maintains a constant temperature of 65°C and is equipped with a bimetallic temperature sensor. A small, spherical controller indicates on/off operation by the display of an LED.

Intelligent Building Systems

The REG 2 is suitable for connection to external timers and intelligent building systems.

Safety

The REG 2 is equipped with a double protection against overheating of the radiator.

Design

The REG 2 is one of the smallest heating elements on the market. Its main objective is simplicity of use. It does not have an on/off switch on its housing so it must be activated externally either by a timer or switched fused spur. A version equipped with a plug with an on/off switch is available.

Colour


Available colours: white, silver, chrome and black. The heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100 pcs per colour.

Specifications:

- Power supply: 230 V AC
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IPx5


Configurations table:

Example of product code: **WE**R2G04TSMAW



Code elements highlighted in blue.


| Model | Power [W] | Packaging | Colour | Cable Type |
|---------------------|-----------|--------------|------------|---------------------------------------|
| WE R2G REG 2 | 01 120 | F Plain foil | 916 White | P Straight cable without plug |
| R2T REG 2 + T-piece | 02 200 | T Tube | SMA Silver | W Straight cable with plug |
| | 03 300 | | CRO Chrome | R Straight cable with plug and switch |
| | 04 400 | | 905 Black | T Spiral cable with plug and switch |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |

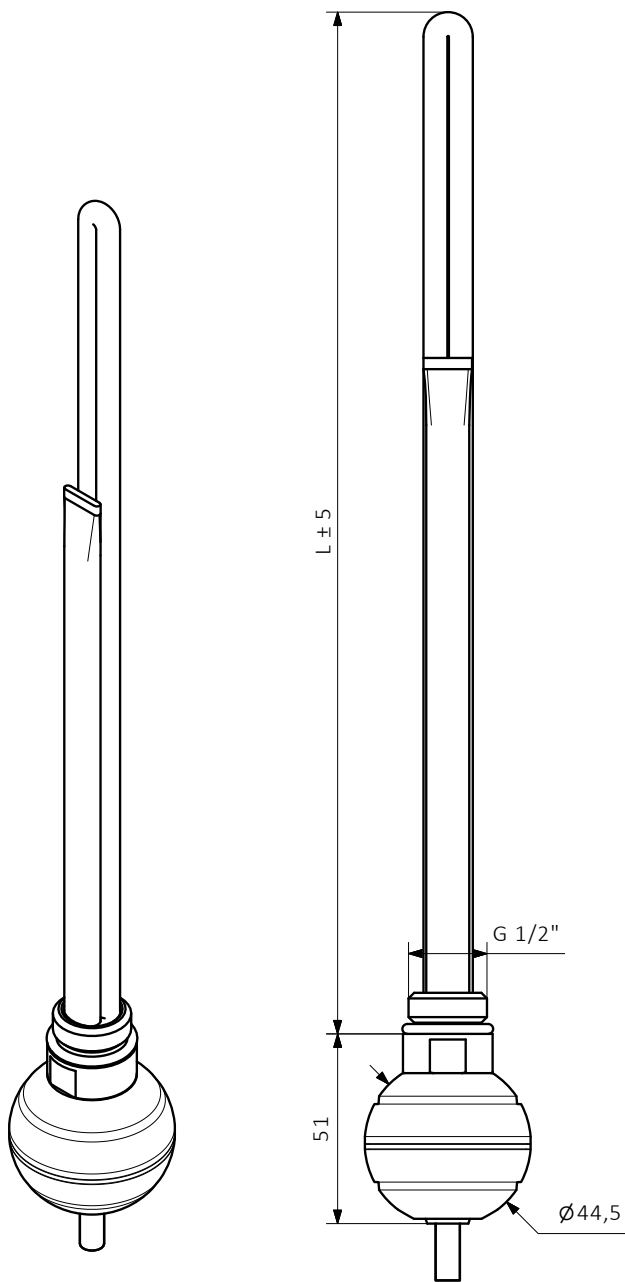


Straight cable without plug




Straight cable with plug



Straight cable with plug and switch



Spiral cable with plug and switch



| | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| L [mm] | 315 | 275 | 300 | 335 | 365 | 475 | 565 | 660 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 |

Functions and features:

Functionality

The SIM is a basic, simple heating element. The SIM has built-in protection against overheating and is fitted with a bimetal temperature limiter. The device is available in a wide range of power outputs up to 1500 W.

Intelligent Building Systems

The SIM is suitable for connection to external timers and intelligent building systems.

Safety

The SIM has an exceptionally high degree of moisture ingress protection and is fitted with a thermal fuse to prevent overheating of the radiator.

Design

The SIM has a stainless steel housing. It does not have an on/off switch on its housing so it must be controlled externally either by a timer or switched fused spur. A version with a switch located on the plug is available.

Colour

Housing: stainless steel. Available cable colours: white or grey.

Specifications:

- Power supply: 230 V AC
- Device protection class: Class I
- Radiator connection: G 1/2"
- Ingress protection [IP]: IP67


Configurations table:

Example of product code: **WE** **SIM** **04** **T** **INX** **W**




Code elements highlighted in blue.

| Model | Power [W] | Packaging | Colour / Cable colour | Cable Type |
|--------------------------|----------------|---------------------|--|--|
| WE SIM SIM | 01 120 | F Plain foil | INX Stainless steel / white cable | R Straight cable with plug and switch |
| | 02 200 | | ING Stainless steel / grey cable | P Straight cable without plug |
| | 03 300 | | | |
| | 04 400 | | | |
| | 06 600 | | | |
| | 08 800 | | | |
| | 10 1000 | | | |
| | 12 1200 | | | |
| | 15 1500 | | | |

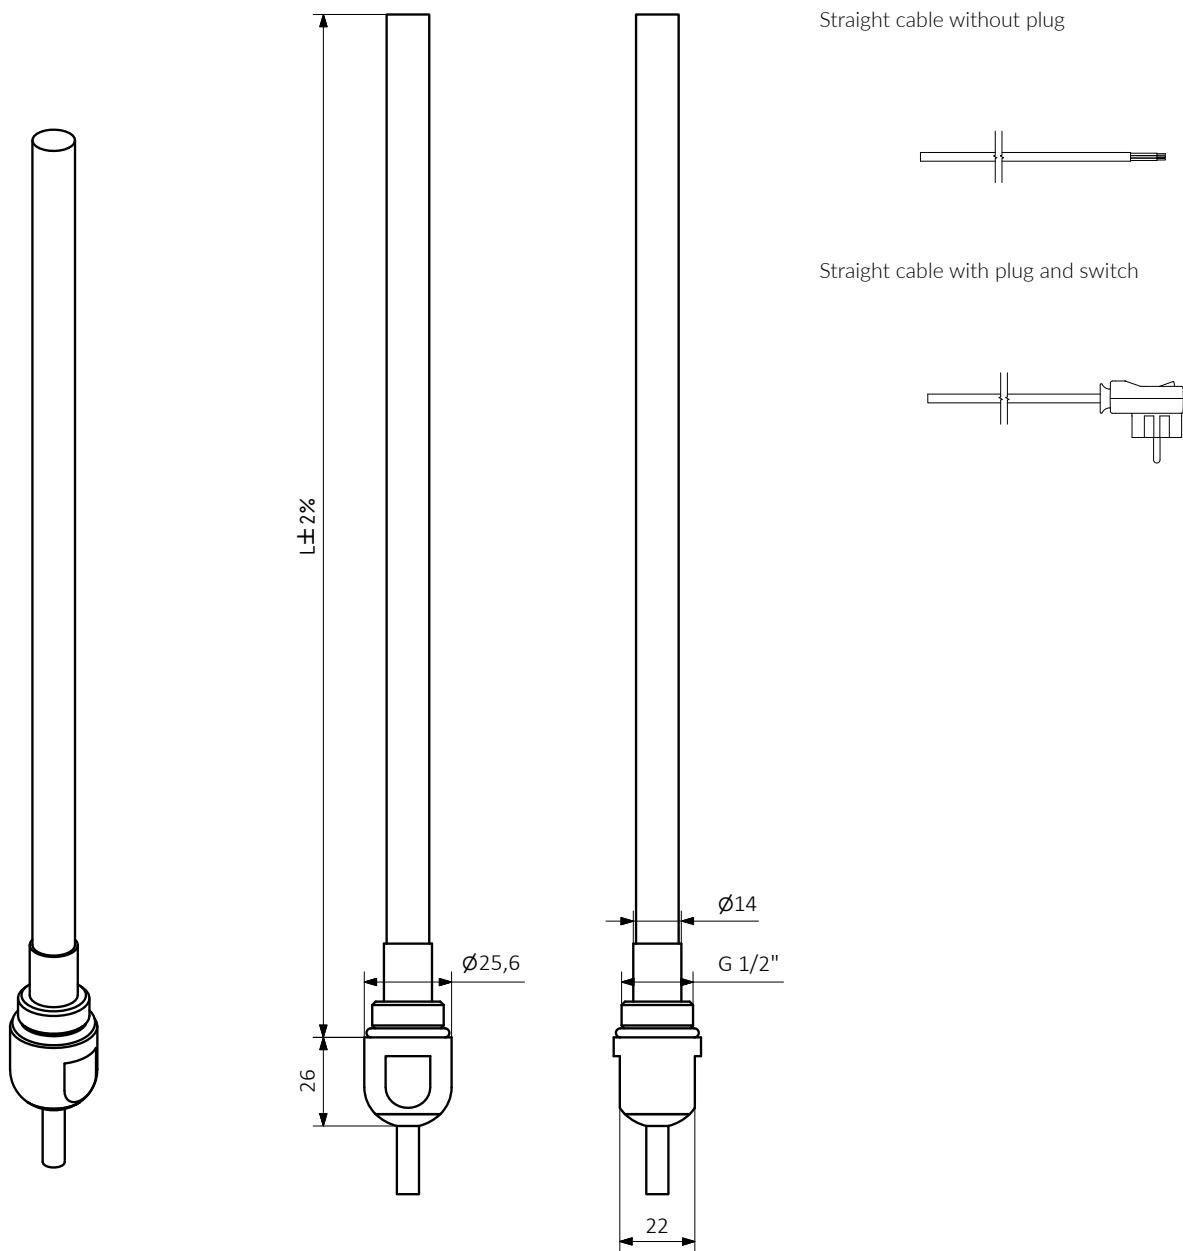


| | | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|------|------|------|
| L [mm] | 315 | 285 | 310 | 345 | 375 | 485 | 575 | 750 | 950 |
| Power [W] | 120 | 200 | 300 | 400 | 600 | 800 | 1000 | 1200 | 1500 |

Terma BlueLine mobile application

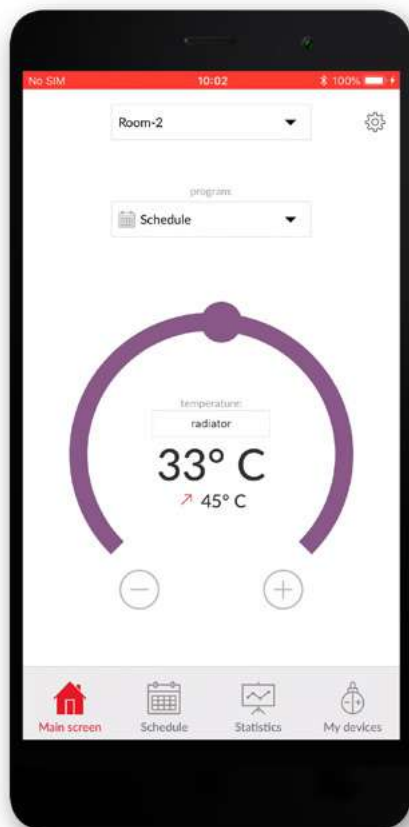

Functions and features:

- Designed based on Bluetooth® Low Energy technology
- Allows to intuitively add and manage Terma BlueLINE devices
- Available for mobile devices with operating systems Android 4.0 (or newer) and iOS 6 (or newer)
- Manages several devices simultaneously
- Intuitively solves conflicts in case a few users control the devices
- Allows to prepare individual heating cycles (also off-line) and activate them at any time
- Integrates all the properties of the device



TTIR1



Functions and features:

Functionality

The TTIR is a weekly portable or wallmounted programmable controller. It allows you to adjust the temperature through a range from 10°C to 30°C in steps of 0.5°C. It displays both the current time and temperature as well as the set temperature. The TTIR allows you to set an economical and a comfortable temperature level controlled in two modes, manual and automatic. You are able to manually calibrate the temperature sensor of the TTIR if required.

Timer and Dryer

The weekly timer function allows you to program your desired 'heating time profiles' in certain modes throughout the 7 days of the week (with an interval of 0,5 h). There is also a dryer function that allows a timed operation from 15 minutes up to 4 hours.

Remote Control

The TTIR works wirelessly with a range of Terma heating elements and controllers that are equipped with an IR receiver (ONE, MOA IR and KTX 4). The TTIR can control multiple heating elements in one room.

Supply

The TTIR is a battery powered device and does not require an external power supply.

Safety

The TTIR is equipped with a 'frost' protection mode (ANTIFREEZE) to protect the radiator from the effects of freezing.


Design

An elegant white body gives the TTIR a modern look and provides the perfect backdrop for an elegant amber display.

Colour

An elegant white body gives the TTIR a modern look and provides the perfect backdrop for an elegant amber display.

| Power supply | Communication module | Casing ingress protection | Colour | Product code |
|----------------|----------------------|---------------------------|--------|--------------|
| 2 x LR03 (AAA) | IR | IP 30 | White | TGRTBI001 |

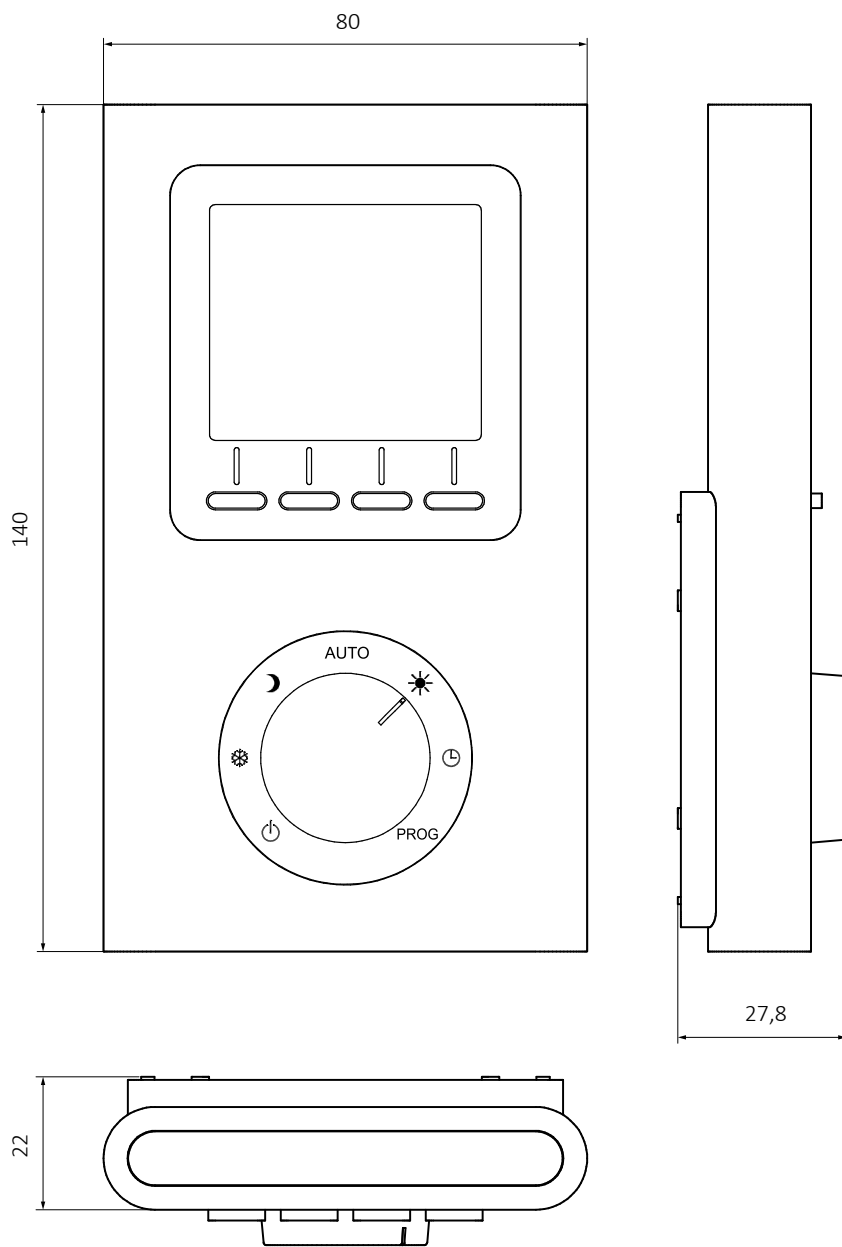

DTIR1



Functions and features:

Functionality

The DTIR is a daily portable or wallmounted programmable controller. It allows precise adjustments in room temperature in increments of 0.5°C. The DTIR displays both the set and the room temperature and works with a number of different modes, manual, automatic, dryer and antifreeze. It can also be programmed in two temperature zones, economic and comfortable and the user has the ability, if required to calibrate the electronic temperature sensor.

Timer und Trockner

The daily timer allows you to program the device (turning on and off) in 15 minute intervals within a 24 hr period. During these timed in-

tervals the DTIR can work in either economic or comfort modes. The dryer function operates from 15 minutes up to 4 hours. After the timed period of drying the DTIR will return to its previously set function relevant to the time of day.

Remote Control

The programmer works wirelessly with a range of Terma heating elements and controllers that are equipped with an IR receiver (ONE, MOA IR and KTX 4). The DTIR can control multiple heating elements in one room.

Intelligent Building Systems

The DTIR is battery powered and does not require an external power supply.

Safety

The DTIR is equipped with a 'frost' protection mode (ANTIFREEZE) to protect the radiator from the effects of freezing.


Design

The DTIR is of simple and minimalist design, it is light and easy to use with a clear blue display.

Colour

Available housing colours: white and silver. Blue display.

| Power supply | Communication module | Casing ingress protection | Colour | Product code |
|----------------|----------------------|---------------------------|--------|--------------|
| 2 x LR03 (AAA) | IR | IP 30 | White | TGRDBI001 |
| 2 x LR03 (AAA) | IR | IP 30 | Silver | TGRDSI001 |

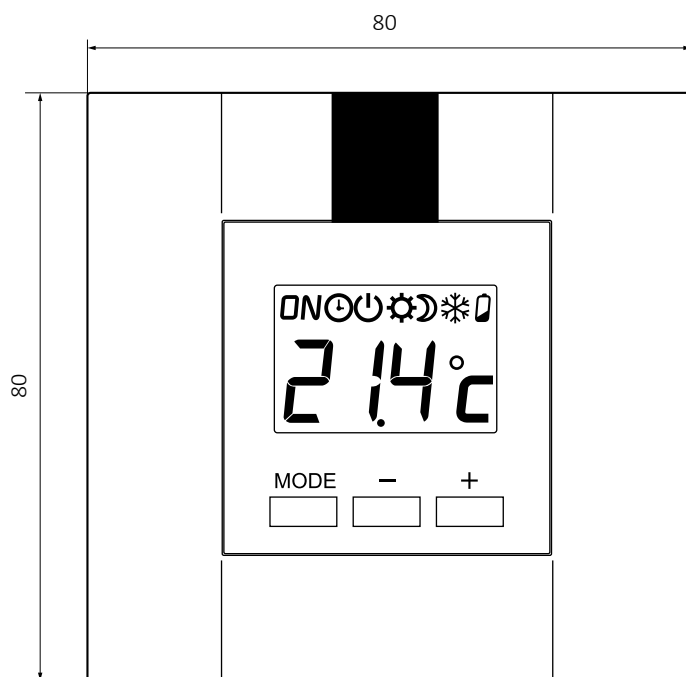

Choosing the correct heating element

The first and most important criterion for the selection of the heating element is choosing the correct power output. The heating element output needs to match the radiator power output for the parameters of 75/65/20 based on the following criteria:

- a) For most heating elements with a maximum set temperature of approximately 60-65°C (e.g. MEG, MOA, REG, KTX, ONE), the heater power output should be as close to the radiator power output as possible.
- b) In the case of a self-regulating heater with a PTC element (SKT, SOA), the heating elements power output should never exceed the power of the radiator.

Following the above criteria when selecting a heating element will ensure full functionality and efficient operation of the device.

When selecting a heating element it is recommended that the potential user should consider its ease of operation, the types of settings required, the purpose of use (drying or heating) and the location of fitting (bathroom, lounge etc.).

We recommended heating elements with features that simplify their operation (e.g. an automatic "switch off" function after a specified time, which could be useful for efficient drying of towels or clothes). When choosing a heating element, it is also worth considering if you will need room temperature control or perhaps a heating element which is capable of cooperation with an external remote controller.

How to install a heating element in a radiator

A radiator with many connection tapings (valve entry points) will provide the option to connect an electric heating element. Using an electric heating element gives great flexibility and has many advantages;

- the ability to use a 'water' towel rail or radiator as a clothes or towel dryer during the summer months.

- the ability to heat a room (e.g. bathroom) without having to switch on the entire central heating system during the transition period between Autumn and Winter or just to add warmth on colder days at any time of the year.

Before installing the heating element please refer to the information provided on Terma's website at www.termaheat.pl. The diagrams below show the recommended way to install your heating element in the water radiator:




Diagram 1 – Connect the heating element directly to the radiator using an integrated thermostatic valve (for Z1, Z8, Y8 and Y1 connections).




Diagram 2 – Connect the heating element directly to the radiator using an integrated thermostatic valve with immersion tube (for SX, S1 and S8 connections).




Diagram 3 – Connect the heating element through the lockshield valve integrated with a T-piece (for SX connection).




Diagram 4 – Connect the heating element via a T-piece and lockshield valve (for SX connection).




Diagram 5 – Connect the heating element directly to the radiator using a side connection (for L8, P1, S8 and S1 connections).




Diagram 6 – Connect the heating element directly to the radiator using a cross-connection (for GD, UN and UC connections).

When you connect the heating element to the water radiator one valve must always be left open during operation. This is to avoid pressure build-up within the radiator. Failure to leave a valve open could result in damage to the heating element or the radiator.

Terma heating elements are safe to use and meet all the required European safety standards. All have inbuilt temperature regulators protecting the user against a risk of hot water burns. Heating elements should not be installed in central heating systems where the water temperature exceeds 82°C as excessive water temperature will

damage the heating element's thermal fuse. The distribution of heat within the radiator depends on many factors including construction of the radiator and positioning of the heating element. The heating element should always be installed in the bottom part of the radiator.

The heating element protrudes beyond the outline of the radiator, therefore, care should be taken to minimize the risk of mechanical damage (do not stand on the heating element or hang any objects from it).




Diagram 7 – Connection of the heating element directly to the radiator from below, with the tubes arranged horizontally (for E1, E8 and EX connections).




Diagram 8 – Connection of the heating element to the radiator from below, with tubes placed vertically.






Diagram 9 – Connection of the heating element to the radiator from side, with tubes placed vertically.

Straight handrail

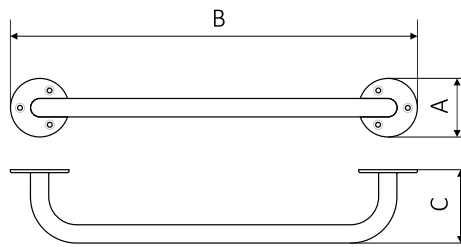

Specifications:


| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 80 | 555 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPPX001 |
| 80 | 655 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPPX003 |
| 80 | 755 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPPX005 |
| 80 | 855 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPPX007 |

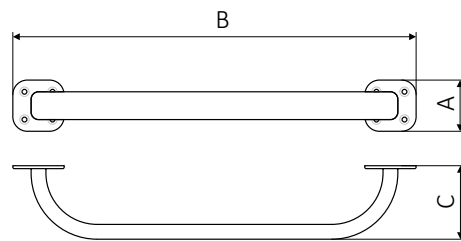

Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 70 | 550 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPPX002 |
| 70 | 650 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPPX004 |
| 70 | 750 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPPX006 |
| 70 | 850 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPPX008 |

Handrail with 90° bend




• Diagram shows a left-handed version.



Specifications:

| A ↕ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 505 | 405 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSL003 | LEFT-HANDED |
| 705 | 505 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSL007 | LEFT-HANDED |
| 505 | 405 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSP003 | RIGHT-HANDED |
| 705 | 505 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSP007 | RIGHT-HANDED |




• Diagram shows a left-handed version.



Specifications:

| A ↕ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 500 | 400 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSL004 | LEFT-HANDED |
| 700 | 500 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSL008 | LEFT-HANDED |
| 500 | 400 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSP004 | RIGHT-HANDED |
| 700 | 500 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSP008 | RIGHT-HANDED |

Handrail with 125° bend

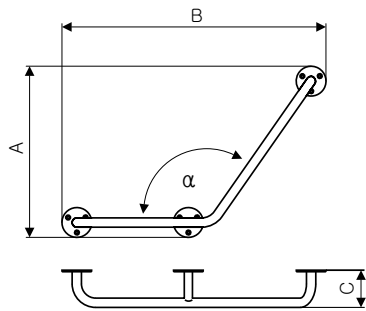


• Diagram shows a left-handed version.



Specifications:

| A ↕ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 460 | 710 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSL001 | LEFT-HANDED |
| 624 | 925 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSL005 | LEFT-HANDED |
| 460 | 710 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSP001 | RIGHT-HANDED |
| 624 | 925 | 100 | Ø 25 | RAL + Special colours palette (with chrome) | WBPSP005 | RIGHT-HANDED |

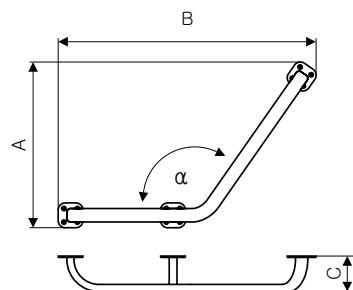


• Diagram shows a left-handed version.



Specifications:


| A ↕ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 475 | 742 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSL002 | LEFT-HANDED |
| 639 | 957 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSL006 | LEFT-HANDED |
| 475 | 742 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSP002 | RIGHT-HANDED |
| 639 | 957 | 100 | 38x20 | RAL + Special colours palette (with chrome) | WBPSP006 | RIGHT-HANDED |

Horizontal handrail



Specifications:


| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 778 | 778 | 80 | Ø 25 | RAL + Special colours palette (with chrome) | WBPLX001 |
| 778 | 978 | 80 | Ø 25 | RAL + Special colours palette (with chrome) | WBPLX003 |



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 775 | 775 | 70 | 38x20 | RAL + Special colours palette (with chrome) | WBPLX002 |
| 775 | 975 | 70 | 38x20 | RAL + Special colours palette (with chrome) | WBPLX004 |

Vertical, floor support handrail




• Diagram shows a left-handed version.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 235 | 824 | 424 | Ø 32 | RAL + Special colours palette (with chrome) | WBWIL001 | LEFT-HANDED |
| 235 | 824 | 824 | Ø 32 | RAL + Special colours palette (with chrome) | WBWIL003 | LEFT-HANDED |
| 235 | 824 | 424 | Ø 32 | RAL + Special colours palette (with chrome) | WBWIP001 | RIGHT-HANDED |
| 235 | 824 | 824 | Ø 32 | RAL + Special colours palette (with chrome) | WBWIP003 | RIGHT-HANDED |




• Diagram shows a left-handed version.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 210 | 825 | 425 | 38x20 | RAL + Special colours palette (with chrome) | WBWIL002 | LEFT-HANDED |
| 210 | 825 | 825 | 38x20 | RAL + Special colours palette (with chrome) | WBWIL004 | LEFT-HANDED |
| 210 | 825 | 425 | 38x20 | RAL + Special colours palette (with chrome) | WBWIP002 | RIGHT-HANDED |
| 210 | 825 | 825 | 38x20 | RAL + Special colours palette (with chrome) | WBWIP004 | RIGHT-HANDED |

Wall-mounted support handrail




• Diagram shows a left-handed version.



Specifications:

| A ↑ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 180 | 240 | 600 | Ø 32 | RAL + Special colours palette (with chrome) | WBWOL001 | LEFT-HANDED |
| 180 | 240 | 700 | Ø 32 | RAL + Special colours palette (with chrome) | WBWOL003 | LEFT-HANDED |
| 180 | 240 | 600 | Ø 32 | RAL + Special colours palette (with chrome) | WBWOP001 | RIGHT-HANDED |
| 180 | 240 | 700 | Ø 32 | RAL + Special colours palette (with chrome) | WBWOP003 | RIGHT-HANDED |




• Diagram shows a left-handed version.



Specifications:


| A ↑ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> | Version |
|--------|--------|-----------|----------------|---|--|--------------|
| 180 | 230 | 600 | 38x20 | RAL + Special colours palette (with chrome) | WBWOL002 | LEFT-HANDED |
| 180 | 230 | 700 | 38x20 | RAL + Special colours palette (with chrome) | WBWOL004 | LEFT-HANDED |
| 180 | 230 | 600 | 38x20 | RAL + Special colours palette (with chrome) | WBWOP002 | RIGHT-HANDED |
| 180 | 230 | 700 | 38x20 | RAL + Special colours palette (with chrome) | WBWOP004 | RIGHT-HANDED |

Free standing floor handrail



Specifications:


| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|--|--|
| 235 | 800 | 448 | Ø 32 | RAL + Special colours palette (without chrome) | WBWWX001 |
| 235 | 800 | 748 | Ø 32 | RAL + Special colours palette (without chrome) | WBWWX003 |



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|--|--|
| 210 | 800 | 450 | 38x20 | RAL + Special colours palette (without chrome) | WBWWX002 |
| 210 | 800 | 750 | 38x20 | RAL + Special colours palette (without chrome) | WBWWX004 |

Wall-mounted horizontal handrail

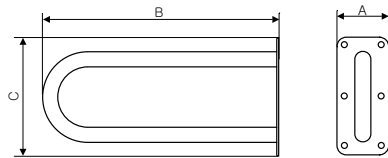


- This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSX001 |
| 90 | 600 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSX003 |
| 90 | 700 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSX005 |
| 90 | 800 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSX007 |




- This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSX002 |
| 90 | 600 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSX004 |
| 90 | 700 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSX006 |
| 90 | 800 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSX008 |

Wall-mounted handrail with hanger

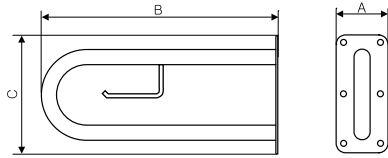


- This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSR001 |
| 90 | 600 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSR002 |
| 90 | 700 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSR003 |
| 90 | 800 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUSR004 |

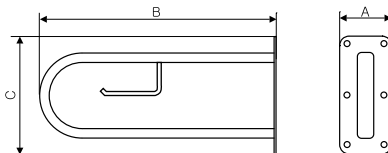


- This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSR005 |
| 90 | 600 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSR006 |
| 90 | 700 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSR007 |
| 90 | 800 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUSR008 |

Wall-mounted folding handrail

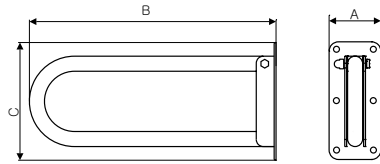


- This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPX001 |
| 90 | 600 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPX003 |
| 90 | 700 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPX005 |
| 90 | 800 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPX007 |

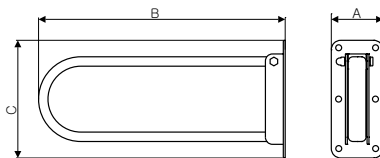


- This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <i>Configuration code p. 791</i> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPX002 |
| 90 | 600 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPX004 |
| 90 | 700 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPX006 |
| 90 | 800 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPX008 |

Wall-mounted folding handrail with hanger

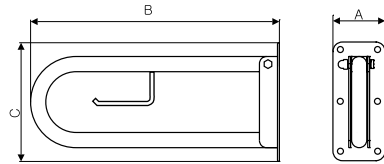


• This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPR001 |
| 90 | 600 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPR002 |
| 90 | 700 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPR003 |
| 90 | 800 | 275 | Ø 32 | RAL + Special colours palette (with chrome) | WBUPR004 |

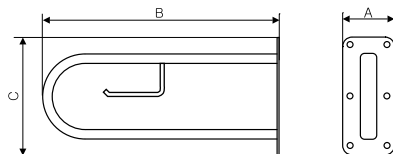







• This product is compatible with TECE fixing plate number 9.042.013.



Specifications:

| A ↓ | B ↔ | C [mm] | Profil [mm] | Colour | Product code <small>Configuration code p. 791</small> |
|--------|--------|-----------|----------------|---|--|
| 90 | 500 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPR005 |
| 90 | 600 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPR006 |
| 90 | 700 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPR007 |
| 90 | 800 | 275 | 38x20 | RAL + Special colours palette (with chrome) | WBUPR008 |

Suggested installation dimensions

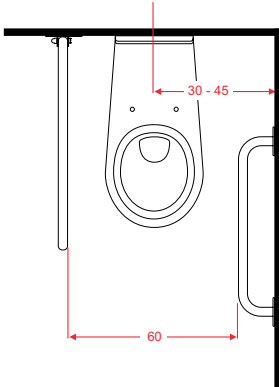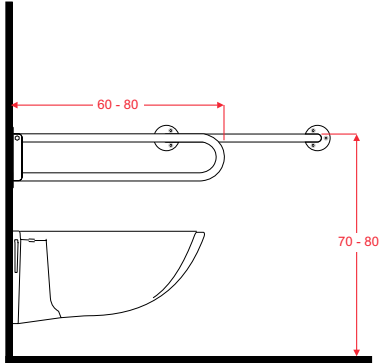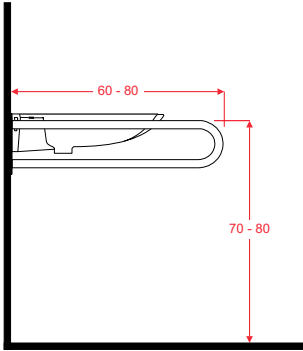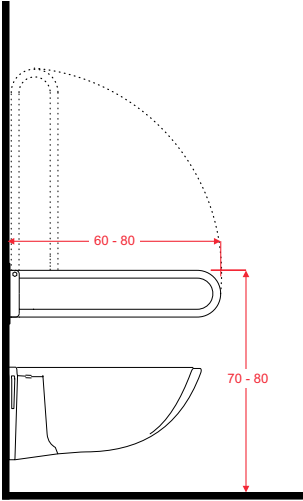

Fitting Kit

Each product contains a universal set of rawl plugs and mounting screws.

Advantages:

- universal design allows for use with all building materials
- a cross-cut head provides optimum control of the screw
- the rawl plug expands in solid building material and forms a reliable knot formation in all cavities
- the rawl plug is protected against premature collapse whilst fitting
- rawl plug geometry allows the use of screws for wood or chipboard with diameters between 4 and 12 mm
- easy installation

Application:


- concrete
- building board
- natural stone with dense structure
- solid brick
- cement-lime solid brick
- lightweight concrete blocks
- aerated concrete
- plasterboard panels
- checker brick
- lightweight concrete blocks
- concrete blocks
- plasterboard
- chipboard

Material tolerance specifications






| TYPE | SYMBOL | UX 8 x 50 UX 8 x 50R [mm] |
|------------------|--------|------------------------------|
| rawl plug length | l | 50 |
| hole diameter | d0 | 8 |
| drilling depth | h0 | 60 |
| screw diameter | ds | 6 |

Highest recommended loads and breaking loads [kN]






| | | | |
|------------------------|--|------|-----|
| concrete | ≥C12/C15 | 0,6 | 2,5 |
| solid brick | ≥Mz12 (DIN 105) | 0,3 | 2,1 |
| checker brick | ≥Mz12 (p ≥ 1.0 kg/dm ³ , DIN 105) | 0,2 | 1,0 |
| hollow sand lime stone | ≥KSL 12 (DIN 106) | 0,5 | 3,2 |
| aerated concrete | ≥PB2 | 0,15 | 0,7 |
| aerated concrete | ≥PB4 | 0,3 | 1,7 |
| plasterboard | thickness: 12,5 mm | 0,1 | 0,6 |
| plasterboard | thickness: 2 x 12,5 mm | 0,15 | 0,8 |
| gypsum board | (e.g. Fermacell) | 0,2 | 1,7 |



pre-assembly



installation
(with cavity wall)



(Diagrams - Fisher archive)

Terms and Conditions


This document specifies general terms & conditions of cooperation between TERMA Sp. z o.o., hereinafter referred to as the Supplier and any trader registered in accordance with local laws applicable, hereinafter referred to as the Trading Partner. It is implied that by placing an order or signing an agreement with the Supplier the Trading Partner accepts all terms specified hereunder.

1. Correct product use

- A. Radiators produced by the Supplier have been designed for heating installations which stay in accordance with current Polish and European norms, especially PN-B-02414 and PN-93/C-04607 with further amendments.
- B. Our radiators have a declaration of compliance with the European Parliament Directive, Regulation (EU) No 305/2011 dated 9 March 2011. This regulates the conditions for the marketing of construction products and replaces Council Directive 89/106/EEC.
- C. Heating elements produced by the Supplier have been designed for installation in the following types of radiators; those filled with oil of a density lower or equal to 4-5 mm²/s at the temperature of 40°C, and a flow temperature below -18°C, radiators filled with water or water with anti-freeze agent (designed for direct contact with heating elements, as per the instruction manual attached to the product), or, to radiators connected to central heating. The heating medium should be prevented from freezing at all times.
- D. Heating elements produced by the Supplier are CE certified in accordance with the relevant EU norms and directives, such as:
 - Low Voltage Directive LVD 2006/95/EC,
 - Electromagnetic Compatibility Directive EMC 2004/108/EC.
- E. All radiators, heating elements and handrails must be installed according to the Supplier's installation, design guidelines and technical requirements specified in the installation and user manuals attached to the product.
- F. The temperature and pressure of the heating medium permitted for a given radiator model or heating element should not exceed those described in the product technical specifications published in the catalogue and product cards.
- G. Radiators and handrails should be cleaned with a soft dry or damp cloth – dampened only with water and small amount of soap or household washing-up liquid. Use of any other chemical substances (including in particular the corrosive ones) or abrasive agents is forbidden.
- H. Covering surfaces of radiators and handrails with any type of paint or varnish is forbidden. I. Placing objects soaked with chemically active substances on chrome radiators is strictly forbidden, as doing so may cause discolouration or other damage to the chrome layer. For chrome maintenance purposes, it is recommended that oily substances such as a chrome

preservation cream are used for maintenance. This practice will ensure the necessary protection against external factors. Use of abrasive agents or cleaning products containing chlorine is strictly forbidden.

- J. While drying clothes, the End User is advised to pay attention to the recommended temperature range in order not to damage the clothes or painted surface of the radiator. It is not advisable to use the dryer for drying clothes or fabrics which might dye the surface (new towels, fabrics containing polymers) or fabrics which might have been soaked in chemical substances as this might lead to discolouration of the paint. Surface faults of this type are not covered by the warranty provided by the Supplier.
- K. Installation zones for radiators and handrails.

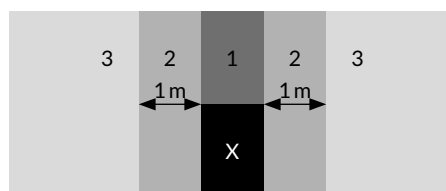

Zone X stands for a water source (meaning any sink, shower, bathtub or toilet). If the radiators are to be installed in zones 1 and 2 they need to have an additional zinc coating offered at extra cost by the Supplier. Installing a radiator without a zinc coating in zones 1 or 2 will void the warranty. Zone 3 is safe for installation of any hot-water radiator with standard coating.

- L. It is advisable to have the radiators installed by an installation professional in order to eliminate the risk of thread corrosion.

2. Orders.

- A. The Trading Partner is expected to provide valid company registration documents prior to commencement of cooperation as well as on every amendment or modification of their company details. These documents should specify the form of economic activity and taxation status. Trading Partners domiciled in the EU countries are expected to present their VAT number. Limited companies are expected to present their trading name, company registration number and registered address of the company. Sole traders and individuals operating in partnerships are expected to specify the trading name, business address, key person's contact details as well as names and private addresses of the owners.
- B. Based on an individual agreement with the Trading Partner the Supplier defines the trade credit limit and payment terms.
- C. Orders are accepted in the following forms:
 - electronic (email),
 - by data transfer (EDI), this option requires a computer system compatible with Supplier's system.

- D. A product order should include: a product code, a configuration code and the quantity of items ordered. The codes are defined in the current Supplier's catalogue or a custom price list created for the Trading Partner and presented in the annex to the agreement.
- E. Any orders for products made to an individual design, should be supported with the design drawing and a detailed description of design requirements.
- F. In case of incomplete orders (lack of necessary data) or necessity of confirmation of selected order details, the Supplier will contact the Trading Partner in order to confirm the missing order details. The Trading Partner should provide in writing personal contact details of the individual responsible for placing the order. Lack of the above details may result in extending order lead times, completion of the order in an incomplete manner or lack of order completion. In such a situation the Supplier will not be held responsible if the order is not realized in accordance with the Trading Partner's requirements.
- G. Receipt of an order takes place at the moment that the Supplier sends an order confirmation with a lead time assessment to the Trading Partner.
- H. An order reference number is generated and sent to the Trading Partner in order to allow order status verification.
- I. The Trading Partner may cancel the order within 24 hours after order receipt and confirmation of order shipping date, but this applies only to products with lead times of 10 days and more. An order cannot be cancelled if it has already been dispatched (realized) by the Supplier.
- J. Every modification made to an order may extend the order lead time and delay the shipping date by the time necessary to implement the requested modification.

3. Prices.

- A. The Supplier's prices are expressed in PLN and EUR and based on Incoterms 2010 ex works rates unless the agreement, business offer or conditions for a particular country state otherwise.
- B. The product price list is provided in an electronic form or defined in an appendix to the agreement.
- C. The price list specifies net prices.
- D. In case of the introduction of a new price list, the Trading Partner will be informed of the planned changes not later than a month before the changes.
- E. Any price offer that is individually prepared is valid for 30 days, unless the offer terms and conditions specify otherwise.
- F. The Trading Partner is obliged to pay for the received goods within the payment due date as specified on the invoice. Any delay in payment may result in calculating statutory interest fees for every day of delay.
- G. Payment is considered as received at the moment of receipt of funds on the Supplier's account. Any bank charges applicable will be covered by the Trading Partner.

4. Order realization.

- A. Order lead times:
 - The Supplier keeps stock of selected products while others need to be pre-ordered.
 - Order lead time for pre-ordered products is up to 10 or 25 working days, depending on product type.
 - Information on stock inventory and lead time for pre-ordered products is available in the Supplier's current product catalogue.
 - The above detailed order lead times do not apply to products:
 - not included in the catalogue,
 - ordered to comply with specified delivery dates,
 - catalogue items ordered in batches of more than 10.
 - Lead times are confirmed individually in case of such orders. Each order is confirmed in terms of its contents and lead time within 1 working day of its receipt. Order confirmations are sent by email.
- B. Order delivery times:
 - Standard delivery time in Poland is 1 or 2 working days.
 - Depending on the distance or customs procedures, longer delivery times should be allowed for in case of deliveries outside of Poland.
 - The Supplier is not liable for delivery delays which are due to the carrier.
- C. The Supplier does not accept 'unjustified' returns of the purchased goods.
- D. The Trading Partner is obliged to check the goods upon delivery for possible transport damages. Any damage in transit should be reported and described in the carrier's delivery note and confirmed with the driver's name. In order for the claim on grounds of damage in transit to be accepted by the Supplier, it is necessary to fill out the damage report within the time specified in the carrier's terms and conditions and forward it to the Supplier within no more than 3 working days from its creation. Non production of such a document within the above due dates, exempts the Supplier from responsibility for the damage that occurred in transit. In the case of the Trading Partner's own transport from the Supplier's premises, Supplier's responsibility for the goods ceases at the moment of their release from the warehouse.
- E. Goods supplied by the Supplier are intended for use in the country specified by the Trading Partner as the country of delivery. Further delivery — as single or group load outside of the delivery country — is subject to export regulations of the given country. The Trading Partner is obliged to familiarize himself with the regulations and procedures applicable in such cases.

5. Warranty terms & conditions

- A. The Supplier grants the following warranty periods for products included in the catalogue:
 - 8 years for steel radiator paint coating in all RAL and Supplier's special colours,

- 8 years for water tightness of steel and cast iron radiators assembled in the Supplier's factory,
- 3 years for chrome layer,
- 4 years for the Galvanic Brass finish and 2 years for Metal Alive and Burnish finishes of cast-iron radiators.

Heating elements for radiators and electric components in electric heaters:

- 2 years.

Handrails:

- 2 years for paint coating in all RAL and Supplier's special colours,
- 2 years for chrome layer.

Radiator and heating element accessories:

- 2 years.

B. The warranty period is calculated from the moment of product purchase by the End User, with the following conditions:

- for heating elements the warranty period is 2 years from the product purchase date but no longer than 3 years from the date of production;
- for steel radiators the warranty period for paint coating and water tightness is 8 years, but not more than 9 years from the date of production;
- for radiators with chrome layer the warranty period is 3 years, but not more than 4 years from the date of production;
- for cast-iron radiators the warranty period for paint coating is 8 years, but not more than 9 years from the date of production and 8 years for water tightness of units assembled in the Supplier's factory but not more than 9 years from the date of production;
- for handrails the warranty period is 2 years from the product purchase date, but not more than 3 years from the date of production.

C. Any claims resulting from the warranty provided by the Supplier should be reported directly to the Supplier or through the Trading Partner by filling out the claim form and returning the product in question, or, by supplying supporting photographs (if disassembly of the item is not possible). In each case the product warranty card and evidence of purchase should be included with the return. The Supplier may reject the claim if any of the above is not supplied.

D. Every claim is processed within 14 days of its receipt; it may be longer if a more detailed investigation is required. All claims are investigated based on the returned product or supporting photographs.

E. Any costs related to the return of faulty items including the costs of disassembly/assembly of the product, transportation and labour costs etc. will be covered by the Trading Partner i.e. the trader who sold the product directly to the End User. The possibility of cost sharing between the Trading Partner and the Supplier is agreed individually for each returned item. The Supplier covers the cost of a new product and its shipment to the Trading Partner.

F. Warranty claims can be forwarded to the Supplier by:

- email,
- via Claim Form on the Supplier's website: www.termaheat.pl,
- by post.

G. Warranty covers any product faults which are due to Supplier's error discovered on delivery or while in use, with the exclusion of:

- Damage in transit caused by the carrier or during unloading of goods (this applies to relations between the Supplier and the Trading Partner only). Please refer to point 4E for more information on complaints/claims on the grounds of damage in transit.
- Damage in stock (any radiator accepted at the Trading Partner's warehouse is considered free from any faults, excluding any hidden faults, discovered upon unpacking of goods when the packaging did not have any signs of damage).
- Items stored outside or inside warehouse spaces with increased air humidity.
- Filling a radiator with any other medium than those which are approved for a given type of product (i.e. with steam) or any medium containing any chemical substances that are damaging to radiator materials, i.e. steel, cast iron or aluminium.
- Filling a radiator with a heating medium with a working pressure exceeding that which is specified by the Supplier in the user manual or product technical card; or increasing the working pressure inside the radiator with a heating element by closing all radiator valves in the central heating system; or by leaving an insufficient air cushion inside a standalone electric radiator.
- The use of products with standard paint coating in areas with increased concentration of aggressive agents, such as sulphur, ammonia or chlorine compounds.
- Use of steel radiators in open installations, with a permanent connection to water-supply systems and installations drained from the heating medium more often than required.
- Use of electric radiators with the heating element exposed to splashes of water (with no consideration of IP protection class).
- Incorrect (not in compliance with the manual) installation, use or disassembly.
- Use of heating element in a way that differs from its intended use.
- Modification of the product structure.

H. Warranty does not cover any faults or damages which occurred due to force majeure, meaning any future phenomena which are impossible to predict and prevent, such as weather circumstances, electric installation disturbances, wars, natural disasters.

I. A claim procedure which is in progress does not constitute the basis for suspension of payment for delivered goods.

6. Procedure for handling complaints for heating elements purchased by Trading Partners residing in EU and keeping no stock.

- A. The Trading Partner places a complaint number on each heating element returned by the consumer.
- B. The Trading Partner conducts a preliminary assessment of the heating element based on its appearance using reference materials received from the Supplier. In case of obvious signs indicating the misuse of the product, the Trading Partner is entitled to rejecting a complaint.
- C. Each complaint should be forwarded by email to the Supplier in the form of a return form with two photographs attached (showing the full front and side views of the heating element).
- D. The Supplier records the complaint in the system and after the verification of images, in the absence of clear grounds to reject the claim, makes an initial settlement (delivered in absentia) in the form of:
 - corrective invoice/credit noteor
 - a new heating element shipped for exchange on the basis of a goods issued note;
 - in case of Trading Partners keeping a larger stock the settlement may take place after the returned item has been verified by the Supplier.
- E. Sales document (invoice) and release document shall bear the complaint number issued by the Trading Partner.
- F. All returned heating elements (with the exception of rejected returns) must be returned to the Supplier. The unit responsible for trade in the Supplier's company works with the Trading Partner to determine the heating element collection period after which the returned items are picked up by the Supplier. The collection intervals for the returned heating elements cannot be longer than three months.
- G. If the Trading Partner fails to present all the heating elements returned during the given period, the cost of the missing items shall be passed on to the Trading Partner (invoice).
- H. The Supplier performs a thorough investigation of returned heating elements resulting in a list of accepted returns (product defects) and rejected returns (items not used in accordance with the instructions, other defects which occurred without the Supplier's fault).
- I. The settlement with the Trading Partner is processed on the basis of the return investigation summary which constitutes a proper record of return examination. In case of accepted returns the applied pre-settlement does not change.
- J. The Trading Partner receives the return investigation summary and in cases of rejected complaints should inform the product End User about the causes of a negative decision and provide instructions for correct product use.
- K. Each individual End User, and in particular the one who has filed a return claim, should be provided with the leaflet "Electric heating element: Read before installation – important".

- L. The above procedure does not rule out individual arrangements between the Supplier and the Trading Partner, documented in writing and setting out operation standards similar to those followed by larger Trading Partners residing in EU, i.e. collecting larger numbers of faulty heating elements returned during a specific period of time, sending a "wholesale" return at the expense of the Supplier and obtaining the settlement once the experts have carried out their examination.

7. Final provisions

- A. Sold goods remain the Supplier's property until receipt of the full payment amount from the Trading Partner. Therefore, the Trading Partner becomes the owner of the goods only upon the settlement of full payment for the goods in question.
- B. The Trading Partner will not disclose any technical, technological, trade or organizational information provided by the Supplier (this also comprises prices, discount rates or any other trade terms and conditions). This provision is in force both during trade cooperation between the Trading Partner and the Supplier and after its termination. Any information that is considered confidential may be passed on to third parties only on receipt of the Supplier's written consent.
- C. Any disputes resulting from these terms & conditions, orders, claim procedures or agreements between the Supplier and the Trading Partner, will first be arbitrated through amicable negotiations. If a settlement is not reached between the parties, the arbitrary court will be the court competent for the Supplier as per his business address. In case of any disputes, Polish law applies. In case of any discrepancies between translations of these terms & conditions, the Polish version is binding.
- D. These terms & conditions are valid from January 1, 2015.
- E. Any other provisions, amendments or additions to this document which are not currently included in it, require the Supplier's written confirmation of approval.

Key to symbols used in catalogue



Radiator available in a water version.




Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes fitted with a heating wire or prefilled with a heating medium and equipped with a heating element. All tested and ready to use.



Available in chrome finish.



Connection types dedicated for this radiator.

The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Chrome.



Nickel.



Satin.



White.



Brush Copper.

Structure of configuration code for water and dual fuel radiators

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

Code structure

WGALE054030

K916SX


PRODUCT CODE

(located in the table for the product)

CONFIGURATION CODE

(supplemented by hand)

Configuration

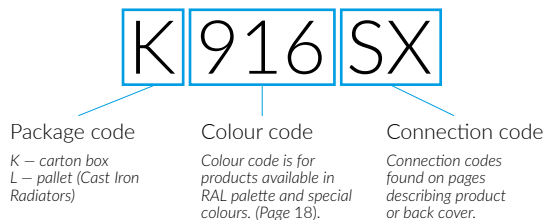

Epoxy primery

E – Code of epoxy primer is an extra processes.

WGALE054030 K916SX **E** — Extra processes or additions code

Structure of configuration code for central heating radiators with the built-in ONE heating element and electric radiators with the built-in ONE heating element

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

Code structure


WWBNN076050

PRODUCT CODE
(located in the table for the product)

K916E1W

CONFIGURATION CODE
(supplemented by hand)

Configuration

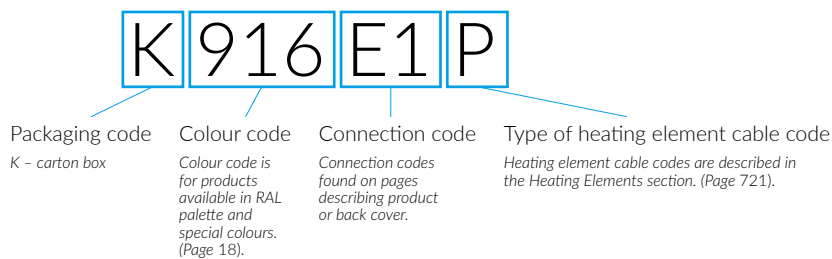

Epoxy primery

E – Code of epoxy primer is an extra processes.

WWBNN076050 916SX **E** — *Extra processes or additions code*

Structure of configuration code for electric radiators with a heating medium

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

Code structure


WLALE054030

K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

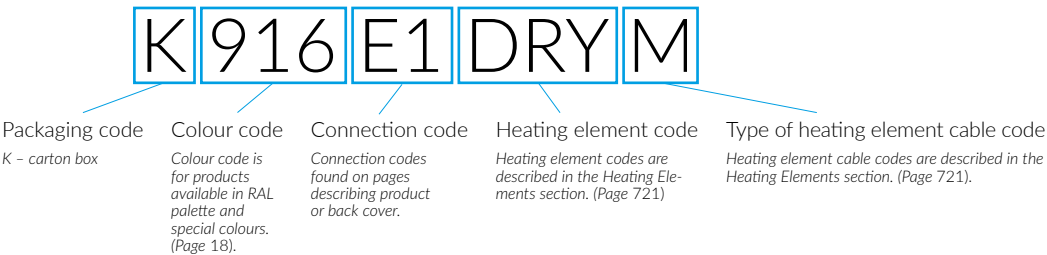

Epoxy primery

E - Code of epoxy primer is an extra processes.

WLALE054030 K916SX **E** — Extra processes or additions code

Structure of configuration code for electric radiators with a heating wire

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

Code structure


WSPER136050

PRODUCT CODE
(located in the table for the product)

K916EXW

CONFIGURATION CODE
(supplemented by hand)

Configuration

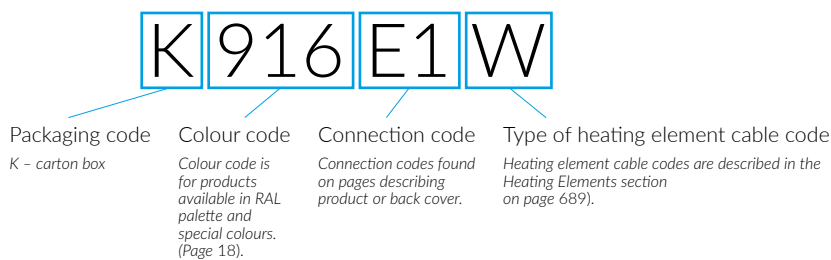

Epoxy primery

E - Code of epoxy primer is an extra processes.

WSPER136050 K916SX **E** — Extra processes or additions code

Structure of configuration code for customizable accessories

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

Code structure


WRRCAS044

PRODUCT CODE
(located in the table for the product)

K916

CONFIGURATION CODE
(supplemented by hand)

Configuration



Contact information

Terma Sp. z o.o.

Czaple 100
80-298 Gdańsk
NIP: 583-10-18-844
www.termaheat.com

We are open from Monday to Friday from 07:00am until 18:00pm. You can contact us 24/7 by calling us on our mobile numbers.

Terma Products (UK) Ltd

Drop Ship Distribution Centre and Sales Office
Unit 24 Salisbury Road
Haydock Industrial Estate
Haydock
St Helens
WA11 9XG
Company Registration Number: 09302583
VAT Registration Number: GB 206112660

UK Office opening hours are Monday to Friday from 08:00 am until 16:00 pm. We are available on mobile outside of these hours.

Breakdown of sales regions

Australia, New Zealand, Republic of Ireland, Turkey, United Kingdom

+ 44 (0)1942 272 172 (UK Office)
+ 44 (0)7375 519 211
+ 48 607 451 960
+ 48 607 451 959

Austria, Germany, Switzerland

+ 48 887 022 427
+ 48 607 451 306

Germany (East region)

+ 49 171 528 1085

Germany (North region)

+ 49 171 528 1082

Germany (West region)

+ 49 171 528 1090

Belgium, Portugal, Spain

+ 48 607 451 035

Bosnia and Herzegovina, Croatia, Northern Macedonia, Serbia

+420 739 529 165

Cyprus, Czech Republic, Greece, Slovakia

+ 420 774 924 084

Denmark, Finland, Iceland, Norway, Sweden,

+ 48 607 451 984

Estonia, Latvia, Lithuania

+ 48 607 779 066

France

+ 33 6 99 91 01 01
+ 48 607 451 035

Italy

+ 39 347 786 386 0
+ 48 607 451 035

Moldova, Ukraine, White Russia

+ 48 607 451 202

Netherlands, Luxembourg

+ 48 607 451 947

Terma Russia

МО, Ленинский район, ГП Видное, д. Апаринки,
стр.1, корпус 2, 2 этаж
+7 963 644 34 36
+7 963 644 34 37
+7 963 644 34 38
+7 963 644 34 39



Terma Sp. z o.o.
Czaple 100
80-298 Gdańsk
NIP: 583-10-18-844
www.termaheat.com